
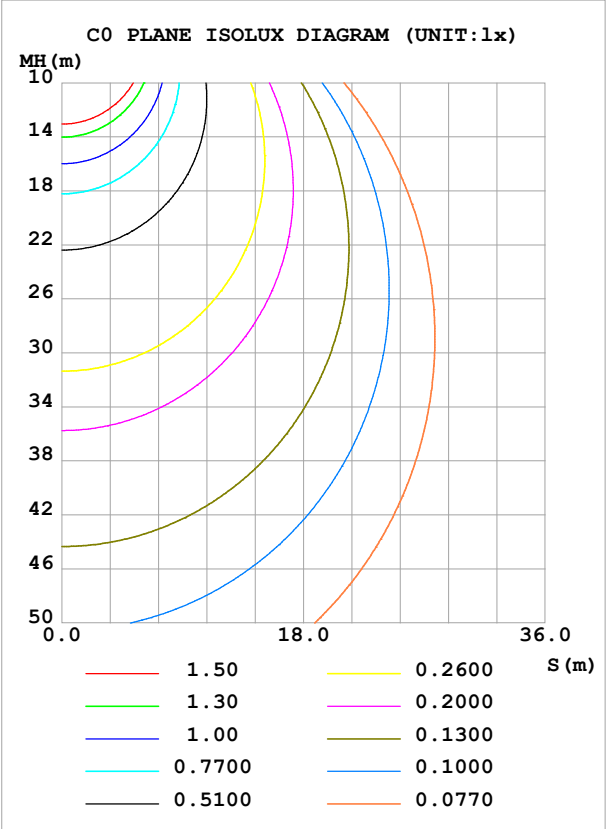


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.4178A P:10.03W PF:1.000 Freq:0Hz Lamp Flux:777.957x1 lm		
NAME: SF06-24V-2835-120-2700-80	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 77.58 lm/W
MODEL		Imax (cd)	255.4	S/MH(C0/180)		1.24
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)		1.26
RATED VOLTAGE(V)		TOTAL FLUX(lm)	777.96	η UP,DN(C0-180)		1.8,47.9
NOMINAL FLUX(lm)	777.957	CIE CLASS	DIRECT	η UP,DN(C180-360)		1.8,48.5
LAMPS INSIDE	1	η up (%)	3.6	CIBSE SHR NOM		1.25
TEST VOLTAGE(V)		η down (%)	96.4	CIBSE SHR MAX		1.35

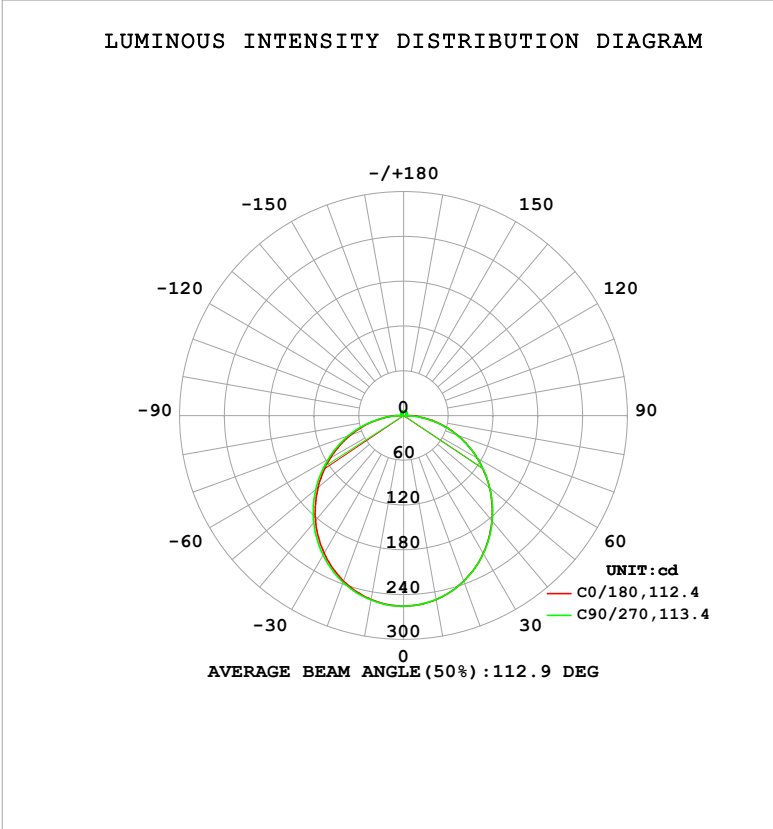

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Temperature:25.3℃	Humidity:65.0%
Operators:Cloud	Test Distance:6.360m [K=1.0000]
Test Date:2024-10-24	Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	250.3	250.4	250.2	250.1	250.3	250.7	251.1	251.0	0- 10	24.15	24.15	3.1,3.1
20	235.9	236.2	236.1	235.7	235.8	236.9	237.7	237.4	10- 20	69.01	93.16	12,12
30	213.4	213.7	213.7	213.1	213.1	214.7	216.0	215.3	20- 30	104.2	197.4	25.4,25.4
40	184.2	184.6	184.7	183.8	183.8	185.8	187.4	186.6	30- 40	125.3	322.7	41.5,41.5
50	150.4	150.8	150.7	149.6	149.8	151.9	153.6	152.8	40- 50	130.1	452.9	58.2,58.2
60	114.0	114.2	113.9	112.8	113.0	115.0	116.7	116.2	50- 60	119.0	571.8	73.5,73.5
70	76.66	76.39	75.76	74.74	75.31	76.97	78.52	78.42	60- 70	94.64	666.5	85.7,85.7
80	39.34	38.58	37.39	36.74	37.57	38.80	39.98	40.51	70- 80	60.80	727.3	93.5,93.5
90	8.997	6.722	2.974	5.799	7.835	6.868	3.495	7.629	80- 90	22.68	749.9	96.4,96.4
100	3.389	3.365	3.418	3.470	3.160	3.684	3.298	3.512	90-100	4.181	754.1	96.9,96.9
110	3.897	3.847	3.878	3.958	3.598	4.004	3.685	3.592	100-110	3.826	757.9	97.4,97.4
120	4.390	4.176	4.288	4.429	4.039	4.339	4.133	3.856	110-120	3.968	761.9	97.9,97.9
130	4.834	4.583	4.680	4.859	4.483	4.691	4.557	4.289	120-130	3.975	765.9	98.4,98.4
140	5.237	4.985	5.073	5.281	4.930	5.089	5.011	5.005	130-140	3.758	769.6	98.9,98.9
150	5.606	5.374	5.601	5.703	5.377	5.528	5.490	5.484	140-150	3.317	773.0	99.4,99.4
160	5.993	5.960	6.029	6.101	5.818	5.947	5.961	5.955	150-160	2.650	775.6	99.7,99.7
170	6.085	6.289	6.373	6.390	6.031	6.307	6.359	6.318	160-170	1.735	777.3	99.9,99.9
180	6.244	6.472	6.546	6.532	6.241	6.477	6.546	6.538	170-180	0.6087	778.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 388.24 lm

%lum = 49.9%

%lamp = 49.9%

Conical surface Flux(130deg): 622.88 lm

%lum = 80.1%


%lamp = 80.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Cloud
 Test Date:2024-10-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
 Humidity:65.0%
 Test Distance:6.360m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.4178A P:10.03W PF:1.000 Freq:0Hz Lamp Flux:777.957x1 lm		
NAME: SF06-24V-2835-120-2700-80	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

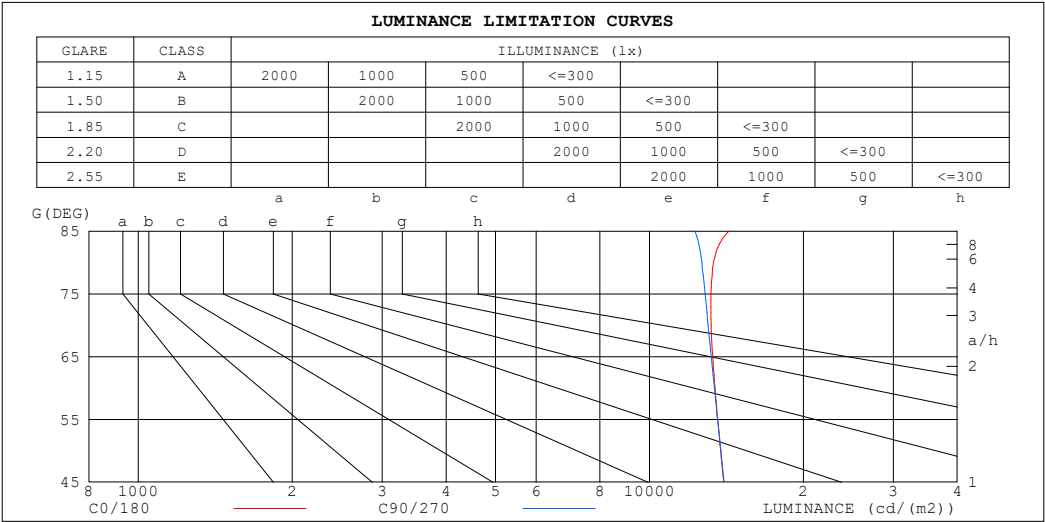

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	14302	12276
80	13343	12659
75	13192	12845
70	13200	13023
65	13296	13213
60	13432	13395
55	13591	13584
50	13783	13786
45	13971	13984


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-10-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.360m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.4178A P:10.03W PF:1.000 Freq:0Hz Lamp Flux:777.957x1 lm		
NAME: SF06-24V-2835-120-2700-80	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.96
1.0	1.02	.98	.94	.90	.95	.92	.95	.91	.88	.90	.87	.85	.86	.84	.82	.79
2.0	.89	.82	.76	.86	.80	.74	.82	.77	.72	.78	.74	.70	.75	.71	.68	.65
3.0	.78	.69	.63	.76	.68	.62	.72	.66	.60	.69	.63	.59	.66	.61	.57	.55
4.0	.69	.60	.53	.67	.59	.52	.64	.57	.51	.61	.55	.50	.59	.53	.49	.47
5.0	.61	.52	.45	.60	.51	.45	.57	.50	.44	.55	.48	.43	.53	.47	.42	.40
6.0	.55	.46	.39	.54	.45	.39	.52	.44	.38	.50	.43	.38	.48	.42	.37	.35
7.0	.50	.41	.35	.49	.40	.35	.47	.39	.34	.45	.39	.34	.44	.38	.33	.31
8.0	.45	.37	.31	.45	.36	.31	.43	.36	.30	.41	.35	.30	.40	.34	.30	.28
9.0	.42	.33	.28	.41	.33	.28	.40	.32	.27	.38	.32	.27	.37	.31	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.30	.25	.35	.29	.24	.34	.28	.24	.22

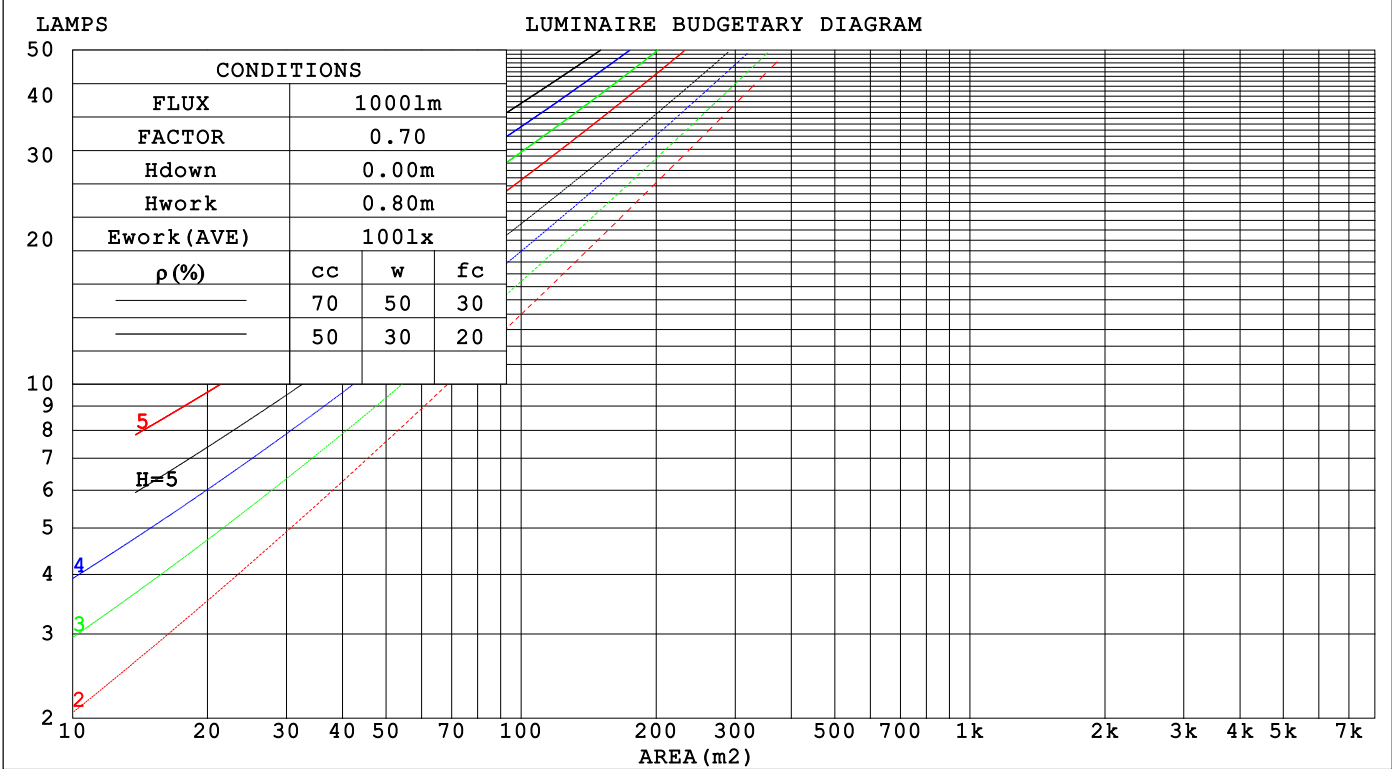

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Cloud

Test Date:2024-10-24

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488

Humidity:65.0%

Test Distance:6.360m [K=1.0000]

Remarks:

WEC AND CCEC

Test:U:24.00V I:0.4178A P:10.03W PF:1.000 Freq:0Hz Lamp Flux:777.957x1 lm		
NAME: SF06-24V-2835-120-2700-80	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.325	.185	.059	.317	.181	.057	.302	.173	.055	.288	.166	.053	.275	.159	.051															
2.0	.301	.165	.051	.293	.162	.050	.280	.155	.048	.267	.150	.047	.255	.144	.046															
3.0	.276	.147	.044	.269	.144	.043	.257	.139	.042	.246	.135	.041	.235	.130	.040															
4.0	.253	.131	.039	.247	.129	.038	.236	.125	.037	.226	.121	.037	.217	.118	.036															
5.0	.233	.119	.034	.228	.117	.034	.218	.114	.033	.209	.110	.033	.200	.107	.032															
6.0	.215	.108	.031	.211	.106	.031	.202	.104	.030	.194	.101	.030	.186	.098	.029															
7.0	.200	.099	.028	.196	.098	.028	.188	.095	.027	.181	.093	.027	.174	.090	.027															
8.0	.187	.091	.026	.183	.090	.025	.176	.088	.025	.169	.086	.025	.163	.084	.024															
9.0	.175	.084	.024	.171	.083	.023	.165	.081	.023	.159	.080	.023	.153	.078	.022															
10.0	.164	.079	.022	.161	.078	.022	.155	.076	.021	.150	.074	.021	.144	.073	.021															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.218	.218	.218	.186	.186	.186	.127	.127	.127	.073	.073	.073	.023	.023	.023	
1.0	.209	.184	.161	.179	.158	.138	.122	.108	.096	.070	.063	.056	.023	.020	.018	
2.0	.201	.160	.125	.172	.137	.108	.118	.095	.075	.068	.055	.044	.022	.018	.014	
3.0	.194	.142	.102	.166	.123	.088	.114	.085	.062	.066	.050	.036	.021	.016	.012	
4.0	.186	.129	.086	.160	.112	.075	.110	.078	.053	.063	.046	.031	.020	.015	.010	
5.0	.178	.119	.075	.153	.103	.065	.106	.072	.046	.061	.042	.027	.020	.014	.009	
6.0	.171	.111	.067	.147	.096	.059	.101	.067	.041	.059	.039	.025	.019	.013	.008	
7.0	.164	.104	.061	.141	.090	.054	.098	.063	.038	.057	.037	.023	.018	.012	.007	
8.0	.158	.098	.057	.136	.085	.050	.094	.060	.035	.055	.035	.021	.018	.012	.007	
9.0	.152	.093	.054	.131	.081	.047	.090	.057	.033	.053	.034	.020	.017	.011	.007	
10.0	.146	.089	.051	.126	.077	.044	.087	.054	.032	.051	.032	.019	.016	.011	.006	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-10-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.360m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.4178A P:10.03W PF:1.000 Freq:0Hz Lamp Flux:777.957x1 lm										
NAME: SF06-24V-2835-120-2700-80					TYPE:			WEIGHT:		
SPEC.:					DIM.: Length=1m			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.6	24.1	22.9	24.3	24.6	22.6	24.1	22.9	24.3	24.6
3H	24.3	25.7	24.6	26.0	26.3	24.3	25.6	24.6	25.9	26.3
4H	25.0	26.4	25.4	26.7	27.0	25.0	26.3	25.4	26.6	27.0
6H	25.7	26.9	26.1	27.3	27.6	25.6	26.8	26.0	27.2	27.5
8H	25.9	27.1	26.3	27.5	27.8	25.8	27.0	26.2	27.4	27.7
12H	26.1	27.3	26.5	27.6	28.0	26.0	27.1	26.4	27.5	27.9
4H 2H	23.2	24.5	23.6	24.9	25.2	23.2	24.5	23.6	24.9	25.2
3H	25.1	26.3	25.5	26.6	27.0	25.1	26.2	25.5	26.6	27.0
4H	26.0	27.1	26.5	27.5	27.9	26.0	27.0	26.4	27.4	27.8
6H	26.8	27.7	27.3	28.2	28.6	26.7	27.7	27.2	28.1	28.5
8H	27.1	28.0	27.6	28.4	28.9	27.0	27.9	27.5	28.3	28.8
12H	27.4	28.2	27.9	28.7	29.1	27.2	28.0	27.7	28.5	29.0
8H 4H	26.4	27.2	26.8	27.7	28.1	26.3	27.2	26.8	27.6	28.1
6H	27.3	28.1	27.8	28.5	29.0	27.2	28.0	27.7	28.4	29.0
8H	27.8	28.4	28.3	28.9	29.4	27.6	28.3	28.2	28.8	29.3
12H	28.2	28.7	28.7	29.2	29.8	28.0	28.5	28.5	29.0	29.6
12H 4H	26.4	27.2	26.9	27.6	28.1	26.3	27.1	26.8	27.6	28.1
6H	27.4	28.1	27.9	28.6	29.1	27.3	28.0	27.9	28.5	29.0
8H	27.9	28.5	28.5	29.0	29.5	27.8	28.4	28.3	28.9	29.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 778.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.9)
Area: 0.017 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-10-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.360m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.4178A P:10.03W PF:1.000 Freq:0Hz Lamp Flux:777.957x1 lm		
NAME: SF06-24V-2835-120-2700-80	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	56	44	37	55	44	37	53	43	37	30
0.80	66	54	46	64	53	46	62	52	45	38
1.00	74	62	55	72	62	55	70	63	54	46
1.25	81	70	63	79	69	62	76	67	61	53
1.50	86	76	68	84	74	68	80	72	66	58
2.00	93	84	77	91	82	76	87	80	74	65
2.50	97	89	82	94	87	81	90	84	79	70
3.00	100	93	87	98	91	86	93	88	83	74
4.00	104	98	93	102	96	92	97	92	89	78
5.00	107	102	97	104	100	96	99	95	92	82
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: Cloud
 Test Date: 2024-10-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.488
 Humidity: 65.0%
 Test Distance: 6.360m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.4178A P:10.03W PF:1.000 Freq:0Hz Lamp Flux:777.957x1 lm		
NAME: SF06-24V-2835-120-2700-80	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

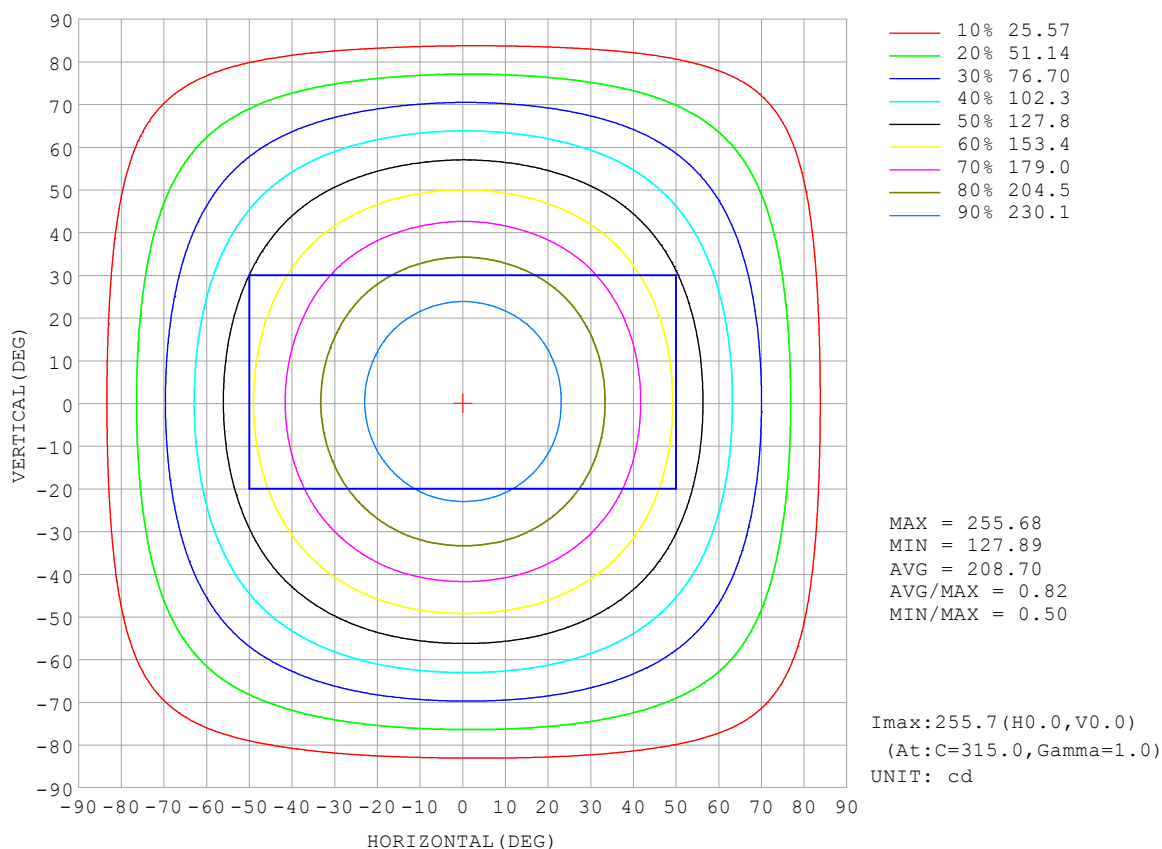


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-10-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.360m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.4178A P:10.03W PF:1.000 Freq:0Hz Lamp Flux:777.957x1 lm		
NAME: SF06-24V-2835-120-2700-80	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

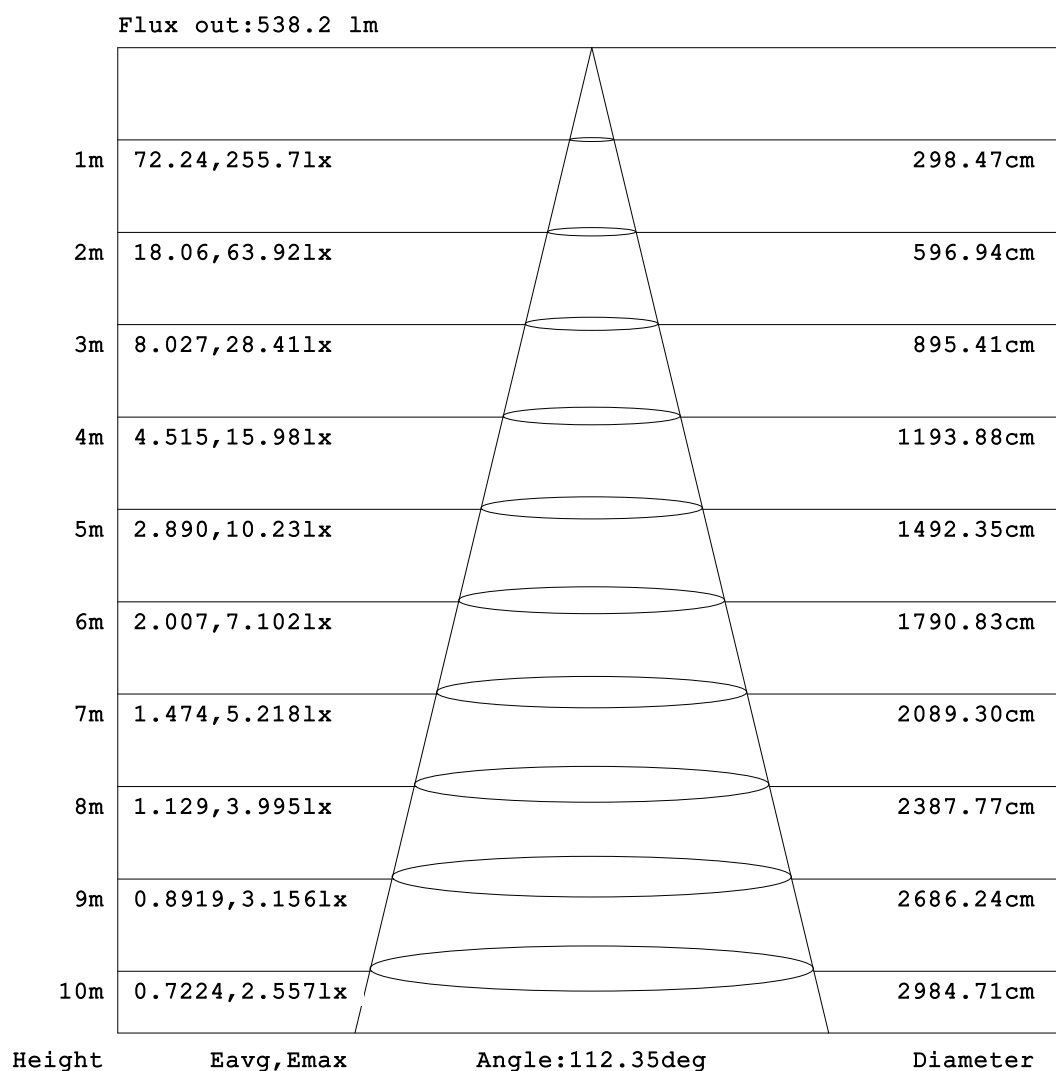


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Cloud
Test Date: 2024-10-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity: 65.0%
Test Distance: 6.360m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.4178A P:10.03W PF:1.000 Freq:0Hz Lamp Flux:777.957x1 lm		
NAME: SF06-24V-2835-120-2700-80	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

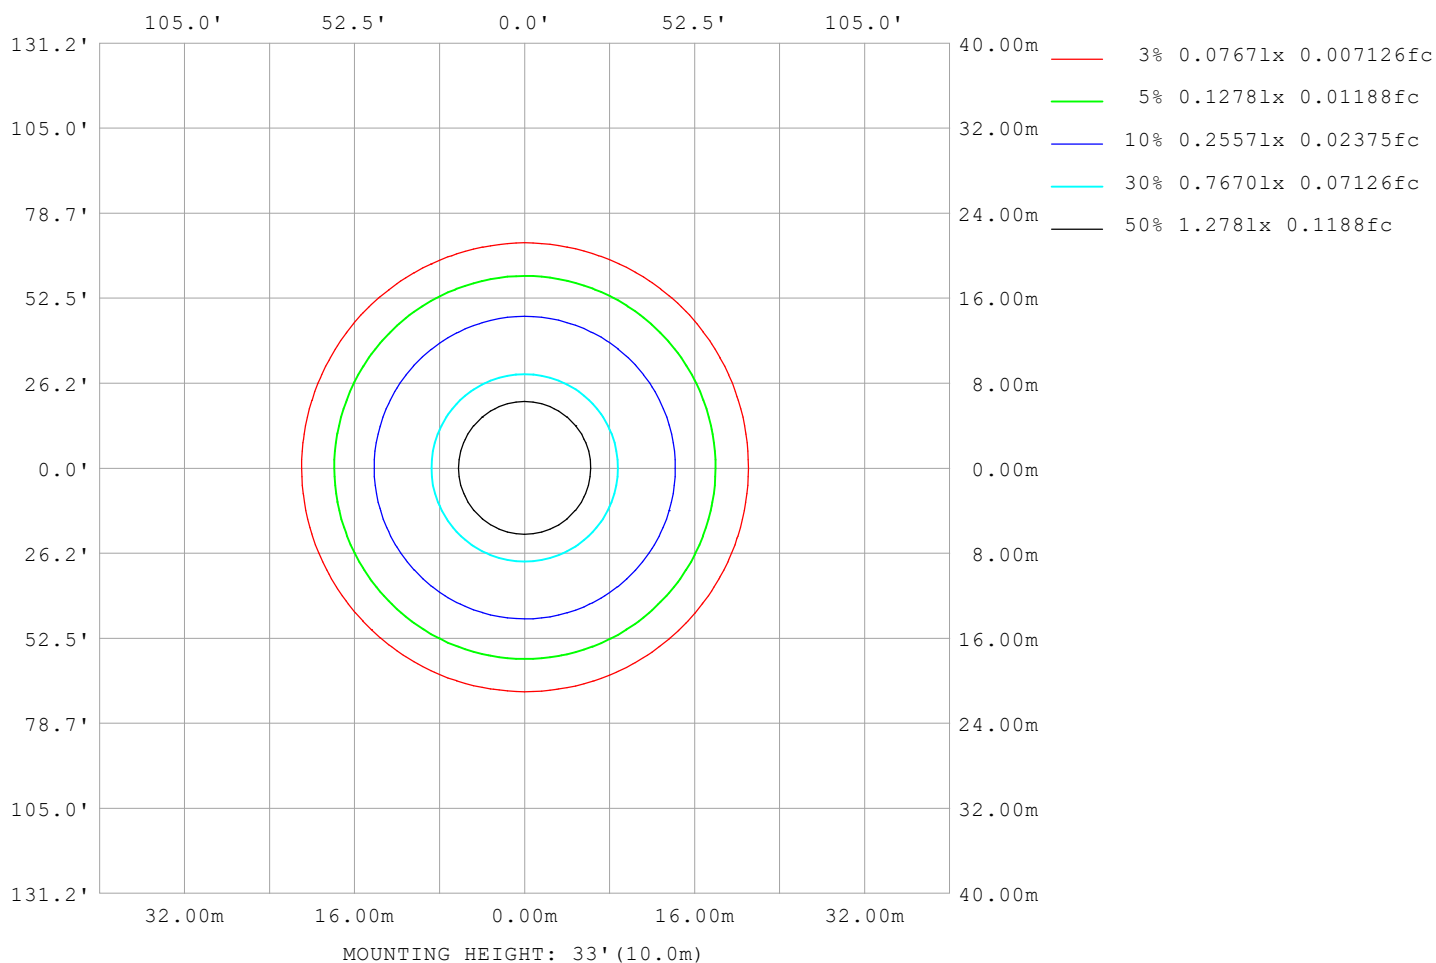

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Cloud
Test Date: 2024-10-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity: 65.0%
Test Distance: 6.360m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.4178A P:10.03W PF:1.000 Freq:0Hz Lamp Flux:777.957x1 lm		
NAME: SF06-24V-2835-120-2700-80	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13198
L_0~180 (75) av	13000
L_0~180 (85) av	13992
L_90~270 (65) av	13410
L_90~270 (75) av	13159
L_90~270 (85) av	13092
L_45 (65) av	13314
L_45 (75) av	13100
L_45 (85) av	13553

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-10-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.360m [K=1.0000]
Remarks:

Planar Illuminance Curve

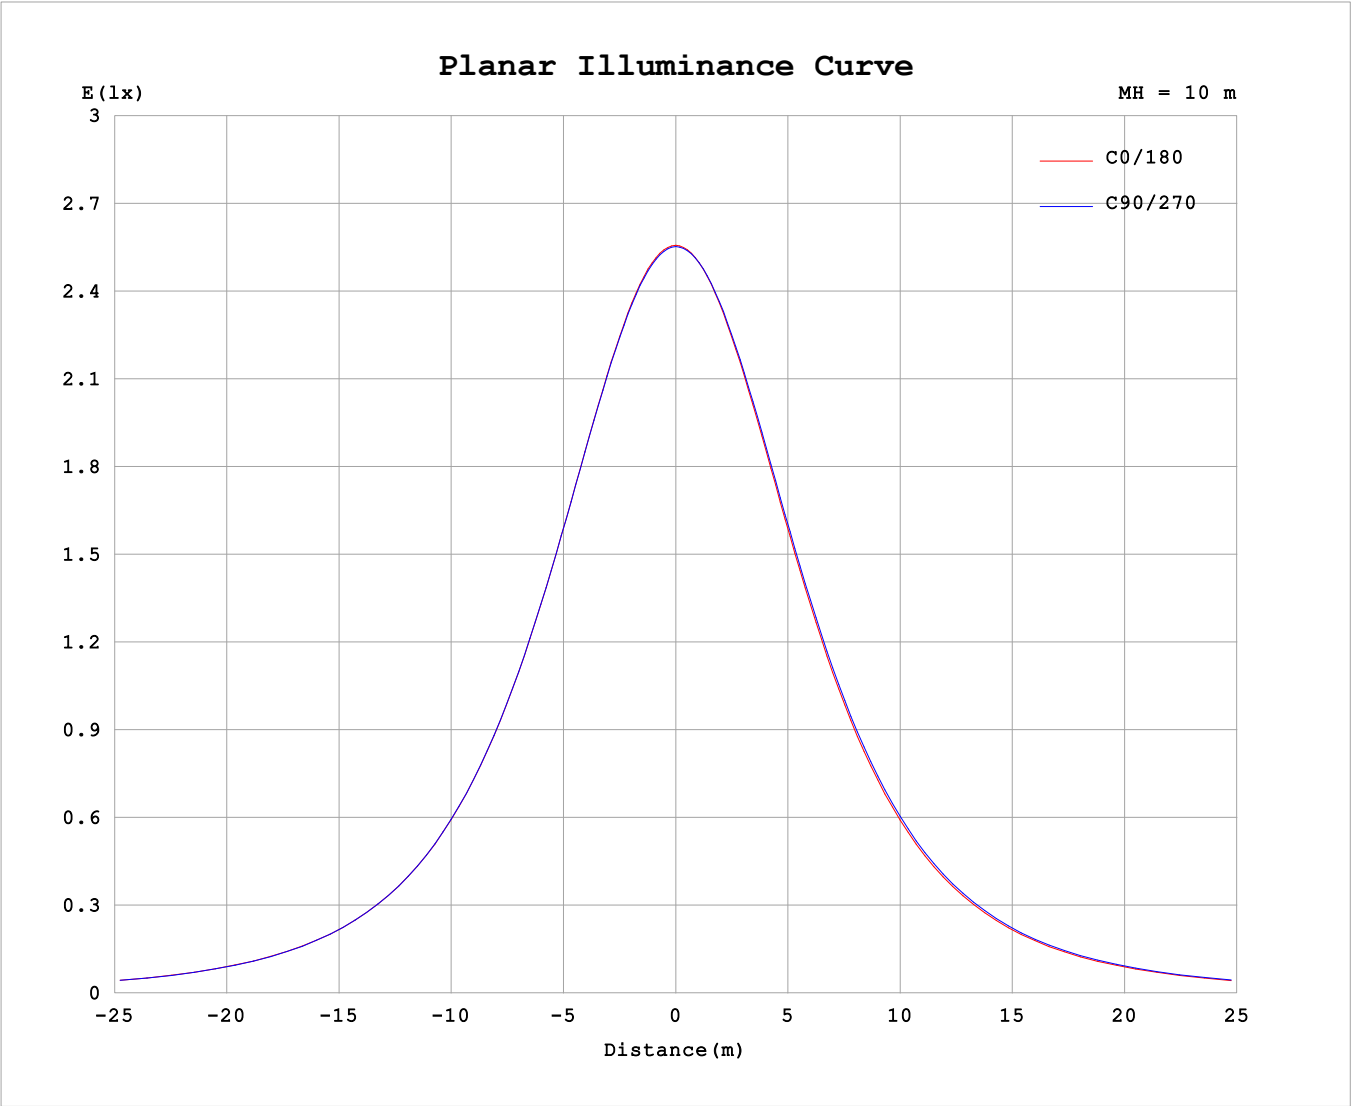

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Temperature:25.3℃	Humidity:65.0%
Operators:Cloud	Test Distance:6.360m [K=1.0000]
Test Date:2024-10-24	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.4178A P:10.03W PF:1.000 Freq:0Hz Lamp Flux:777.957x1 lm																	
NAME: SF06-24V-2835-120-2700-80									TYPE:						WEIGHT:		
SPEC.:									DIM.: Length=1m						SERIAL No.:		
MFR.:									SUR.:						Shielding Angle:		


Table--1

UNIT: cd

γ (DEG)	C (DEG)																
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	
0	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	255	
5	254	254	254	254	254	254	254	254	254	254	254	254	254	254	254	254	
10	250	251	250	250	250	250	250	250	250	250	251	251	251	251	251	251	
15	244	244	244	244	244	244	244	244	244	244	245	245	245	245	245	245	
20	236	236	236	236	236	236	236	236	236	236	237	237	238	237	237	237	
25	226	226	226	226	226	226	225	225	225	226	227	227	228	228	227	226	
30	213	214	214	214	214	214	213	213	213	214	215	215	216	216	215	214	
35	199	200	200	200	200	200	199	199	199	200	201	202	202	202	202	201	
40	184	185	185	185	185	185	184	184	184	184	186	187	187	187	187	185	
45	168	168	168	169	168	168	167	167	167	168	169	170	171	171	170	169	
50	150	151	151	151	151	151	150	149	150	150	152	153	154	153	153	152	
55	132	133	133	133	133	132	131	131	132	132	134	134	135	135	135	134	
60	114	114	114	114	114	114	113	113	113	114	115	116	117	117	116	115	
65	95.4	95.5	95.3	95.5	95.0	94.6	93.8	93.7	94.2	94.7	96.0	96.9	97.7	97.6	97.4	96.5	
70	76.7	76.7	76.4	76.4	75.8	75.4	74.7	74.7	75.3	75.8	77.0	77.7	78.5	78.5	78.4	77.7	
75	58.0	58.0	57.5	57.3	56.5	56.3	55.7	55.8	56.4	56.8	57.9	58.5	59.2	59.4	59.5	58.9	
80	39.3	39.3	38.6	38.2	37.4	37.2	36.7	36.9	37.6	37.8	38.8	39.3	40.0	40.3	40.5	40.2	
85	21.2	21.0	20.0	19.1	18.2	18.1	18.3	19.4	20.3	20.2	20.2	20.0	20.6	21.1	21.8	21.8	
90	9.00	8.49	6.72	4.55	2.97	4.10	5.80	7.24	7.84	7.59	6.87	5.12	3.49	5.47	7.63	8.77	
95	3.71	3.42	3.15	3.11	3.17	3.21	3.23	3.28	2.99	3.19	3.53	3.57	3.27	3.53	3.39	3.43	
100	3.39	3.38	3.37	3.35	3.42	3.46	3.47	3.50	3.16	3.34	3.68	3.67	3.30	3.54	3.51	3.23	
105	3.65	3.63	3.61	3.60	3.66	3.71	3.72	3.75	3.37	3.54	3.84	3.81	3.45	3.55	3.59	3.41	
110	3.90	3.89	3.85	3.85	3.88	3.95	3.96	3.99	3.60	3.74	4.00	3.96	3.69	3.53	3.59	3.57	
115	4.15	4.13	4.01	4.04	4.08	4.17	4.20	4.23	3.82	3.94	4.17	4.12	3.91	3.58	3.62	3.72	
120	4.39	4.36	4.18	4.25	4.29	4.40	4.43	4.47	4.04	4.14	4.34	4.28	4.13	3.89	3.86	3.88	
125	4.62	4.59	4.38	4.45	4.49	4.62	4.65	4.69	4.26	4.35	4.51	4.46	4.34	4.32	4.19	4.18	
130	4.83	4.76	4.58	4.66	4.68	4.84	4.86	4.91	4.48	4.56	4.69	4.65	4.56	4.55	4.29	4.47	
135	5.04	4.92	4.79	4.85	4.88	5.05	5.07	5.11	4.71	4.78	4.88	4.85	4.78	4.76	4.78	4.56	
140	5.24	4.99	4.98	5.05	5.07	5.26	5.28	5.32	4.93	4.99	5.09	5.05	5.01	4.98	5.00	4.91	
145	5.42	5.19	5.18	5.25	5.27	5.48	5.50	5.51	5.15	5.21	5.31	5.28	5.26	5.23	5.21	5.16	
150	5.61	5.37	5.37	5.45	5.60	5.70	5.70	5.72	5.38	5.43	5.53	5.51	5.49	5.50	5.48	5.38	
155	5.68	5.58	5.57	5.80	5.82	5.90	5.90	5.92	5.60	5.66	5.74	5.73	5.73	5.73	5.74	5.66	
160	5.99	5.77	5.96	6.01	6.03	6.10	6.10	6.12	5.82	5.87	5.95	5.95	5.96	5.95	5.95	5.88	
165	6.15	5.95	6.14	6.20	6.22	6.27	6.26	6.28	5.99	6.07	6.14	6.15	6.18	6.14	6.15	6.09	
170	6.09	6.13	6.29	6.36	6.37	6.42	6.39	6.40	6.03	6.24	6.31	6.32	6.36	6.32	6.32	6.27	
175	6.18	6.41	6.41	6.48	6.49	6.52	6.49	6.49	6.17	6.37	6.44	6.45	6.49	6.45	6.46	6.41	
180	6.24	6.44	6.47	6.53	6.55	6.55	6.53	6.53	6.24	6.44	6.48	6.52	6.55	6.55	6.54	6.51	


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-10-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.360m [K=1.0000]
Remarks:

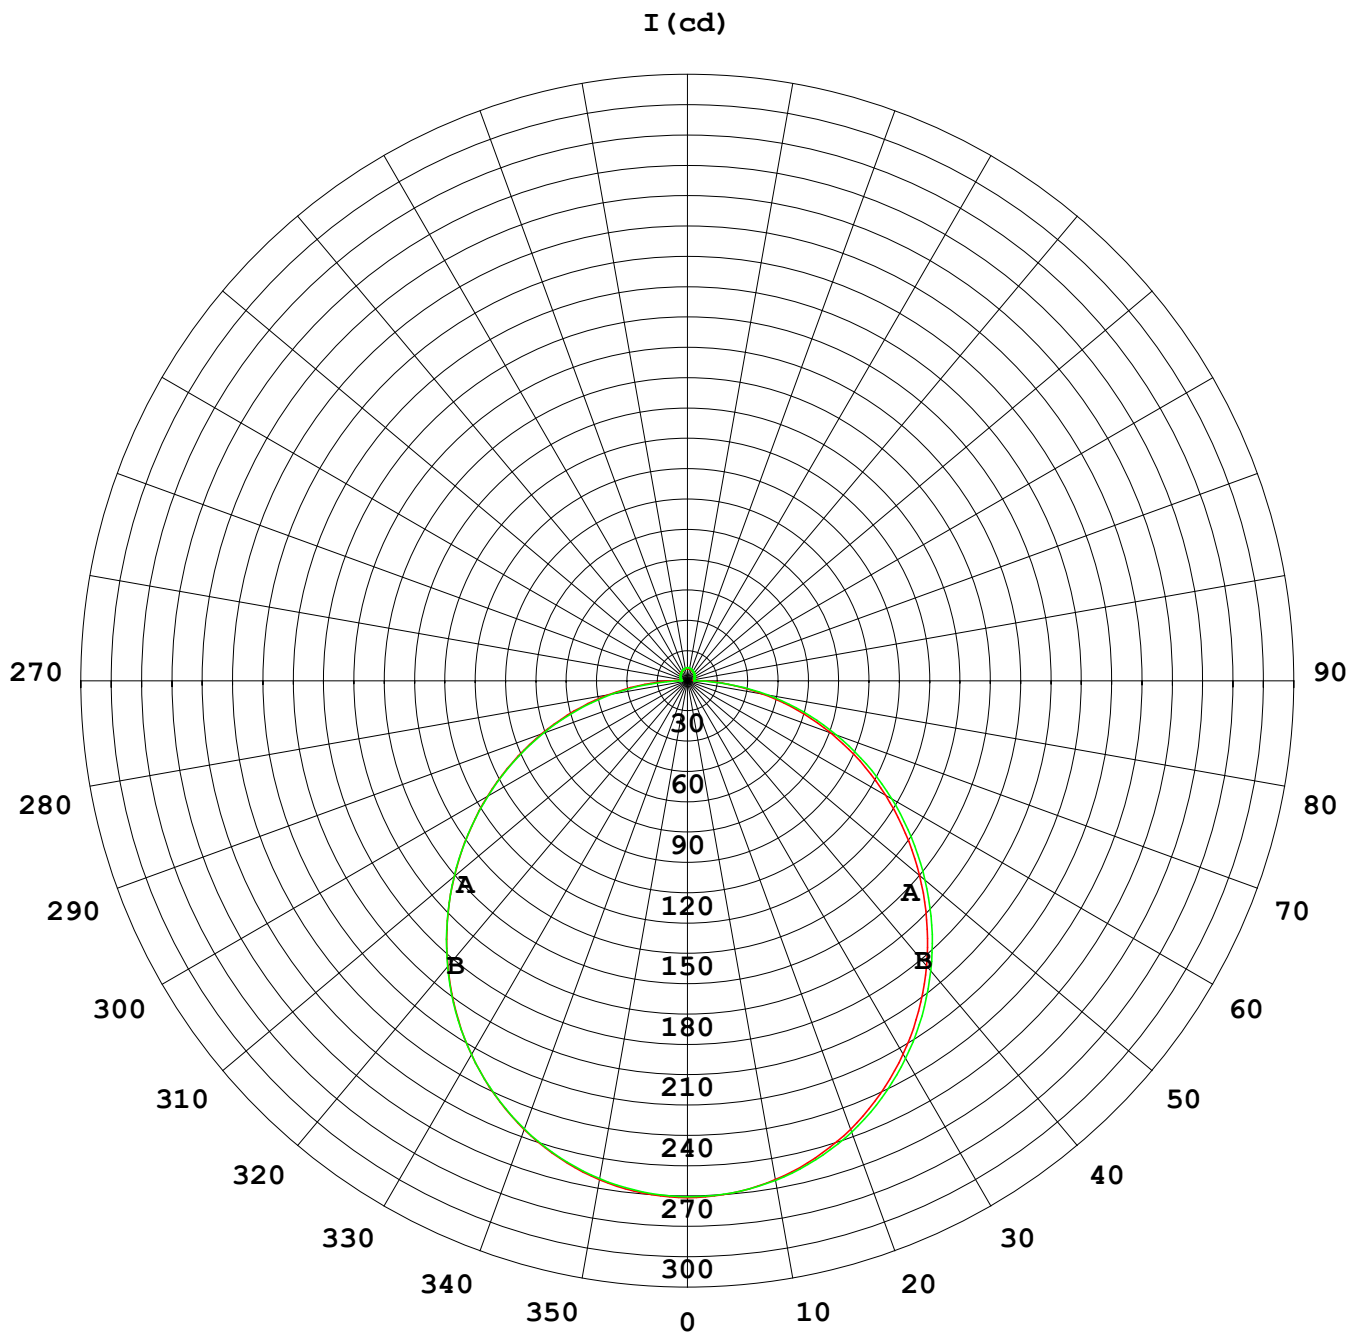

1000 lm

$\kappa = 1$

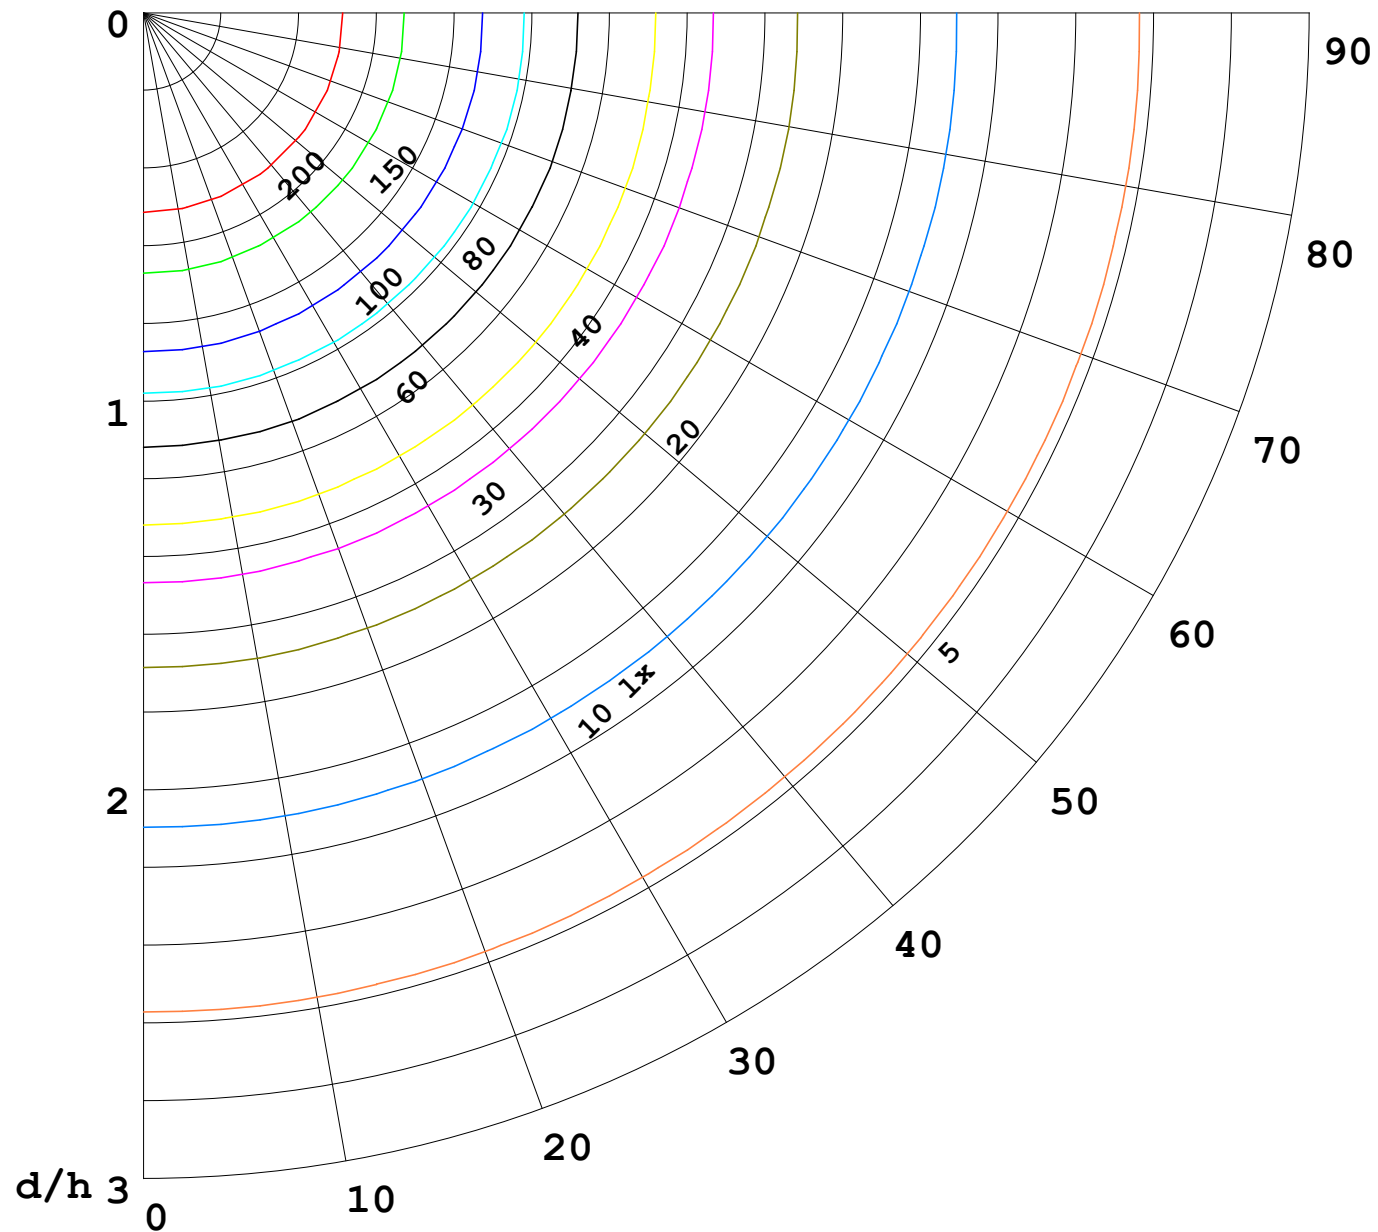

F = 1000 lm
 K = 0.7
 Hcc = 0.8 m
 Hfc = 0.0 m
 Eave = 100 lx

	Pcc	Pw	Pfc
—————	70	50	30
—————	50	30	20

