


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.4919A P:11.81W PF:1.000 Freq:50.00Hz Lamp Flux:115.353x1 lm		
NAME: SF15-24V-5050-56-DMX3-RGB	TYPE: 硅胶	WEIGHT:
SPEC.:	DIM.: 21*11.5MM	SERIAL No.:2021123014
MFR.: OLYMPIA	SUR.:1*0.0115	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 9.77 lm/W
MODEL	5050	I _{max} (cd)	40.43	S/MH (C0/180)	1.23	
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.21	
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	115.35	η UP, DN (C0-180)	0.9, 49.8	
NOMINAL FLUX (lm)	115.353	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.6, 48.7	
LAMPS INSIDE	1	η up (%)	1.5	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	24	η down (%)	98.5	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

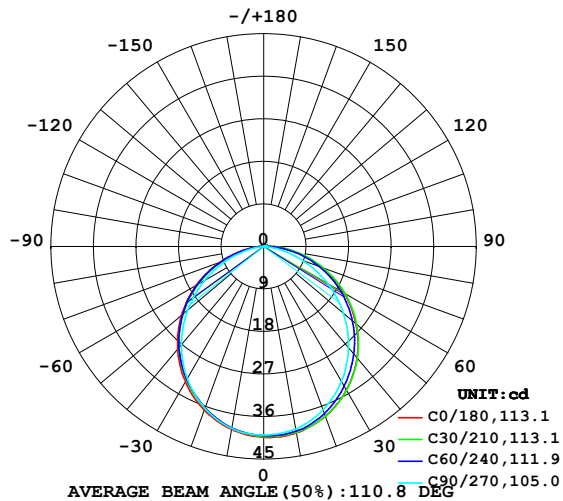

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

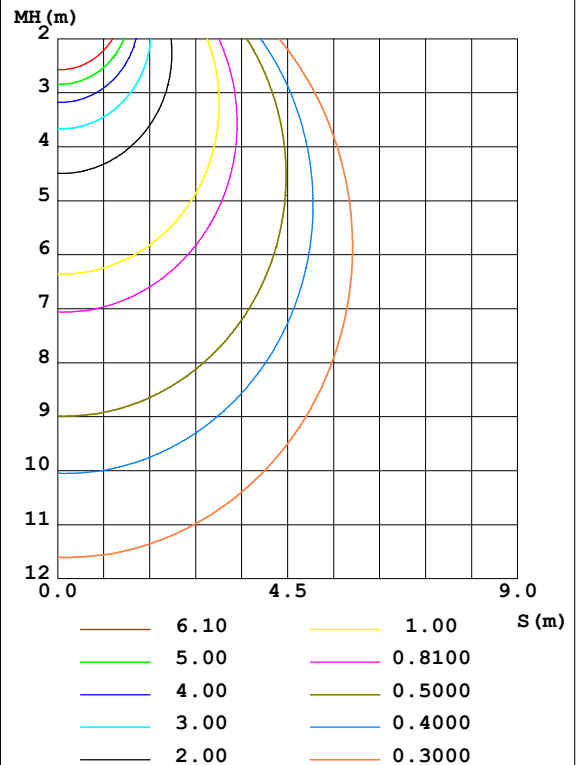

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LPC
 Test Date: 2021-12-30

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 9.200m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	40.04	39.80	39.19	38.58	39.29	39.01	39.10	39.49	0- 10	3.785	3.785	3.28,3.28
20	38.19	37.92	36.79	35.99	36.84	36.40	36.42	37.50	10- 20	10.81	14.59	12.7,12.7
30	35.04	34.61	32.94	32.22	33.11	32.62	32.33	34.23	20- 30	16.28	30.88	26.8,26.8
40	30.75	30.27	27.92	27.45	28.36	27.90	27.07	30.10	30- 40	19.52	50.40	43.7,43.7
50	25.52	25.13	22.06	21.85	22.73	22.32	21.03	25.18	40- 50	20.18	70.58	61.2,61.2
60	19.60	19.31	15.64	15.67	16.49	16.12	14.49	19.49	50- 60	18.21	88.79	77,77
70	13.23	13.04	8.834	9.192	9.929	9.603	7.791	13.28	60- 70	13.92	102.7	89,89
80	6.836	6.687	2.684	3.390	4.011	3.598	1.869	6.933	70- 80	8.119	110.8	96.1,96.1
90	1.998	1.656	0.3569	0.7238	0.7726	0.5634	0.1608	1.722	80- 90	2.775	113.6	98.5,98.5
100	0.5030	0.5880	0.4223	0.6734	0.4624	0.4598	0.1959	0.4022	90-100	0.7144	114.3	99.1,99.1
110	0.4774	0.5854	0.4776	0.6332	0.4624	0.4674	0.2713	0.3970	100-110	0.5065	114.8	99.5,99.5
120	0.5327	0.5981	0.5227	0.6810	0.4624	0.4774	0.3267	0.4121	110-120	0.4970	115.3	100,100
130	0	0	0	0	0	0	0	0	120-130	0.0243	115.4	100,100
140	0	0	0	0	0	0	0	0	130-140	0	115.4	100,100
150	0	0	0	0	0	0	0	0	140-150	0	115.4	100,100
160	0	0	0	0	0	0	0	0	150-160	0	115.4	100,100
170	0	0	0	0	0	0	0	0	160-170	0	115.4	100,100
180	0	0	0	0	0	0	0	0	170-180	0	115.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 60.575 lm

%lum = 52.5%

%lamp = 52.5%

Conical surface Flux(120deg): 88.794 lm

%lum = 77.0%


%lamp = 77.0%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-12-30

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.4919A P:11.81W PF:1.000 Freq:50.00Hz Lamp Flux:115.353x1 lm		
NAME: SF15-24V-5050-56-DMX3-RGB	TYPE: 硅胶	WEIGHT:
SPEC.:	DIM.: 21*11.5MM	SERIAL No.:2021123014
MFR.: OLYMPIA	SUR.:1*0.0115	Shielding Angle:

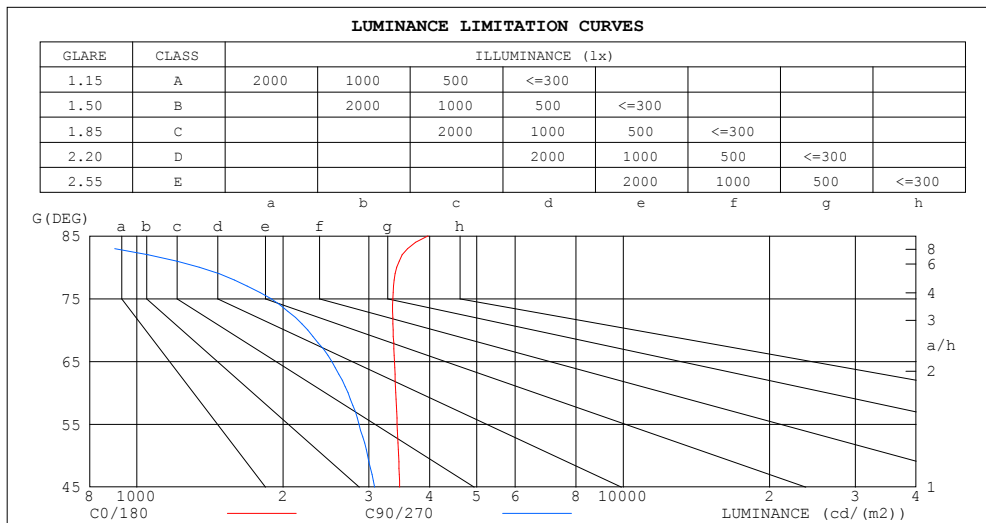

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3972	530
80	3423	1344
75	3361	1886
70	3365	2246
65	3386	2516
60	3409	2720
55	3430	2863
50	3453	2984
45	3473	3084


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-12-30

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.4919A P:11.81W PF:1.000 Freq:50.00Hz Lamp Flux:115.353x1 lm		
NAME: SF15-24V-5050-56-DMX3-RGB	TYPE:硅胶	WEIGHT:
SPEC.:	DIM.: 21*11.5MM	SERIAL No.:2021123014
MFR.: OLYMPIA	SUR.:1*0.0115	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.80	.76	.72	.77	.74	.70	.68
3.0	.79	.71	.64	.77	.69	.63	.74	.67	.62	.71	.65	.61	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.55	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.32	.43	.36	.31	.41	.35	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

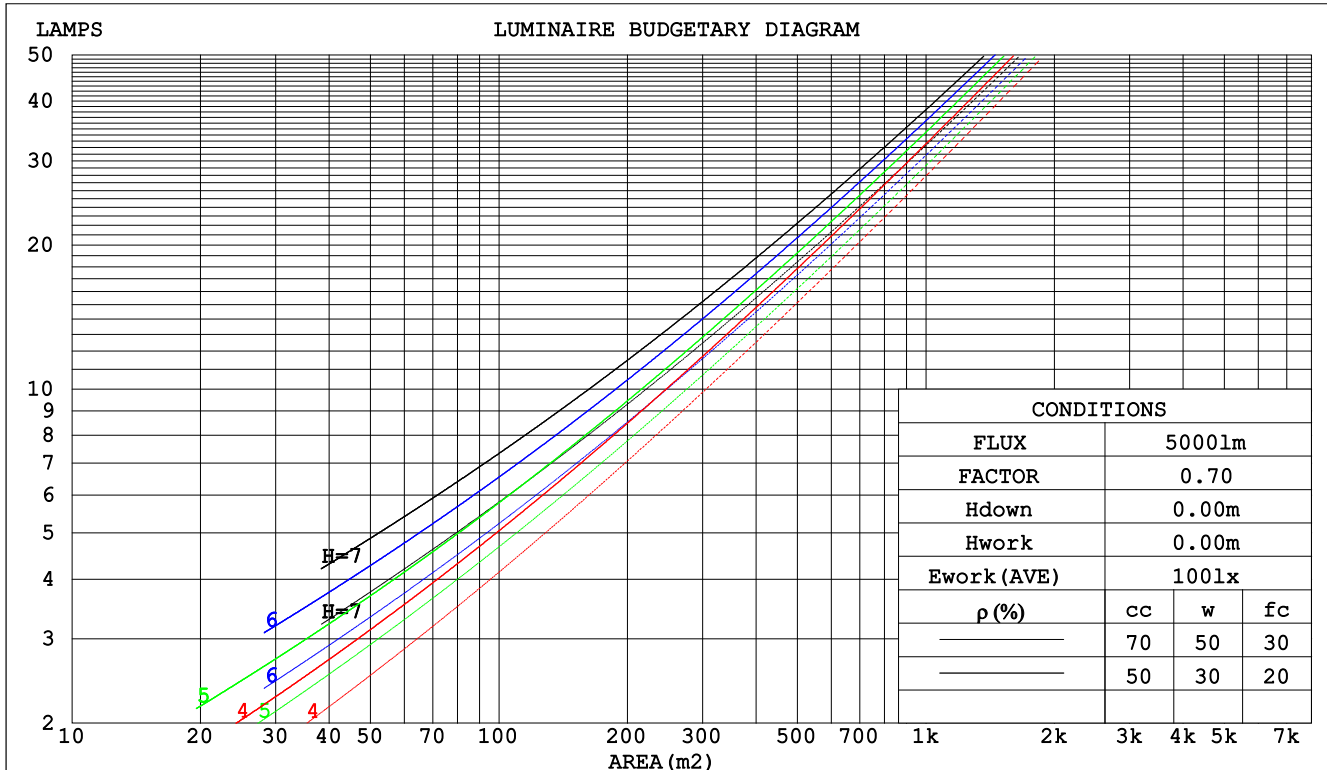

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-12-30

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.4919A P:11.81W PF:1.000 Freq:50.00Hz Lamp Flux:115.353x1 lm		
NAME: SF15-24V-5050-56-DMX3-RGB	TYPE: 硅胶	WEIGHT:
SPEC.:	DIM.: 21*11.5MM	SERIAL No.:2021123014
MFR.: OLYMPIA	SUR.:1*0.0115	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.315	.179	.057	.307	.175	.056	.293	.168	.054	.280	.162	.052	.268	.156	.050		
2.0	.294	.161	.049	.287	.158	.049	.275	.153	.047	.263	.148	.046	.253	.143	.045		
3.0	.271	.144	.043	.265	.142	.043	.254	.138	.042	.244	.134	.041	.234	.130	.040		
4.0	.250	.130	.038	.244	.128	.038	.235	.124	.037	.225	.121	.037	.217	.118	.036		
5.0	.231	.118	.034	.226	.116	.034	.217	.113	.033	.209	.110	.033	.201	.108	.032		
6.0	.214	.107	.031	.210	.106	.030	.202	.103	.030	.194	.101	.030	.187	.099	.029		
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.175	.091	.027		
8.0	.186	.091	.025	.182	.090	.025	.176	.088	.025	.170	.086	.025	.164	.084	.025		
9.0	.174	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.155	.079	.023		
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.021	.151	.075	.021	.146	.073	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.146	.165	.144	.125	.113	.099	.087	.065	.057	.050	.021	.018	.016	
2.0	.184	.144	.109	.158	.124	.095	.108	.086	.066	.062	.050	.039	.020	.016	.013	
3.0	.176	.126	.086	.151	.109	.074	.104	.076	.052	.060	.044	.031	.019	.014	.010	
4.0	.169	.113	.070	.145	.097	.061	.100	.068	.043	.058	.040	.025	.019	.013	.008	
5.0	.161	.102	.059	.139	.089	.051	.095	.062	.036	.055	.036	.021	.018	.012	.007	
6.0	.154	.094	.051	.132	.081	.044	.091	.057	.031	.053	.034	.019	.017	.011	.006	
7.0	.147	.087	.045	.127	.076	.039	.088	.053	.028	.051	.031	.017	.016	.010	.005	
8.0	.141	.081	.041	.121	.071	.035	.084	.050	.025	.049	.029	.015	.016	.010	.005	
9.0	.135	.076	.037	.116	.066	.032	.080	.047	.023	.047	.028	.014	.015	.009	.005	
10.0	.129	.072	.034	.111	.063	.030	.077	.044	.021	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-12-30

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.4919A P:11.81W PF:1.000 Freq:50.00Hz Lamp Flux:115.353x1 lm											
NAME: SF15-24V-5050-56-DMX3-RGB						TYPE:硅胶			WEIGHT:		
SPEC.:						DIM.: 21*11.5MM			SERIAL No.:2021123014		
MFR.: OLYMPIA						SUR.:1*0.0115			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.0	26.5	25.3	26.7	26.9	24.3	25.8	24.5	26.0	26.2	
	3H	26.7	28.1	27.1	28.4	28.7	25.6	27.0	25.9	27.3	27.5
	4H	27.5	28.8	27.8	29.1	29.4	26.1	27.4	26.4	27.7	28.0
	6H	28.2	29.4	28.5	29.7	30.0	26.3	27.6	26.7	27.9	28.2
	8H	28.4	29.6	28.8	29.9	30.3	26.4	27.6	26.7	27.9	28.2
	12H	28.7	29.8	29.0	30.1	30.5	26.4	27.5	26.7	27.8	28.2
4H	2H	25.6	26.9	26.0	27.2	27.5	25.1	26.4	25.4	26.7	27.0
	3H	27.6	28.8	28.0	29.1	29.4	26.7	27.9	27.1	28.2	28.5
	4H	28.5	29.6	28.9	29.9	30.3	27.4	28.4	27.8	28.8	29.2
	6H	29.3	30.3	29.8	30.7	31.1	27.8	28.7	28.2	29.1	29.5
	8H	29.7	30.6	30.1	31.0	31.4	27.9	28.8	28.3	29.2	29.6
	12H	30.0	30.8	30.4	31.2	31.7	27.9	28.7	28.4	29.1	29.6
8H	4H	28.9	29.7	29.3	30.1	30.5	27.9	28.8	28.3	29.1	29.6
	6H	29.9	30.6	30.3	31.0	31.5	28.5	29.3	29.0	29.7	30.2
	8H	30.4	31.0	30.8	31.5	31.9	28.8	29.4	29.3	29.9	30.4
	12H	30.8	31.4	31.3	31.8	32.3	28.9	29.4	29.4	29.9	30.4
12H	4H	28.9	29.7	29.3	30.1	30.5	27.9	28.8	28.4	29.2	29.6
	6H	30.0	30.6	30.5	31.1	31.6	28.7	29.4	29.2	29.8	30.3
	8H	30.5	31.1	31.0	31.5	32.1	29.0	29.6	29.5	30.1	30.6
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.4					
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.5					

CIE Pub.117, 115.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -7.5)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-12-30

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:


```

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.4919A P:11.81W PF:1.000 Freq:50.00Hz Lamp Flux:115.353x1 lm		
NAME: SF15-24V-5050-56-DMX3-RGB	TYPE: 硅胶	WEIGHT:
SPEC.:	DIM.: 21*11.5MM	SERIAL No.:2021123014
MFR.: OLYMPIA	SUR.:1*0.0115	Shielding Angle:

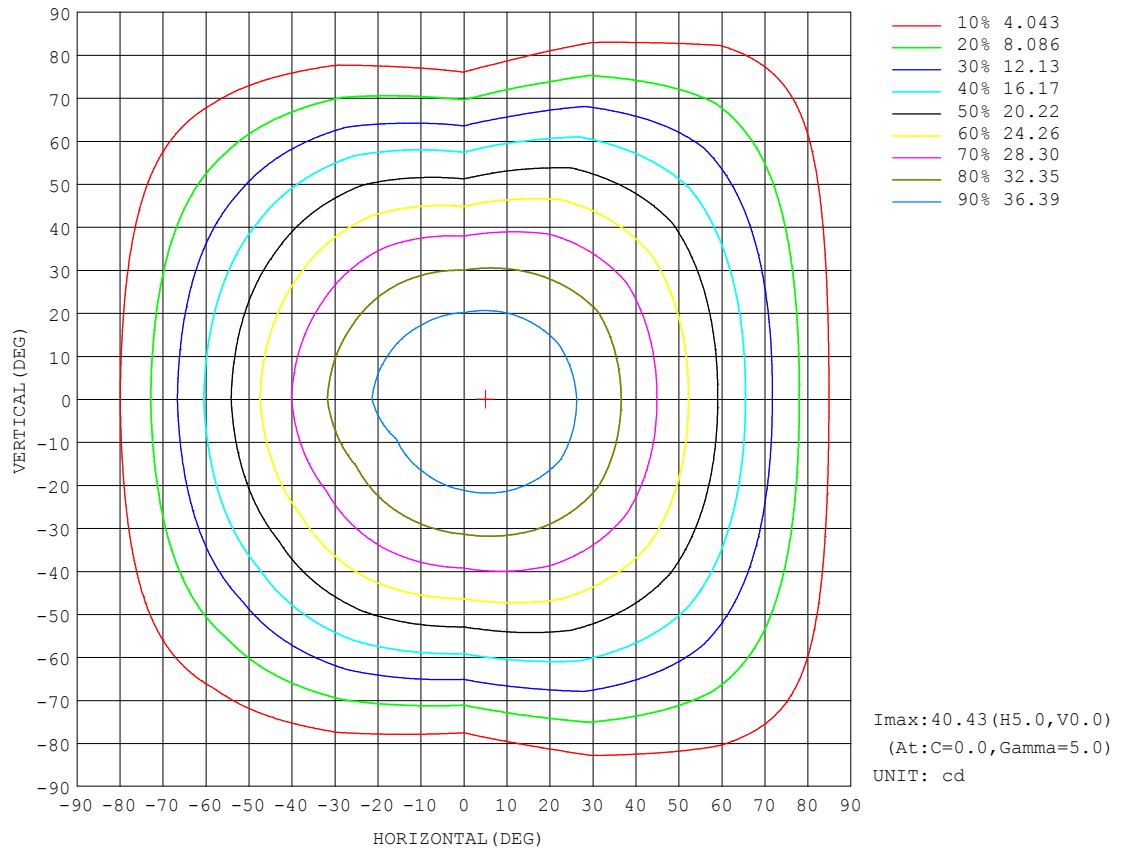


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: LPC
Test Date: 2021-12-30

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.4919A P:11.81W PF:1.000 Freq:50.00Hz Lamp Flux:115.353x1 lm		
NAME: SF15-24V-5050-56-DMX3-RGB	TYPE: 硅胶	WEIGHT:
SPEC.:	DIM.: 21*11.5MM	SERIAL No.:2021123014
MFR.: OLYMPIA	SUR.:1*0.0115	Shielding Angle:

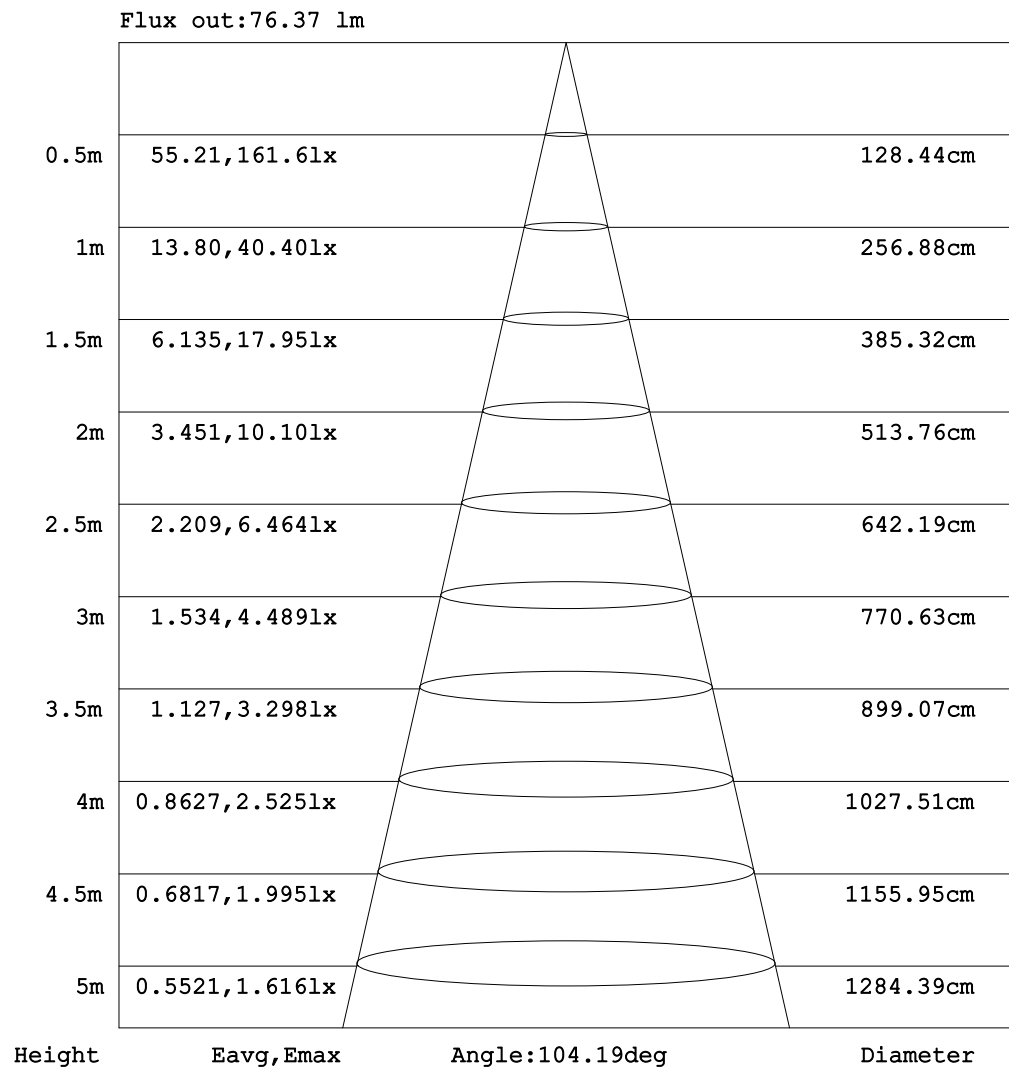


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-12-30

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.4919A P:11.81W PF:1.000 Freq:50.00Hz Lamp Flux:115.353x1 lm		
NAME: SF15-24V-5050-56-DMX3-RGB	TYPE: 硅胶	WEIGHT:
SPEC.:	DIM.: 21*11.5MM	SERIAL No.:2021123014
MFR.: OLYMPIA	SUR.:1*0.0115	Shielding Angle:

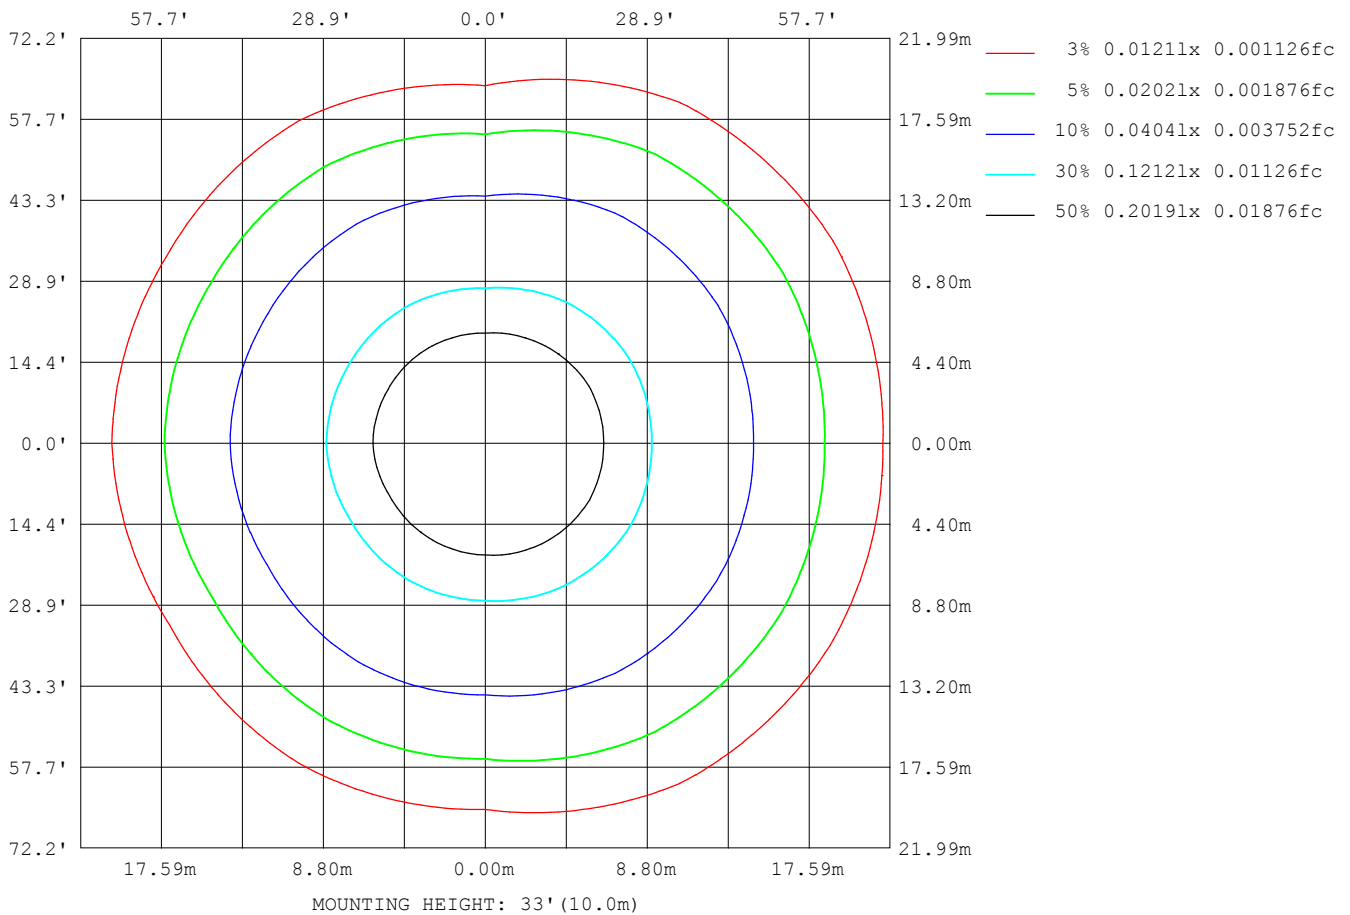

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-12-30

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.4919A P:11.81W PF:1.000 Freq:50.00Hz Lamp Flux:115.353x1 lm		
NAME: SF15-24V-5050-56-DMX3-RGB	TYPE:硅胶	WEIGHT:
SPEC.:	DIM.: 21*11.5MM	SERIAL No.:2021123014
MFR.: OLYMPIA	SUR.:1*0.0115	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3051
L_0~180 (75) av	2815
L_0~180 (85) av	2962
L_90~270 (65) av	2400
L_90~270 (75) av	1717
L_90~270 (85) av	401
L_45 (65) av	3013
L_45 (75) av	2783
L_45 (85) av	2821

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-12-30

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

Planar Illuminance Curve

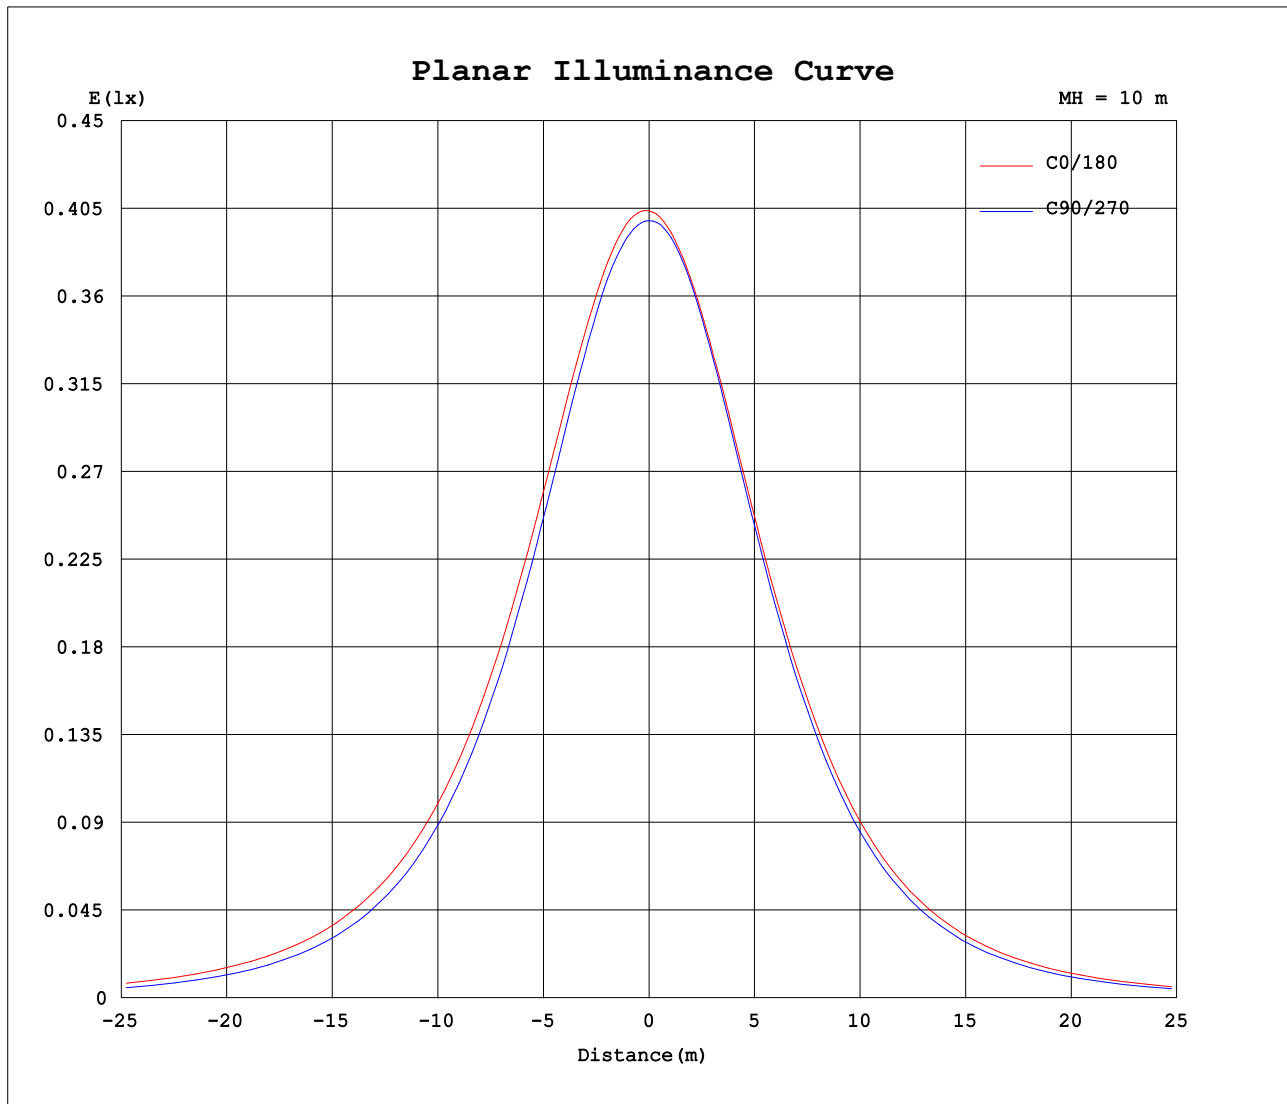

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: LPC
Test Date: 2021-12-30

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.4919A P:11.81W PF:1.000 Freq:50.00Hz Lamp Flux:115.353x1 lm		
NAME: SF15-24V-5050-56-DMX3-RGB	TYPE: 硅胶	WEIGHT:
SPEC.:	DIM.: 21*11.5MM	SERIAL No.:2021123014
MFR.: OLYMPIA	SUR.:1*0.0115	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	40.4	40.2	40.0	39.9	39.8	39.7	40.4	40.2	40.0	39.9	39.8	39.7						
5	40.4	40.2	40.1	39.7	39.5	39.2	40.0	39.8	39.7	39.7	39.8	39.8						
10	40.0	39.9	39.7	39.2	38.8	38.4	39.3	39.0	39.0	39.1	39.4	39.6						
15	39.3	39.3	38.9	38.2	37.6	37.3	38.2	37.9	37.8	38.0	38.5	38.9						
20	38.2	38.2	37.6	36.8	36.1	35.8	36.8	36.5	36.3	36.4	37.2	37.8						
25	36.8	36.8	36.0	35.0	34.4	34.1	35.1	34.7	34.6	34.5	35.5	36.5						
30	35.0	35.1	34.1	32.9	32.4	32.0	33.1	32.7	32.6	32.3	33.6	34.9						
35	33.0	33.1	32.0	30.5	30.1	29.7	30.9	30.4	30.3	29.8	31.5	33.0						
40	30.7	30.8	29.7	27.9	27.7	27.2	28.4	27.9	27.9	27.1	29.4	30.8						
45	28.2	28.4	27.2	25.1	25.0	24.5	25.6	25.2	25.2	24.1	27.1	28.4						
50	25.5	25.7	24.6	22.1	22.2	21.5	22.7	22.2	22.4	21.0	24.5	25.9						
55	22.6	22.9	21.7	18.9	19.2	18.5	19.7	19.2	19.4	17.8	21.7	23.1						
60	19.6	19.9	18.8	15.6	16.0	15.3	16.5	15.9	16.3	14.5	18.8	20.2						
65	16.5	16.8	15.7	12.2	12.8	12.1	13.2	12.7	13.1	11.1	15.7	17.1						
70	13.2	13.5	12.5	8.83	9.57	8.82	9.93	9.41	9.79	7.79	12.6	13.9						
75	10.0	10.3	9.36	5.61	6.42	5.77	6.75	6.30	6.57	4.60	9.44	10.7						
80	6.84	7.11	6.26	2.68	3.56	3.22	4.01	3.57	3.63	1.87	6.33	7.54						
85	3.98	4.15	3.40	0.53	1.51	1.51	1.96	1.64	1.41	0.27	3.41	4.58						
90	2.00	1.98	1.33	0.36	0.72	0.73	0.77	0.66	0.46	0.16	1.22	2.22						
95	0.94	0.89	0.65	0.38	0.68	0.68	0.46	0.51	0.44	0.16	0.43	0.95						
100	0.50	0.56	0.61	0.42	0.67	0.67	0.46	0.48	0.44	0.20	0.38	0.42						
105	0.48	0.57	0.55	0.48	0.57	0.67	0.46	0.48	0.39	0.27	0.35	0.40						
110	0.48	0.60	0.57	0.48	0.59	0.67	0.46	0.48	0.46	0.27	0.40	0.40						
115	0.48	0.61	0.61	0.50	0.63	0.67	0.46	0.48	0.48	0.28	0.39	0.40						
120	0.53	0.62	0.58	0.52	0.69	0.67	0.46	0.48	0.48	0.33	0.38	0.45						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-12-30

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: