


室内灯具光度数据


| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.1906A P:4.574W PF:1.000 Freq:50.00Hz 实检光通:88.9259x1 lm | | |
| 灯具名称: SF15-24V-5050-56-DMX4SM-RGBW(4000)-W | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021123019 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

| 光源数据 | | 光度数据 | | | | 光效: 19.44 lm/W |
|-----------|---------|----------|--------|------------------------|----------|----------------|
| 型号 | 5050 | 峰值光强(cd) | 30.94 | S/MH(C0/180) | 1.24 | |
| 标称功率(W) | 3.75 | 灯具效率(%) | 100.0 | S/MH(C90/270) | 1.21 | |
| 额定电源电压(V) | 24 | 总光通量(lm) | 88.926 | η UP,DN(C0-180) | 0.8,50.0 | |
| 额定光通量(lm) | 88.9259 | CIE分类 | 直接 | η UP,DN(C180-360) | 0.6,48.7 | |
| 灯具内光源数(只) | 1 | 上射光通比(%) | 1.4 | CIBSE SHR NOM | 1.25 | |
| 实测电源电压(V) | 24 | 下射光通比(%) | 98.6 | CIBSE SHR MAX | 1.35 | |

室内灯具配光曲线

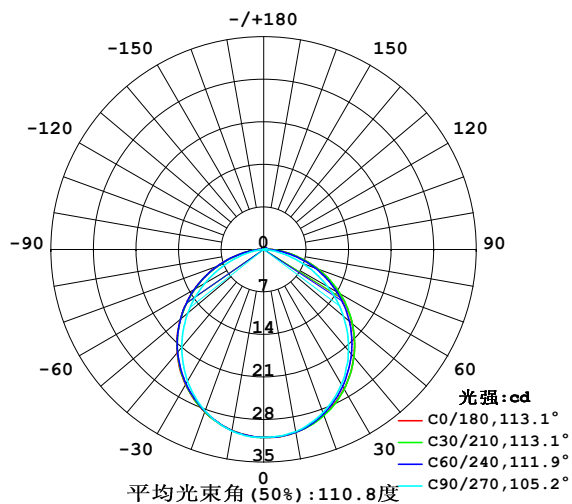

空间等照度曲线(单位:lx)

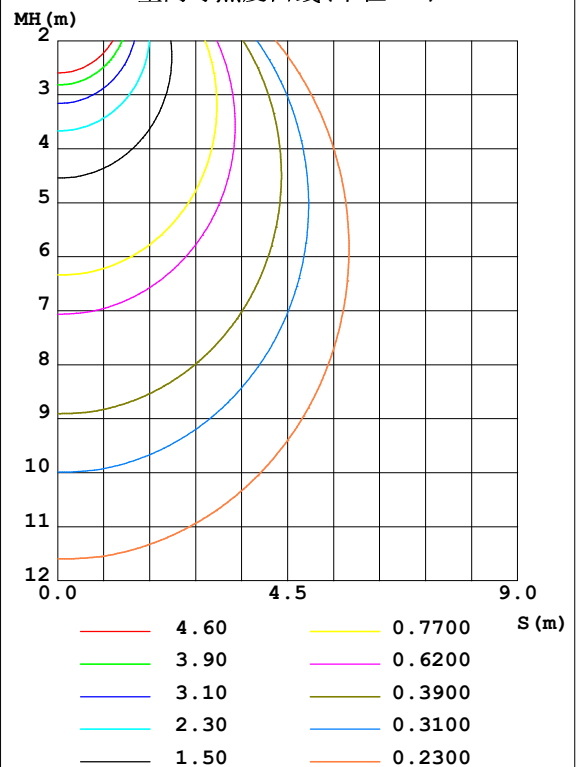

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2021-12-30

γ角度范围: 0度 - 120度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

灯具环带光通量

环带光通量:

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | $\gamma(^{\circ})$ | Φ 环 | Φ 总 | %lum, lamp |
|----------|--------|--------|--------|--------|--------|--------|--------|--------|--------------------|----------|----------|------------|
| 10 | 30.54 | 30.54 | 30.42 | 30.30 | 30.22 | 30.25 | 30.34 | 30.50 | 0- 10 | 2.928 | 2.928 | 3.29, 3.29 |
| 20 | 29.01 | 28.94 | 28.56 | 28.51 | 28.46 | 28.37 | 28.25 | 28.69 | 10- 20 | 8.362 | 11.29 | 12.7, 12.7 |
| 30 | 26.48 | 26.27 | 25.61 | 25.77 | 25.72 | 25.60 | 25.06 | 25.97 | 20- 30 | 12.60 | 23.89 | 26.9, 26.9 |
| 40 | 23.08 | 22.79 | 21.74 | 22.22 | 22.16 | 22.07 | 21.00 | 22.56 | 30- 40 | 15.10 | 38.98 | 43.8, 43.8 |
| 50 | 19.01 | 18.74 | 17.16 | 17.99 | 17.93 | 17.88 | 16.32 | 18.61 | 40- 50 | 15.62 | 54.60 | 61.4, 61.4 |
| 60 | 14.43 | 14.19 | 12.12 | 13.25 | 13.19 | 13.14 | 11.21 | 14.10 | 50- 60 | 14.09 | 68.69 | 77.2, 77.2 |
| 70 | 9.523 | 9.320 | 6.885 | 8.212 | 8.166 | 8.124 | 6.055 | 9.247 | 60- 70 | 10.76 | 79.45 | 89.3, 89.3 |
| 80 | 4.663 | 4.448 | 2.042 | 3.428 | 3.489 | 3.327 | 1.481 | 4.380 | 70- 80 | 6.238 | 85.69 | 96.4, 96.4 |
| 90 | 1.274 | 0.9800 | 0.2804 | 0.6962 | 0.7073 | 0.5355 | 0.1275 | 0.8521 | 80- 90 | 2.021 | 87.71 | 98.6, 98.6 |
| 100 | 0.3620 | 0.4391 | 0.3168 | 0.5144 | 0.3346 | 0.3369 | 0.1506 | 0.2805 | 90-100 | 0.4924 | 88.20 | 99.2, 99.2 |
| 110 | 0.3619 | 0.4493 | 0.3702 | 0.4865 | 0.3124 | 0.3508 | 0.1947 | 0.2937 | 100-110 | 0.3795 | 88.58 | 99.6, 99.6 |
| 120 | 0.1463 | 0.2621 | 0.0942 | 0.2987 | 0.3368 | 0.3392 | 0.2211 | 0.1674 | 110-120 | 0.3288 | 88.91 | 100, 100 |
| 130 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 120-130 | 0.0133 | 88.93 | 100, 100 |
| 140 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 130-140 | 0 | 88.93 | 100, 100 |
| 150 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 140-150 | 0 | 88.93 | 100, 100 |
| 160 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 150-160 | 0 | 88.93 | 100, 100 |
| 170 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 160-170 | 0 | 88.93 | 100, 100 |
| 180 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 170-180 | 0 | 88.93 | 100, 100 |
| 单位:° | 光强:cd | | | | | | | | | 单位:lm | | |

锥面光通量(90度): 46.858 lm

%lum = 52.7%

%lamp = 52.7%

锥面光通量(120度): 68.69 lm

%lum = 77.2%


%lamp = 77.2%

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2021-12-30

γ 角度范围: 0度 - 120度
 γ 角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

灯具亮度限制曲线

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.1906A P:4.574W PF:1.000 Freq:50.00Hz 实检光通:88.9259x1 lm | | |
| 灯具名称: SF15-24V-5050-56-DMX4SM-RGBW(4000)-W | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021123019 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

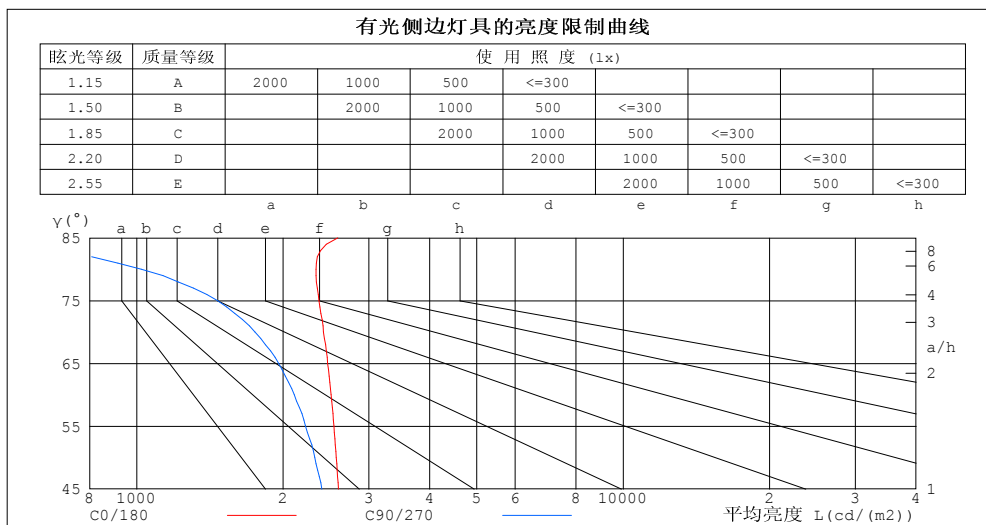

| 平均亮度值 cd/(m²) | | |
|---------------|--------|---------|
| Y (°) | C0/180 | C90/270 |
| 85 | 2591 | 395 |
| 80 | 2335 | 1022 |
| 75 | 2369 | 1466 |
| 70 | 2421 | 1751 |
| 65 | 2468 | 1957 |
| 60 | 2510 | 2107 |
| 55 | 2544 | 2224 |
| 50 | 2572 | 2322 |
| 45 | 2599 | 2402 |


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-30

Y角度范围: 0度 - 120度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.1906A P:4.574W PF:1.000 Freq:50.00Hz 实检光通:88.9259x1 lm | | |
| 灯具名称: SF15-24V-5050-56-DMX4SM-RGBW(4000)-W | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021123019 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 工 作 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | 1.19 | 1.19 | 1.19 | 1.16 | 1.16 | 1.16 | 1.10 | 1.10 | 1.10 | 1.05 | 1.05 | 1.05 | 1.01 | 1.01 | 1.01 | .99 |
| 1.0 | 1.03 | .99 | .95 | 1.01 | .97 | .93 | .96 | .93 | .90 | .92 | .90 | .87 | .88 | .86 | .84 | .82 |
| 2.0 | .90 | .83 | .77 | .88 | .82 | .76 | .84 | .79 | .74 | .81 | .76 | .72 | .77 | .74 | .70 | .68 |
| 3.0 | .79 | .71 | .64 | .77 | .70 | .63 | .74 | .68 | .62 | .71 | .66 | .61 | .68 | .64 | .60 | .57 |
| 4.0 | .70 | .61 | .54 | .68 | .60 | .54 | .66 | .59 | .53 | .63 | .57 | .52 | .61 | .56 | .51 | .49 |
| 5.0 | .62 | .53 | .47 | .61 | .53 | .46 | .59 | .51 | .46 | .57 | .50 | .45 | .55 | .49 | .44 | .42 |
| 6.0 | .56 | .47 | .41 | .55 | .47 | .40 | .53 | .46 | .40 | .51 | .45 | .40 | .50 | .44 | .39 | .37 |
| 7.0 | .51 | .42 | .36 | .50 | .42 | .36 | .48 | .41 | .35 | .47 | .40 | .35 | .45 | .39 | .35 | .33 |
| 8.0 | .46 | .38 | .32 | .46 | .38 | .32 | .44 | .37 | .32 | .43 | .36 | .31 | .42 | .36 | .31 | .29 |
| 9.0 | .43 | .34 | .29 | .42 | .34 | .29 | .41 | .34 | .28 | .40 | .33 | .28 | .38 | .32 | .28 | .26 |
| 10.0 | .39 | .31 | .26 | .39 | .31 | .26 | .38 | .31 | .26 | .37 | .30 | .26 | .36 | .30 | .25 | .24 |

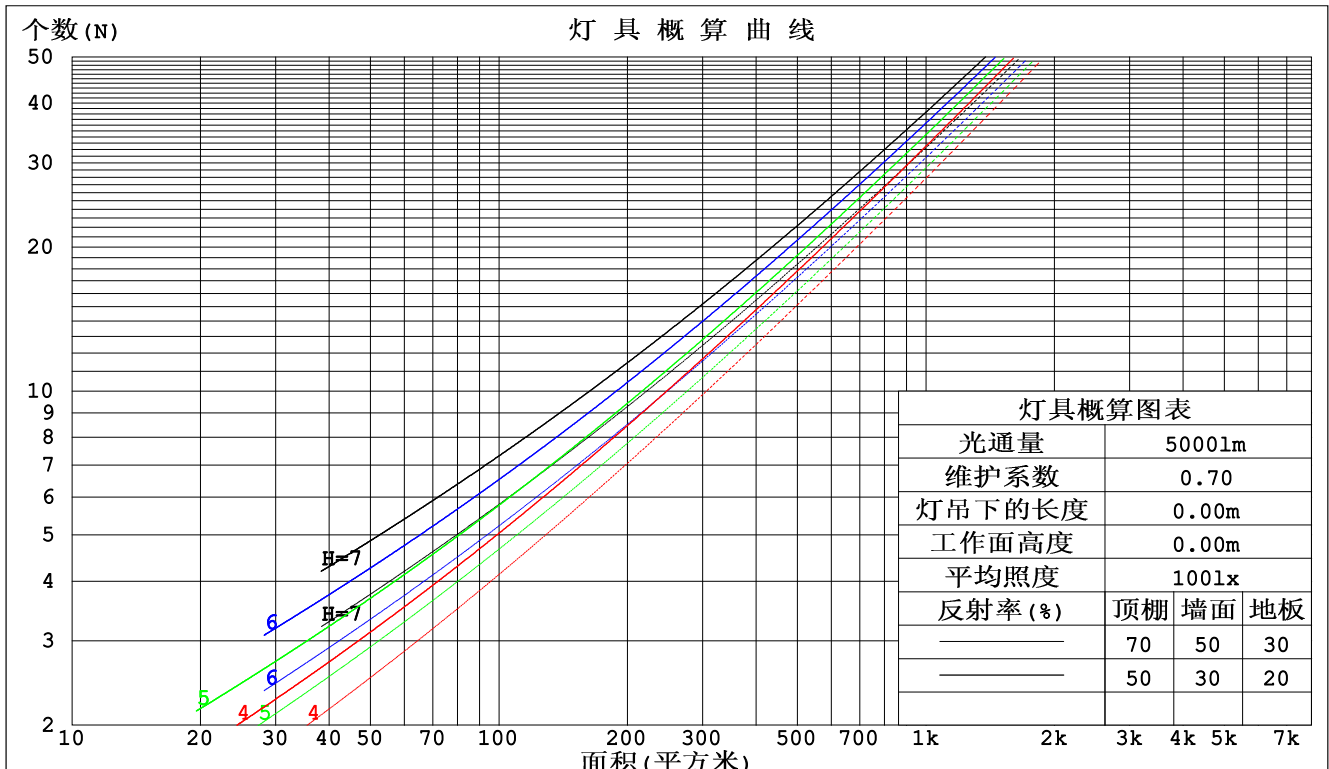

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2021-12-30

γ角度范围: 0度 - 120度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

墙面和天花板利用系数

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.1906A P:4.574W PF:1.000 Freq:50.00Hz 实检光通:88.9259x1 lm | | |
| 灯具名称: SF15-24V-5050-56-DMX4SM-RGBW(4000)-W | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021123019 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 墙 壁 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .314 | .178 | .056 | .306 | .175 | .055 | .292 | .168 | .053 | .279 | .161 | .052 | .267 | .155 | .050 | |
| 2.0 | .293 | .161 | .049 | .287 | .158 | .049 | .274 | .152 | .047 | .263 | .147 | .046 | .252 | .143 | .045 | |
| 3.0 | .271 | .144 | .043 | .265 | .142 | .043 | .254 | .138 | .042 | .244 | .133 | .041 | .234 | .130 | .040 | |
| 4.0 | .249 | .130 | .038 | .244 | .128 | .038 | .234 | .124 | .037 | .225 | .121 | .037 | .217 | .118 | .036 | |
| 5.0 | .230 | .117 | .034 | .226 | .116 | .034 | .217 | .113 | .033 | .209 | .110 | .033 | .201 | .108 | .032 | |
| 6.0 | .214 | .107 | .031 | .209 | .106 | .030 | .202 | .103 | .030 | .194 | .101 | .030 | .188 | .099 | .029 | |
| 7.0 | .199 | .098 | .028 | .195 | .097 | .028 | .188 | .095 | .027 | .181 | .093 | .027 | .175 | .091 | .027 | |
| 8.0 | .185 | .091 | .025 | .182 | .090 | .025 | .176 | .088 | .025 | .170 | .086 | .025 | .164 | .084 | .025 | |
| 9.0 | .174 | .084 | .023 | .171 | .083 | .023 | .165 | .082 | .023 | .160 | .080 | .023 | .155 | .079 | .023 | |
| 10.0 | .163 | .078 | .022 | .161 | .078 | .022 | .156 | .076 | .021 | .151 | .075 | .021 | .146 | .074 | .021 | |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 天 花 板 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | .201 | .201 | .201 | .172 | .172 | .172 | .117 | .117 | .117 | .067 | .067 | .067 | .022 | .022 | .022 | |
| 1.0 | .191 | .167 | .145 | .163 | .143 | .124 | .112 | .098 | .086 | .064 | .057 | .050 | .021 | .018 | .016 | |
| 2.0 | .183 | .142 | .108 | .157 | .123 | .094 | .107 | .085 | .065 | .062 | .049 | .038 | .020 | .016 | .012 | |
| 3.0 | .175 | .125 | .085 | .150 | .108 | .074 | .103 | .075 | .052 | .060 | .044 | .030 | .019 | .014 | .010 | |
| 4.0 | .168 | .112 | .069 | .144 | .096 | .060 | .099 | .067 | .042 | .057 | .039 | .025 | .018 | .013 | .008 | |
| 5.0 | .160 | .101 | .058 | .138 | .088 | .050 | .095 | .061 | .036 | .055 | .036 | .021 | .018 | .012 | .007 | |
| 6.0 | .153 | .093 | .050 | .131 | .080 | .043 | .091 | .056 | .031 | .053 | .033 | .018 | .017 | .011 | .006 | |
| 7.0 | .146 | .086 | .044 | .126 | .075 | .038 | .087 | .052 | .027 | .050 | .031 | .016 | .016 | .010 | .005 | |
| 8.0 | .140 | .080 | .039 | .120 | .070 | .034 | .083 | .049 | .024 | .048 | .029 | .015 | .016 | .009 | .005 | |
| 9.0 | .134 | .075 | .036 | .115 | .065 | .031 | .080 | .046 | .022 | .046 | .027 | .013 | .015 | .009 | .004 | |
| 10.0 | .128 | .071 | .033 | .110 | .062 | .029 | .076 | .043 | .021 | .045 | .026 | .012 | .014 | .008 | .004 | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-30

γ角度范围: 0度 - 120度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

UGR(Unified Glare Rating) 数据表

| | | | | | | | | | | |
|---|-----------------------|------|------|------|-------------------|---------------------|------|------------------|------|------|
| 实测参数: U:24.00V I:0.1906A P:4.574W PF:1.000 Freq:50.00Hz 实检光通:88.9259x1 lm | | | | | | | | | | |
| 灯具名称: SF15-24V-5050-56-DMX4SM-RGBW(4000)-W | | | | | 灯具类型: 硅胶 | | | 灯具重量: | | |
| 灯具规格: | | | | | 外型尺寸: 21mm*11.5mm | | | 测试编号: 2021123019 | | |
| 制造厂商: OLYMPIA | | | | | 发光口面: 1*0.0115 | | | 遮光角: | | |
| 反射比: 天花板 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| 墙面 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| 房间尺寸 | 交叉 (Viewed crosswise) | | | | | 向前 (Viewed endwise) | | | | |
| x = 2H y = 2H | 24.7 | 26.2 | 25.0 | 26.4 | 26.6 | 24.1 | 25.6 | 24.4 | 25.9 | 26.1 |
| 3H | 26.4 | 27.7 | 26.7 | 28.0 | 28.3 | 25.5 | 26.9 | 25.8 | 27.1 | 27.4 |
| 4H | 27.1 | 28.4 | 27.4 | 28.7 | 29.0 | 26.0 | 27.3 | 26.3 | 27.6 | 27.8 |
| 6H | 27.7 | 28.9 | 28.0 | 29.2 | 29.5 | 26.2 | 27.4 | 26.5 | 27.7 | 28.0 |
| 8H | 27.9 | 29.1 | 28.3 | 29.4 | 29.7 | 26.2 | 27.4 | 26.6 | 27.7 | 28.0 |
| 12H | 28.1 | 29.2 | 28.5 | 29.6 | 29.9 | 26.2 | 27.3 | 26.6 | 27.7 | 28.0 |
| 4H 2H | 25.3 | 26.6 | 25.6 | 26.9 | 27.2 | 24.9 | 26.2 | 25.2 | 26.5 | 26.8 |
| 3H | 27.2 | 28.3 | 27.6 | 28.7 | 29.0 | 26.5 | 27.7 | 26.9 | 28.0 | 28.3 |
| 4H | 28.1 | 29.1 | 28.4 | 29.5 | 29.8 | 27.1 | 28.2 | 27.5 | 28.5 | 28.9 |
| 6H | 28.8 | 29.7 | 29.2 | 30.1 | 30.5 | 27.5 | 28.4 | 27.9 | 28.8 | 29.2 |
| 8H | 29.1 | 30.0 | 29.5 | 30.4 | 30.8 | 27.6 | 28.5 | 28.0 | 28.9 | 29.3 |
| 12H | 29.3 | 30.1 | 29.8 | 30.6 | 31.0 | 27.6 | 28.4 | 28.0 | 28.8 | 29.2 |
| 8H 4H | 28.3 | 29.2 | 28.8 | 29.6 | 30.0 | 27.5 | 28.4 | 28.0 | 28.8 | 29.2 |
| 6H | 29.3 | 30.0 | 29.7 | 30.4 | 30.9 | 28.2 | 28.9 | 28.6 | 29.3 | 29.8 |
| 8H | 29.7 | 30.3 | 30.2 | 30.8 | 31.3 | 28.3 | 29.0 | 28.8 | 29.4 | 29.9 |
| 12H | 30.1 | 30.6 | 30.6 | 31.1 | 31.6 | 28.4 | 29.0 | 28.9 | 29.5 | 30.0 |
| 12H 4H | 28.4 | 29.2 | 28.8 | 29.6 | 30.0 | 27.6 | 28.4 | 28.0 | 28.8 | 29.2 |
| 6H | 29.3 | 30.0 | 29.8 | 30.4 | 30.9 | 28.3 | 28.9 | 28.8 | 29.4 | 29.9 |
| 8H | 29.8 | 30.4 | 30.3 | 30.8 | 31.3 | 28.5 | 29.1 | 29.0 | 29.6 | 30.1 |
| 不同间隔布灯时, 观察者位置引起的UGR变化: | | | | | | | | | | |
| S = 1.0H | + 0.1 / - 0.2 | | | | | + 0.2 / - 0.2 | | | | |
| 1.5H | + 0.2 / - 0.3 | | | | | + 0.2 / - 0.4 | | | | |
| 2.0H | + 0.1 / - 0.3 | | | | | + 0.2 / - 0.5 | | | | |

依据CIE Pub.117计算, 88.93lm光源光通要进行修正 ($8\log(F/F_0) = -8.4$).

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-30

γ角度范围: 0度 - 120度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

UF利用系数表

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.1906A P:4.574W PF:1.000 Freq:50.00Hz 实检光通:88.9259x1 lm | | |
| 灯具名称: SF15-24V-5050-56-DMX4SM-RGBW(4000)-W | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021123019 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |


| 反 射 比 / REFLECTANCE | | | | | | | | | | |
|----------------------------|--|-----|-----|-----|-----|-----|---------------------|-----|-----|---------|
| 天花板 | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| 墙壁 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| 室形指数 | 利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$ | | | | | | | | | |
| $k = 0.60$ | 57 | 45 | 38 | 56 | 45 | 38 | 55 | 45 | 38 | 32 |
| 0.80 | 67 | 55 | 48 | 66 | 55 | 48 | 64 | 54 | 47 | 40 |
| 1.00 | 75 | 64 | 57 | 74 | 63 | 56 | 72 | 65 | 56 | 49 |
| 1.25 | 82 | 72 | 65 | 81 | 71 | 64 | 78 | 70 | 63 | 56 |
| 1.50 | 87 | 77 | 70 | 86 | 76 | 70 | 83 | 75 | 69 | 61 |
| 2.00 | 94 | 86 | 79 | 92 | 84 | 78 | 89 | 82 | 77 | 69 |
| 2.50 | 98 | 90 | 84 | 96 | 89 | 83 | 92 | 86 | 81 | 73 |
| 3.00 | 102 | 95 | 89 | 99 | 93 | 88 | 95 | 90 | 85 | 77 |
| 4.00 | 106 | 100 | 95 | 103 | 98 | 94 | 99 | 94 | 91 | 81 |
| 5.00 | 108 | 103 | 99 | 106 | 101 | 97 | 101 | 97 | 94 | 84 |
| ROOM INDEX | UF (总) | | | | | | | | | UF (直接) |
| 依据标准文件 DIN EN 13032-2 2004 | | | 悬挂灯 | | | | 安装距高比 SHRNOM = 1.25 | | | |

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2021-12-30

γ角度范围: 0度 - 120度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

灯具等光强曲线

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.1906A P:4.574W PF:1.000 Freq:50.00Hz 实检光通:88.9259x1 lm | | |
| 灯具名称: SF15-24V-5050-56-DMX4SM-RGBW(4000)-W | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021123019 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

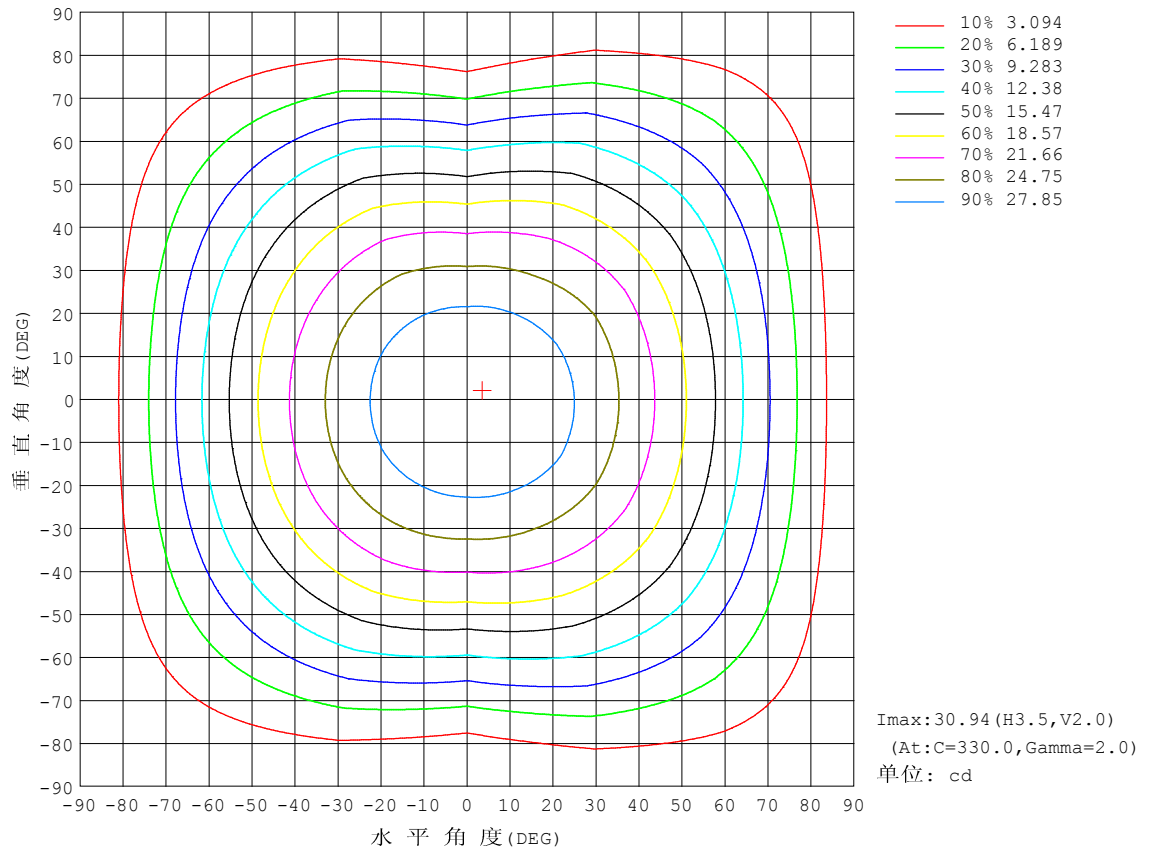


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-30

γ角度范围: 0度 - 120度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

灯具有效平均照度图

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.1906A P:4.574W PF:1.000 Freq:50.00Hz 实检光通:88.9259x1 lm | | |
| 灯具名称: SF15-24V-5050-56-DMX4SM-RGBW(4000)-W | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021123019 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

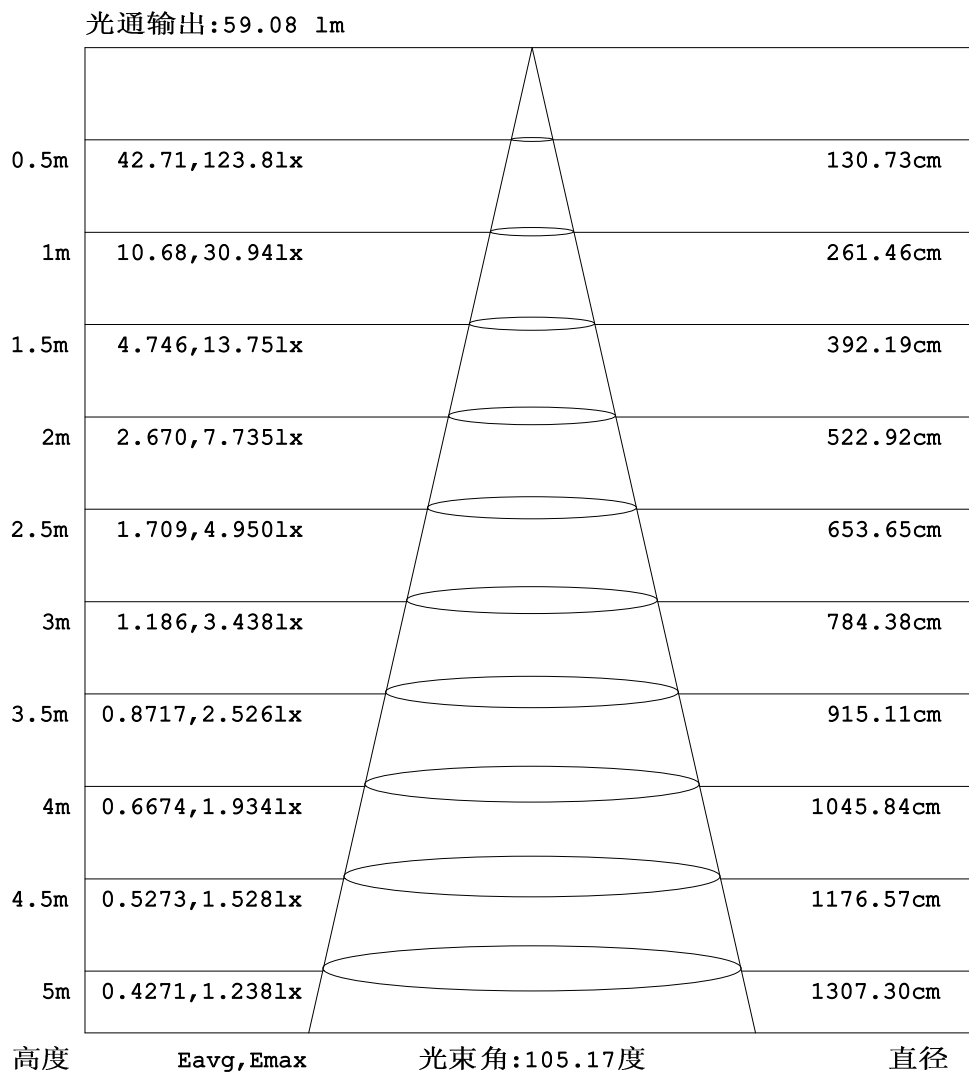


C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2021-12-30

γ角度范围: 0度 - 120度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

平面等照度曲线

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.1906A P:4.574W PF:1.000 Freq:50.00Hz 实检光通:88.9259x1 lm | | |
| 灯具名称: SF15-24V-5050-56-DMX4SM-RGBW(4000)-W | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021123019 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

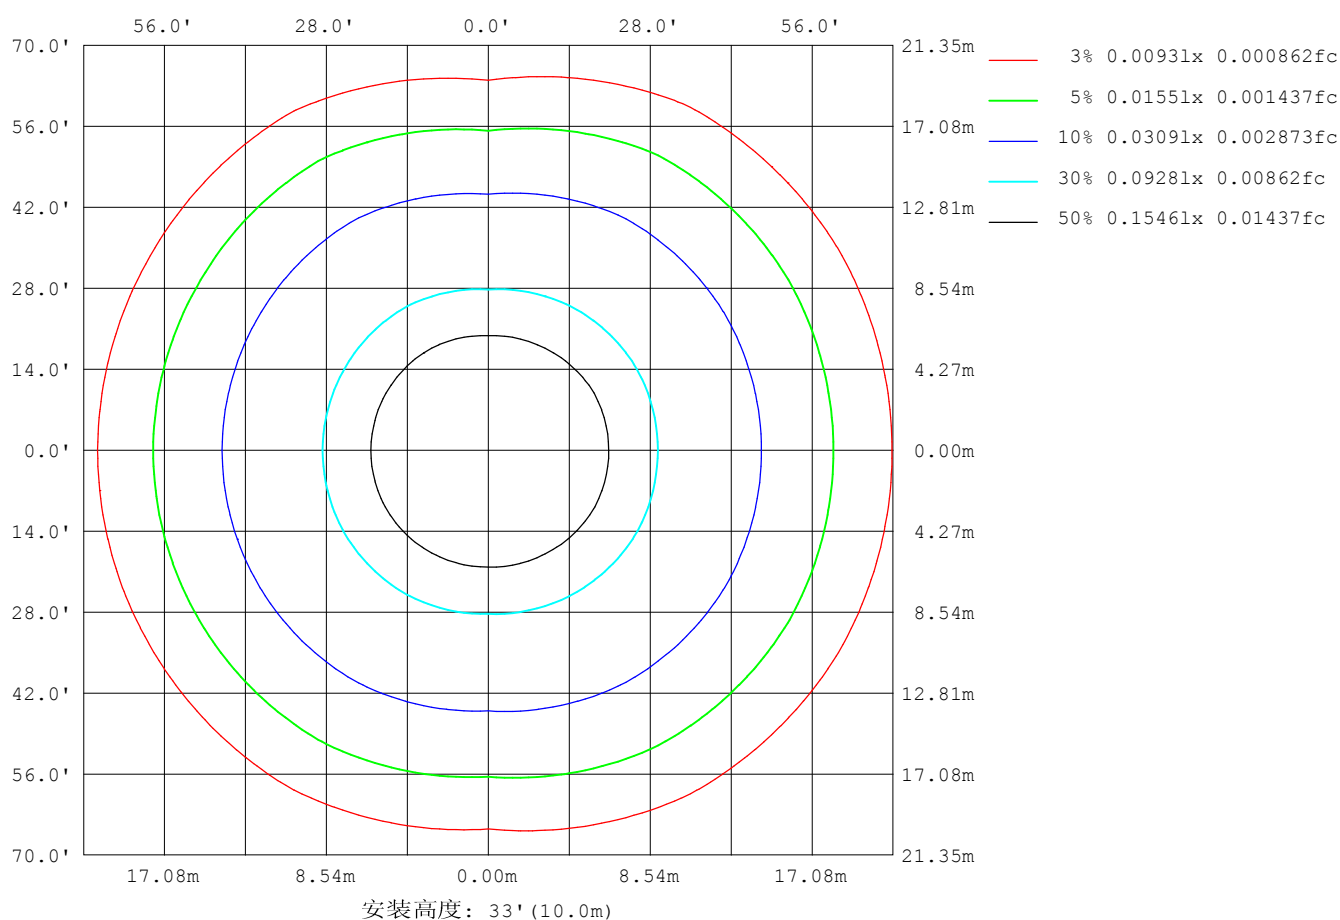

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2021-12-30

γ角度范围: 0度 - 120度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

LED筒灯平均亮度报告

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.1906A P:4.574W PF:1.000 Freq:50.00Hz 实检光通:88.9259x1 lm | | |
| 灯具名称: SF15-24V-5050-56-DMX4SM-RGBW(4000)-W | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021123019 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |


| 平均亮度 | 数值 (cd/m2) |
|-------------|------------|
| L横 (65) av | 2334 |
| L横 (75) av | 2143 |
| L横 (85) av | 2182 |
| L纵 (65) av | 1865 |
| L纵 (75) av | 1341 |
| L纵 (85) av | 296 |
| L45 (65) av | 2336 |
| L45 (75) av | 2144 |
| L45 (85) av | 2011 |

注: 依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-30

γ角度范围: 0度 - 120度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

平面照度曲线

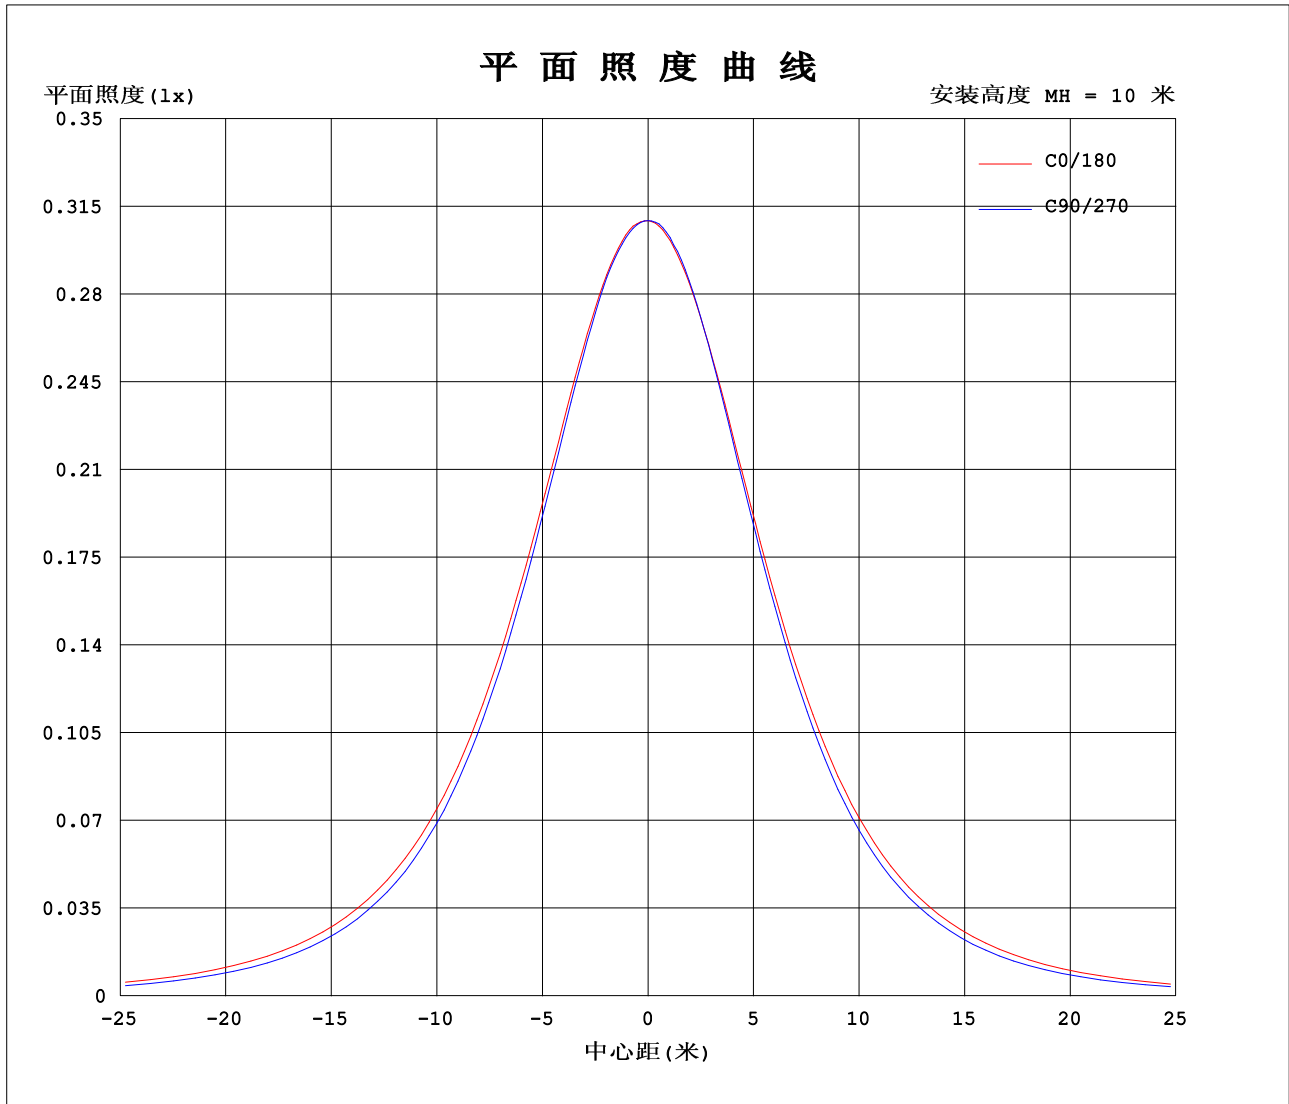

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-30

γ角度范围: 0度 - 120度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

光强分布数据表格

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.1906A P:4.574W PF:1.000 Freq:50.00Hz 实检光通:88.9259x1 lm | | |
| 灯具名称: SF15-24V-5050-56-DMX4SM-RGBW(4000)-W | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021123019 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

表--1

单位: cd

| C (DEG) γ (DEG) | 0 | 30 | 60 | 90 | 120 | 150 | 180 | 210 | 240 | 270 | 300 | 330 | | | | | | |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|--|--|--|--|--|--|
| 0 | 30.9 | 30.9 | 30.9 | 30.9 | 30.9 | 30.9 | 30.9 | 30.9 | 30.9 | 30.9 | 30.9 | 30.9 | | | | | | |
| 5 | 30.9 | 30.9 | 30.9 | 30.8 | 30.8 | 30.7 | 30.7 | 30.8 | 30.7 | 30.8 | 30.8 | 30.9 | | | | | | |
| 10 | 30.5 | 30.5 | 30.5 | 30.4 | 30.3 | 30.3 | 30.2 | 30.3 | 30.3 | 30.3 | 30.4 | 30.6 | | | | | | |
| 15 | 29.9 | 29.9 | 29.8 | 29.6 | 29.6 | 29.5 | 29.5 | 29.5 | 29.4 | 29.5 | 29.6 | 29.9 | | | | | | |
| 20 | 29.0 | 29.1 | 28.8 | 28.6 | 28.5 | 28.5 | 28.5 | 28.4 | 28.3 | 28.2 | 28.5 | 28.9 | | | | | | |
| 25 | 27.8 | 27.9 | 27.5 | 27.2 | 27.2 | 27.3 | 27.2 | 27.1 | 27.0 | 26.8 | 27.2 | 27.7 | | | | | | |
| 30 | 26.5 | 26.5 | 26.0 | 25.6 | 25.7 | 25.8 | 25.7 | 25.6 | 25.6 | 25.1 | 25.5 | 26.4 | | | | | | |
| 35 | 24.9 | 24.9 | 24.3 | 23.8 | 24.1 | 24.1 | 24.0 | 24.0 | 23.9 | 23.1 | 23.8 | 24.8 | | | | | | |
| 40 | 23.1 | 23.1 | 22.5 | 21.7 | 22.2 | 22.2 | 22.2 | 22.1 | 22.1 | 21.0 | 22.1 | 23.0 | | | | | | |
| 45 | 21.1 | 21.2 | 20.5 | 19.5 | 20.2 | 20.2 | 20.1 | 20.0 | 20.0 | 18.7 | 20.3 | 21.1 | | | | | | |
| 50 | 19.0 | 19.1 | 18.4 | 17.2 | 18.0 | 18.0 | 17.9 | 17.9 | 17.9 | 16.3 | 18.3 | 19.0 | | | | | | |
| 55 | 16.8 | 16.8 | 16.2 | 14.7 | 15.7 | 15.6 | 15.6 | 15.5 | 15.6 | 13.8 | 16.1 | 16.7 | | | | | | |
| 60 | 14.4 | 14.5 | 13.9 | 12.1 | 13.3 | 13.2 | 13.2 | 13.1 | 13.2 | 11.2 | 13.8 | 14.4 | | | | | | |
| 65 | 12.0 | 12.1 | 11.5 | 9.51 | 10.8 | 10.7 | 10.7 | 10.6 | 10.7 | 8.61 | 11.4 | 12.0 | | | | | | |
| 70 | 9.52 | 9.60 | 9.04 | 6.89 | 8.25 | 8.17 | 8.17 | 8.04 | 8.21 | 6.06 | 8.98 | 9.52 | | | | | | |
| 75 | 7.05 | 7.12 | 6.59 | 4.36 | 5.75 | 5.71 | 5.70 | 5.58 | 5.68 | 3.62 | 6.52 | 7.03 | | | | | | |
| 80 | 4.66 | 4.70 | 4.19 | 2.04 | 3.41 | 3.45 | 3.49 | 3.32 | 3.33 | 1.48 | 4.13 | 4.63 | | | | | | |
| 85 | 2.60 | 2.54 | 2.07 | 0.40 | 1.56 | 1.75 | 1.78 | 1.65 | 1.40 | 0.20 | 1.98 | 2.48 | | | | | | |
| 90 | 1.27 | 1.17 | 0.79 | 0.28 | 0.62 | 0.77 | 0.71 | 0.65 | 0.42 | 0.13 | 0.62 | 1.09 | | | | | | |
| 95 | 0.59 | 0.53 | 0.49 | 0.29 | 0.53 | 0.52 | 0.36 | 0.38 | 0.36 | 0.12 | 0.35 | 0.45 | | | | | | |
| 100 | 0.36 | 0.42 | 0.46 | 0.32 | 0.51 | 0.52 | 0.33 | 0.37 | 0.31 | 0.15 | 0.29 | 0.27 | | | | | | |
| 105 | 0.36 | 0.44 | 0.41 | 0.36 | 0.45 | 0.53 | 0.32 | 0.36 | 0.29 | 0.18 | 0.28 | 0.28 | | | | | | |
| 110 | 0.36 | 0.46 | 0.44 | 0.37 | 0.46 | 0.51 | 0.31 | 0.36 | 0.34 | 0.19 | 0.30 | 0.29 | | | | | | |
| 115 | 0.36 | 0.32 | 0.46 | 0.33 | 0.47 | 0.38 | 0.32 | 0.35 | 0.36 | 0.20 | 0.30 | 0.26 | | | | | | |
| 120 | 0.15 | 0.09 | 0.43 | 0.09 | 0.49 | 0.11 | 0.34 | 0.32 | 0.36 | 0.22 | 0.29 | 0.04 | | | | | | |
| 125 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 130 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 135 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 140 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 145 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 150 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 155 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 160 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 165 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 170 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 175 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 180 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: LPC

测试日期: 2021-12-30

γ角度范围: 0度 - 120度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362

环境湿度: 65.0%

测试距离: 9.200米 [K=1.0000]

备注:

Photometric Data Table [cd]

| G/C | 0.0 | 30.0 | 60.0 | 90.0 | 120.0 | 150.0 | 180.0 | 210.0 | 240.0 | 270.0 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0.0 | 30.93 | 30.94 | 30.92 | 30.93 | 30.93 | 30.94 | 30.93 | 30.94 | 30.92 | 30.93 |
| 3.0 | 30.94 | 30.92 | 30.93 | 30.89 | 30.91 | 30.84 | 30.84 | 30.87 | 30.84 | 30.93 |
| 6.0 | 30.86 | 30.83 | 30.85 | 30.75 | 30.73 | 30.66 | 30.64 | 30.67 | 30.66 | 30.76 |
| 9.0 | 30.64 | 30.63 | 30.63 | 30.51 | 30.45 | 30.37 | 30.33 | 30.37 | 30.37 | 30.48 |
| 12.0 | 30.32 | 30.33 | 30.32 | 30.16 | 30.09 | 29.97 | 29.95 | 29.96 | 29.95 | 30.02 |
| 15.0 | 29.90 | 29.94 | 29.84 | 29.64 | 29.57 | 29.50 | 29.46 | 29.47 | 29.42 | 29.46 |
| 18.0 | 29.40 | 29.45 | 29.25 | 29.01 | 28.97 | 28.95 | 28.89 | 28.89 | 28.78 | 28.77 |
| 21.0 | 28.79 | 28.86 | 28.57 | 28.31 | 28.27 | 28.27 | 28.22 | 28.17 | 28.08 | 27.99 |
| 24.0 | 28.09 | 28.20 | 27.79 | 27.50 | 27.49 | 27.54 | 27.47 | 27.43 | 27.30 | 27.10 |
| 27.0 | 27.33 | 27.37 | 26.94 | 26.61 | 26.68 | 26.72 | 26.64 | 26.58 | 26.48 | 26.12 |
| 30.0 | 26.48 | 26.53 | 26.00 | 25.61 | 25.75 | 25.79 | 25.72 | 25.64 | 25.55 | 25.06 |
| 33.0 | 25.53 | 25.58 | 24.99 | 24.57 | 24.76 | 24.81 | 24.73 | 24.69 | 24.59 | 23.91 |
| 36.0 | 24.54 | 24.57 | 23.95 | 23.40 | 23.71 | 23.75 | 23.68 | 23.59 | 23.54 | 22.69 |
| 39.0 | 23.46 | 23.49 | 22.85 | 22.14 | 22.59 | 22.61 | 22.55 | 22.46 | 22.43 | 21.42 |
| 42.0 | 22.31 | 22.35 | 21.71 | 20.89 | 21.41 | 21.44 | 21.37 | 21.31 | 21.27 | 20.08 |
| 45.0 | 21.13 | 21.16 | 20.51 | 19.54 | 20.18 | 20.22 | 20.12 | 20.04 | 20.04 | 18.73 |
| 48.0 | 19.88 | 19.93 | 19.28 | 18.12 | 18.89 | 18.90 | 18.83 | 18.73 | 18.77 | 17.29 |
| 51.0 | 18.59 | 18.64 | 17.99 | 16.70 | 17.54 | 17.55 | 17.47 | 17.37 | 17.44 | 15.83 |
| 54.0 | 17.23 | 17.29 | 16.66 | 15.17 | 16.17 | 16.13 | 16.09 | 16.03 | 16.07 | 14.34 |
| 57.0 | 15.85 | 15.94 | 15.28 | 13.69 | 14.74 | 14.71 | 14.66 | 14.51 | 14.67 | 12.79 |
| 60.0 | 14.43 | 14.50 | 13.88 | 12.12 | 13.28 | 13.22 | 13.19 | 13.08 | 13.21 | 11.21 |
| 63.0 | 12.99 | 13.05 | 12.45 | 10.55 | 11.81 | 11.72 | 11.69 | 11.58 | 11.73 | 9.660 |
| 66.0 | 11.52 | 11.60 | 11.01 | 9.001 | 10.29 | 10.22 | 10.19 | 10.04 | 10.23 | 8.096 |
| 69.0 | 10.02 | 10.10 | 9.529 | 7.413 | 8.760 | 8.680 | 8.674 | 8.588 | 8.709 | 6.558 |
| 72.0 | 8.550 | 8.604 | 8.057 | 5.865 | 7.243 | 7.162 | 7.161 | 6.991 | 7.181 | 5.066 |
| 75.0 | 7.052 | 7.117 | 6.589 | 4.363 | 5.750 | 5.710 | 5.705 | 5.579 | 5.685 | 3.618 |
| 78.0 | 5.599 | 5.645 | 5.126 | 2.911 | 4.307 | 4.293 | 4.318 | 4.200 | 4.237 | 2.266 |
| 81.0 | 4.211 | 4.227 | 3.748 | 1.645 | 2.984 | 3.052 | 3.092 | 2.943 | 2.900 | 1.099 |
| 84.0 | 2.950 | 2.931 | 2.457 | 0.6556 | 1.843 | 2.032 | 2.067 | 1.928 | 1.720 | 0.2535 |
| 87.0 | 1.968 | 1.887 | 1.415 | 0.3074 | 1.053 | 1.270 | 1.270 | 1.153 | 0.8826 | 0.1309 |
| 90.0 | 1.274 | 1.169 | 0.7906 | 0.2804 | 0.6243 | 0.7681 | 0.7073 | 0.6546 | 0.4164 | 0.1275 |
| 93.0 | 0.7953 | 0.7127 | 0.5232 | 0.2815 | 0.5328 | 0.5277 | 0.3967 | 0.4125 | 0.3839 | 0.1241 |
| 96.0 | 0.5085 | 0.4620 | 0.4805 | 0.2965 | 0.5278 | 0.5177 | 0.3525 | 0.3720 | 0.3514 | 0.1206 |
| 99.0 | 0.3722 | 0.4172 | 0.4621 | 0.3067 | 0.5152 | 0.5177 | 0.3390 | 0.3663 | 0.3189 | 0.1456 |
| 102.0 | 0.3619 | 0.4323 | 0.4437 | 0.3470 | 0.5027 | 0.5257 | 0.3256 | 0.3646 | 0.2864 | 0.1607 |
| 105.0 | 0.3619 | 0.4423 | 0.4143 | 0.3594 | 0.4545 | 0.5347 | 0.3166 | 0.3628 | 0.2866 | 0.1815 |
| 108.0 | 0.3619 | 0.4538 | 0.4202 | 0.3685 | 0.4505 | 0.5274 | 0.3076 | 0.3610 | 0.3167 | 0.1902 |
| 111.0 | 0.3624 | 0.4581 | 0.4423 | 0.3711 | 0.4630 | 0.5076 | 0.3149 | 0.3592 | 0.3468 | 0.1963 |
| 114.0 | 0.3641 | 0.3676 | 0.4673 | 0.3770 | 0.4665 | 0.4394 | 0.3222 | 0.3521 | 0.3519 | 0.2022 |
| 117.0 | 0.3658 | 0.2297 | 0.4498 | 0.2356 | 0.4701 | 0.2746 | 0.3295 | 0.3344 | 0.3619 | 0.2088 |
| 120.0 | 0.1463 | 0.0919 | 0.4322 | 0.0942 | 0.4875 | 0.1098 | 0.3368 | 0.3166 | 0.3618 | 0.2211 |
| G/C | 300.0 | 330.0 | | | | | | | | |
| 0.0 | 30.93 | 30.94 | | | | | | | | |
| 3.0 | 30.91 | 30.94 | | | | | | | | |
| 6.0 | 30.79 | 30.87 | | | | | | | | |
| 9.0 | 30.55 | 30.66 | | | | | | | | |
| 12.0 | 30.15 | 30.34 | | | | | | | | |
| 15.0 | 29.63 | 29.89 | | | | | | | | |
| 18.0 | 29.01 | 29.34 | | | | | | | | |
| 21.0 | 28.28 | 28.61 | | | | | | | | |
| 24.0 | 27.46 | 27.92 | | | | | | | | |
| 27.0 | 26.54 | 27.16 | | | | | | | | |
| 30.0 | 25.55 | 26.38 | | | | | | | | |
| 33.0 | 24.52 | 25.43 | | | | | | | | |
| 36.0 | 23.48 | 24.45 | | | | | | | | |
| 39.0 | 22.45 | 23.37 | | | | | | | | |
| 42.0 | 21.42 | 22.23 | | | | | | | | |
| 45.0 | 20.31 | 21.06 | | | | | | | | |
| 48.0 | 19.10 | 19.81 | | | | | | | | |
| 51.0 | 17.83 | 18.51 | | | | | | | | |
| 54.0 | 16.52 | 17.20 | | | | | | | | |
| 57.0 | 15.17 | 15.81 | | | | | | | | |
| 60.0 | 13.79 | 14.41 | | | | | | | | |
| 63.0 | 12.35 | 12.97 | | | | | | | | |
| 66.0 | 10.94 | 11.51 | | | | | | | | |
| 69.0 | 9.463 | 10.02 | | | | | | | | |
| 72.0 | 7.985 | 8.534 | | | | | | | | |
| 75.0 | 6.524 | 7.026 | | | | | | | | |
| 78.0 | 5.071 | 5.538 | | | | | | | | |
| 81.0 | 3.674 | 4.160 | | | | | | | | |
| 84.0 | 2.368 | 2.829 | | | | | | | | |
| 87.0 | 1.294 | 1.792 | | | | | | | | |
| 90.0 | 0.6168 | 1.087 | | | | | | | | |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: LPC

测试日期: 2021-12-30

γ角度范围: 0度 - 120度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362

环境湿度: 65.0%

测试距离: 9.200米 [K=1.0000]

备注:


Photometric Data Table [cd]

| | | |
|-------|--------|--------|
| 93.0 | 0.3771 | 0.6394 |
| 96.0 | 0.3339 | 0.3976 |
| 99.0 | 0.2974 | 0.2768 |
| 102.0 | 0.2741 | 0.2763 |
| 105.0 | 0.2766 | 0.2798 |
| 108.0 | 0.2936 | 0.2860 |
| 111.0 | 0.2966 | 0.2948 |
| 114.0 | 0.2996 | 0.3035 |
| 117.0 | 0.2955 | 0.1734 |
| 120.0 | 0.2915 | 0.0434 |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-30


γ角度范围: 0度 - 120度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

I (cd)

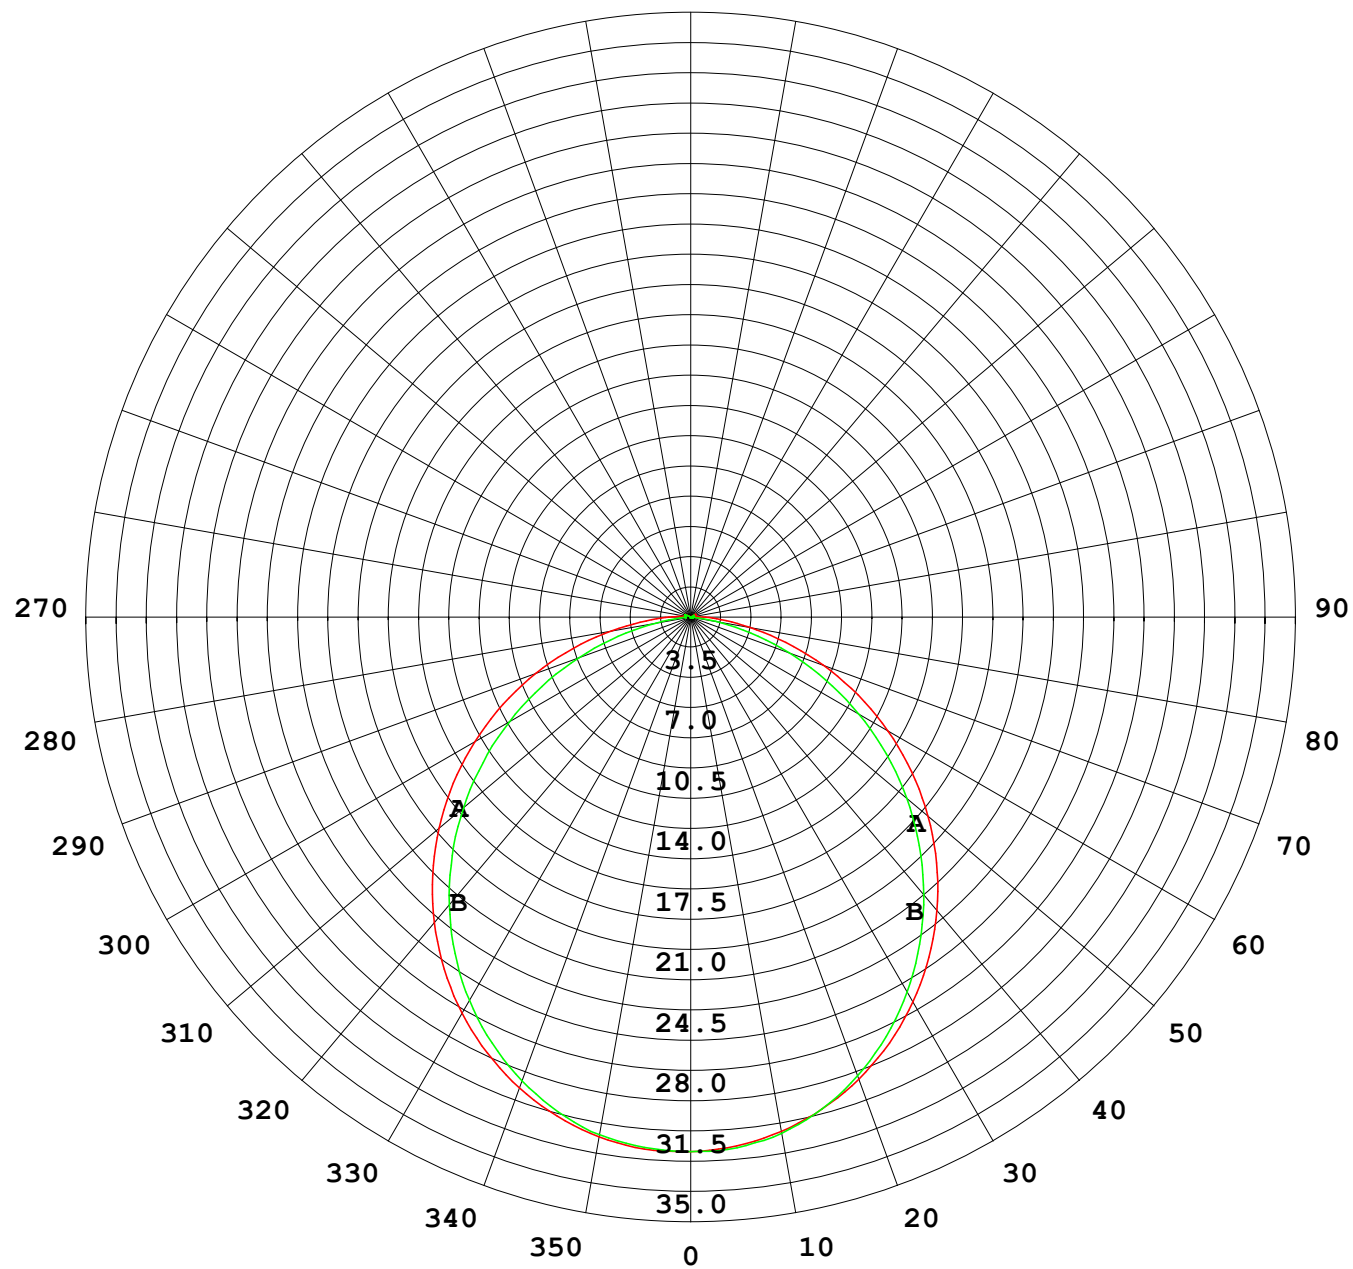

1000 lm

$\kappa = 1$

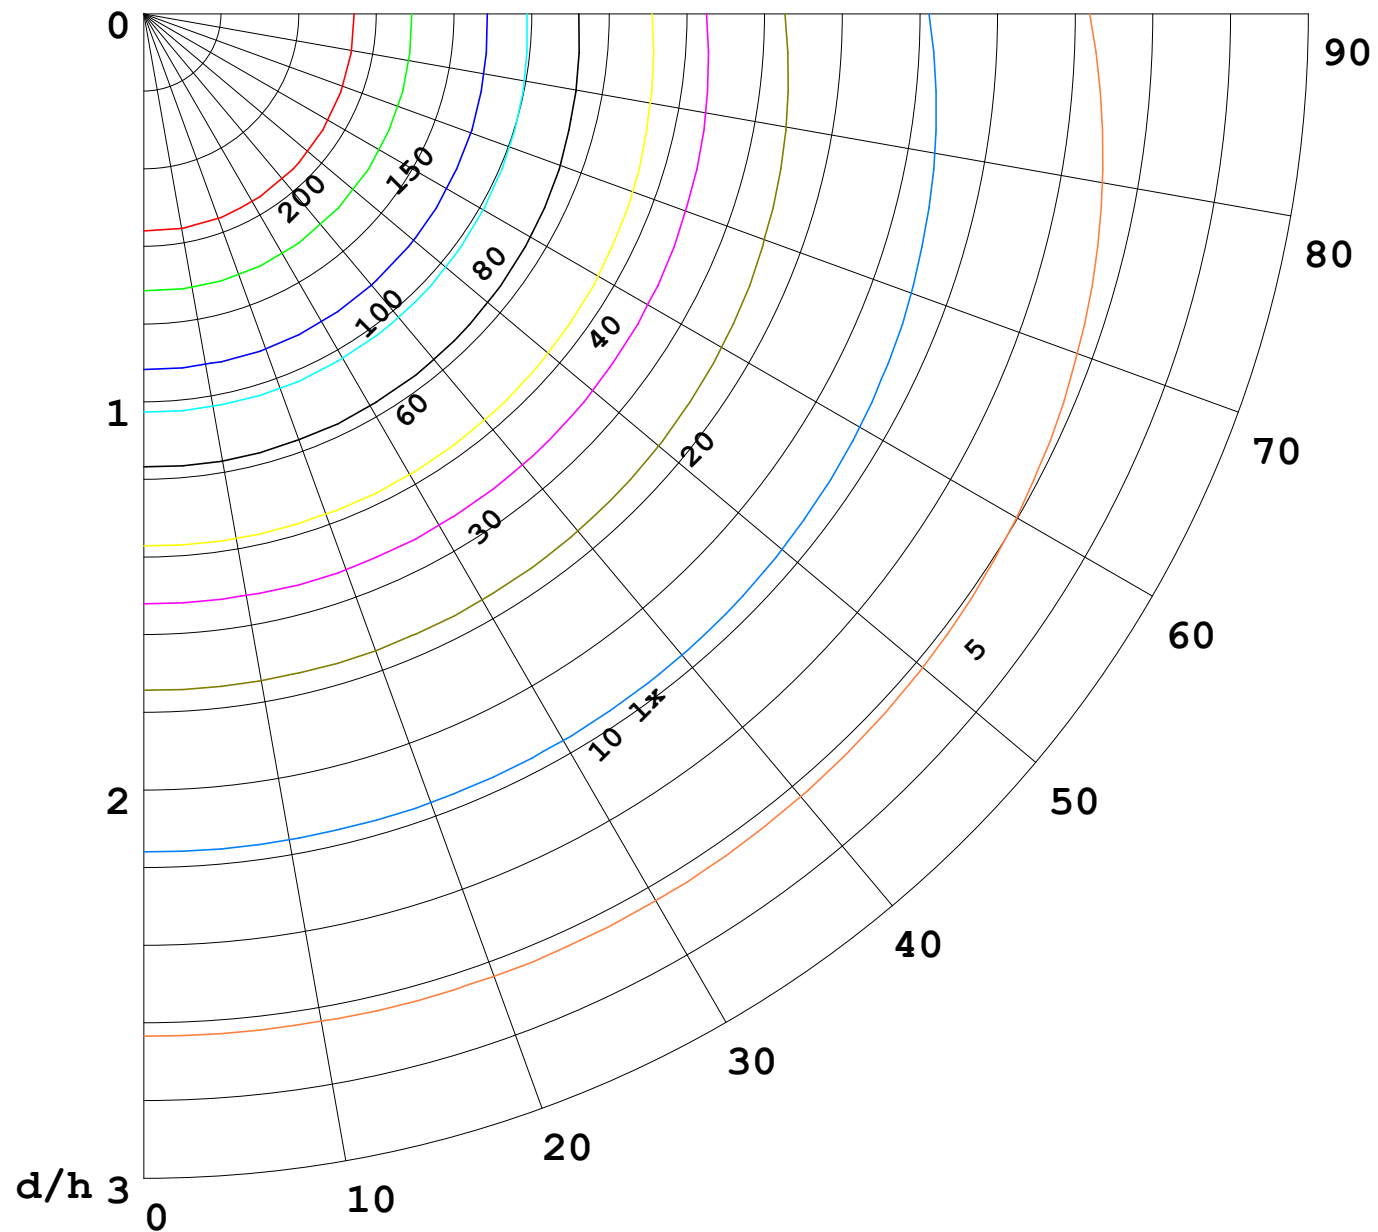

F = 5000 lm
 K = 0.7
 Hcc = 0.0 m
 Hfc = 0.0 m
 Eave = 100 lx

| | Pcc | Pw | Pfc |
|---|-----|----|-----|
| — | 70 | 50 | 30 |
| — | 50 | 30 | 20 |

