


## 室内灯具光度数据


实测参数: U:24.00V I:0.7389A P:17.73W PF:1.000 Freq:50.00Hz 实检光通:246.657x1 lm		
灯具名称: SF15-24V-5050-70-SPI4-RGBW(3000)	灯具类型: 硅胶	灯具重量:
灯具规格:	外型尺寸: 21mm*11.5mm	测试编号: 2021123005
制造厂商: OLYMPIA	发光口面: 1*0.0115	遮光角:

光源数据		光度数据				光效: 13.91 lm/W
型号	5050	峰值光强(cd)	86.73	S/MH(C0/180)	1.23	
标称功率(W)	15	灯具效率(%)	100.0	S/MH(C90/270)	1.21	
额定电源电压(V)	24	总光通量(lm)	246.66	$\eta$ UP,DN(C0-180)	0.8,49.7	
额定光通量(lm)	246.657	CIE分类	直接	$\eta$ UP,DN(C180-360)	0.7,48.8	
灯具内光源数(只)	1	上射光通比(%)	1.5	CIBSE SHR NOM	1.25	
实测电源电压(V)	24	下射光通比(%)	98.5	CIBSE SHR MAX	1.35	

室内灯具配光曲线

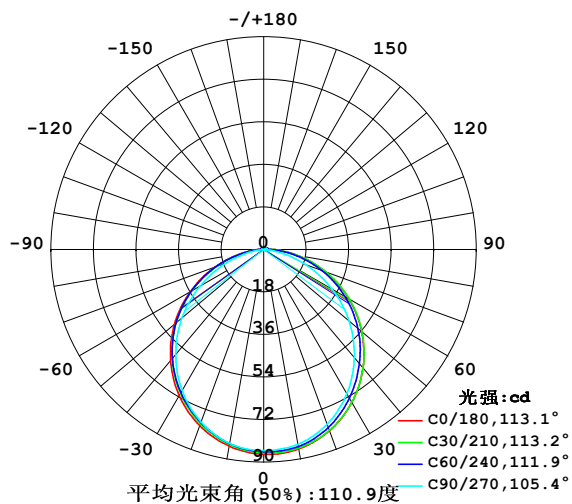

空间等照度曲线(单位:lx)

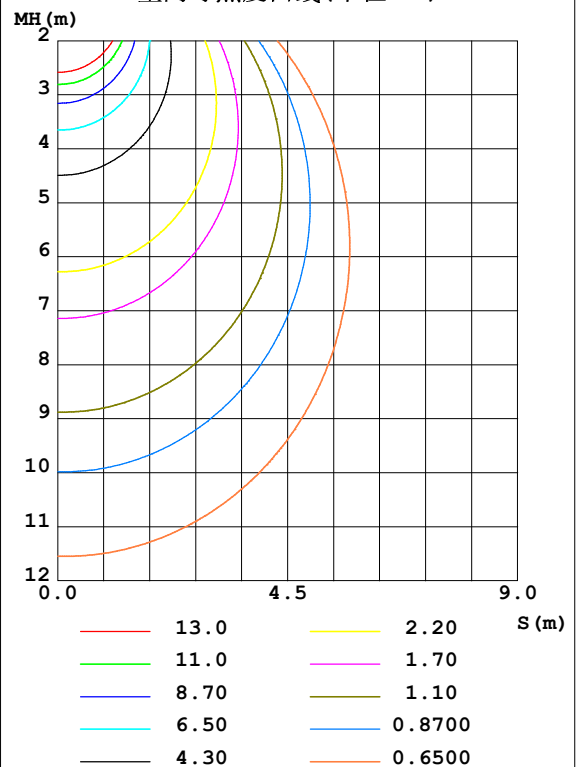

C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: LPC  
 测试日期: 2021-12-30

Y角度范围: 0度 - 120度  
 Y角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 9.200米 [K=1.0000]  
 备注:

## 灯具环带光通量

环带光通量:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	$\Phi$ 环	$\Phi$ 总	%lum, lamp
10	85.72	84.99	83.72	82.30	84.47	83.63	83.37	83.88	0- 10	8.084	8.084	3.28, 3.28
20	81.60	80.83	78.64	76.95	79.30	78.17	77.66	79.50	10- 20	23.09	31.17	12.6, 12.6
30	74.70	73.63	70.44	69.04	71.48	70.22	69.01	72.43	20- 30	34.79	65.96	26.7, 26.7
40	65.43	64.23	59.75	59.02	61.31	60.24	57.90	63.47	30- 40	41.71	107.7	43.7, 43.7
50	54.19	53.24	47.18	47.22	49.35	48.47	45.24	52.96	40- 50	43.16	150.8	61.1, 61.1
60	41.46	40.77	33.32	34.09	36.01	35.29	31.10	40.76	50- 60	38.97	189.8	76.9, 76.9
70	27.82	27.31	18.90	20.31	22.00	21.36	16.88	27.64	60- 70	29.80	219.6	89, 89
80	14.19	13.72	5.654	7.811	9.192	8.346	4.136	14.22	70- 80	17.40	237.0	96.1, 96.1
90	4.062	3.325	0.8243	1.676	1.967	1.408	0.4341	3.451	80- 90	5.938	242.9	98.5, 98.5
100	1.121	1.290	0.9504	1.475	1.084	1.056	0.5625	0.9420	90-100	1.562	244.5	99.1, 99.1
110	1.116	1.342	1.092	1.112	1.091	1.083	0.6949	0.9690	100-110	1.141	245.6	99.6, 99.6
120	0.1476	0.8473	0.3887	0.8149	0.2739	1.131	0.8192	0.5319	110-120	0.9818	246.6	100, 100
130	0	0	0	0	0	0	0	0	120-130	0.0373	246.7	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	246.7	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	246.7	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	246.7	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	246.7	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	246.7	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 129.42 lm

%lum = 52.5%

%lamp = 52.5%

锥面光通量(120度): 189.79 lm

%lum = 76.9%

%lamp = 76.9%

C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: LPC  
 测试日期: 2021-12-30


$\gamma$ 角度范围: 0度 - 120度  
 $\gamma$ 角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 9.200米 [K=1.0000]  
 备注:

## 灯具亮度限制曲线

实测参数: U:24.00V I:0.7389A P:17.73W PF:1.000 Freq:50.00Hz 实检光通:246.657x1 lm		
灯具名称: SF15-24V-5050-70-SPI4-RGBW(3000)	灯具类型: 硅胶	灯具重量:
灯具规格:	外型尺寸: 21mm*11.5mm	测试编号: 2021123005
制造厂商: OLYMPIA	发光口面: 1*0.0115	遮光角:

有光侧边灯具的亮度限制曲线

眩光等级	质量等级	使用照度 (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

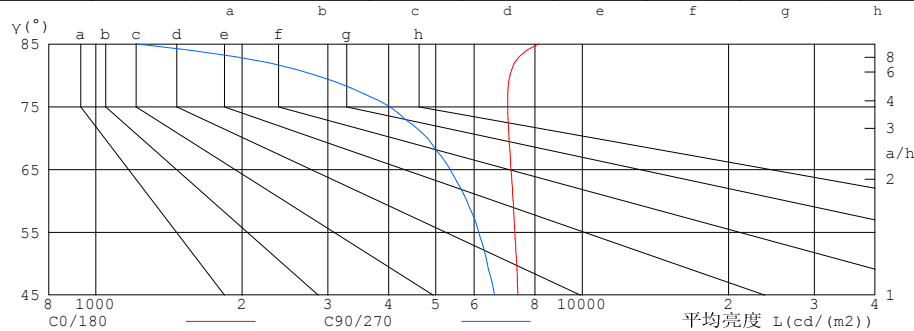

平均亮度值 cd/(m²)		
γ (°)	C0/180	C90/270
85	8145	1211
80	7104	2831
75	7028	4018
70	7072	4806
65	7142	5352
60	7210	5795
55	7272	6129
50	7331	6383
45	7384	6602


C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: LPC  
 测试日期: 2021-12-30

γ角度范围: 0度 - 120度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 9.200米 [K=1.0000]  
 备注:

## 工作面利用系数和灯具概算曲线

实测参数: U:24.00V I:0.7389A P:17.73W PF:1.000 Freq:50.00Hz 实检光通:246.657x1 lm		
灯具名称: SF15-24V-5050-70-SPI4-RGBW(3000)	灯具类型: 硅胶	灯具重量:
灯具规格:	外型尺寸: 21mm*11.5mm	测试编号: 2021123005
制造厂商: OLYMPIA	发光口面: 1*0.0115	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.80	.76	.72	.77	.74	.70	.68
3.0	.79	.71	.64	.77	.69	.63	.74	.67	.62	.71	.65	.61	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.55	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.45	.40	.51	.45	.39	.49	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

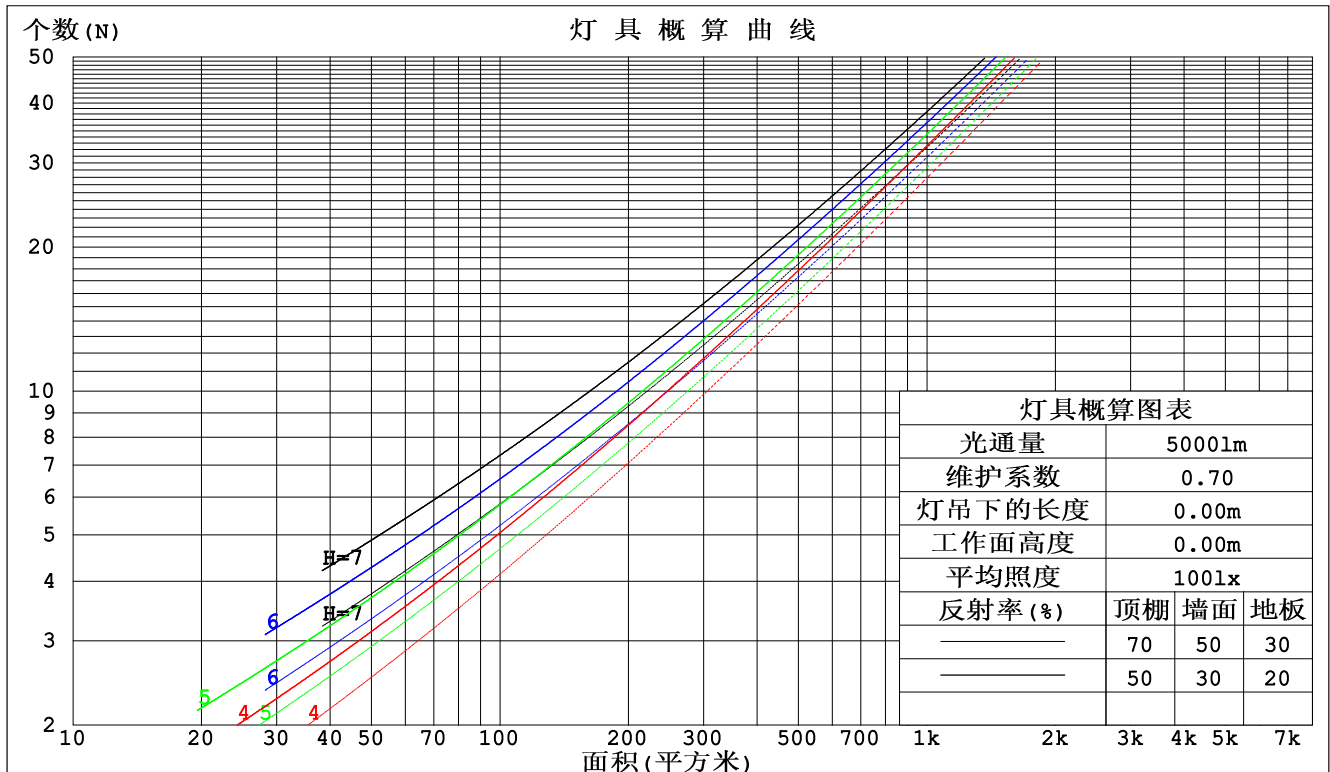

C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: LPC  
 测试日期: 2021-12-30

γ角度范围: 0度 - 120度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 9.200米 [K=1.0000]  
 备注:

## 墙面和天花板利用系数

实测参数: U:24.00V I:0.7389A P:17.73W PF:1.000 Freq:50.00Hz 实检光通:246.657x1 lm					
灯具名称: SF15-24V-5050-70-SPI4-RGBW(3000)			灯具类型: 硅胶		灯具重量:
灯具规格:			外型尺寸: 21mm*11.5mm		测试编号: 2021123005
制造厂商: OLYMPIA			发光口面: 1*0.0115		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.315	.179	.057	.308	.175	.056	.293	.168	.054	.280	.162	.052	.269	.156	.050	
2.0	.294	.161	.049	.287	.158	.049	.275	.153	.047	.263	.148	.046	.253	.143	.045	
3.0	.271	.144	.043	.265	.142	.043	.254	.138	.042	.244	.134	.041	.234	.130	.040	
4.0	.250	.130	.038	.245	.128	.038	.235	.124	.037	.226	.121	.037	.217	.118	.036	
5.0	.231	.118	.034	.226	.116	.034	.217	.113	.033	.209	.110	.033	.201	.108	.032	
6.0	.214	.107	.031	.210	.106	.030	.202	.103	.030	.194	.101	.030	.188	.099	.029	
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.186	.091	.025	.182	.090	.025	.176	.088	.025	.170	.086	.025	.164	.084	.025	
9.0	.174	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.155	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.021	.151	.075	.021	.146	.073	.021	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.146	.165	.144	.125	.113	.099	.087	.065	.057	.050	.021	.018	.016	
2.0	.184	.144	.109	.158	.124	.095	.108	.086	.066	.062	.050	.039	.020	.016	.013	
3.0	.176	.126	.086	.151	.109	.074	.104	.076	.052	.060	.044	.031	.019	.014	.010	
4.0	.169	.113	.070	.145	.097	.061	.100	.068	.043	.058	.040	.025	.019	.013	.008	
5.0	.161	.102	.059	.139	.089	.051	.095	.062	.036	.055	.036	.021	.018	.012	.007	
6.0	.154	.094	.051	.132	.081	.044	.091	.057	.031	.053	.034	.019	.017	.011	.006	
7.0	.147	.087	.045	.127	.076	.039	.088	.053	.028	.051	.031	.017	.016	.010	.005	
8.0	.141	.081	.041	.121	.071	.035	.084	.050	.025	.049	.029	.015	.016	.010	.005	
9.0	.135	.076	.037	.116	.066	.032	.080	.047	.023	.047	.028	.014	.015	.009	.005	
10.0	.129	.072	.034	.111	.063	.030	.077	.044	.021	.045	.026	.013	.015	.009	.004	

C角度范围: 0度 - 360度  
C角度间隔: 30.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: LPC  
测试日期: 2021-12-30

γ角度范围: 0度 - 120度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362  
环境湿度: 65.0%  
测试距离: 9.200米 [K=1.0000]  
备注:

UGR(Unified Glare Rating) 数据表

实测参数: U:24.00V I:0.7389A P:17.73W PF:1.000 Freq:50.00Hz 实检光通:246.657x1 lm										
灯具名称: SF15-24V-5050-70-SPI4-RGBW(3000)					灯具类型: 硅胶			灯具重量:		
灯具规格:					外型尺寸: 21mm*11.5mm			测试编号: 2021123005		
制造厂商: OLYMPIA					发光口面: 1*0.0115			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	24.9	26.4	25.2	26.6	26.9	24.2	25.7	24.5	25.9	26.2
3H	26.6	28.0	27.0	28.3	28.6	25.6	27.0	25.9	27.2	27.5
4H	27.4	28.7	27.7	29.0	29.3	26.0	27.4	26.4	27.6	27.9
6H	28.0	29.3	28.4	29.6	29.9	26.3	27.5	26.6	27.8	28.1
8H	28.3	29.5	28.6	29.8	30.1	26.3	27.5	26.7	27.8	28.2
12H	28.5	29.7	28.9	30.0	30.3	26.3	27.5	26.7	27.8	28.1
4H 2H	25.5	26.9	25.9	27.1	27.4	25.0	26.3	25.4	26.6	26.9
3H	27.5	28.6	27.9	29.0	29.3	26.6	27.8	27.0	28.1	28.5
4H	28.4	29.4	28.8	29.8	30.2	27.3	28.4	27.7	28.7	29.1
6H	29.2	30.1	29.6	30.5	30.9	27.7	28.6	28.1	29.0	29.4
8H	29.5	30.4	30.0	30.8	31.2	27.8	28.7	28.2	29.1	29.5
12H	29.8	30.6	30.3	31.0	31.5	27.8	28.6	28.3	29.0	29.5
8H 4H	28.7	29.6	29.1	30.0	30.4	27.8	28.7	28.2	29.0	29.5
6H	29.7	30.4	30.2	30.9	31.3	28.4	29.2	28.9	29.6	30.1
8H	30.2	30.8	30.6	31.3	31.7	28.6	29.3	29.1	29.7	30.2
12H	30.6	31.2	31.1	31.6	32.1	28.8	29.3	29.3	29.8	30.3
12H 4H	28.7	29.5	29.2	29.9	30.4	27.8	28.6	28.3	29.1	29.5
6H	29.8	30.4	30.3	30.9	31.4	28.6	29.2	29.1	29.7	30.2
8H	30.3	30.9	30.8	31.3	31.9	28.9	29.4	29.4	29.9	30.4
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.4				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.5				

依据CIE Pub.117计算, 246.7lm光源光通要进行修正 ( $8\log(F/F_0) = -4.9$ ).

C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: LPC  
 测试日期: 2021-12-30

γ角度范围: 0度 - 120度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 9.200米 [K=1.0000]  
 备注:

## UF利用系数表

实测参数: U:24.00V I:0.7389A P:17.73W PF:1.000 Freq:50.00Hz 实检光通:246.657x1 lm		
灯具名称: SF15-24V-5050-70-SPI4-RGBW(3000)	灯具类型:硅胶	灯具重量:
灯具规格:	外型尺寸: 21mm*11.5mm	测试编号:2021123005
制造厂商: OLYMPIA	发光口面:1*0.0115	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	48
1.25	82	72	64	81	71	64	78	69	63	56
1.50	87	77	70	86	76	70	82	74	68	61
2.00	94	85	79	92	84	78	89	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	88	95	90	85	76
4.00	105	100	95	103	98	93	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(总)									UF(直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: LPC  
 测试日期: 2021-12-30

γ角度范围: 0度 - 120度  
 γ角度间隔: 1.0度  
 测试系统: 远方(EVERFINE) GO-2000B\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 9.200米 [K=1.0000]  
 备注:

## 灯具等光强曲线

实测参数: U:24.00V I:0.7389A P:17.73W PF:1.000 Freq:50.00Hz 实检光通:246.657x1 lm		
灯具名称: SF15-24V-5050-70-SPI4-RGBW(3000)	灯具类型: 硅胶	灯具重量:
灯具规格:	外型尺寸: 21mm*11.5mm	测试编号: 2021123005
制造厂商: OLYMPIA	发光口面: 1*0.0115	遮光角:

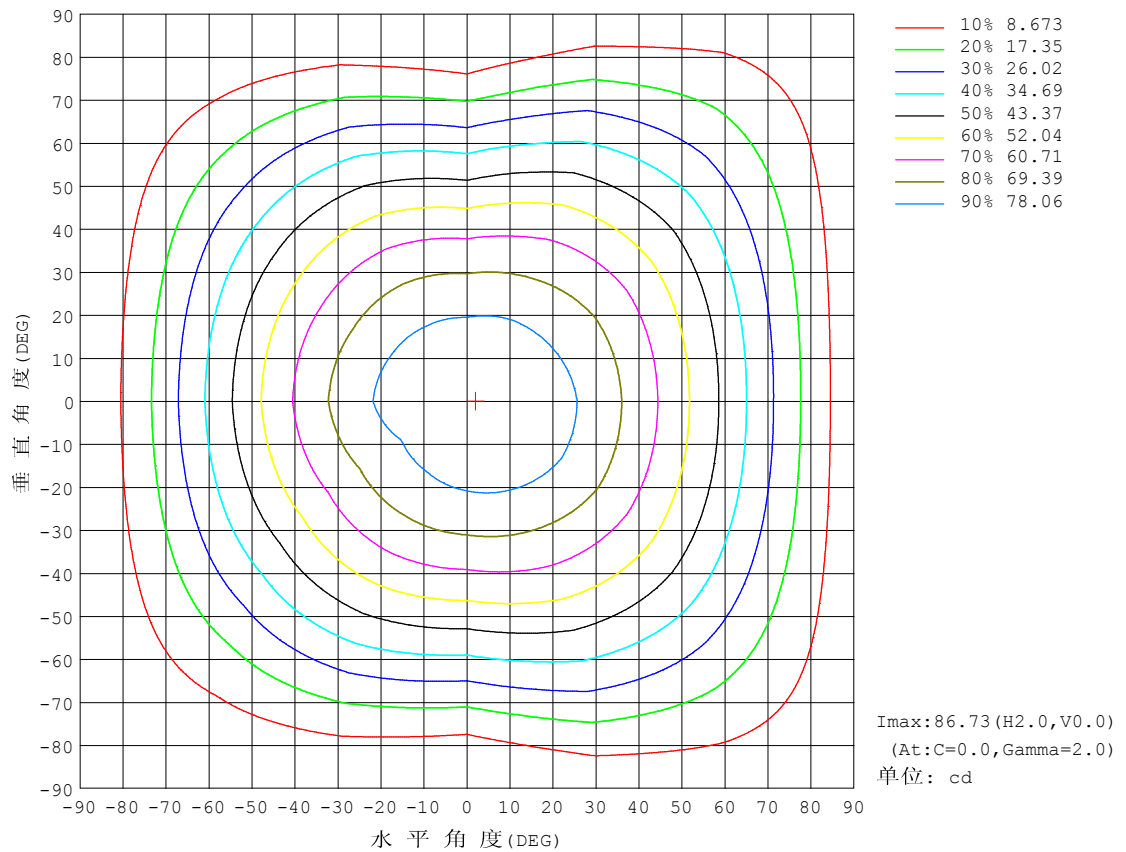


C角度范围: 0度 - 360度  
C角度间隔: 30.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: LPC  
测试日期: 2021-12-30

γ角度范围: 0度 - 120度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362  
环境湿度: 65.0%  
测试距离: 9.200米 [K=1.0000]  
备注:



## 灯具有效平均照度图

实测参数: U:24.00V I:0.7389A P:17.73W PF:1.000 Freq:50.00Hz 实检光通:246.657x1 lm		
灯具名称: SF15-24V-5050-70-SPI4-RGBW(3000)	灯具类型: 硅胶	灯具重量:
灯具规格:	外型尺寸: 21mm*11.5mm	测试编号: 2021123005
制造厂商: OLYMPIA	发光口面: 1*0.0115	遮光角:

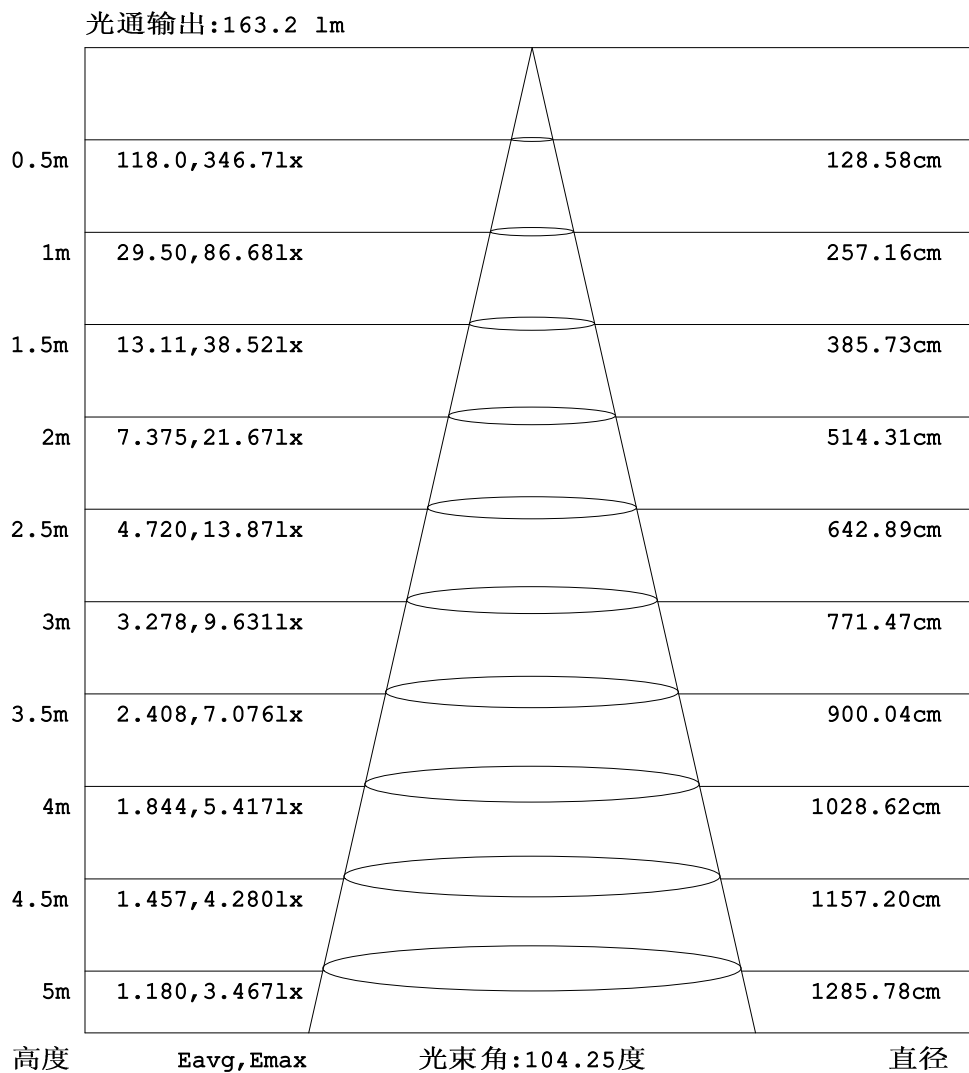


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: LPC  
 测试日期: 2021-12-30

γ角度范围: 0度 - 120度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 9.200米 [K=1.0000]  
 备注:

## 平面等照度曲线

实测参数: U:24.00V I:0.7389A P:17.73W PF:1.000 Freq:50.00Hz 实检光通:246.657x1 lm		
灯具名称: SF15-24V-5050-70-SPI4-RGBW(3000)	灯具类型: 硅胶	灯具重量:
灯具规格:	外型尺寸: 21mm*11.5mm	测试编号: 2021123005
制造厂商: OLYMPIA	发光口面: 1*0.0115	遮光角:

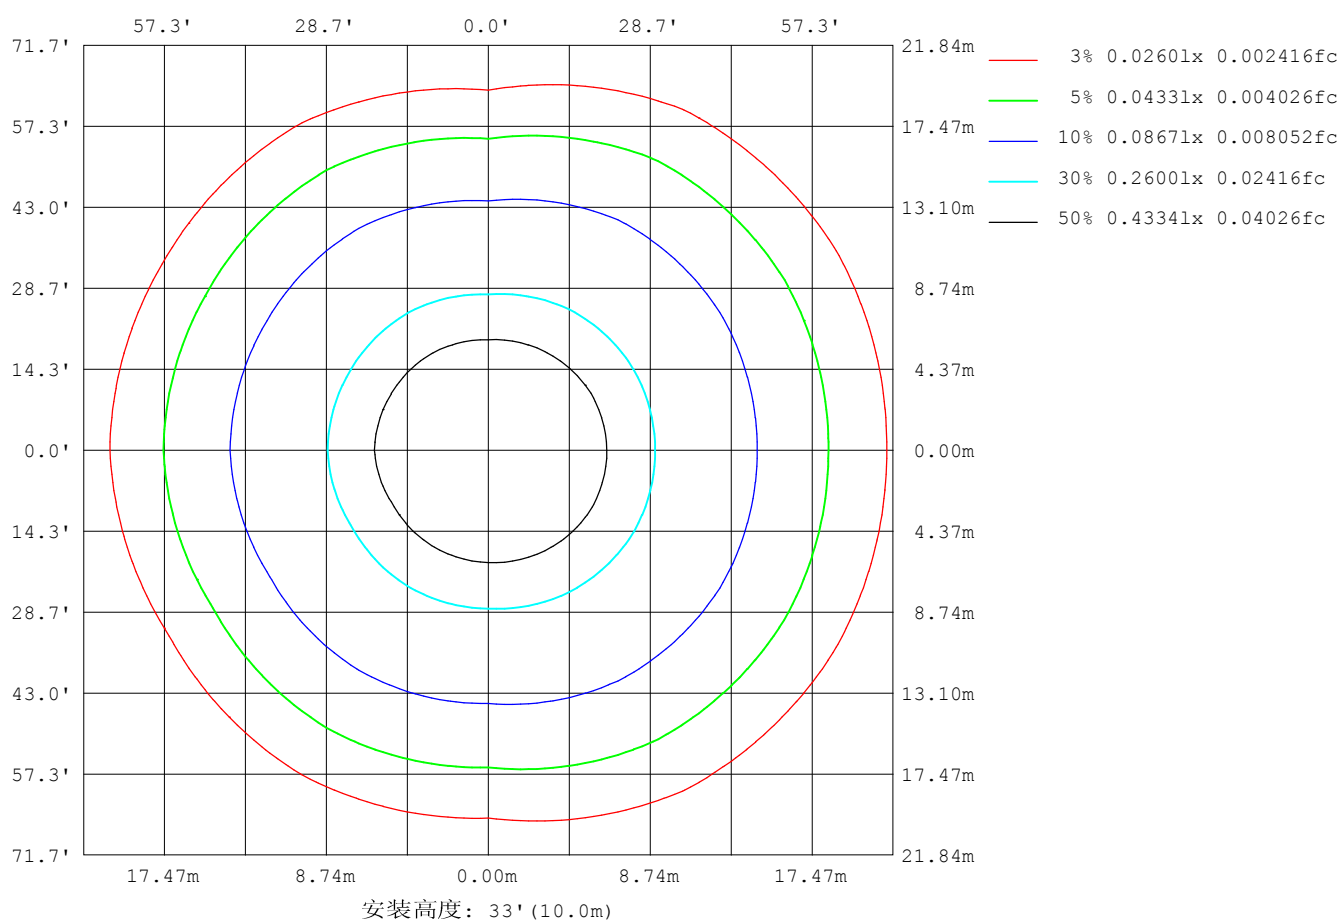

C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: LPC  
 测试日期: 2021-12-30

γ角度范围: 0度 - 120度  
 γ角度间隔: 1.0度  
 测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 9.200米 [K=1.0000]  
 备注:

## LED筒灯平均亮度报告

实测参数: U:24.00V I:0.7389A P:17.73W PF:1.000 Freq:50.00Hz 实检光通:246.657x1 lm		
灯具名称: SF15-24V-5050-70-SPI4-RGBW(3000)	灯具类型: 硅胶	灯具重量:
灯具规格:	外型尺寸: 21mm*11.5mm	测试编号: 2021123005
制造厂商: OLYMPIA	发光口面: 1*0.0115	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	6556
L横 (75) av	6061
L横 (85) av	6415
L纵 (65) av	5138
L纵 (75) av	3703
L纵 (85) av	930
L45 (65) av	6443
L45 (75) av	5962
L45 (85) av	5988

注: 依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度  
C角度间隔: 30.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: LPC  
测试日期: 2021-12-30

γ角度范围: 0度 - 120度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362  
环境湿度: 65.0%  
测试距离: 9.200米 [K=1.0000]  
备注:

## 平面照度曲线

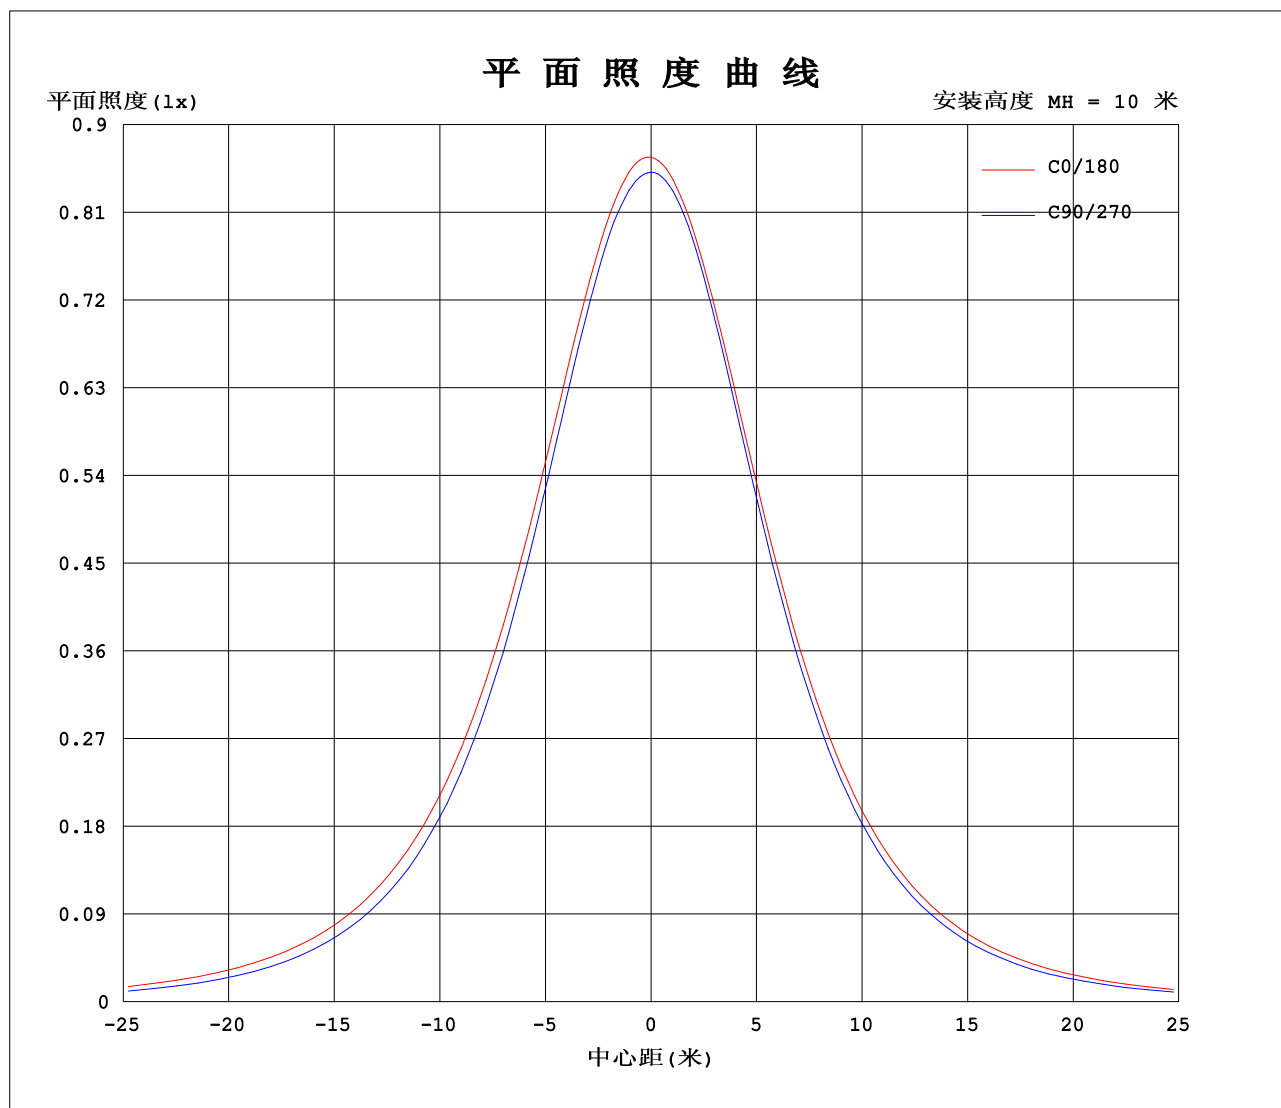

C角度范围: 0度 - 360度  
C角度间隔: 30.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: LPC  
测试日期: 2021-12-30

γ角度范围: 0度 - 120度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362  
环境湿度: 65.0%  
测试距离: 9.200米 [K=1.0000]  
备注:

## 光强分布数据表格

实测参数: U:24.00V I:0.7389A P:17.73W PF:1.000 Freq:50.00Hz 实检光通:246.657x1 lm		
灯具名称: SF15-24V-5050-70-SPI4-RGBW(3000)	灯具类型: 硅胶	灯具重量:
灯具规格:	外型尺寸: 21mm*11.5mm	测试编号: 2021123005
制造厂商: OLYMPIA	发光口面: 1*0.0115	遮光角:

表--1

单位: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	86.7	86.2	85.6	85.1	84.8	84.5	86.7	86.2	85.6	85.1	84.8	84.5							
5	86.6	86.1	85.5	84.7	84.1	83.6	86.0	85.4	84.9	84.7	84.7	84.6							
10	85.7	85.3	84.7	83.7	82.6	82.0	84.5	83.8	83.5	83.4	83.8	84.0							
15	84.0	83.8	82.8	81.6	80.3	79.6	82.2	81.4	81.0	80.9	81.8	82.5							
20	81.6	81.5	80.2	78.6	77.3	76.6	79.3	78.4	77.9	77.7	79.1	79.9							
25	78.5	78.4	76.7	74.9	73.6	73.0	75.7	74.7	74.2	73.7	75.5	77.0							
30	74.7	74.7	72.6	70.4	69.4	68.7	71.5	70.4	70.1	69.0	71.3	73.6							
35	70.3	70.4	68.0	65.3	64.7	63.8	66.6	65.7	65.3	63.7	66.7	69.5							
40	65.4	65.4	63.0	59.7	59.5	58.5	61.3	60.3	60.1	57.9	62.1	64.8							
45	60.0	60.1	57.8	53.7	53.9	52.7	55.5	54.6	54.5	51.7	57.2	59.8							
50	54.2	54.4	52.1	47.2	47.8	46.6	49.3	48.5	48.5	45.2	51.7	54.3							
55	48.0	48.3	46.0	40.4	41.4	40.1	42.8	41.9	42.1	38.3	45.7	48.2							
60	41.5	41.9	39.6	33.3	34.8	33.4	36.0	35.2	35.4	31.1	39.5	42.0							
65	34.7	35.2	33.1	26.0	27.9	26.5	29.0	28.1	28.6	23.9	33.0	35.5							
70	27.8	28.3	26.3	18.9	21.0	19.6	22.0	21.1	21.6	16.9	26.4	28.8							
75	20.9	21.3	19.6	12.0	14.2	13.1	15.2	14.3	14.7	10.1	19.7	22.1							
80	14.2	14.5	13.0	5.65	8.05	7.57	9.19	8.33	8.36	4.14	13.1	15.4							
85	8.16	8.28	6.91	1.21	3.45	3.67	4.70	4.00	3.45	0.65	6.95	9.24							
90	4.06	4.00	2.65	0.82	1.58	1.77	1.97	1.64	1.18	0.43	2.52	4.38							
95	1.91	1.87	1.41	0.88	1.50	1.52	1.10	1.18	1.01	0.45	1.01	1.88							
100	1.12	1.27	1.31	0.95	1.45	1.50	1.08	1.11	1.01	0.56	0.95	0.94							
105	1.10	1.32	1.21	1.04	1.27	1.21	1.08	1.11	0.91	0.68	0.85	0.92							
110	1.12	1.35	1.33	1.09	1.37	0.85	1.09	1.11	1.06	0.69	1.00	0.94							
115	0.89	1.38	1.40	1.15	1.44	0.50	0.96	1.11	1.12	0.75	1.02	1.02							
120	0.15	0.39	1.30	0.39	1.49	0.14	0.27	1.12	1.15	0.82	0.89	0.17							
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: LPC

测试日期: 2021-12-30

γ角度范围: 0度 - 120度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362

环境湿度: 65.0%

测试距离: 9.200米 [K=1.0000]

备注:

Photometric Data Table [cd]

G/C	0.0	30.0	60.0	90.0	120.0	150.0	180.0	210.0	240.0	270.0
0.0	86.67	86.18	85.59	85.12	84.80	84.46	86.67	86.18	85.59	85.12
3.0	86.73	86.23	85.64	84.99	84.46	84.03	86.35	85.78	85.27	84.98
6.0	86.50	86.03	85.40	84.59	83.84	83.32	85.73	85.11	84.69	84.53
9.0	85.97	85.56	84.87	83.96	82.97	82.34	84.82	84.17	83.81	83.73
12.0	85.12	84.80	84.07	82.95	81.84	81.10	83.67	82.95	82.57	82.49
15.0	84.02	83.79	82.85	81.59	80.32	79.61	82.25	81.45	81.04	80.95
18.0	82.67	82.50	81.32	79.95	78.59	77.86	80.58	79.73	79.19	79.14
21.0	81.04	80.99	79.50	77.96	76.60	75.95	78.66	77.74	77.22	76.90
24.0	79.15	79.07	77.47	75.77	74.40	73.73	76.47	75.46	75.02	74.59
27.0	77.05	76.97	75.12	73.24	72.02	71.30	74.07	73.08	72.62	71.89
30.0	74.70	74.69	72.58	70.44	69.42	68.67	71.48	70.39	70.06	69.01
33.0	72.14	72.14	69.85	67.48	66.64	65.82	68.65	67.65	67.31	65.99
36.0	69.38	69.40	67.02	64.26	63.71	62.77	65.61	64.63	64.30	62.62
39.0	66.43	66.47	64.03	60.84	60.62	59.64	62.42	61.46	61.19	59.13
42.0	63.33	63.38	60.99	57.37	57.31	56.27	59.05	58.17	57.93	55.54
45.0	60.04	60.10	57.75	53.69	53.89	52.71	55.53	54.62	54.49	51.74
48.0	56.58	56.68	54.40	49.83	50.30	49.13	51.87	50.90	50.93	47.83
51.0	52.98	53.19	50.88	45.92	46.58	45.33	48.07	47.12	47.24	43.81
54.0	49.24	49.51	47.23	41.80	42.75	41.45	44.14	43.30	43.40	39.84
57.0	45.41	45.69	43.48	37.69	38.80	37.48	40.13	39.07	39.49	35.39
60.0	41.46	41.91	39.63	33.32	34.78	33.40	36.01	35.15	35.44	31.10
63.0	37.44	37.80	35.75	28.90	30.69	29.27	31.82	30.91	31.33	26.70
66.0	33.35	33.80	31.78	24.58	26.56	25.15	27.61	26.65	27.21	22.39
69.0	29.21	29.61	27.70	20.27	22.35	21.00	23.39	22.58	23.01	18.33
72.0	25.06	25.43	23.66	15.99	18.25	16.94	19.20	18.41	18.82	13.95
75.0	20.92	21.34	19.60	11.96	14.24	13.11	15.17	14.31	14.72	10.08
78.0	16.83	17.17	15.55	8.010	10.39	9.555	11.42	10.57	10.79	6.419
81.0	12.89	13.15	11.69	4.624	6.951	6.636	8.187	7.356	7.191	3.135
84.0	9.246	9.441	8.020	1.883	4.145	4.296	5.479	4.677	4.248	0.7945
87.0	6.232	6.295	4.821	0.9340	2.342	2.665	3.382	2.770	2.182	0.4681
90.0	4.062	3.995	2.654	0.8243	1.584	1.768	1.967	1.636	1.180	0.4341
93.0	2.582	2.514	1.651	0.8545	1.511	1.523	1.235	1.192	1.025	0.4439
96.0	1.666	1.642	1.362	0.8997	1.493	1.513	1.091	1.166	1.012	0.4572
99.0	1.187	1.271	1.326	0.9349	1.463	1.483	1.085	1.106	1.008	0.5175
102.0	1.096	1.282	1.290	1.015	1.433	1.422	1.083	1.107	0.9894	0.6579
105.0	1.096	1.317	1.211	1.044	1.272	1.208	1.084	1.109	0.9100	0.6812
108.0	1.108	1.347	1.276	1.073	1.322	0.9951	1.088	1.110	0.9953	0.6856
111.0	1.136	1.359	1.396	1.101	1.402	0.7819	1.092	1.112	1.086	0.6996
114.0	1.033	1.372	1.415	1.136	1.437	0.5686	1.096	1.113	1.116	0.7136
117.0	0.5903	0.9823	1.374	0.9716	1.452	0.3554	0.6848	1.115	1.131	0.7639
120.0	0.1476	0.3929	1.302	0.3887	1.488	0.1422	0.2739	1.116	1.146	0.8192

G/C	300.0	330.0
0.0	84.80	84.46
3.0	84.80	84.62
6.0	84.57	84.57
9.0	84.04	84.16
12.0	83.09	83.47
15.0	81.81	82.45
18.0	80.27	81.10
21.0	78.42	79.36
24.0	76.28	77.63
27.0	73.86	75.70
30.0	71.27	73.58
33.0	68.53	71.26
36.0	65.81	68.57
39.0	63.08	65.81
42.0	60.25	62.90
45.0	57.23	59.78
48.0	53.94	56.47
51.0	50.51	53.03
54.0	46.97	49.57
57.0	43.30	45.71
60.0	39.51	42.00
63.0	35.64	38.10
66.0	31.75	34.09
69.0	27.74	30.27
72.0	23.70	26.01
75.0	19.68	22.11
78.0	15.70	18.11
81.0	11.79	14.13
84.0	8.098	10.34
87.0	4.886	6.946
90.0	2.518	4.385

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: LPC

测试日期: 2021-12-30

γ角度范围: 0度 - 120度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362

环境湿度: 65.0%

测试距离: 9.200米 [K=1.0000]

备注:


## Photometric Data Table [cd]

93.0	1.350	2.648
96.0	0.9972	1.596
99.0	0.9607	1.007
102.0	0.9241	0.9303
105.0	0.8498	0.9225
108.0	0.9552	0.9147
111.0	1.011	0.9498
114.0	1.050	0.9949
117.0	0.9996	0.6767
120.0	0.8946	0.1692

C角度范围: 0度 - 360度  
C角度间隔: 30.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: LPC  
测试日期: 2021-12-30

γ角度范围: 0度 - 120度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000B\_V1系统 V2.0.362  
环境湿度: 65.0%  
测试距离: 9.200米 [K=1.0000]  
备注:


I (cd)

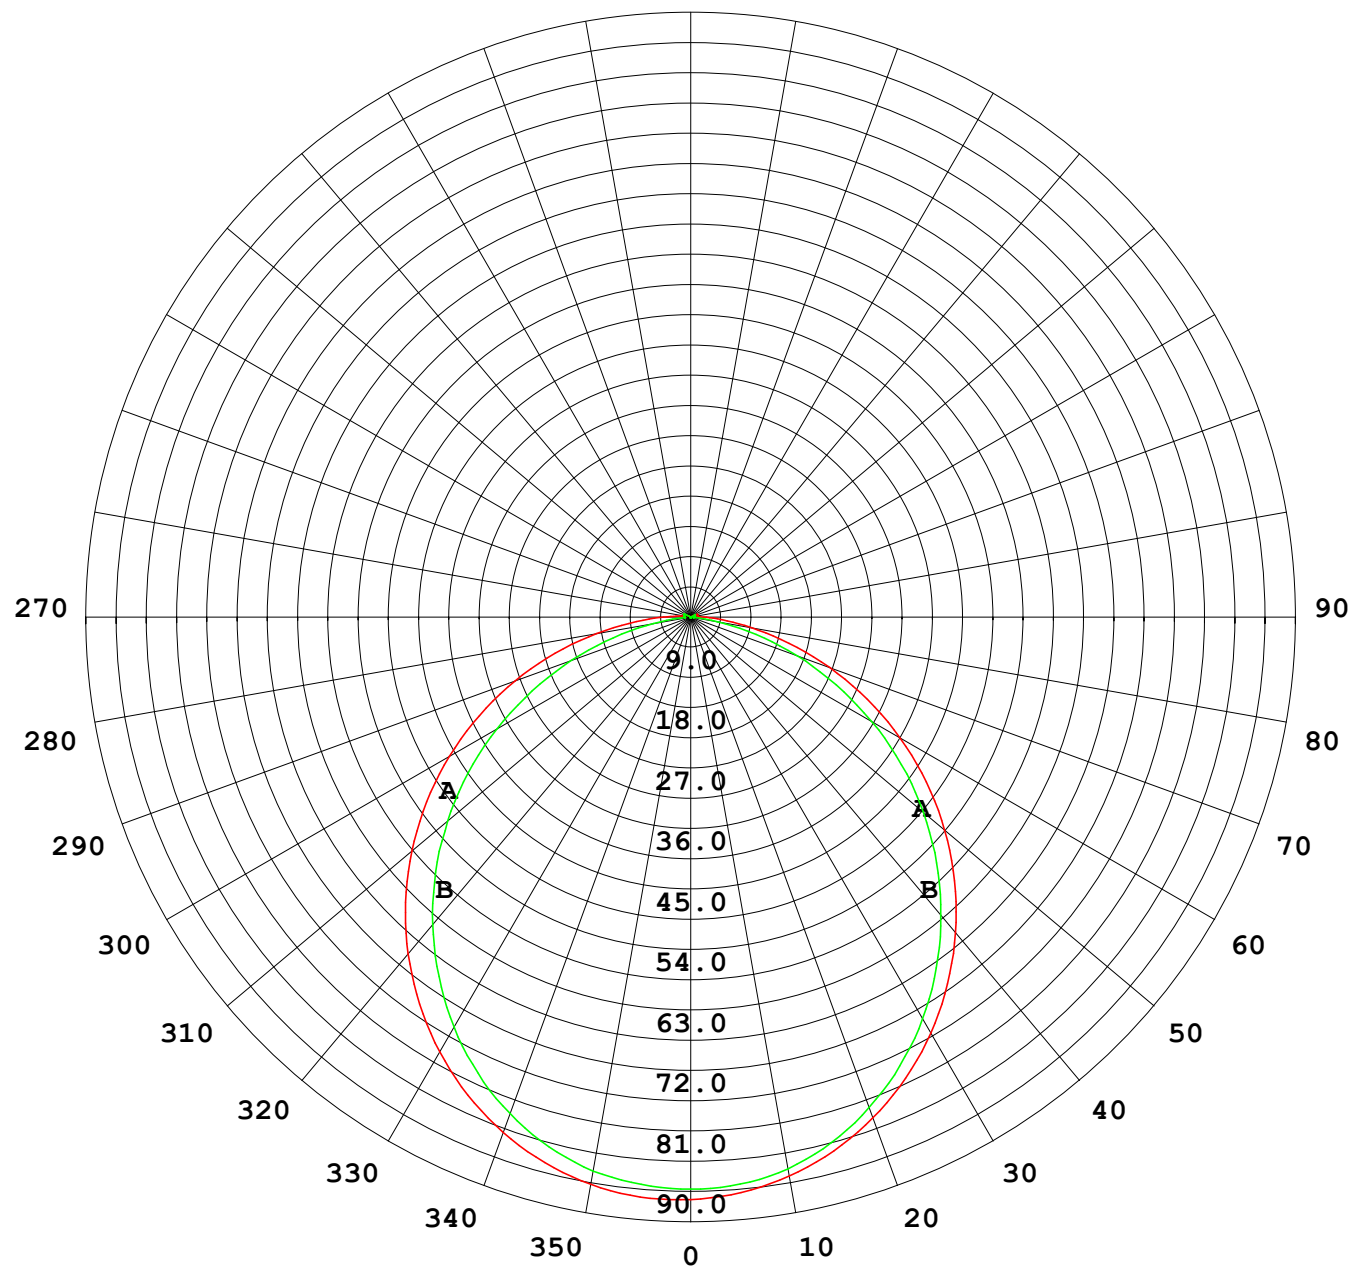



1000 lm

$\kappa = 1$

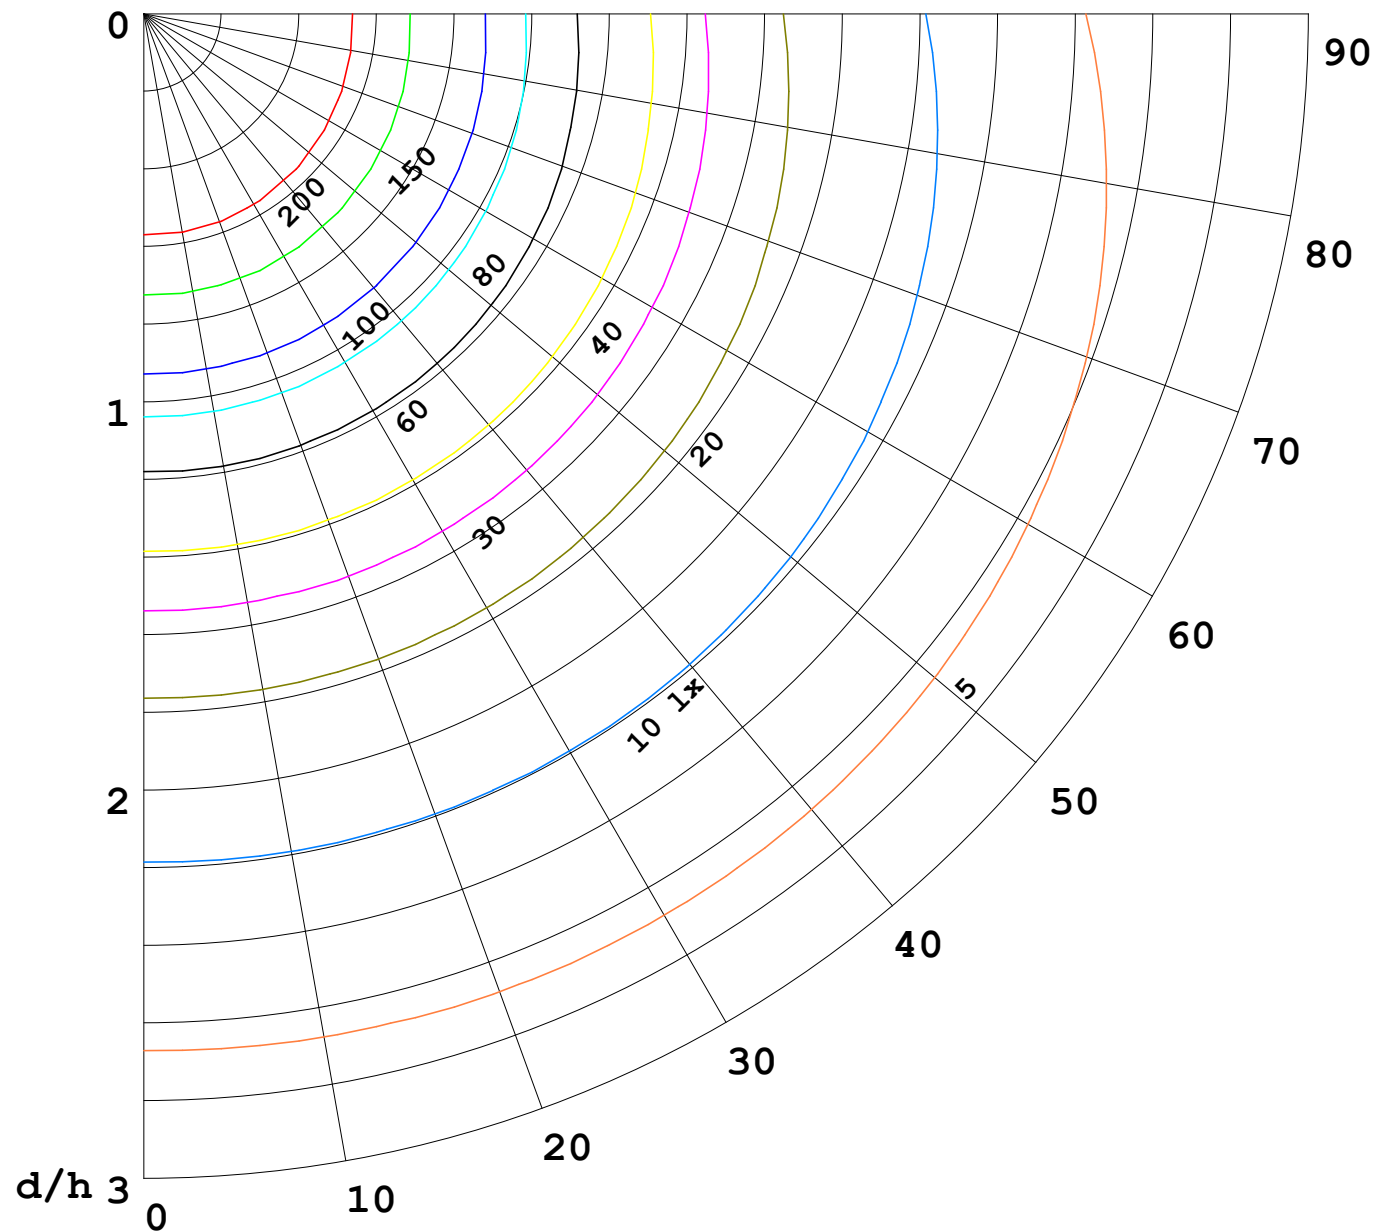

F = 5000 lm  
 K = 0.7  
 Hcc = 0.0 m  
 Hfc = 0.0 m  
 Eave = 100 lx

	Pcc	Pw	Pfc
—	70	50	30
—	50	30	20

