


室内灯具光度数据


| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.3301A P:7.922W PF:1.000 Freq:50.00Hz 实检光通:160.708x1 lm | | |
| 灯具名称: SF15-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021122309 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

| 光源数据 | | 光度数据 | | | | 光效: 20.29 lm/W |
|-----------|---------|----------|--------|-------------------------|-----------|----------------|
| 型号 | 2835 | 峰值光强(cd) | 56.34 | S/MH(C0/180) | 1.28 | |
| 标称功率(W) | 7.5 | 灯具效率(%) | 100.0 | S/MH(C90/270) | 1.22 | |
| 额定电源电压(V) | 24 | 总光通量(lm) | 160.71 | η UP, DN(C0-180) | 0.9, 47.4 | |
| 额定光通量(lm) | 160.708 | CIE分类 | 直接 | η UP, DN(C180-360) | 0.9, 50.8 | |
| 灯具内光源数(只) | 1 | 上射光通比(%) | 1.8 | CIBSE SHR NOM | 1.25 | |
| 实测电源电压(V) | 24 | 下射光通比(%) | 98.2 | CIBSE SHR MAX | 1.35 | |

室内灯具配光曲线

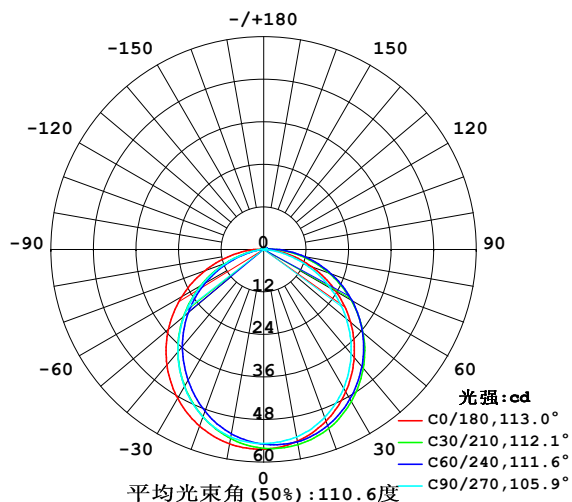

空间等照度曲线(单位:lx)

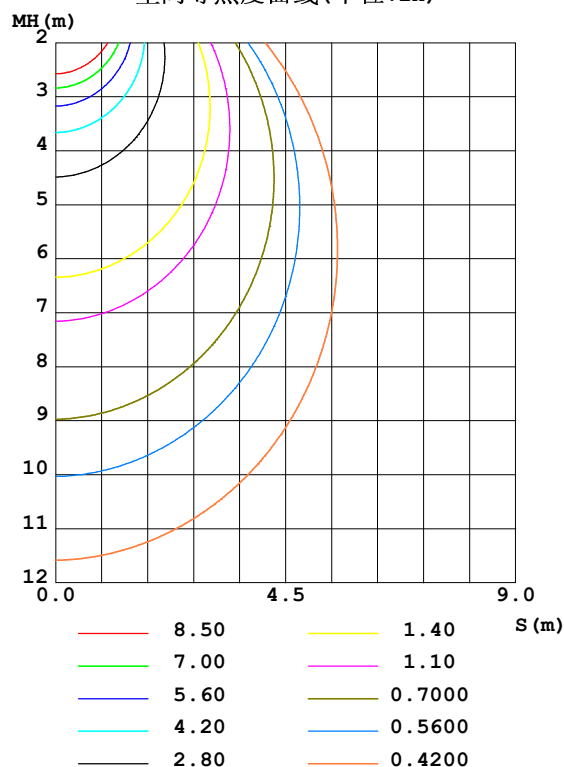

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-23

Y角度范围: 0度 - 120度
Y角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | $\gamma(^{\circ})$ | Φ 环 | Φ 总 | %lum, lamp |
|----------|--------|--------|--------|--------|--------|--------|--------|--------|--------------------|----------|----------|------------|
| 10 | 54.92 | 55.48 | 53.70 | 52.04 | 55.66 | 53.47 | 53.70 | 55.42 | 0- 10 | 5.226 | 5.226 | 3.25, 3.25 |
| 20 | 51.50 | 53.30 | 50.39 | 47.40 | 53.02 | 49.37 | 50.25 | 53.84 | 10- 20 | 14.93 | 20.15 | 12.5, 12.5 |
| 30 | 46.36 | 49.10 | 45.20 | 41.25 | 48.54 | 43.62 | 44.73 | 50.24 | 20- 30 | 22.48 | 42.63 | 26.5, 26.5 |
| 40 | 39.77 | 43.42 | 38.40 | 33.97 | 42.50 | 36.64 | 37.64 | 45.20 | 30- 40 | 26.94 | 69.58 | 43.3, 43.3 |
| 50 | 32.04 | 36.51 | 30.45 | 25.74 | 35.13 | 28.69 | 29.34 | 39.02 | 40- 50 | 27.85 | 97.43 | 60.6, 60.6 |
| 60 | 23.48 | 28.63 | 21.76 | 16.93 | 26.77 | 19.89 | 20.25 | 31.50 | 50- 60 | 25.14 | 122.6 | 76.3, 76.3 |
| 70 | 14.51 | 20.01 | 12.75 | 8.228 | 17.73 | 10.77 | 11.12 | 23.15 | 60- 70 | 19.24 | 141.8 | 88.2, 88.2 |
| 80 | 6.078 | 11.17 | 4.365 | 2.069 | 8.751 | 3.134 | 3.017 | 14.25 | 70- 80 | 11.44 | 153.3 | 95.4, 95.4 |
| 90 | 1.545 | 3.479 | 0.5881 | 0.9358 | 2.353 | 0.7137 | 0.2681 | 5.763 | 80- 90 | 4.584 | 157.8 | 98.2, 98.2 |
| 100 | 0.8201 | 0.9029 | 0.6887 | 0.9269 | 0.6536 | 0.6507 | 0.2964 | 1.151 | 90-100 | 1.419 | 159.3 | 99.1, 99.1 |
| 110 | 0.8508 | 0.8191 | 0.7389 | 0.9205 | 0.5719 | 0.6781 | 0.4484 | 0.6440 | 100-110 | 0.7863 | 160.0 | 99.6, 99.6 |
| 120 | 0.8946 | 0.5115 | 0.2425 | 0.5672 | 0.0953 | 0.4313 | 0.4674 | 0.6006 | 110-120 | 0.6397 | 160.7 | 100, 100 |
| 130 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 120-130 | 0.0266 | 160.7 | 100, 100 |
| 140 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 130-140 | 0 | 160.7 | 100, 100 |
| 150 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 140-150 | 0 | 160.7 | 100, 100 |
| 160 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 150-160 | 0 | 160.7 | 100, 100 |
| 170 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 160-170 | 0 | 160.7 | 100, 100 |
| 180 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 170-180 | 0 | 160.7 | 100, 100 |
| 单位:° | 光强:cd | | | | | | | | | 单位:lm | | |

锥面光通量(90度): 83.617 lm

%lum = 52.0%

%lamp = 52.0%

锥面光通量(120度): 122.57 lm

%lum = 76.3%

%lamp = 76.3%

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2021-12-23


γ 角度范围: 0度 - 120度
 γ 角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

灯具亮度限制曲线

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.3301A P:7.922W PF:1.000 Freq:50.00Hz 实检光通:160.708x1 lm | | |
| 灯具名称: SF15-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021122309 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

有光侧边灯具的亮度限制曲线

| 眩光等级 | 质量等级 | 使用照度 (lx) | | | | | | | |
|------|------|-----------|------|------|-------|-------|-------|-------|-------|
| 1.15 | A | 2000 | 1000 | 500 | <=300 | | | | |
| 1.50 | B | | 2000 | 1000 | 500 | <=300 | | | |
| 1.85 | C | | | 2000 | 1000 | 500 | <=300 | | |
| 2.20 | D | | | | 2000 | 1000 | 500 | <=300 | |
| 2.55 | E | | | | | 2000 | 1000 | 500 | <=300 |

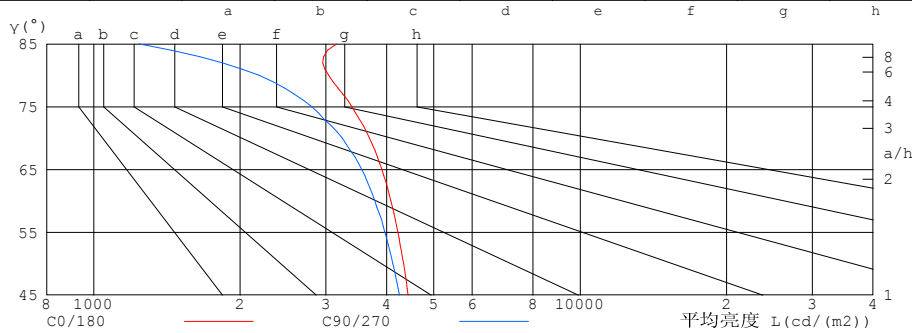

| 平均亮度值 cd/(m²) | | |
|---------------|--------|---------|
| γ (°) | C0/180 | C90/270 |
| 85 | 3159 | 1239 |
| 80 | 3044 | 2186 |
| 75 | 3392 | 2809 |
| 70 | 3688 | 3242 |
| 65 | 3913 | 3554 |
| 60 | 4084 | 3785 |
| 55 | 4220 | 3968 |
| 50 | 4334 | 4119 |
| 45 | 4430 | 4249 |


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-23

γ角度范围: 0度 - 120度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.3301A P:7.922W PF:1.000 Freq:50.00Hz 实检光通:160.708x1 lm | | |
| 灯具名称: SF15-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021122309 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 工 作 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | 1.19 | 1.19 | 1.19 | 1.16 | 1.16 | 1.16 | 1.10 | 1.10 | 1.10 | 1.05 | 1.05 | 1.05 | 1.00 | 1.00 | 1.00 | .98 |
| 1.0 | 1.03 | .98 | .94 | 1.00 | .96 | .93 | .96 | .93 | .89 | .92 | .89 | .86 | .88 | .86 | .84 | .81 |
| 2.0 | .90 | .83 | .77 | .87 | .81 | .76 | .84 | .78 | .74 | .80 | .76 | .72 | .77 | .73 | .70 | .67 |
| 3.0 | .79 | .70 | .64 | .77 | .69 | .63 | .74 | .67 | .62 | .71 | .65 | .60 | .68 | .63 | .59 | .57 |
| 4.0 | .70 | .61 | .54 | .68 | .60 | .53 | .65 | .58 | .52 | .63 | .57 | .51 | .60 | .55 | .51 | .48 |
| 5.0 | .62 | .53 | .46 | .61 | .52 | .46 | .58 | .51 | .45 | .56 | .50 | .45 | .54 | .49 | .44 | .42 |
| 6.0 | .56 | .47 | .40 | .55 | .46 | .40 | .53 | .45 | .40 | .51 | .44 | .39 | .49 | .43 | .39 | .36 |
| 7.0 | .51 | .42 | .36 | .50 | .41 | .35 | .48 | .40 | .35 | .46 | .40 | .35 | .45 | .39 | .34 | .32 |
| 8.0 | .46 | .38 | .32 | .45 | .37 | .32 | .44 | .37 | .31 | .43 | .36 | .31 | .41 | .35 | .31 | .29 |
| 9.0 | .42 | .34 | .29 | .42 | .34 | .28 | .40 | .33 | .28 | .39 | .33 | .28 | .38 | .32 | .28 | .26 |
| 10.0 | .39 | .31 | .26 | .39 | .31 | .26 | .37 | .30 | .26 | .36 | .30 | .25 | .35 | .29 | .25 | .23 |

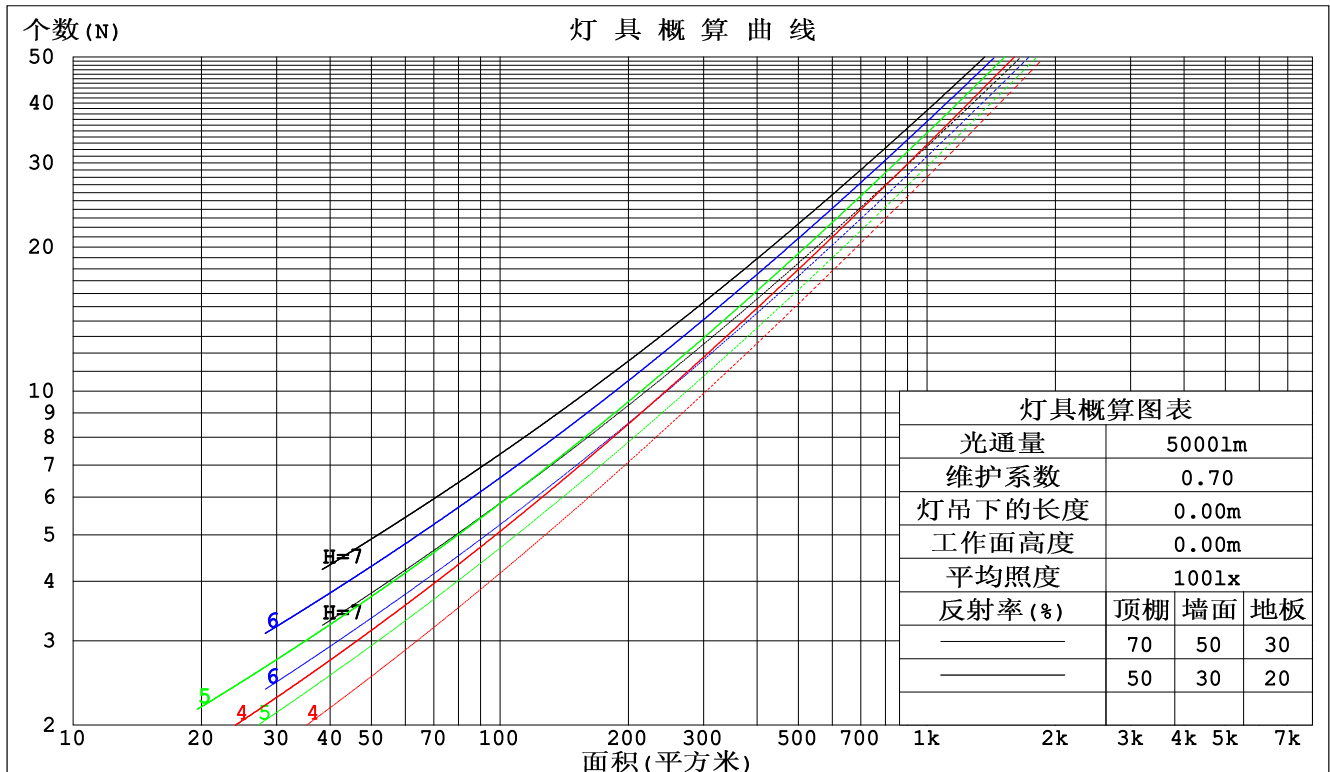

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2021-12-23

γ角度范围: 0度 - 120度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

墙面和天花板利用系数

| | | | | | |
|---|--|--|-------------------|--|------------------|
| 实测参数: U:24.00V I:0.3301A P:7.922W PF:1.000 Freq:50.00Hz 实检光通:160.708x1 lm | | | | | |
| 灯具名称: SF15-24V-2835-120-2200+5700-80-5700 | | | 灯具类型: 硅胶 | | 灯具重量: |
| 灯具规格: | | | 外型尺寸: 21mm*11.5mm | | 测试编号: 2021122309 |
| 制造厂商: OLYMPIA | | | 发光口面: 1*0.0115 | | 遮光角: |

| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 墙 壁 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .320 | .182 | .058 | .312 | .178 | .057 | .298 | .171 | .055 | .285 | .164 | .053 | .273 | .158 | .051 | |
| 2.0 | .296 | .162 | .050 | .290 | .160 | .049 | .277 | .154 | .048 | .265 | .149 | .047 | .255 | .144 | .045 | |
| 3.0 | .273 | .145 | .043 | .267 | .143 | .043 | .255 | .138 | .042 | .245 | .134 | .041 | .235 | .130 | .040 | |
| 4.0 | .251 | .130 | .038 | .245 | .128 | .038 | .235 | .125 | .037 | .226 | .121 | .037 | .217 | .118 | .036 | |
| 5.0 | .231 | .118 | .034 | .227 | .116 | .034 | .218 | .113 | .033 | .209 | .110 | .033 | .202 | .108 | .032 | |
| 6.0 | .214 | .107 | .031 | .210 | .106 | .031 | .202 | .104 | .030 | .195 | .101 | .030 | .188 | .099 | .029 | |
| 7.0 | .199 | .098 | .028 | .195 | .097 | .028 | .188 | .095 | .027 | .181 | .093 | .027 | .175 | .091 | .027 | |
| 8.0 | .186 | .091 | .026 | .182 | .090 | .025 | .176 | .088 | .025 | .170 | .086 | .025 | .164 | .084 | .025 | |
| 9.0 | .174 | .084 | .024 | .171 | .083 | .023 | .165 | .082 | .023 | .160 | .080 | .023 | .155 | .079 | .023 | |
| 10.0 | .164 | .078 | .022 | .161 | .078 | .022 | .156 | .076 | .021 | .151 | .075 | .021 | .146 | .073 | .021 | |

| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 天 花 板 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | .204 | .204 | .204 | .174 | .174 | .174 | .119 | .119 | .119 | .068 | .068 | .068 | .022 | .022 | .022 | |
| 1.0 | .195 | .170 | .147 | .167 | .146 | .127 | .114 | .100 | .088 | .066 | .058 | .051 | .021 | .019 | .016 | |
| 2.0 | .187 | .146 | .111 | .160 | .125 | .096 | .110 | .087 | .067 | .063 | .050 | .039 | .020 | .016 | .013 | |
| 3.0 | .179 | .128 | .088 | .153 | .111 | .076 | .105 | .077 | .053 | .061 | .045 | .031 | .020 | .015 | .010 | |
| 4.0 | .171 | .115 | .072 | .147 | .099 | .063 | .101 | .069 | .044 | .058 | .041 | .026 | .019 | .013 | .009 | |
| 5.0 | .164 | .105 | .061 | .141 | .091 | .053 | .097 | .063 | .037 | .056 | .037 | .022 | .018 | .012 | .007 | |
| 6.0 | .156 | .096 | .053 | .134 | .083 | .046 | .093 | .058 | .033 | .054 | .034 | .019 | .017 | .011 | .006 | |
| 7.0 | .150 | .089 | .047 | .129 | .078 | .041 | .089 | .054 | .029 | .052 | .032 | .017 | .017 | .010 | .006 | |
| 8.0 | .143 | .084 | .043 | .123 | .073 | .037 | .085 | .051 | .026 | .050 | .030 | .016 | .016 | .010 | .005 | |
| 9.0 | .137 | .079 | .039 | .118 | .068 | .034 | .082 | .048 | .024 | .048 | .028 | .015 | .015 | .009 | .005 | |
| 10.0 | .131 | .074 | .037 | .113 | .065 | .032 | .079 | .045 | .023 | .046 | .027 | .014 | .015 | .009 | .004 | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-23

γ角度范围: 0度 - 120度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

UGR(Unified Glare Rating) 数据表

| | | | | | | | | | | |
|---|-----------------------|------|------|------|-------------------|---------------------|------|------------------|------|------|
| 实测参数: U:24.00V I:0.3301A P:7.922W PF:1.000 Freq:50.00Hz 实检光通:160.708x1 lm | | | | | | | | | | |
| 灯具名称: SF15-24V-2835-120-2200+5700-80-5700 | | | | | 灯具类型: 硅胶 | | | 灯具重量: | | |
| 灯具规格: | | | | | 外型尺寸: 21mm*11.5mm | | | 测试编号: 2021122309 | | |
| 制造厂商: OLYMPIA | | | | | 发光口面: 1*0.0115 | | | 遮光角: | | |
| 反射比: 天花板 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| 墙面 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| 房间尺寸 | 交叉 (Viewed crosswise) | | | | | 向前 (Viewed endwise) | | | | |
| x = 2H y = 2H | 24.7 | 26.2 | 25.0 | 26.5 | 26.7 | 24.6 | 26.1 | 24.9 | 26.3 | 26.6 |
| 3H | 26.3 | 27.6 | 26.6 | 27.9 | 28.2 | 26.0 | 27.4 | 26.4 | 27.7 | 28.0 |
| 4H | 26.9 | 28.2 | 27.2 | 28.5 | 28.8 | 26.6 | 27.9 | 26.9 | 28.2 | 28.5 |
| 6H | 27.3 | 28.5 | 27.6 | 28.8 | 29.2 | 26.9 | 28.1 | 27.3 | 28.4 | 28.8 |
| 8H | 27.4 | 28.6 | 27.8 | 28.9 | 29.3 | 27.0 | 28.2 | 27.3 | 28.5 | 28.8 |
| 12H | 27.5 | 28.7 | 27.9 | 29.0 | 29.4 | 27.0 | 28.1 | 27.3 | 28.5 | 28.8 |
| 4H 2H | 25.6 | 26.9 | 25.9 | 27.2 | 27.5 | 25.5 | 26.8 | 25.8 | 27.1 | 27.4 |
| 3H | 27.4 | 28.5 | 27.8 | 28.9 | 29.2 | 27.3 | 28.4 | 27.6 | 28.7 | 29.1 |
| 4H | 28.2 | 29.2 | 28.6 | 29.6 | 29.9 | 28.0 | 29.1 | 28.4 | 29.4 | 29.8 |
| 6H | 28.8 | 29.7 | 29.2 | 30.1 | 30.5 | 28.5 | 29.5 | 29.0 | 29.9 | 30.3 |
| 8H | 29.0 | 29.8 | 29.4 | 30.2 | 30.7 | 28.7 | 29.6 | 29.1 | 30.0 | 30.4 |
| 12H | 29.1 | 29.9 | 29.6 | 30.4 | 30.8 | 28.8 | 29.6 | 29.2 | 30.0 | 30.4 |
| 8H 4H | 28.7 | 29.5 | 29.1 | 29.9 | 30.4 | 28.6 | 29.4 | 29.0 | 29.8 | 30.3 |
| 6H | 29.5 | 30.3 | 30.0 | 30.7 | 31.2 | 29.4 | 30.2 | 29.9 | 30.6 | 31.1 |
| 8H | 29.9 | 30.6 | 30.4 | 31.0 | 31.5 | 29.8 | 30.4 | 30.3 | 30.9 | 31.4 |
| 12H | 30.2 | 30.8 | 30.7 | 31.3 | 31.8 | 30.0 | 30.6 | 30.5 | 31.0 | 31.6 |
| 12H 4H | 28.7 | 29.6 | 29.2 | 30.0 | 30.4 | 28.6 | 29.4 | 29.1 | 29.9 | 30.3 |
| 6H | 29.7 | 30.4 | 30.2 | 30.8 | 31.3 | 29.6 | 30.3 | 30.1 | 30.7 | 31.2 |
| 8H | 30.2 | 30.7 | 30.7 | 31.2 | 31.7 | 30.1 | 30.6 | 30.6 | 31.1 | 31.6 |
| 不同间隔布灯时, 观察者位置引起的UGR变化: | | | | | | | | | | |
| S = 1.0H | + 0.1 / - 0.2 | | | | | + 0.1 / - 0.2 | | | | |
| 1.5H | + 0.3 / - 0.4 | | | | | + 0.3 / - 0.4 | | | | |
| 2.0H | + 0.2 / - 0.5 | | | | | + 0.3 / - 0.6 | | | | |

依据CIE Pub.117计算, 160.7lm光源光通要进行修正 ($8\log(F/F_0) = -6.4$).

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2021-12-23

γ角度范围: 0度 - 120度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

UF利用系数表

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.3301A P:7.922W PF:1.000 Freq:50.00Hz 实检光通:160.708x1 lm | | |
| 灯具名称: SF15-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021122309 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |


| 反 射 比 / REFLECTANCE | | | | | | | | | | |
|----------------------------|---|-----|-----|-----|-----|-----|---------------------|-----|-----|---------|
| 天花板 | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| 墙壁 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| 室形指数 | 利用系数 UTILIZATION FACTORS (%) $k(RI) \times RCR = 5$ | | | | | | | | | |
| $k = 0.60$ | 57 | 45 | 38 | 56 | 45 | 38 | 55 | 44 | 38 | 31 |
| 0.80 | 67 | 55 | 47 | 66 | 54 | 47 | 64 | 54 | 47 | 40 |
| 1.00 | 75 | 64 | 56 | 74 | 63 | 56 | 71 | 64 | 55 | 48 |
| 1.25 | 82 | 71 | 64 | 80 | 70 | 63 | 78 | 69 | 63 | 55 |
| 1.50 | 87 | 77 | 70 | 85 | 76 | 69 | 82 | 74 | 68 | 60 |
| 2.00 | 94 | 85 | 78 | 92 | 84 | 77 | 88 | 81 | 76 | 68 |
| 2.50 | 98 | 90 | 83 | 96 | 88 | 82 | 92 | 85 | 80 | 72 |
| 3.00 | 101 | 94 | 88 | 99 | 92 | 87 | 95 | 89 | 85 | 76 |
| 4.00 | 105 | 99 | 94 | 103 | 97 | 93 | 98 | 94 | 90 | 81 |
| 5.00 | 108 | 103 | 98 | 105 | 100 | 97 | 100 | 97 | 93 | 84 |
| ROOM INDEX | UF (总) | | | | | | | | | UF (直接) |
| 依据标准文件 DIN EN 13032-2 2004 | | | 悬挂灯 | | | | 安装距高比 SHRNOM = 1.25 | | | |

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2021-12-23

γ角度范围: 0度 - 120度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

灯具等光强曲线

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.3301A P:7.922W PF:1.000 Freq:50.00Hz 实检光通:160.708x1 lm | | |
| 灯具名称: SF15-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021122309 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

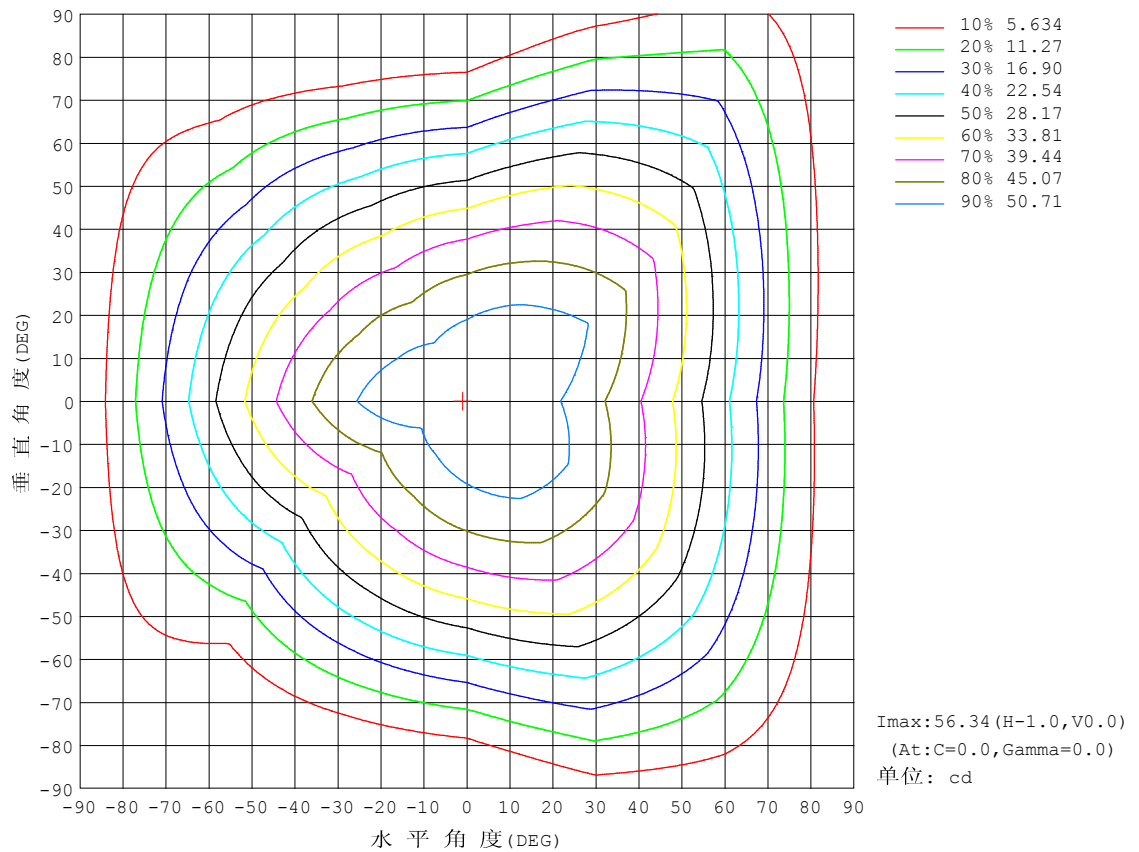


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-23

γ角度范围: 0度 - 120度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

灯具有效平均照度图

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.3301A P:7.922W PF:1.000 Freq:50.00Hz 实检光通:160.708x1 lm | | |
| 灯具名称: SF15-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021122309 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

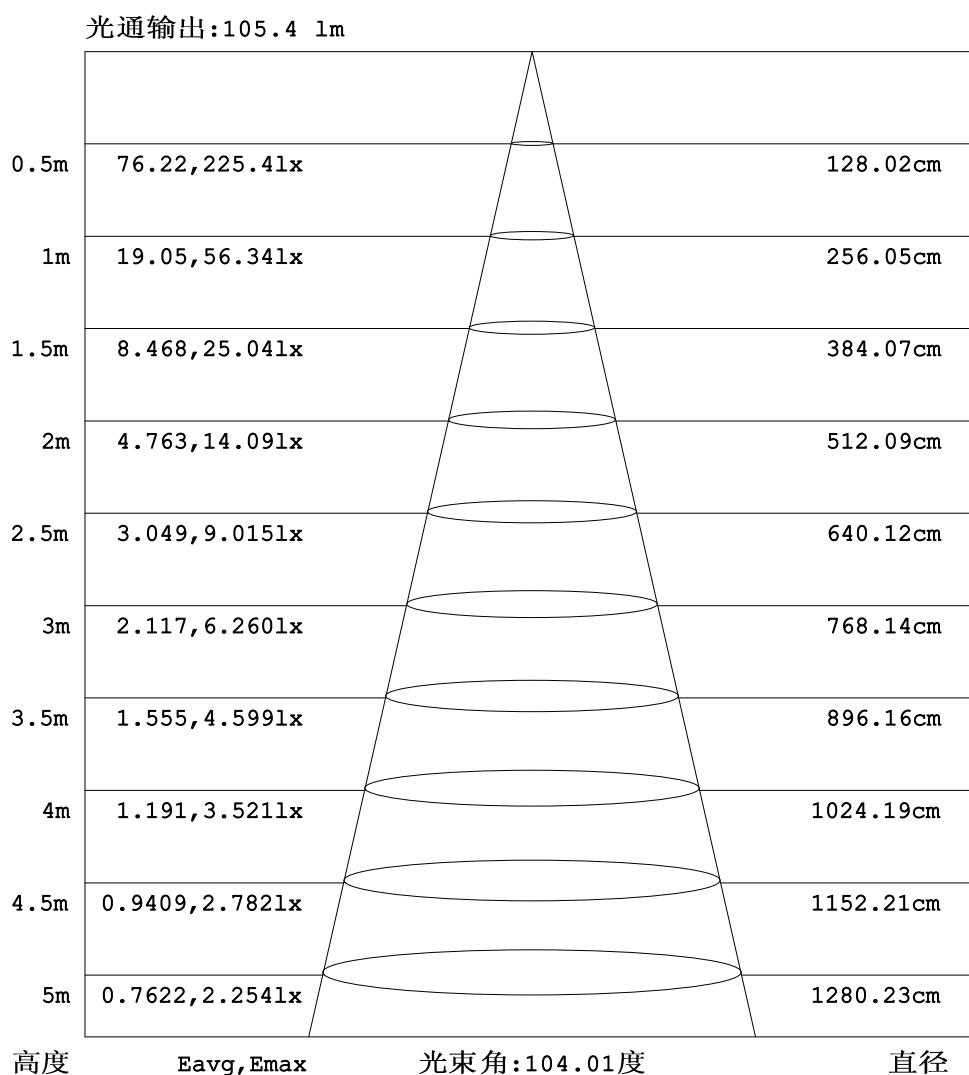


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2021-12-23

γ角度范围: 0度 - 120度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

平面等照度曲线

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.3301A P:7.922W PF:1.000 Freq:50.00Hz 实检光通:160.708x1 lm | | |
| 灯具名称: SF15-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021122309 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

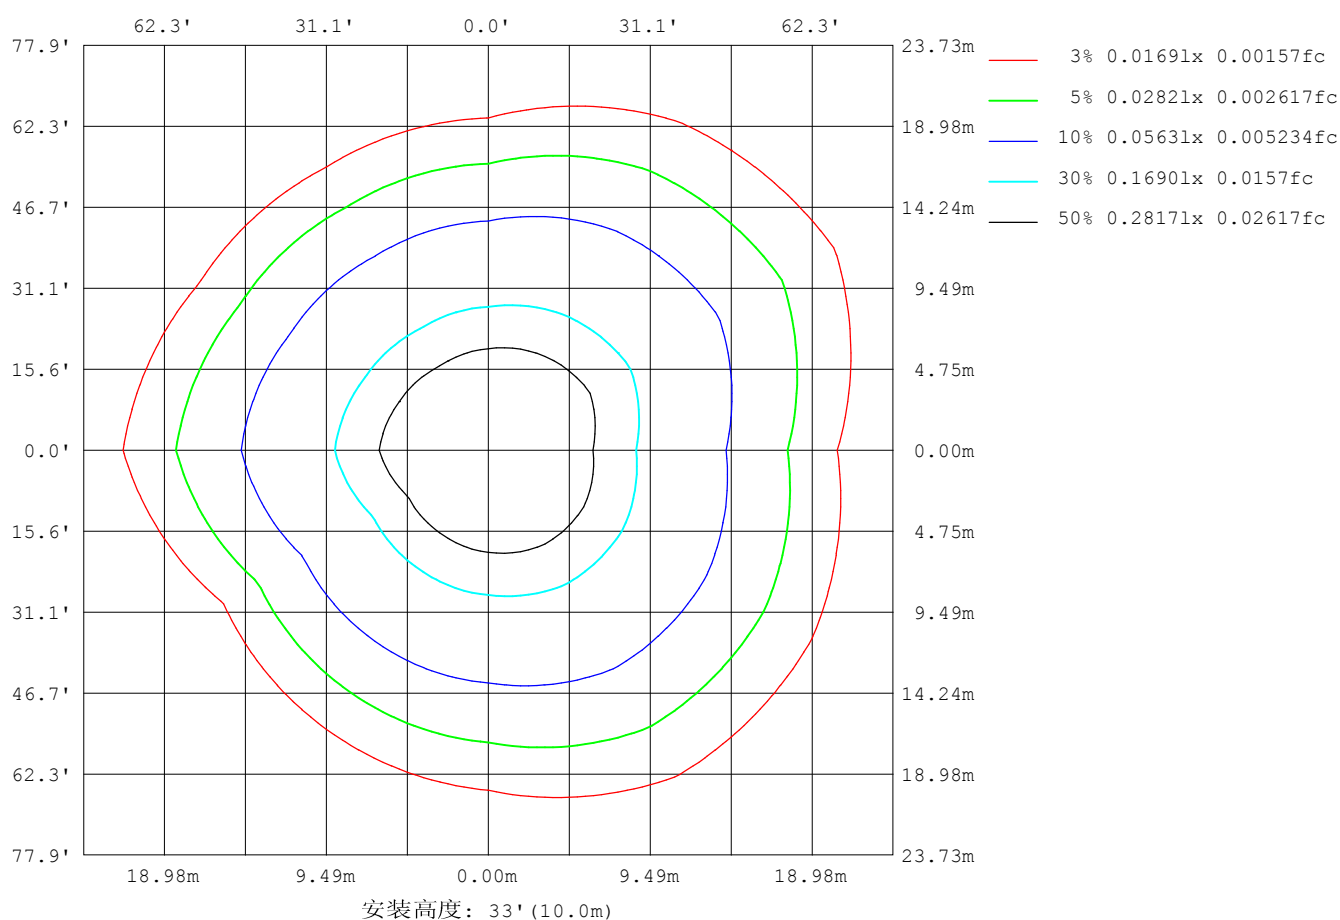

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2021-12-23

γ角度范围: 0度 - 120度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

LED筒灯平均亮度报告

| | | |
|---|-------------------|-----------------|
| 实测参数: U:24.00V I:0.3301A P:7.922W PF:1.000 Freq:50.00Hz 实检光通:160.708x1 lm | | |
| 灯具名称: SF15-24V-2835-120-2200+5700-80-5700 | 灯具类型:硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号:2021122309 |
| 制造厂商: OLYMPIA | 发光口面:1*0.0115 | 遮光角: |


| 平均亮度 | 数值 (cd/m2) |
|-------------|------------|
| L横 (65) av | 4250 |
| L横 (75) av | 3902 |
| L横 (85) av | 4088 |
| L纵 (65) av | 3385 |
| L纵 (75) av | 2545 |
| L纵 (85) av | 874 |
| L45 (65) av | 4128 |
| L45 (75) av | 3893 |
| L45 (85) av | 5025 |

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:LPC
测试日期:2021-12-23

γ角度范围: 0度 - 120度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度:65.0%
测试距离:9.200米 [K=1.0000]
备注:

平面照度曲线

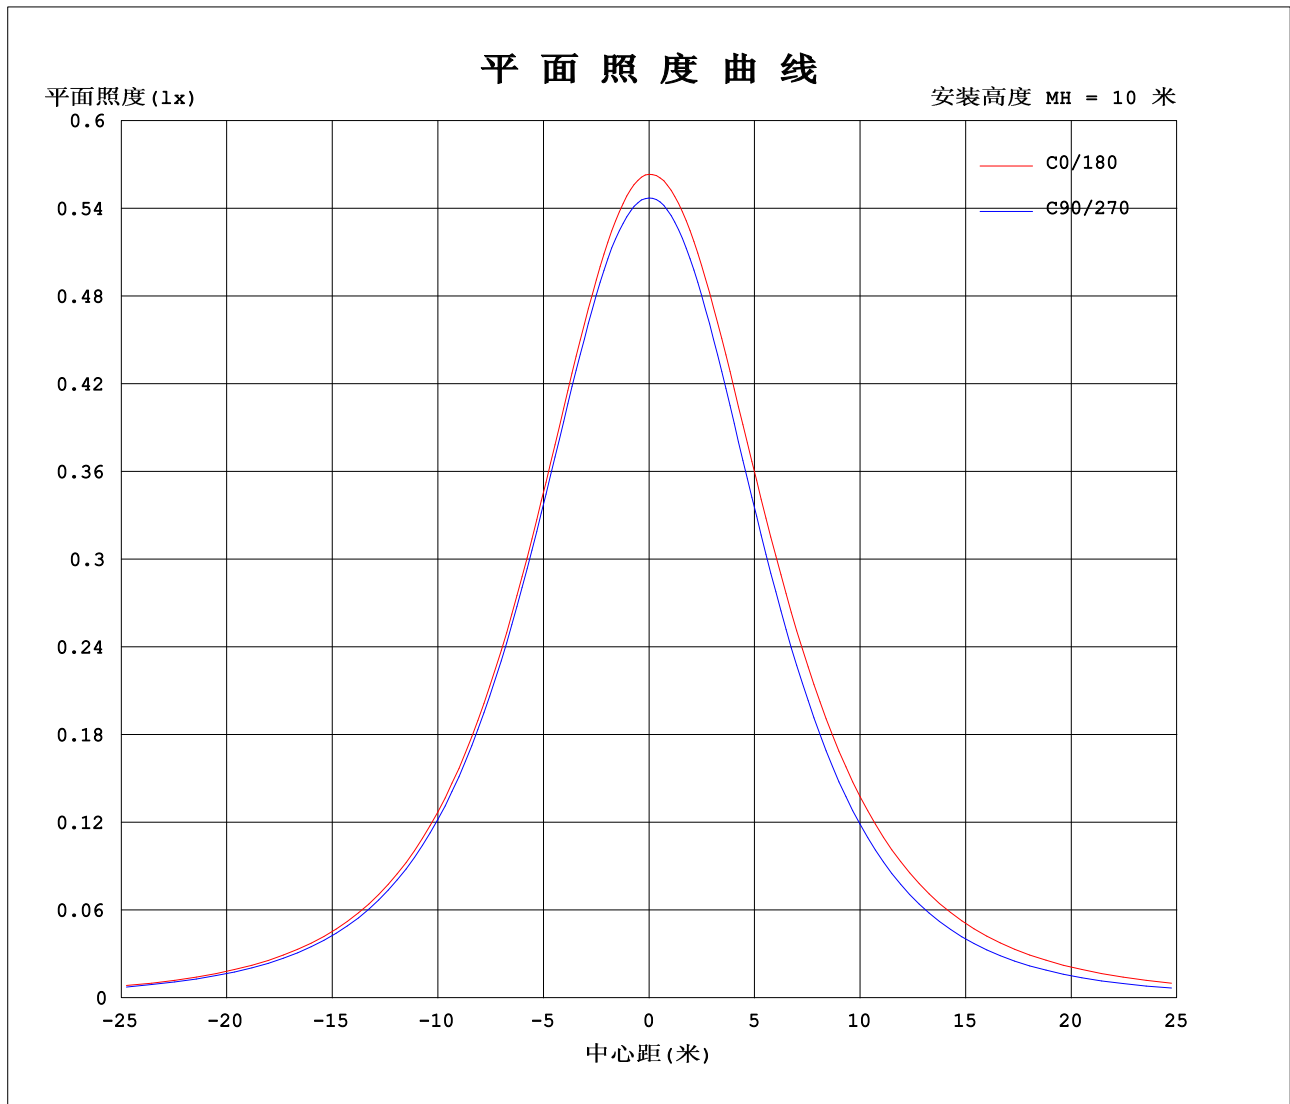

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-23

γ角度范围: 0度 - 120度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

光强分布数据表格

| | | |
|---|-------------------|------------------|
| 实测参数: U:24.00V I:0.3301A P:7.922W PF:1.000 Freq:50.00Hz 实检光通:160.708x1 lm | | |
| 灯具名称: SF15-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 灯具规格: | 外型尺寸: 21mm*11.5mm | 测试编号: 2021122309 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0115 | 遮光角: |

表--1

单位: cd

| C (DEG) γ (DEG) | 0 | 30 | 60 | 90 | 120 | 150 | 180 | 210 | 240 | 270 | 300 | 330 | | | | | | |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|--|--|--|--|--|--|
| 0 | 56.3 | 56.1 | 54.9 | 54.7 | 54.7 | 54.8 | 56.3 | 56.1 | 54.9 | 54.7 | 54.7 | 54.8 | | | | | | |
| 5 | 55.9 | 56.2 | 55.2 | 54.4 | 53.8 | 53.5 | 56.2 | 55.4 | 54.1 | 54.5 | 55.1 | 55.6 | | | | | | |
| 10 | 54.9 | 55.9 | 55.1 | 53.7 | 52.4 | 51.7 | 55.7 | 54.1 | 52.8 | 53.7 | 54.9 | 55.9 | | | | | | |
| 15 | 53.4 | 55.0 | 54.2 | 52.3 | 50.4 | 49.4 | 54.6 | 52.4 | 50.9 | 52.3 | 54.2 | 55.7 | | | | | | |
| 20 | 51.5 | 53.7 | 52.9 | 50.4 | 48.0 | 46.8 | 53.0 | 50.2 | 48.5 | 50.3 | 52.8 | 54.8 | | | | | | |
| 25 | 49.1 | 51.8 | 51.0 | 48.0 | 45.2 | 43.8 | 51.0 | 47.6 | 45.8 | 47.7 | 50.9 | 53.6 | | | | | | |
| 30 | 46.4 | 49.5 | 48.7 | 45.2 | 42.1 | 40.4 | 48.5 | 44.6 | 42.7 | 44.7 | 48.5 | 51.9 | | | | | | |
| 35 | 43.2 | 46.8 | 46.1 | 42.0 | 38.7 | 36.8 | 45.7 | 41.2 | 39.3 | 41.4 | 45.8 | 49.9 | | | | | | |
| 40 | 39.8 | 43.7 | 43.1 | 38.4 | 35.0 | 32.9 | 42.5 | 37.6 | 35.7 | 37.6 | 43.1 | 47.3 | | | | | | |
| 45 | 36.0 | 40.4 | 39.9 | 34.5 | 31.2 | 28.8 | 39.0 | 33.7 | 31.8 | 33.6 | 40.1 | 44.4 | | | | | | |
| 50 | 32.0 | 36.6 | 36.4 | 30.4 | 27.1 | 24.4 | 35.1 | 29.6 | 27.8 | 29.3 | 36.9 | 41.2 | | | | | | |
| 55 | 27.8 | 32.6 | 32.7 | 26.2 | 22.8 | 19.9 | 31.1 | 25.2 | 23.5 | 24.9 | 33.2 | 37.6 | | | | | | |
| 60 | 23.5 | 28.5 | 28.8 | 21.8 | 18.4 | 15.4 | 26.8 | 20.7 | 19.1 | 20.3 | 29.3 | 33.7 | | | | | | |
| 65 | 19.0 | 24.2 | 24.6 | 17.3 | 14.0 | 11.0 | 22.3 | 16.0 | 14.6 | 15.6 | 25.2 | 29.7 | | | | | | |
| 70 | 14.5 | 19.7 | 20.3 | 12.8 | 9.64 | 6.81 | 17.7 | 11.4 | 10.1 | 11.1 | 20.9 | 25.4 | | | | | | |
| 75 | 10.1 | 15.2 | 16.0 | 8.36 | 5.63 | 3.60 | 13.1 | 7.10 | 5.94 | 6.79 | 16.5 | 21.0 | | | | | | |
| 80 | 6.08 | 10.7 | 11.6 | 4.37 | 2.52 | 1.62 | 8.75 | 3.70 | 2.56 | 3.02 | 12.0 | 16.5 | | | | | | |
| 85 | 3.17 | 6.45 | 7.45 | 1.24 | 1.08 | 0.94 | 5.03 | 1.58 | 0.84 | 0.51 | 7.67 | 12.0 | | | | | | |
| 90 | 1.55 | 3.18 | 3.78 | 0.59 | 0.94 | 0.93 | 2.35 | 0.75 | 0.68 | 0.27 | 3.82 | 7.70 | | | | | | |
| 95 | 0.87 | 1.42 | 1.51 | 0.64 | 0.94 | 0.93 | 0.93 | 0.71 | 0.64 | 0.27 | 1.32 | 4.03 | | | | | | |
| 100 | 0.82 | 0.89 | 0.92 | 0.69 | 0.93 | 0.92 | 0.65 | 0.69 | 0.61 | 0.30 | 0.61 | 1.69 | | | | | | |
| 105 | 0.84 | 0.80 | 0.81 | 0.74 | 0.87 | 0.98 | 0.61 | 0.69 | 0.56 | 0.42 | 0.51 | 0.84 | | | | | | |
| 110 | 0.85 | 0.83 | 0.80 | 0.74 | 0.85 | 0.99 | 0.57 | 0.69 | 0.66 | 0.45 | 0.61 | 0.68 | | | | | | |
| 115 | 0.86 | 0.54 | 0.88 | 0.73 | 0.94 | 0.58 | 0.33 | 0.61 | 0.68 | 0.45 | 0.63 | 0.69 | | | | | | |
| 120 | 0.89 | 0.15 | 0.87 | 0.24 | 0.97 | 0.16 | 0.10 | 0.17 | 0.69 | 0.47 | 0.52 | 0.68 | | | | | | |
| 125 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 130 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 135 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 140 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 145 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 150 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 155 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 160 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 165 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 170 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 175 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| 180 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: LPC

测试日期: 2021-12-23

γ角度范围: 0度 - 120度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362

环境湿度: 65.0%

测试距离: 9.200米 [K=1.0000]

备注:

Photometric Data Table [cd]

| G/C | 0.0 | 30.0 | 60.0 | 90.0 | 120.0 | 150.0 | 180.0 | 210.0 | 240.0 | 270.0 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0.0 | 56.34 | 56.09 | 54.93 | 54.71 | 54.72 | 54.79 | 56.34 | 56.09 | 54.93 | 54.71 |
| 3.0 | 56.15 | 56.24 | 55.17 | 54.61 | 54.23 | 54.05 | 56.33 | 55.71 | 54.50 | 54.68 |
| 6.0 | 55.75 | 56.21 | 55.21 | 54.31 | 53.55 | 53.16 | 56.16 | 55.17 | 53.88 | 54.40 |
| 9.0 | 55.15 | 56.00 | 55.14 | 53.88 | 52.70 | 52.09 | 55.82 | 54.41 | 53.09 | 53.92 |
| 12.0 | 54.38 | 55.59 | 54.83 | 53.17 | 51.69 | 50.81 | 55.29 | 53.47 | 52.10 | 53.19 |
| 15.0 | 53.43 | 55.03 | 54.24 | 52.31 | 50.44 | 49.44 | 54.59 | 52.41 | 50.91 | 52.27 |
| 18.0 | 52.33 | 54.32 | 53.49 | 51.19 | 49.03 | 47.91 | 53.69 | 51.16 | 49.54 | 51.13 |
| 21.0 | 51.06 | 53.39 | 52.55 | 49.94 | 47.47 | 46.23 | 52.66 | 49.70 | 48.01 | 49.78 |
| 24.0 | 49.63 | 52.26 | 51.43 | 48.53 | 45.77 | 44.46 | 51.44 | 48.17 | 46.35 | 48.23 |
| 27.0 | 48.07 | 50.93 | 50.15 | 46.89 | 43.99 | 42.51 | 50.06 | 46.45 | 44.54 | 46.57 |
| 30.0 | 46.36 | 49.49 | 48.71 | 45.20 | 42.09 | 40.42 | 48.54 | 44.58 | 42.66 | 44.73 |
| 33.0 | 44.50 | 47.93 | 47.16 | 43.28 | 40.08 | 38.30 | 46.89 | 42.70 | 40.66 | 42.73 |
| 36.0 | 42.56 | 46.20 | 45.49 | 41.26 | 37.98 | 36.03 | 45.09 | 40.54 | 38.59 | 40.65 |
| 39.0 | 40.48 | 44.35 | 43.72 | 39.13 | 35.79 | 33.66 | 43.16 | 38.37 | 36.43 | 38.39 |
| 42.0 | 38.28 | 42.42 | 41.86 | 36.90 | 33.51 | 31.27 | 41.12 | 36.09 | 34.18 | 36.04 |
| 45.0 | 36.03 | 40.36 | 39.91 | 34.55 | 31.18 | 28.78 | 38.96 | 33.72 | 31.85 | 33.62 |
| 48.0 | 33.65 | 38.15 | 37.84 | 32.15 | 28.74 | 26.20 | 36.70 | 31.26 | 29.43 | 31.09 |
| 51.0 | 31.21 | 35.87 | 35.71 | 29.63 | 26.26 | 23.54 | 34.35 | 28.73 | 26.95 | 28.45 |
| 54.0 | 28.70 | 33.44 | 33.48 | 27.05 | 23.70 | 20.80 | 31.90 | 26.13 | 24.39 | 25.80 |
| 57.0 | 26.12 | 31.04 | 31.18 | 24.45 | 21.10 | 18.12 | 29.37 | 23.32 | 21.78 | 23.04 |
| 60.0 | 23.48 | 28.48 | 28.78 | 21.76 | 18.45 | 15.41 | 26.77 | 20.66 | 19.11 | 20.25 |
| 63.0 | 20.82 | 25.89 | 26.32 | 19.07 | 15.79 | 12.64 | 24.09 | 17.89 | 16.40 | 17.52 |
| 66.0 | 18.11 | 23.30 | 23.76 | 16.38 | 13.12 | 10.08 | 21.39 | 15.05 | 13.70 | 14.78 |
| 69.0 | 15.40 | 20.59 | 21.21 | 13.63 | 10.49 | 7.567 | 18.64 | 12.32 | 11.01 | 12.02 |
| 72.0 | 12.73 | 17.87 | 18.62 | 10.93 | 7.975 | 5.356 | 15.86 | 9.728 | 8.389 | 9.338 |
| 75.0 | 10.10 | 15.16 | 16.01 | 8.361 | 5.627 | 3.599 | 13.13 | 7.104 | 5.938 | 6.788 |
| 78.0 | 7.597 | 12.45 | 13.37 | 5.903 | 3.585 | 2.233 | 10.47 | 4.927 | 3.773 | 4.420 |
| 81.0 | 5.374 | 9.757 | 10.79 | 3.632 | 2.090 | 1.400 | 7.937 | 3.206 | 2.076 | 2.378 |
| 84.0 | 3.635 | 7.244 | 8.257 | 1.739 | 1.224 | 0.9945 | 5.692 | 1.869 | 1.043 | 0.8489 |
| 87.0 | 2.366 | 4.970 | 5.883 | 0.6778 | 0.9502 | 0.9317 | 3.825 | 1.088 | 0.7005 | 0.3123 |
| 90.0 | 1.545 | 3.182 | 3.776 | 0.5881 | 0.9444 | 0.9273 | 2.353 | 0.7494 | 0.6780 | 0.2681 |
| 93.0 | 1.042 | 1.962 | 2.155 | 0.6133 | 0.9432 | 0.9266 | 1.364 | 0.7187 | 0.6556 | 0.2700 |
| 96.0 | 0.8198 | 1.230 | 1.294 | 0.6434 | 0.9419 | 0.9259 | 0.7928 | 0.7046 | 0.6331 | 0.2714 |
| 99.0 | 0.8165 | 0.9123 | 0.9507 | 0.6736 | 0.9407 | 0.9251 | 0.6650 | 0.6926 | 0.6180 | 0.2864 |
| 102.0 | 0.8273 | 0.8474 | 0.8729 | 0.7241 | 0.9053 | 0.9500 | 0.6308 | 0.6886 | 0.6028 | 0.3767 |
| 105.0 | 0.8382 | 0.8042 | 0.8097 | 0.7364 | 0.8699 | 0.9750 | 0.6109 | 0.6885 | 0.5629 | 0.4230 |
| 108.0 | 0.8490 | 0.8243 | 0.8062 | 0.7427 | 0.8605 | 0.9834 | 0.6153 | 0.6905 | 0.6134 | 0.4473 |
| 111.0 | 0.8522 | 0.8443 | 0.8439 | 0.7370 | 0.8942 | 0.9045 | 0.5243 | 0.6936 | 0.6662 | 0.4495 |
| 114.0 | 0.8565 | 0.6141 | 0.8795 | 0.7313 | 0.9354 | 0.6578 | 0.3813 | 0.6966 | 0.6736 | 0.4528 |
| 117.0 | 0.8644 | 0.3838 | 0.8846 | 0.6063 | 0.9527 | 0.4111 | 0.2383 | 0.4354 | 0.6811 | 0.4561 |
| 120.0 | 0.8946 | 0.1535 | 0.8695 | 0.2425 | 0.9700 | 0.1645 | 0.0953 | 0.1741 | 0.6885 | 0.4674 |

| G/C | 300.0 | 330.0 |
|------|-------|-------|
| 0.0 | 54.72 | 54.79 |
| 3.0 | 55.03 | 55.35 |
| 6.0 | 55.10 | 55.71 |
| 9.0 | 55.01 | 55.89 |
| 12.0 | 54.68 | 55.92 |
| 15.0 | 54.16 | 55.73 |
| 18.0 | 53.43 | 55.30 |
| 21.0 | 52.50 | 54.59 |
| 24.0 | 51.35 | 53.83 |
| 27.0 | 50.03 | 52.91 |
| 30.0 | 48.55 | 51.93 |
| 33.0 | 46.96 | 50.75 |
| 36.0 | 45.28 | 49.41 |
| 39.0 | 43.62 | 47.90 |
| 42.0 | 41.90 | 46.21 |
| 45.0 | 40.10 | 44.43 |
| 48.0 | 38.22 | 42.51 |
| 51.0 | 36.17 | 40.46 |
| 54.0 | 33.95 | 38.33 |
| 57.0 | 31.66 | 36.10 |
| 60.0 | 29.27 | 33.72 |
| 63.0 | 26.82 | 31.35 |
| 66.0 | 24.32 | 28.86 |
| 69.0 | 21.73 | 26.31 |
| 72.0 | 19.10 | 23.72 |
| 75.0 | 16.46 | 21.03 |
| 78.0 | 13.78 | 18.32 |
| 81.0 | 11.12 | 15.63 |
| 84.0 | 8.519 | 12.92 |
| 87.0 | 6.064 | 10.23 |
| 90.0 | 3.823 | 7.702 |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: LPC

测试日期: 2021-12-23

γ角度范围: 0度 - 120度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362

环境湿度: 65.0%

测试距离: 9.200米 [K=1.0000]

备注:


Photometric Data Table [cd]

| | | |
|-------|--------|--------|
| 93.0 | 2.061 | 5.354 |
| 96.0 | 1.068 | 3.474 |
| 99.0 | 0.6728 | 2.150 |
| 102.0 | 0.5827 | 1.243 |
| 105.0 | 0.5076 | 0.8402 |
| 108.0 | 0.5783 | 0.6737 |
| 111.0 | 0.6173 | 0.6796 |
| 114.0 | 0.6382 | 0.6856 |
| 117.0 | 0.6130 | 0.6915 |
| 120.0 | 0.5226 | 0.6785 |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-23


γ角度范围: 0度 - 120度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

I (cd)

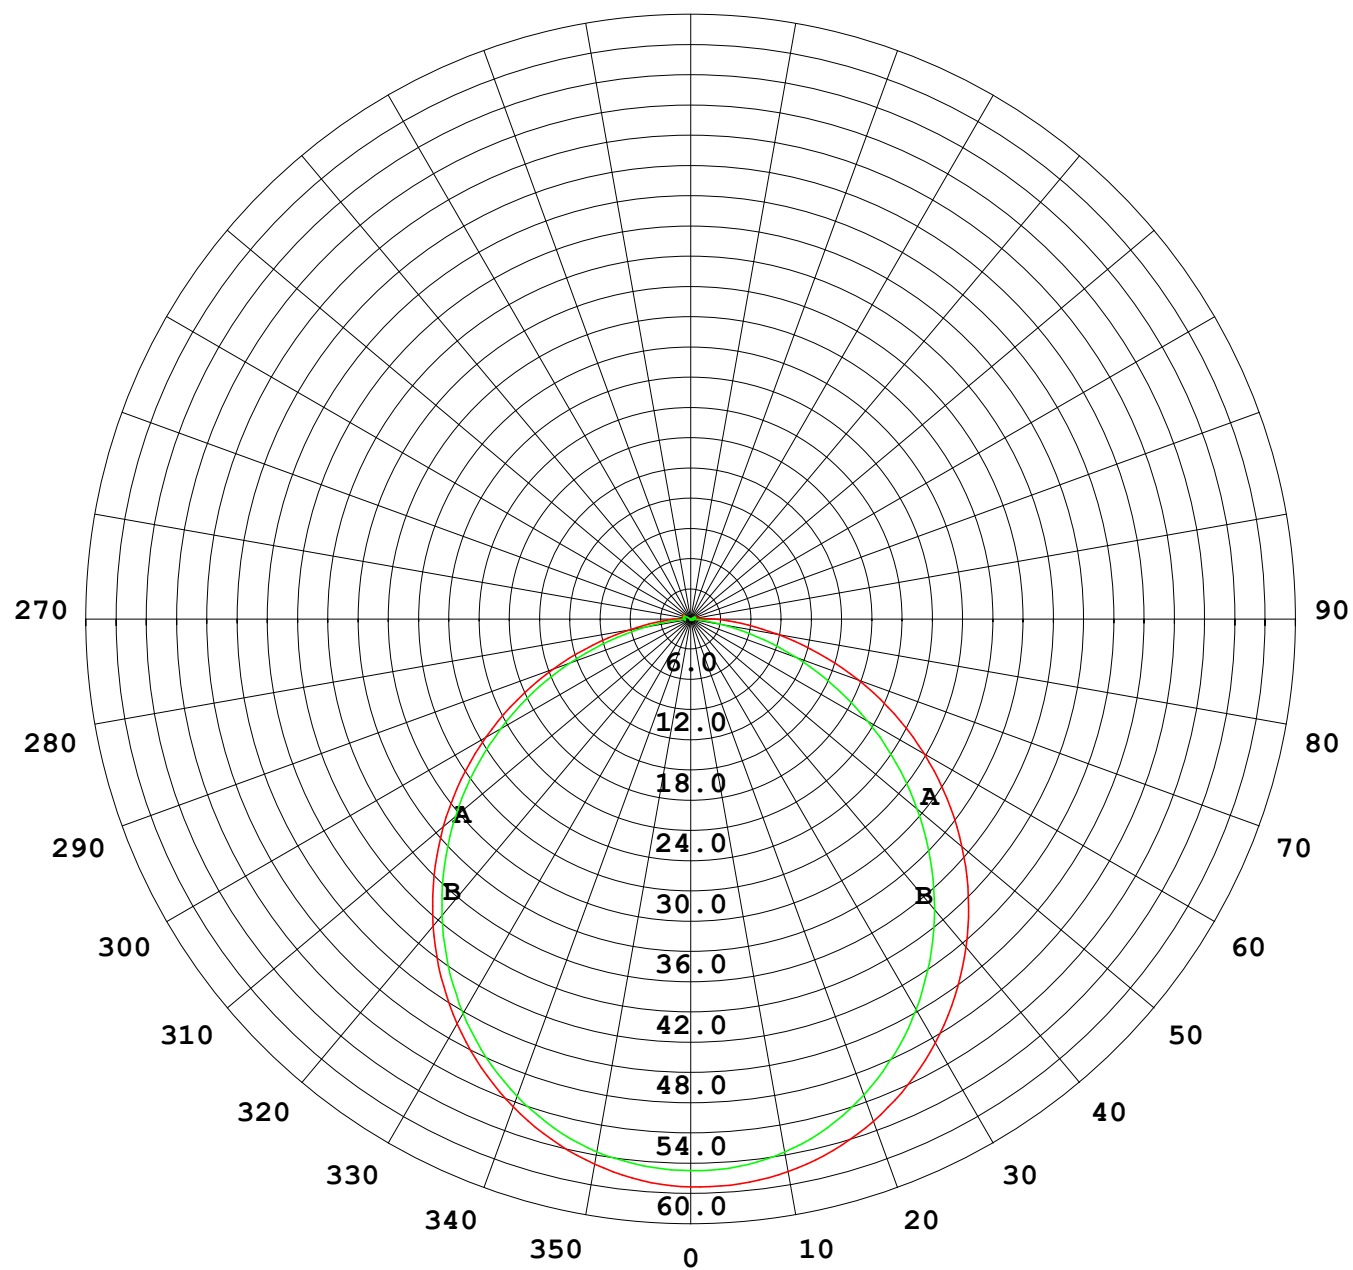

1000 lm

$\kappa = 1$

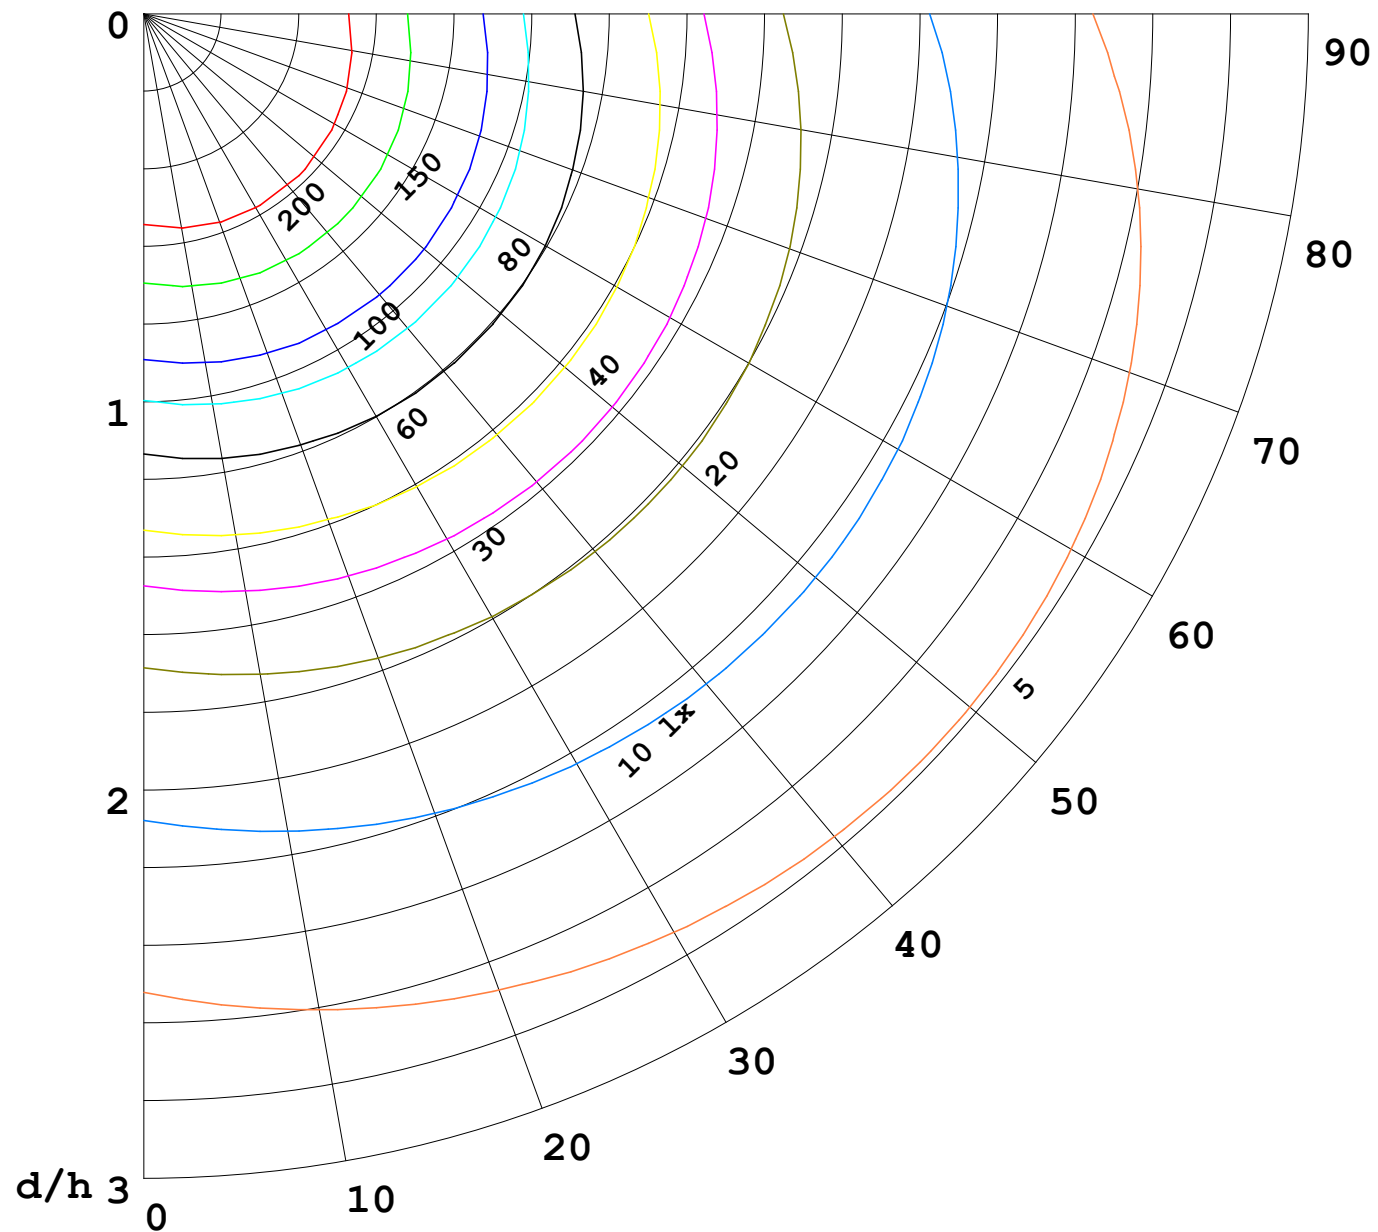

F = 5000 lm
 K = 0.7
 Hcc = 0.0 m
 Hfc = 0.0 m
 Eave = 100 lx

| | Pcc | Pw | Pfc |
|---|-----|----|-----|
| — | 70 | 50 | 30 |
| — | 50 | 30 | 20 |

