


室内灯具光度数据

实测参数: U:24.00V I:0.5402A P:12.96W PF:1.000 Freq:0Hz					
实检光通: 226.399x1 lm					
灯具名称: SF16-24V-5050-72-RGB		灯具类型:		灯具重量:	
灯具规格:		外型尺寸: Length=1m		测试编号:	
制造厂商:		发光口面:		遮光角:	

光源数据		光度数据				光效: 17.46 lm/W
型号		峰值光强 (cd)	73.66	S/MH (C0/180)	1.24	
标称功率 (W)		灯具效率 (%)	100.0	S/MH (C90/270)	1.25	
额定电源电压 (V)		总光通量 (lm)	226.40	η UP,DN (C0-180)	2.0,48.3	
额定光通量 (lm)	226.399	CIE分类	直接	η UP,DN (C180-360)	1.8,47.9	
灯具内光源数 (只)	1	上射光通比 (%)	3.8	CIBSE SHR NOM	1.25	
实测电源电压 (V)		下射光通比 (%)	96.2	CIBSE SHR MAX	1.35	

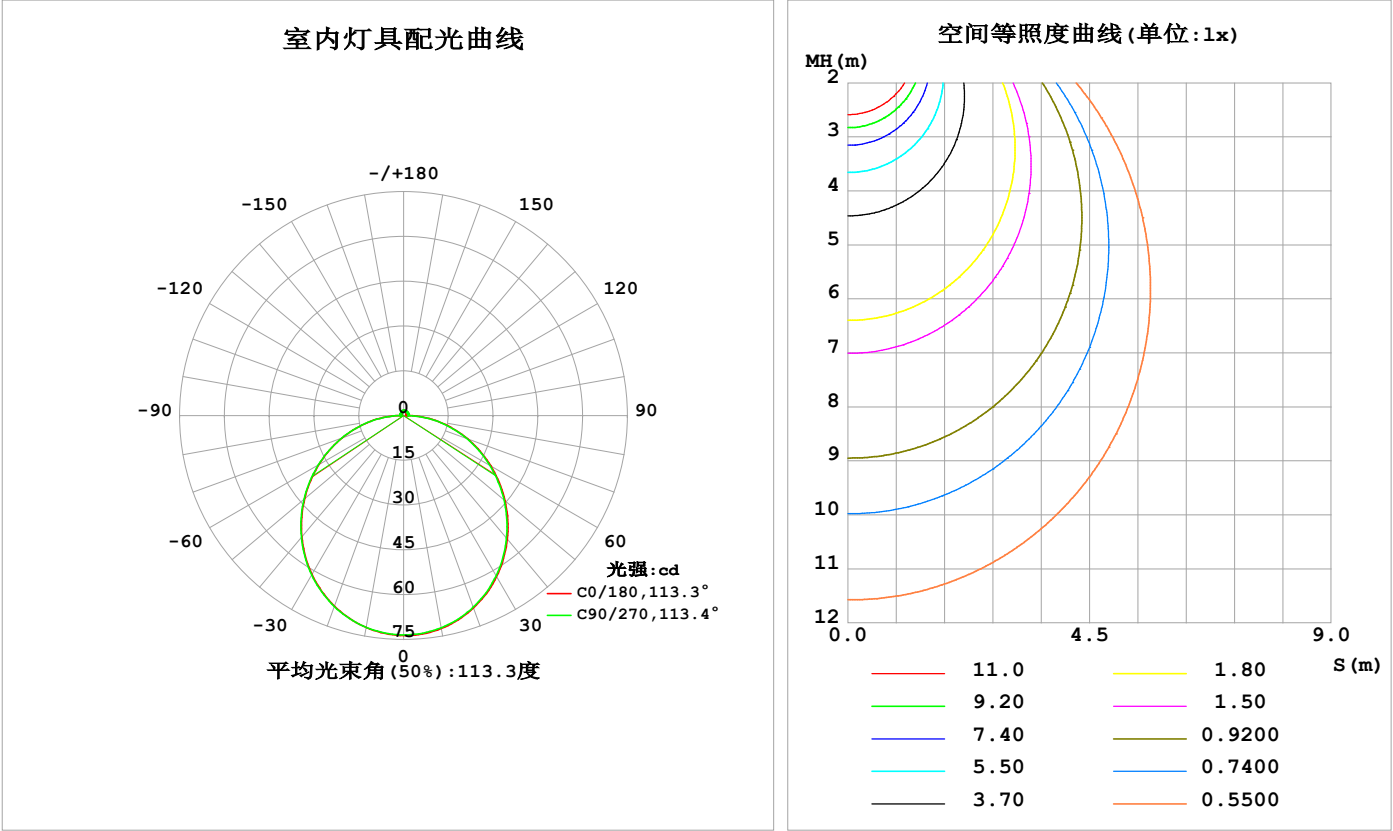

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: Cloud
测试日期: 2024-11-25

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	72.45	72.42	72.20	71.94	72.09	71.96	72.06	72.24	0- 10	6.952	6.952	3.07,3.07
20	68.56	68.63	68.28	67.85	67.91	67.85	68.05	68.41	10- 20	19.89	26.84	11.9,11.9
30	62.33	62.43	61.99	61.43	61.42	61.37	61.63	62.14	20- 30	30.08	56.92	25.1,25.1
40	54.09	54.21	53.66	53.05	53.04	53.02	53.29	53.94	30- 40	36.22	93.14	41.1,41.1
50	44.40	44.55	43.93	43.29	43.26	43.26	43.55	44.29	40- 50	37.66	130.8	57.8,57.8
60	33.80	33.99	33.34	32.73	32.73	32.73	32.98	33.77	50- 60	34.51	165.3	73,73
70	22.86	23.08	22.46	21.92	21.95	21.90	22.07	22.88	60- 70	27.55	192.9	85.2,85.2
80	12.00	12.21	11.65	11.28	11.33	11.21	11.19	12.00	70- 80	17.93	210.8	93.1,93.1
90	2.388	2.293	1.508	1.966	2.171	1.869	1.120	2.101	80- 90	6.973	217.8	96.2,96.2
100	0.9900	1.244	1.509	1.253	0.9064	1.175	1.094	0.9267	90-100	1.348	219.1	96.8,96.8
110	1.094	1.336	1.584	1.359	1.022	1.238	1.178	1.198	100-110	1.271	220.4	97.3,97.3
120	1.218	1.408	1.619	1.443	1.134	1.308	1.284	1.267	110-120	1.285	221.7	97.9,97.9
130	1.325	1.469	1.639	1.515	1.259	1.388	1.374	1.345	120-130	1.232	222.9	98.5,98.5
140	1.434	1.533	1.662	1.576	1.380	1.484	1.475	1.440	130-140	1.125	224.0	99,99
150	1.547	1.587	1.694	1.639	1.507	1.582	1.582	1.533	140-150	0.9644	225.0	99.4,99.4
160	1.651	1.662	1.726	1.697	1.625	1.683	1.691	1.645	150-160	0.7516	225.7	99.7,99.7
170	1.706	1.732	1.755	1.746	1.709	1.772	1.778	1.746	160-170	0.4836	226.2	99.9,99.9
180	1.758	1.801	1.807	1.792	1.755	1.807	1.807	1.804	170-180	0.1688	226.4	100,100
单位:°	光强:cd									单位:lm		

锥面光通量(90度)：112.09 lm

%lum = 49.5%
%lamp = 49.5%


锥面光通量(130度)：180.16 lm

%lum = 79.6%
%lamp = 79.6%

C角度范围： 0度 - 360度 C角度间隔：22.5度 测试速度：快速 环境温度:25.3℃ 测试人员:Cloud 测试日期:2024-11-25	γ角度范围： 0度 - 180度 γ角度间隔： 1.0度 测试系统：远方(EVERFINE) GO-2000B_V1 系统 V2.00.488 环境湿度:65.0% 测试距离:6.360米 [K=1.0000] 备注：
---	--

灯具亮度限制曲线

实测参数：U:24.00V I:0.5402A P:12.96W PF:1.000 Freq:0Hz 实检光通：226.399x1 lm		
灯具名称：SF16-24V-5050-72-RGB	灯具类型：	灯具重量：
灯具规格：	外型尺寸：Length=1m	测试编号：
制造厂商：	发光口面：	遮光角：

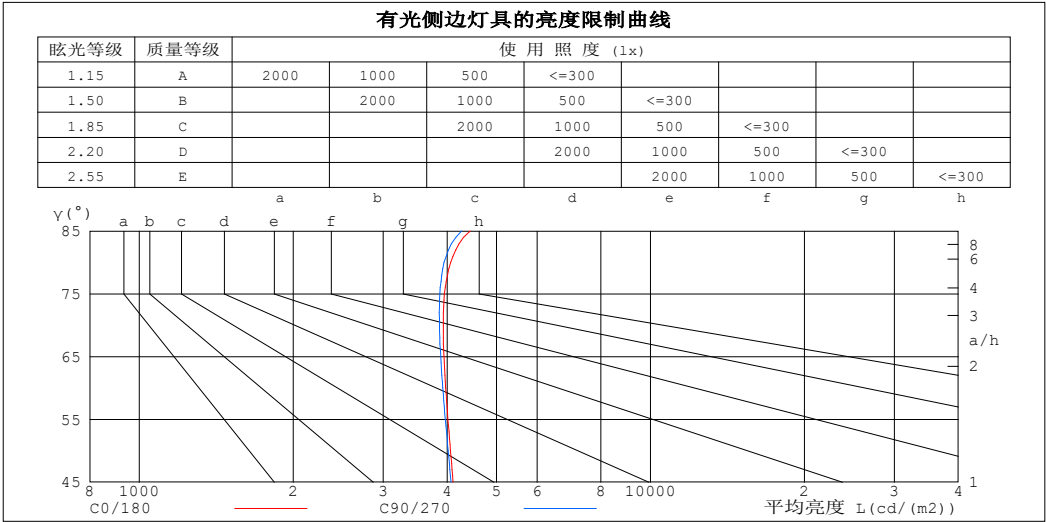

平均亮度值 cd/(m2)		
γ (°)	C0/180	C90/270
85	4439	4273
80	4064	3946
75	3953	3872
70	3931	3863
65	3944	3886
60	3976	3923
55	4016	3969
50	4063	4020
45	4108	4070


C角度范围： 0度 - 360度
C角度间隔： 22.5度
测试速度： 快速
环境温度:25.3℃
测试人员:Cloud
测试日期:2024-11-25

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统： 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注：

工作面利用系数和灯具概算曲线

实测参数: U:24.00V I:0.5402A P:12.96W PF:1.000 Freq:0Hz 实检光通: 226.399x1 lm		
灯具名称: SF16-24V-5050-72-RGB	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商:	发光口面:	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.96
1.0	1.02	.97	.93	.99	.95	.91	.94	.91	.88	.90	.87	.84	.86	.83	.81	.79
2.0	.88	.81	.75	.86	.80	.74	.82	.77	.72	.78	.74	.70	.75	.71	.67	.65
3.0	.77	.69	.62	.76	.68	.61	.72	.65	.60	.69	.63	.58	.66	.61	.57	.54
4.0	.68	.59	.53	.67	.58	.52	.64	.57	.51	.61	.55	.50	.58	.53	.49	.46
5.0	.61	.52	.45	.60	.51	.45	.57	.50	.44	.55	.48	.43	.52	.47	.42	.40
6.0	.55	.46	.39	.54	.45	.39	.51	.44	.38	.49	.43	.38	.48	.42	.37	.35
7.0	.50	.41	.35	.49	.40	.34	.47	.39	.34	.45	.38	.33	.43	.37	.33	.31
8.0	.45	.37	.31	.44	.36	.31	.43	.35	.30	.41	.35	.30	.40	.34	.29	.27
9.0	.42	.33	.28	.41	.33	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.25
10.0	.38	.30	.25	.38	.30	.25	.36	.29	.25	.35	.29	.24	.34	.28	.24	.22

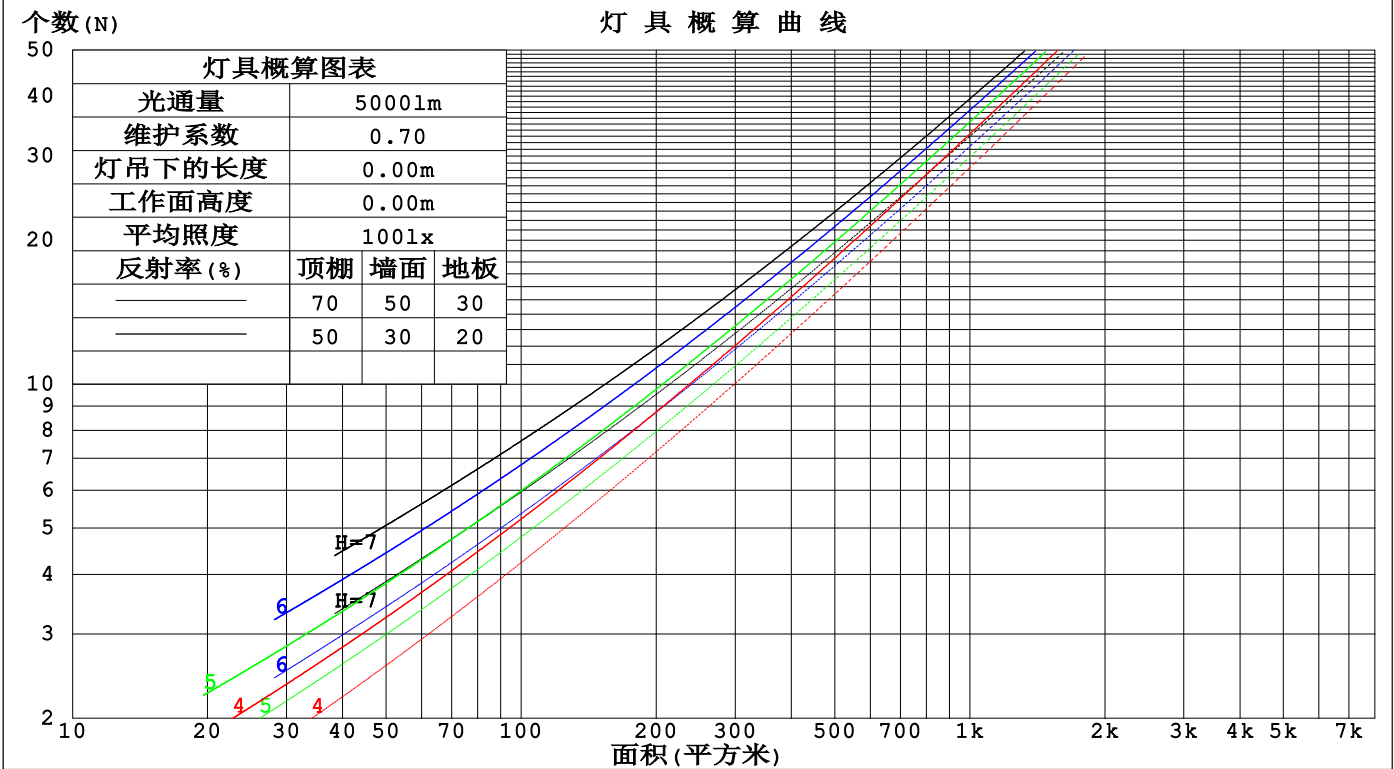

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: Cloud
测试日期: 2024-11-25

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:24.00V I:0.5402A P:12.96W PF:1.000 Freq:0Hz 实检光通: 226.399x1 lm					
灯具名称: SF16-24V-5050-72-RGB			灯具类型:		灯具重量:
灯具规格:			外型尺寸: Length=1m		测试编号:
制造厂商:			发光口面:		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.328	.186	.059	.319	.182	.058	.304	.174	.056	.290	.167	.054	.276	.160	.052	
2.0	.302	.166	.051	.295	.162	.050	.281	.156	.049	.268	.150	.047	.256	.145	.046	
3.0	.277	.147	.044	.270	.145	.044	.258	.140	.042	.246	.135	.041	.236	.131	.040	
4.0	.254	.132	.039	.248	.130	.038	.237	.126	.038	.227	.122	.037	.217	.118	.036	
5.0	.233	.119	.034	.228	.117	.034	.218	.114	.033	.209	.110	.033	.201	.107	.032	
6.0	.216	.108	.031	.211	.107	.031	.202	.104	.030	.194	.101	.030	.186	.098	.029	
7.0	.200	.099	.028	.196	.098	.028	.188	.095	.027	.181	.093	.027	.174	.090	.027	
8.0	.187	.091	.026	.183	.090	.025	.176	.088	.025	.169	.086	.025	.163	.084	.024	
9.0	.175	.085	.024	.171	.084	.023	.165	.082	.023	.159	.080	.023	.153	.078	.022	
10.0	.164	.079	.022	.161	.078	.022	.155	.076	.021	.150	.074	.021	.144	.073	.021	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.220	.220	.220	.188	.188	.188	.128	.128	.128	.074	.074	.074	.024	.024	.024	
1.0	.211	.185	.162	.180	.159	.140	.123	.109	.097	.071	.063	.056	.023	.020	.018	
2.0	.203	.161	.126	.174	.139	.109	.119	.096	.076	.069	.056	.045	.022	.018	.015	
3.0	.195	.144	.103	.168	.124	.089	.115	.086	.063	.066	.050	.037	.021	.016	.012	
4.0	.188	.131	.087	.161	.113	.076	.111	.079	.053	.064	.046	.032	.021	.015	.010	
5.0	.180	.121	.077	.155	.104	.067	.107	.073	.047	.062	.043	.028	.020	.014	.009	
6.0	.173	.112	.069	.149	.097	.060	.103	.068	.042	.059	.040	.025	.019	.013	.008	
7.0	.166	.105	.063	.143	.091	.055	.099	.064	.039	.057	.038	.023	.019	.012	.008	
8.0	.159	.100	.059	.137	.086	.051	.095	.061	.036	.055	.036	.022	.018	.012	.007	
9.0	.153	.095	.055	.132	.082	.048	.092	.058	.034	.053	.034	.020	.017	.011	.007	
10.0	.148	.091	.053	.127	.079	.046	.088	.055	.033	.051	.033	.019	.017	.011	.006	

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度:25.3℃
测试人员:Cloud
测试日期:2024-11-25

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:24.00V I:0.5402A P:12.96W PF:1.000 Freq:0Hz 实检光通: 226.399x1 lm										
灯具名称: SF16-24V-5050-72-RGB					灯具类型:			灯具重量:		
灯具规格:					外型尺寸: Length=1m			测试编号:		
制造厂商:					发光口面:			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	横向(Viewed crosswise)					纵向(Viewed endwise)				
x = 2H y = 2H	22.7	24.2	23.0	24.5	24.8	22.7	24.1	23.0	24.4	24.7
3H	24.4	25.8	24.8	26.1	26.4	24.4	25.7	24.7	26.0	26.4
4H	25.2	26.5	25.6	26.8	27.2	25.1	26.4	25.5	26.8	27.1
6H	25.9	27.1	26.3	27.4	27.8	25.8	27.0	26.2	27.4	27.7
8H	26.1	27.3	26.5	27.7	28.1	26.0	27.2	26.4	27.6	28.0
12H	26.4	27.5	26.8	27.9	28.3	26.3	27.4	26.7	27.8	28.2
4H 2H	23.4	24.7	23.7	25.0	25.3	23.3	24.6	23.7	25.0	25.3
3H	25.3	26.4	25.7	26.8	27.2	25.2	26.4	25.6	26.7	27.1
4H	26.2	27.3	26.6	27.7	28.1	26.1	27.2	26.6	27.6	28.0
6H	27.0	28.0	27.5	28.4	28.8	27.0	27.9	27.4	28.3	28.8
8H	27.4	28.3	27.9	28.7	29.2	27.3	28.2	27.8	28.6	29.1
12H	27.7	28.5	28.2	28.9	29.4	27.6	28.4	28.1	28.8	29.3
8H 4H	26.6	27.4	27.0	27.9	28.3	26.5	27.4	27.0	27.8	28.3
6H	27.6	28.3	28.1	28.8	29.3	27.5	28.2	28.0	28.7	29.2
8H	28.1	28.7	28.6	29.2	29.7	28.0	28.6	28.5	29.1	29.7
12H	28.5	29.0	29.0	29.6	30.1	28.4	29.0	28.9	29.5	30.0
12H 4H	26.6	27.4	27.1	27.9	28.3	26.5	27.4	27.0	27.8	28.3
6H	27.7	28.3	28.2	28.8	29.4	27.6	28.3	28.1	28.8	29.3
8H	28.2	28.8	28.8	29.3	29.9	28.2	28.7	28.7	29.2	29.8
不同间隔布灯时,观察者位置引起的UGR变化(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

依据CIE Pub.117计算, 226.4lm光源光通表格中的数据需要进行修正(8log(F/F0) = -5.2)。
出光口面积: 0.017 m2

C角度范围: 0度 - 360度	γ角度范围: 0度 - 180度
C角度间隔: 22.5度	γ角度间隔: 1.0度
测试速度: 快速	测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.00.488
环境温度:25.3℃	环境湿度:65.0%
测试人员:Cloud	测试距离:6.360米 [K=1.0000]
测试日期:2024-11-25	备注:

UF利用系数表

实测参数: U:24.00V I:0.5402A P:12.96W PF:1.000 Freq:0Hz 实检光通: 226.399x1 lm		
灯具名称: SF16-24V-5050-72-RGB	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商:	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	56	44	37	55	43	37	53	43	36	30
0.80	65	53	46	64	53	46	62	52	45	38
1.00	74	62	55	72	61	54	70	63	53	46
1.25	81	70	62	79	69	62	76	67	61	53
1.50	86	75	68	84	74	67	80	72	66	58
2.00	93	84	77	90	82	76	86	79	74	65
2.50	97	88	82	94	87	81	90	84	79	69
3.00	100	93	87	98	91	86	93	87	83	73
4.00	104	98	93	102	96	91	97	92	88	78
5.00	107	102	97	104	99	95	99	95	92	81
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHR _{NOM} = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度:25.3℃
测试人员:Cloud
测试日期:2024-11-25

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注:

灯 具 等 光 强 曲 线

实测参数: U:24.00V I:0.5402A P:12.96W PF:1.000 Freq:0Hz 实检光通: 226.399x1 lm		
灯具名称: SF16-24V-5050-72-RGB	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商:	发光口面:	遮光角:

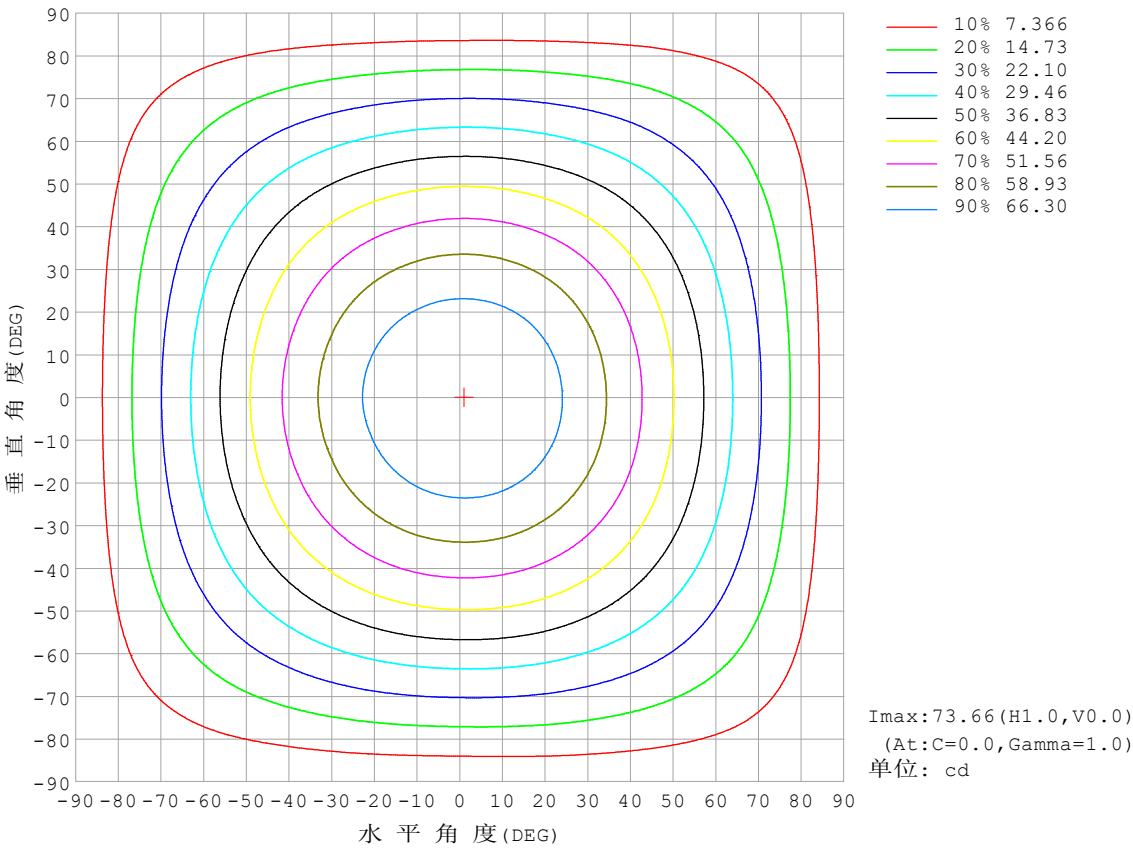


C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度:25.3℃
测试人员:Cloud
测试日期:2024-11-25

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:24.00V I:0.5402A P:12.96W PF:1.000 Freq:0Hz 实检光通: 226.399x1 lm		
灯具名称: SF16-24V-5050-72-RGB	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商:	发光口面:	遮光角:

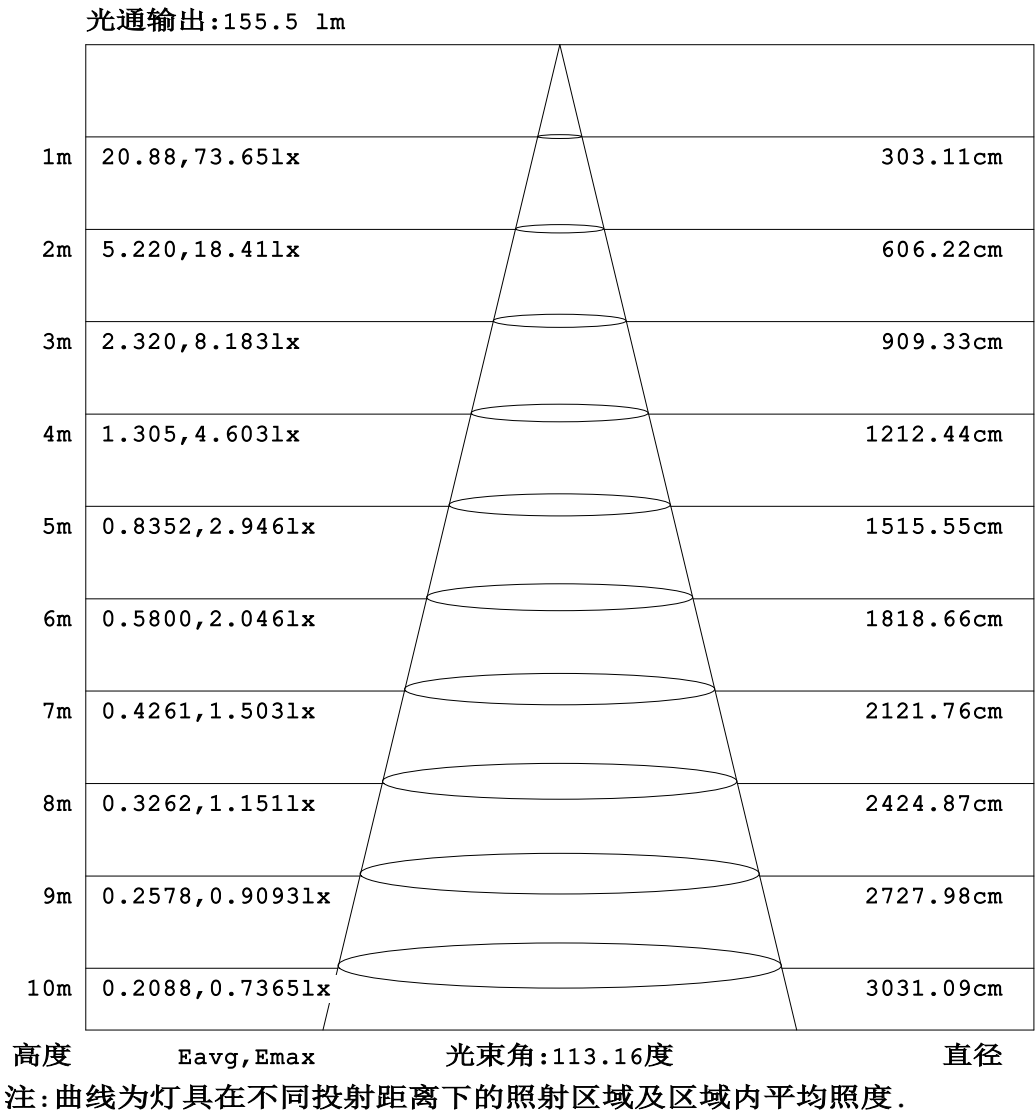


C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度:25.3℃
测试人员:Cloud
测试日期:2024-11-25

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:24.00V I:0.5402A P:12.96W PF:1.000 Freq:0Hz 实检光通: 226.399x1 lm		
灯具名称: SF16-24V-5050-72-RGB	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商:	发光口面:	遮光角:

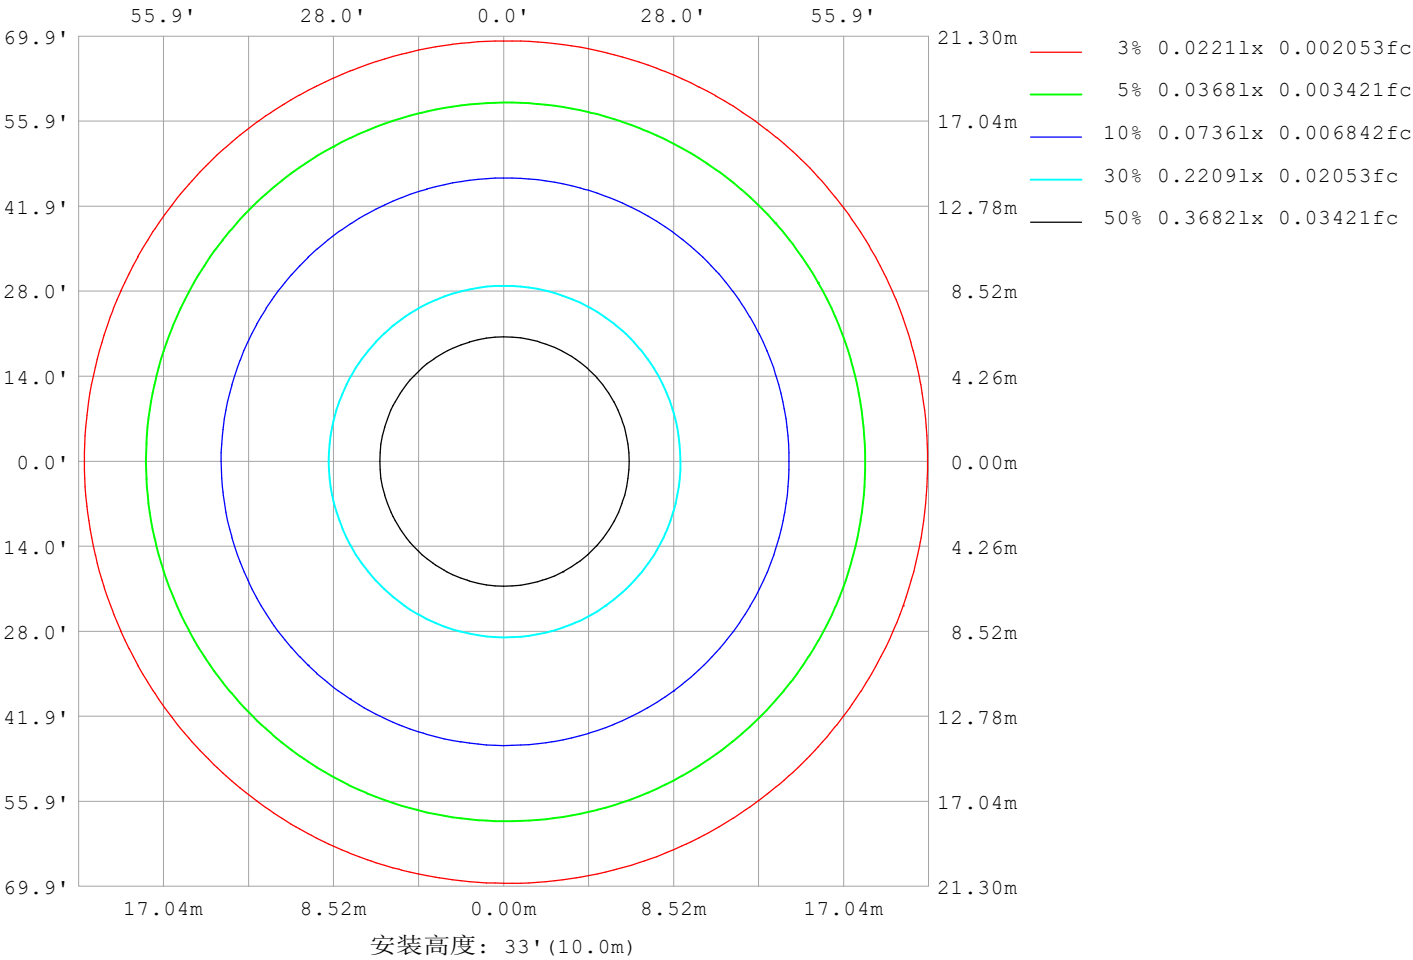

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: Cloud
测试日期: 2024-11-25

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:24.00V I:0.5402A P:12.96W PF:1.000 Freq:0Hz 实检光通: 226.399x1 lm		
灯具名称: SF16-24V-5050-72-RGB	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商:	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	3874
L横 (75) av	3866
L横 (85) av	4250
L纵 (65) av	3859
L纵 (75) av	3824
L纵 (85) av	4089
L45 (65) av	3882
L45 (75) av	3871
L45 (85) av	4269

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度:25.3℃
测试人员:Cloud
测试日期:2024-11-25

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注:

平面照度曲线

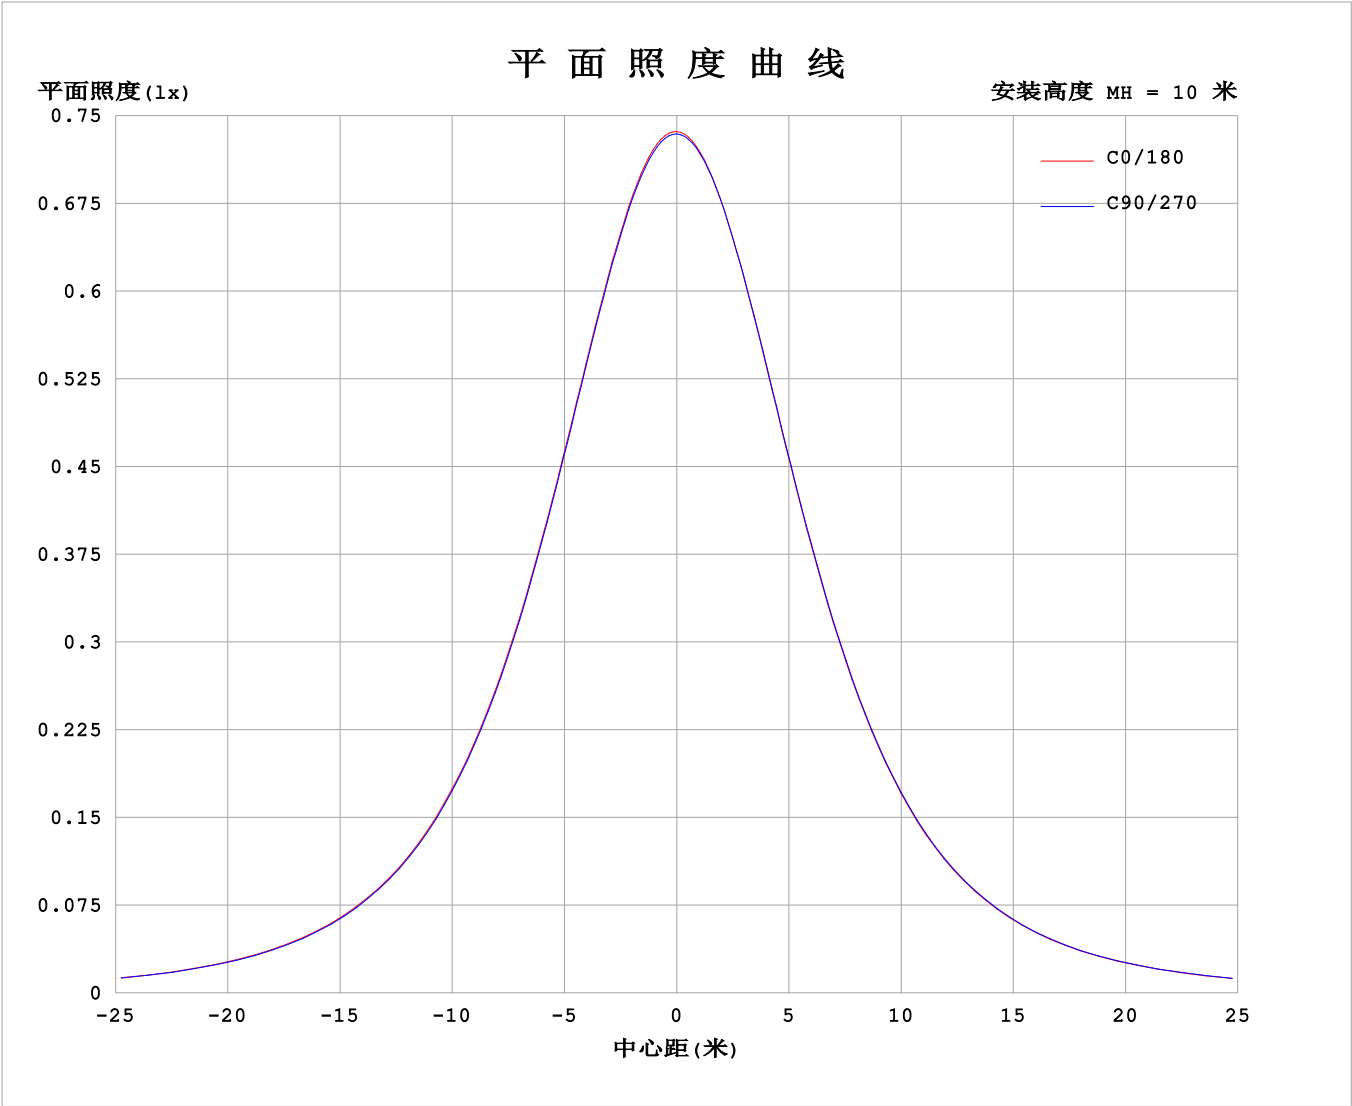

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: Cloud
测试日期: 2024-11-25

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:


光 强 分 布 数 据 表 格

实测参数: U:24.00V I:0.5402A P:12.96W PF:1.000 Freq:0Hz 实检光通: 226.399x1 lm																	
灯具名称: SF16-24V-5050-72-RGB									灯具类型:						灯具重量:		
灯具规格:									外型尺寸: Length=1m						测试编号:		
制造厂商:									发光口面:						遮光角:		

表--1																	
单位: cd																	
C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	
0	73.6	73.6	73.5	73.5	73.4	73.4	73.4	73.5	73.6	73.6	73.5	73.5	73.4	73.4	73.4	73.5	
5	73.4	73.4	73.3	73.2	73.2	73.1	73.0	73.0	73.2	73.1	73.1	73.1	73.1	73.1	73.1	73.2	73.3
10	72.4	72.5	72.4	72.3	72.2	72.1	71.9	71.9	72.1	72.0	72.0	72.0	72.1	72.1	72.1	72.2	72.3
15	70.8	70.9	70.9	70.8	70.6	70.4	70.2	70.1	70.3	70.2	70.2	70.2	70.4	70.5	70.7	70.7	
20	68.6	68.7	68.6	68.5	68.3	68.1	67.8	67.8	67.9	67.8	67.8	67.9	68.1	68.2	68.4	68.5	
25	65.7	65.8	65.8	65.7	65.4	65.2	64.9	64.8	64.9	64.8	64.9	64.9	65.1	65.3	65.5	65.6	
30	62.3	62.5	62.4	62.3	62.0	61.7	61.4	61.3	61.4	61.3	61.4	61.4	61.6	61.9	62.1	62.3	
35	58.4	58.6	58.5	58.4	58.0	57.8	57.4	57.3	57.4	57.4	57.4	57.5	57.7	57.9	58.3	58.4	
40	54.1	54.3	54.2	54.1	53.7	53.4	53.1	52.9	53.0	52.9	53.0	53.1	53.3	53.6	53.9	54.1	
45	49.4	49.6	49.5	49.4	48.9	48.7	48.3	48.1	48.3	48.2	48.3	48.3	48.6	48.8	49.3	49.4	
50	44.4	44.6	44.5	44.4	43.9	43.7	43.3	43.1	43.3	43.2	43.3	43.3	43.6	43.8	44.3	44.4	
55	39.2	39.4	39.3	39.2	38.7	38.4	38.1	37.9	38.0	37.9	38.0	38.1	38.3	38.6	39.1	39.2	
60	33.8	34.1	34.0	33.8	33.3	33.1	32.7	32.6	32.7	32.6	32.7	32.7	33.0	33.3	33.8	33.9	
65	28.3	28.6	28.6	28.4	27.9	27.7	27.3	27.2	27.3	27.2	27.3	27.3	27.5	27.9	28.3	28.5	
70	22.9	23.1	23.1	22.9	22.5	22.3	21.9	21.8	21.9	21.8	21.9	21.9	22.1	22.4	22.9	23.0	
75	17.4	17.7	17.6	17.5	17.0	16.9	16.6	16.5	16.6	16.5	16.5	16.4	16.6	17.0	17.4	17.5	
80	12.0	12.3	12.2	12.1	11.6	11.5	11.3	11.2	11.3	11.2	11.2	11.0	11.2	11.5	12.0	12.1	
85	6.58	6.84	6.84	6.77	6.33	6.30	5.96	5.89	6.02	5.87	5.87	5.72	5.78	6.12	6.62	6.71	
90	2.39	2.45	2.29	1.98	1.51	1.83	1.97	2.11	2.17	2.05	1.87	1.46	1.12	1.49	2.10	2.31	
95	1.01	1.06	1.24	1.41	1.46	1.42	1.23	1.05	0.89	1.02	1.15	1.20	1.09	0.95	0.95	0.89	
100	0.99	1.07	1.24	1.45	1.51	1.47	1.25	1.08	0.91	1.01	1.17	1.20	1.09	0.94	0.93	0.98	
105	1.03	1.13	1.29	1.50	1.55	1.52	1.30	1.14	0.96	1.05	1.21	1.22	1.13	1.07	1.12	1.02	
110	1.09	1.18	1.34	1.53	1.58	1.55	1.36	1.20	1.02	1.09	1.24	1.24	1.18	1.17	1.20	1.07	
115	1.15	1.23	1.37	1.55	1.60	1.58	1.41	1.25	1.07	1.15	1.28	1.27	1.23	1.22	1.23	1.12	
120	1.22	1.29	1.41	1.58	1.62	1.61	1.44	1.31	1.13	1.19	1.31	1.30	1.28	1.25	1.27	1.16	
125	1.27	1.33	1.44	1.60	1.63	1.63	1.48	1.36	1.20	1.24	1.35	1.34	1.33	1.29	1.30	1.21	
130	1.32	1.38	1.47	1.61	1.64	1.64	1.52	1.40	1.26	1.29	1.39	1.38	1.37	1.33	1.34	1.26	
135	1.38	1.43	1.50	1.63	1.65	1.66	1.55	1.45	1.32	1.34	1.43	1.42	1.42	1.38	1.39	1.31	
140	1.43	1.45	1.53	1.64	1.66	1.67	1.58	1.50	1.38	1.40	1.48	1.46	1.47	1.43	1.44	1.37	
145	1.49	1.50	1.56	1.66	1.67	1.69	1.61	1.54	1.44	1.47	1.53	1.51	1.53	1.48	1.48	1.42	
150	1.55	1.54	1.59	1.68	1.69	1.71	1.64	1.59	1.51	1.52	1.58	1.57	1.58	1.54	1.53	1.48	
155	1.60	1.59	1.62	1.71	1.71	1.73	1.67	1.64	1.57	1.58	1.64	1.62	1.64	1.59	1.59	1.54	
160	1.65	1.63	1.66	1.73	1.73	1.75	1.70	1.69	1.62	1.64	1.68	1.67	1.69	1.65	1.65	1.60	
165	1.69	1.69	1.70	1.75	1.74	1.76	1.72	1.73	1.68	1.69	1.73	1.72	1.74	1.69	1.70	1.65	
170	1.71	1.74	1.73	1.76	1.75	1.78	1.75	1.77	1.71	1.73	1.77	1.75	1.78	1.74	1.75	1.71	
175	1.73	1.79	1.77	1.80	1.78	1.80	1.77	1.80	1.75	1.77	1.80	1.79	1.80	1.78	1.78	1.75	
180	1.76	1.80	1.80	1.81	1.81	1.81	1.79	1.80	1.75	1.80	1.81	1.81	1.81	1.80	1.80	1.78	


C角度范围: 0度 - 360度	γ角度范围: 0度 - 180度
C角度间隔: 22.5度	γ角度间隔: 1.0度
测试速度: 快速	测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境温度: 25.3℃	环境湿度: 65.0%
测试人员: Cloud	测试距离: 6.360米 [K=1.0000]
测试日期: 2024-11-25	备注:

I (cd)

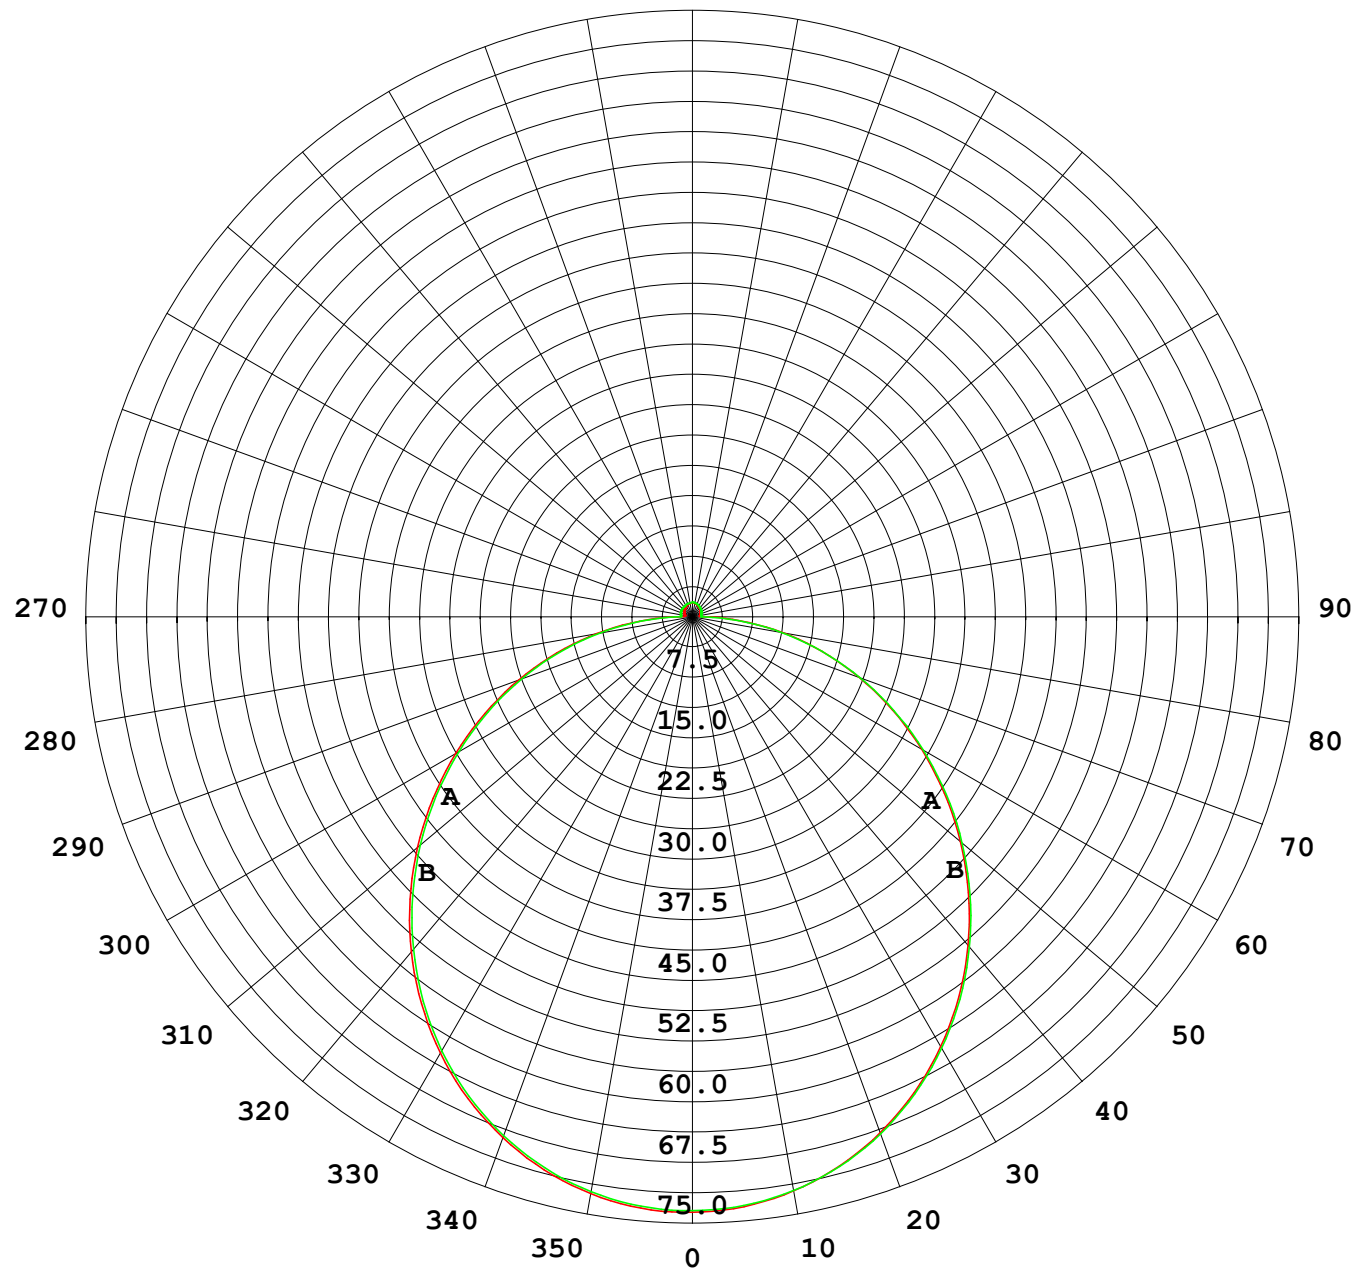

1000 lm

$\kappa = 1$

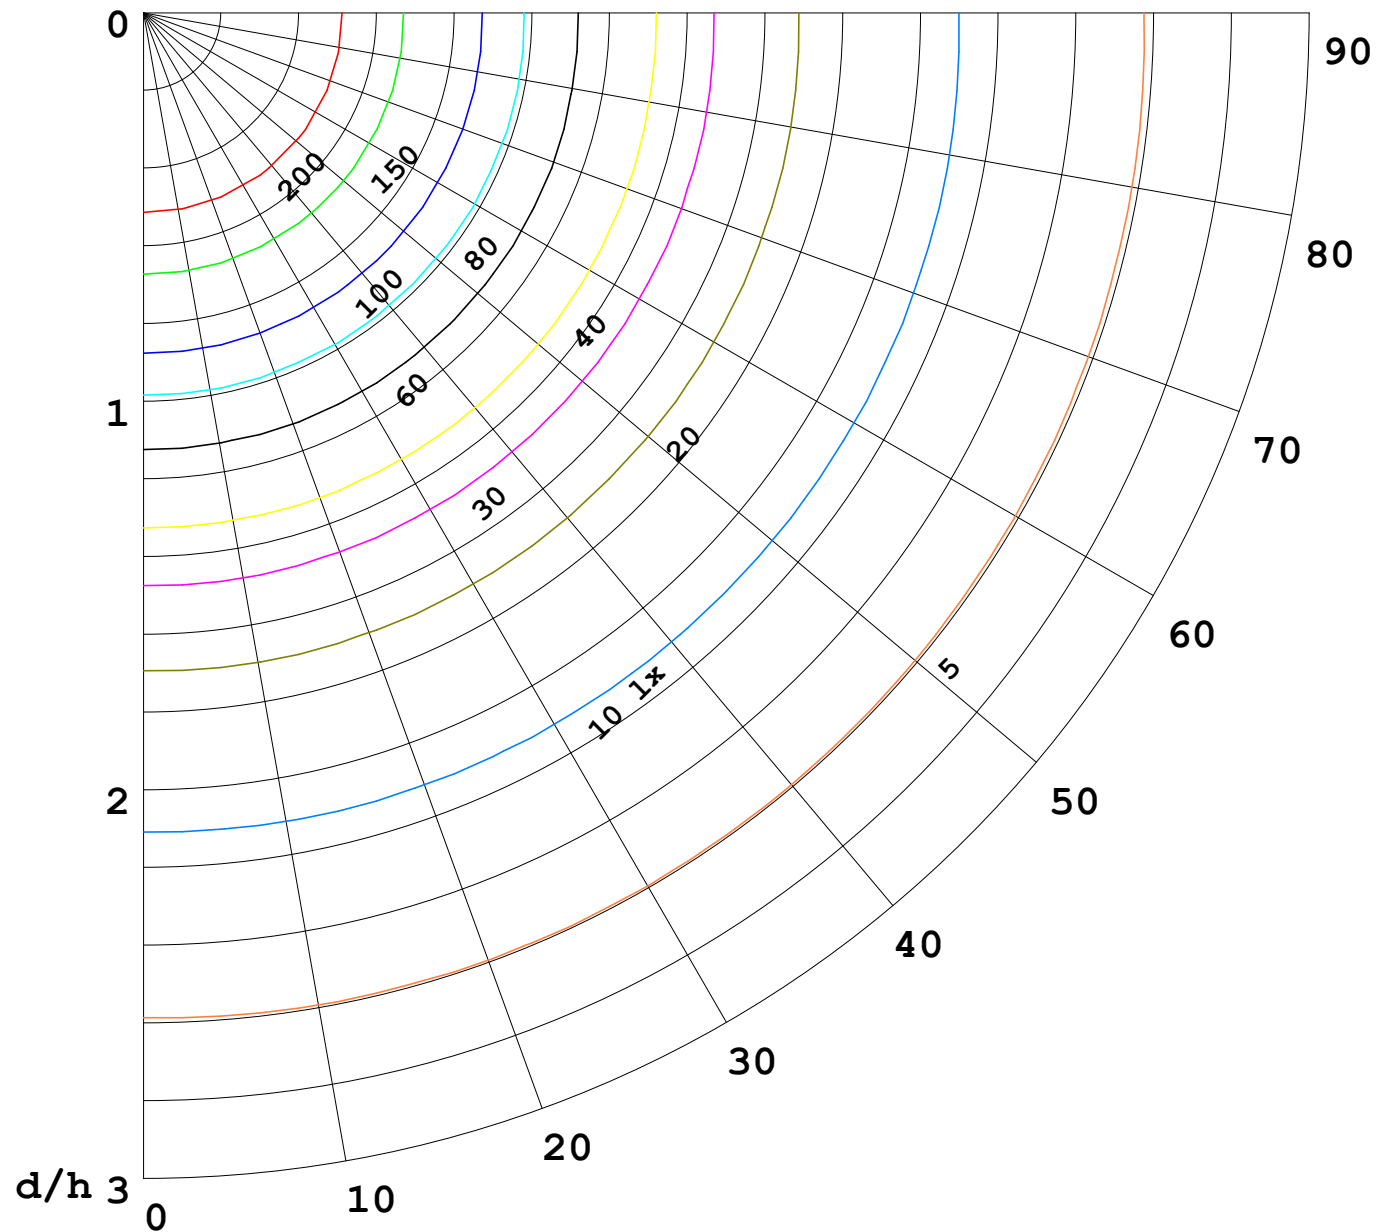

	Pcc	Pw	Pfc
_____	70	50	30
=====	50	30	20

