


室内灯具光度数据


| | | |
|---|----------------|------------------|
| 实测参数: U:24.00V I:0.2352A P:5.644W PF:1.000 实检光通:323.34x1 lm | | |
| 灯具名称: SF18-24V-5050-70-SPI4-RGBW-4000-W | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5mm*16.5mm | 灯具规格: | 测试编号: 2022042901 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

| 光源数据 | | 光度数据 | | | | 光效: 57.29 lm/W |
|-----------|--------|----------|--------|------------------------|------------|----------------|
| 型号 | 5050 | 峰值光强(cd) | 63.65 | S/MH(C0/180) | 1.47 | |
| 标称功率(W) | 4.5 | 灯具效率(%) | 100.0 | S/MH(C90/270) | 1.25 | |
| 额定电源电压(V) | 24 | 总光通量(lm) | 323.34 | η UP,DN(C0-180) | 12.1, 36.9 | |
| 额定光通量(lm) | 323.34 | CIE分类 | 半直接 | η UP,DN(C180-360) | 13.1, 37.8 | |
| 灯具内光源数(只) | 1 | 上射光通比(%) | 25.3 | CIBSE SHR NOM | 1.50 | |
| 实测电源电压(V) | 24.0 | 下射光通比(%) | 74.7 | CIBSE SHR MAX | 1.55 | |

室内灯具配光曲线

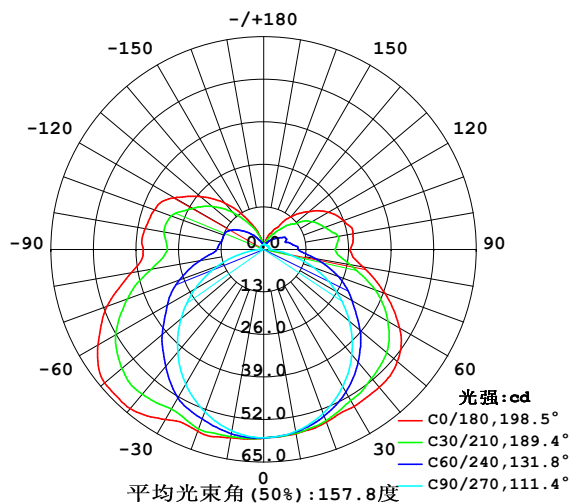

空间等照度曲线(单位:lx)

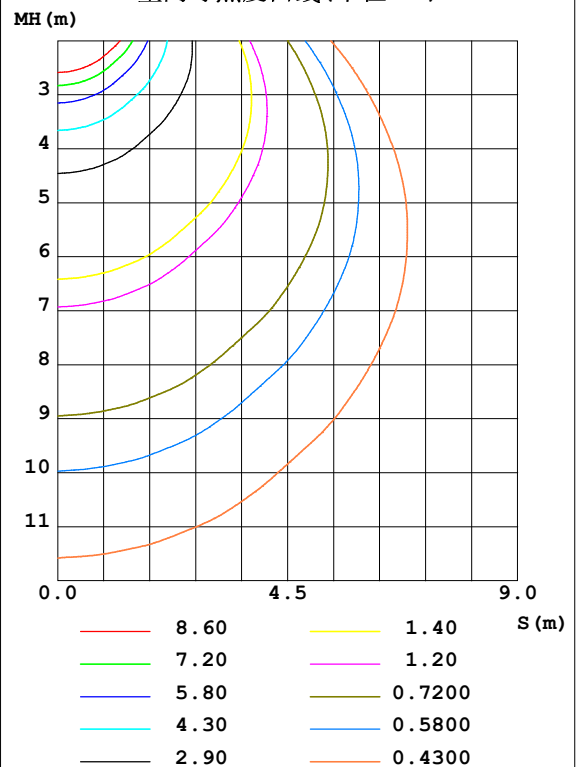


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: HXJ
测试日期: 2022-04-29

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

灯具环带光通量和亮度限制曲线

环带光通量:

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | $\gamma(^{\circ})$ | $\Phi_{\text{环}}$ | $\Phi_{\text{总}}$ | %lum, lamp |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|--------------------|-------------------|-------------------|------------|
| 10 | 57.17 | 56.84 | 56.46 | 57.68 | 58.44 | 57.63 | 56.29 | 56.61 | 0- 10 | 5.479 | 5.479 | 1.69,1.69 |
| 20 | 56.09 | 54.91 | 53.28 | 56.97 | 59.10 | 56.75 | 52.79 | 54.49 | 10- 20 | 15.99 | 21.47 | 6.64,6.64 |
| 30 | 55.36 | 51.77 | 48.39 | 54.71 | 60.00 | 54.42 | 47.62 | 51.19 | 20- 30 | 25.08 | 46.55 | 14.4,14.4 |
| 40 | 54.95 | 48.14 | 41.96 | 52.63 | 63.53 | 52.20 | 40.90 | 47.36 | 30- 40 | 32.42 | 78.97 | 24.4,24.4 |
| 50 | 53.31 | 43.76 | 34.17 | 48.97 | 63.42 | 48.56 | 33.01 | 42.81 | 40- 50 | 37.31 | 116.3 | 36,36 |
| 60 | 47.88 | 37.50 | 25.58 | 43.58 | 58.47 | 43.16 | 24.26 | 36.45 | 50- 60 | 38.54 | 154.8 | 47.9,47.9 |
| 70 | 39.43 | 30.31 | 16.28 | 36.26 | 50.97 | 35.91 | 15.04 | 29.36 | 60- 70 | 35.78 | 190.6 | 58.9,58.9 |
| 80 | 30.84 | 21.36 | 6.969 | 27.45 | 41.09 | 27.35 | 6.012 | 20.60 | 70- 80 | 29.20 | 219.8 | 68,68 |
| 90 | 26.48 | 16.23 | 1.684 | 21.90 | 36.77 | 21.89 | 1.030 | 15.52 | 80- 90 | 21.79 | 241.6 | 74.7,74.7 |
| 100 | 27.76 | 16.04 | 1.659 | 22.13 | 36.82 | 22.13 | 1.098 | 15.35 | 90-100 | 19.91 | 261.5 | 80.9,80.9 |
| 110 | 25.97 | 13.49 | 1.598 | 21.47 | 35.57 | 21.52 | 1.108 | 13.46 | 100-110 | 18.70 | 280.2 | 86.7,86.7 |
| 120 | 22.83 | 12.32 | 1.568 | 18.46 | 31.64 | 18.46 | 1.141 | 12.00 | 110-120 | 16.04 | 296.2 | 91.6,91.6 |
| 130 | 18.07 | 8.847 | 1.559 | 14.80 | 25.17 | 14.79 | 1.191 | 8.665 | 120-130 | 12.03 | 308.3 | 95.3,95.3 |
| 140 | 13.25 | 6.088 | 1.556 | 10.70 | 18.49 | 10.60 | 1.271 | 5.859 | 130-140 | 7.861 | 316.1 | 97.8,97.8 |
| 150 | 7.556 | 4.058 | 1.557 | 6.739 | 11.40 | 6.664 | 1.338 | 3.586 | 140-150 | 4.314 | 320.5 | 99.1,99.1 |
| 160 | 4.948 | 2.515 | 1.558 | 3.987 | 6.297 | 3.873 | 1.422 | 2.307 | 150-160 | 1.996 | 322.4 | 99.7,99.7 |
| 170 | 1.850 | 1.711 | 1.569 | 2.213 | 2.004 | 2.124 | 1.493 | 1.669 | 160-170 | 0.7257 | 323.2 | 99.9,99.9 |
| 180 | 1.548 | 1.568 | 1.578 | 1.638 | 1.578 | 1.626 | 1.568 | 1.601 | 170-180 | 0.1666 | 323.3 | 100,100 |
| 单位:° | 光强:cd | | | | | | | | | 单位:lm | | |

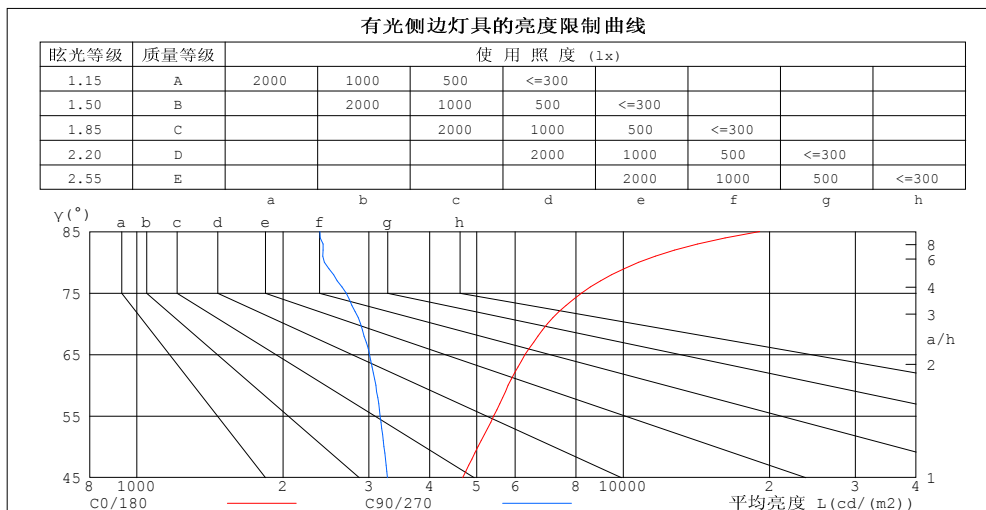

| 平均亮度值 cd/(m ²) | | |
|----------------------------|--------|---------|
| $\gamma(^{\circ})$ | C0/180 | C90/270 |
| 85 | 19089 | 2379 |
| 80 | 10764 | 2432 |
| 75 | 8214 | 2696 |
| 70 | 6986 | 2886 |
| 65 | 6286 | 3008 |
| 60 | 5804 | 3100 |
| 55 | 5421 | 3164 |
| 50 | 5027 | 3222 |
| 45 | 4680 | 3274 |


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: HXJ
测试日期: 2022-04-29

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

| | | |
|---|----------------|------------------|
| 实测参数: U:24.00V I:0.2352A P:5.644W PF:1.000 实检光通:323.34x1 lm | | |
| 灯具名称: SF18-24V-5050-70-SPI4-RGBW-4000-W | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5mm*16.5mm | 灯具规格: | 测试编号: 2022042901 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|---------------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 工 作 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | 1.13 | 1.13 | 1.13 | 1.07 | 1.07 | 1.07 | .97 | .97 | .97 | .88 | .88 | .88 | .79 | .79 | .79 | .75 |
| 1.0 | .94 | .89 | .84 | .89 | .85 | .80 | .80 | .77 | .73 | .72 | .69 | .67 | .65 | .62 | .60 | .56 |
| 2.0 | .80 | .73 | .66 | .76 | .69 | .63 | .69 | .63 | .58 | .62 | .57 | .53 | .55 | .51 | .48 | .45 |
| 3.0 | .70 | .61 | .54 | .66 | .58 | .51 | .59 | .53 | .47 | .53 | .48 | .43 | .48 | .43 | .39 | .36 |
| 4.0 | .61 | .52 | .44 | .58 | .49 | .43 | .52 | .45 | .39 | .47 | .41 | .36 | .42 | .37 | .33 | .30 |
| 5.0 | .54 | .44 | .38 | .51 | .43 | .36 | .46 | .39 | .33 | .42 | .36 | .31 | .37 | .32 | .28 | .25 |
| 6.0 | .48 | .39 | .32 | .46 | .37 | .31 | .41 | .34 | .29 | .37 | .31 | .27 | .34 | .28 | .24 | .22 |
| 7.0 | .43 | .34 | .28 | .41 | .33 | .27 | .37 | .30 | .25 | .34 | .28 | .23 | .30 | .25 | .21 | .19 |
| 8.0 | .39 | .31 | .25 | .37 | .29 | .24 | .34 | .27 | .22 | .31 | .25 | .21 | .28 | .23 | .19 | .17 |
| 9.0 | .36 | .27 | .22 | .34 | .26 | .21 | .31 | .24 | .20 | .28 | .23 | .18 | .26 | .21 | .17 | .15 |
| 10.0 | .33 | .25 | .20 | .31 | .24 | .19 | .29 | .22 | .18 | .26 | .20 | .16 | .24 | .19 | .15 | .13 |

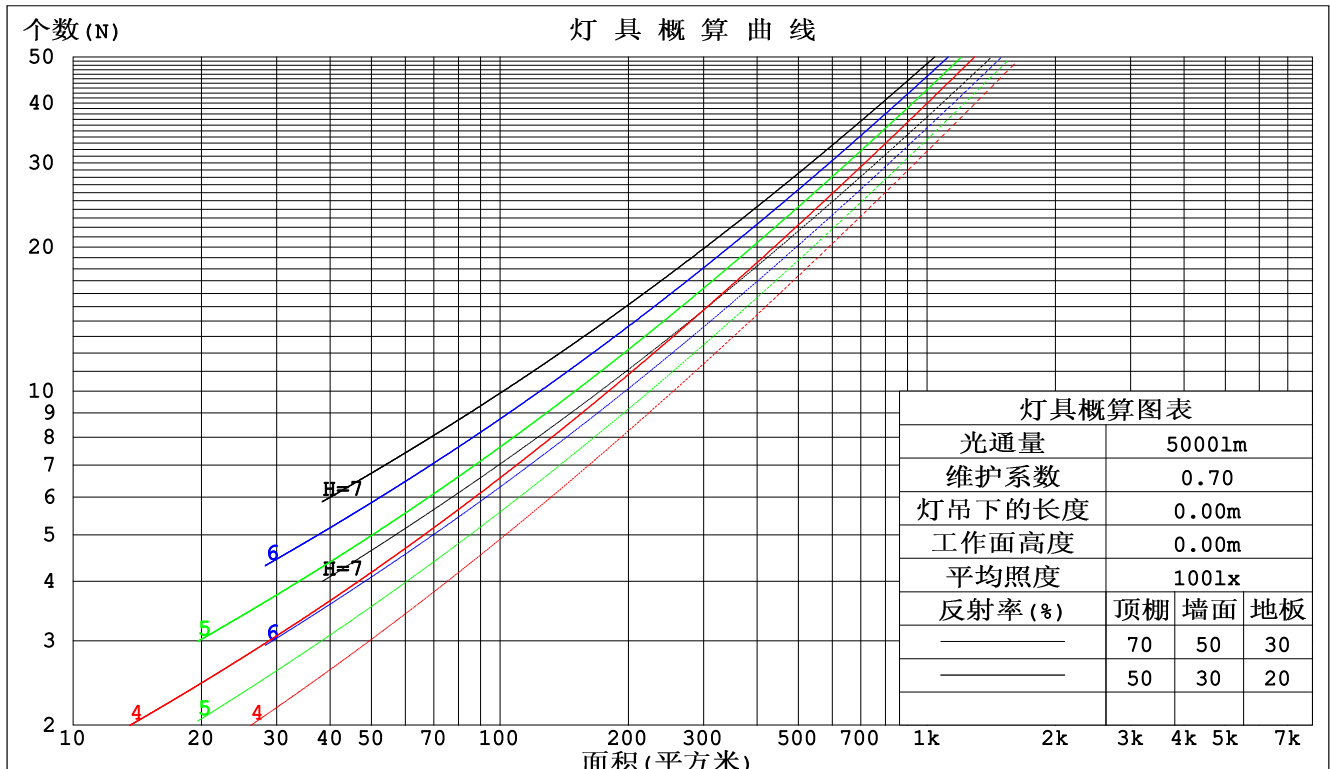

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: HXJ
测试日期: 2022-04-29

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

墙面和天花板利用系数

| | | |
|---|---------------|-----------------|
| 实测参数: U:24.00V I:0.2352A P:5.644W PF:1.000 实检光通:323.34x1 lm | | |
| 灯具名称: SF18-24V-5050-70-SPI4-RGBW-4000-W | 灯具类型:硅胶 | 灯具重量: |
| 外型尺寸: 16.5mm*16.5mm | 灯具规格: | 测试编号:2022042901 |
| 制造厂商: OLYMPIA | 发光口面:1*0.0165 | 保护角: |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 墙 壁 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .378 | .215 | .068 | .363 | .207 | .066 | .335 | .192 | .061 | .310 | .179 | .057 | .286 | .166 | .053 | |
| 2.0 | .329 | .180 | .055 | .316 | .174 | .054 | .290 | .161 | .050 | .267 | .150 | .047 | .245 | .139 | .044 | |
| 3.0 | .293 | .156 | .047 | .281 | .150 | .045 | .258 | .140 | .042 | .237 | .130 | .040 | .217 | .120 | .037 | |
| 4.0 | .264 | .137 | .040 | .253 | .133 | .039 | .232 | .123 | .037 | .213 | .114 | .034 | .195 | .106 | .032 | |
| 5.0 | .240 | .123 | .035 | .230 | .118 | .034 | .211 | .110 | .032 | .193 | .102 | .030 | .177 | .094 | .028 | |
| 6.0 | .220 | .110 | .032 | .211 | .107 | .031 | .194 | .099 | .029 | .177 | .092 | .027 | .162 | .085 | .025 | |
| 7.0 | .203 | .101 | .028 | .195 | .097 | .028 | .179 | .090 | .026 | .164 | .084 | .024 | .150 | .078 | .023 | |
| 8.0 | .189 | .092 | .026 | .181 | .089 | .025 | .166 | .083 | .024 | .152 | .077 | .022 | .139 | .071 | .021 | |
| 9.0 | .176 | .085 | .024 | .169 | .082 | .023 | .155 | .077 | .022 | .142 | .071 | .020 | .130 | .066 | .019 | |
| 10.0 | .164 | .079 | .022 | .158 | .076 | .021 | .145 | .071 | .020 | .133 | .066 | .019 | .122 | .061 | .018 | |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 天 花 板 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | .383 | .383 | .383 | .327 | .327 | .327 | .223 | .223 | .223 | .128 | .128 | .128 | .041 | .041 | .041 | |
| 1.0 | .379 | .350 | .323 | .324 | .300 | .278 | .222 | .207 | .192 | .128 | .119 | .112 | .041 | .038 | .036 | |
| 2.0 | .373 | .327 | .289 | .319 | .282 | .250 | .219 | .195 | .174 | .126 | .113 | .102 | .040 | .037 | .033 | |
| 3.0 | .366 | .311 | .268 | .313 | .268 | .232 | .215 | .186 | .163 | .124 | .109 | .096 | .040 | .035 | .031 | |
| 4.0 | .358 | .299 | .253 | .307 | .258 | .220 | .211 | .180 | .155 | .122 | .105 | .092 | .039 | .034 | .030 | |
| 5.0 | .351 | .289 | .244 | .301 | .250 | .212 | .207 | .175 | .150 | .120 | .103 | .089 | .039 | .033 | .029 | |
| 6.0 | .343 | .281 | .237 | .295 | .244 | .206 | .204 | .171 | .146 | .118 | .100 | .087 | .038 | .033 | .029 | |
| 7.0 | .336 | .275 | .232 | .289 | .238 | .202 | .200 | .167 | .143 | .116 | .098 | .085 | .038 | .032 | .028 | |
| 8.0 | .330 | .269 | .228 | .284 | .234 | .199 | .196 | .164 | .141 | .114 | .097 | .084 | .037 | .032 | .028 | |
| 9.0 | .324 | .265 | .225 | .279 | .230 | .196 | .193 | .161 | .139 | .112 | .095 | .083 | .036 | .031 | .028 | |
| 10.0 | .318 | .261 | .223 | .274 | .226 | .194 | .190 | .159 | .138 | .111 | .094 | .082 | .036 | .031 | .027 | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: HXJ
测试日期: 2022-04-29

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

UGR(Unified Glare Rating) 数据表

| | | | | | | | | | | |
|---|-----------------------|------|------|------|----------------|---------------------|------|------------------|------|------|
| 实测参数: U:24.00V I:0.2352A P:5.644W PF:1.000 实检光通:323.34x1 lm | | | | | | | | | | |
| 灯具名称: SF18-24V-5050-70-SPI4-RGBW-4000-W | | | | | 灯具类型: 硅胶 | | | 灯具重量: | | |
| 外型尺寸: 16.5mm*16.5mm | | | | | 灯具规格: | | | 测试编号: 2022042901 | | |
| 制造厂商: OLYMPIA | | | | | 发光口面: 1*0.0165 | | | 保护角: | | |
| 反射比: 天花板 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| 墙面 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| 房间尺寸 | 交叉 (Viewed crosswise) | | | | | 向前 (Viewed endwise) | | | | |
| x = 2H y = 2H | 17.6 | 18.9 | 18.2 | 19.5 | 20.2 | 14.9 | 16.2 | 15.5 | 16.8 | 17.5 |
| 3H | 20.1 | 21.3 | 20.7 | 21.9 | 22.7 | 16.5 | 17.7 | 17.1 | 18.3 | 19.1 |
| 4H | 21.4 | 22.5 | 22.0 | 23.2 | 23.9 | 17.1 | 18.3 | 17.8 | 18.9 | 19.7 |
| 6H | 22.8 | 23.9 | 23.5 | 24.5 | 25.3 | 17.6 | 18.7 | 18.3 | 19.3 | 20.1 |
| 8H | 23.6 | 24.6 | 24.2 | 25.3 | 26.1 | 17.8 | 18.8 | 18.5 | 19.5 | 20.3 |
| 12H | 24.5 | 25.4 | 25.1 | 26.1 | 27.0 | 17.9 | 18.9 | 18.6 | 19.6 | 20.4 |
| 4H 2H | 18.1 | 19.2 | 18.7 | 19.8 | 20.6 | 16.1 | 17.2 | 16.8 | 17.9 | 18.7 |
| 3H | 20.8 | 21.8 | 21.5 | 22.5 | 23.3 | 17.9 | 18.9 | 18.6 | 19.6 | 20.4 |
| 4H | 22.3 | 23.2 | 23.0 | 23.9 | 24.8 | 18.7 | 19.6 | 19.5 | 20.4 | 21.2 |
| 6H | 23.9 | 24.7 | 24.7 | 25.5 | 26.3 | 19.4 | 20.2 | 20.1 | 20.9 | 21.8 |
| 8H | 24.8 | 25.6 | 25.6 | 26.3 | 27.2 | 19.6 | 20.4 | 20.4 | 21.1 | 22.0 |
| 12H | 25.8 | 26.5 | 26.6 | 27.3 | 28.2 | 19.8 | 20.5 | 20.6 | 21.3 | 22.2 |
| 8H 4H | 22.6 | 23.3 | 23.3 | 24.1 | 25.0 | 19.7 | 20.5 | 20.5 | 21.2 | 22.1 |
| 6H | 24.5 | 25.1 | 25.3 | 25.9 | 26.8 | 20.7 | 21.3 | 21.5 | 22.1 | 23.0 |
| 8H | 25.6 | 26.1 | 26.4 | 26.9 | 27.9 | 21.1 | 21.7 | 21.9 | 22.5 | 23.4 |
| 12H | 26.9 | 27.4 | 27.7 | 28.2 | 29.1 | 21.5 | 22.0 | 22.3 | 22.8 | 23.7 |
| 12H 4H | 22.6 | 23.3 | 23.4 | 24.0 | 25.0 | 20.0 | 20.7 | 20.8 | 21.5 | 22.4 |
| 6H | 24.6 | 25.1 | 25.4 | 25.9 | 26.9 | 21.2 | 21.7 | 22.0 | 22.5 | 23.5 |
| 8H | 25.8 | 26.3 | 26.6 | 27.1 | 28.0 | 21.7 | 22.2 | 22.5 | 23.0 | 24.0 |
| 不同间隔布灯时, 观察者位置引起的UGR变化: | | | | | | | | | | |
| S = 1.0H | + 0.1 / - 0.1 | | | | | + 0.1 / - 0.1 | | | | |
| 1.5H | + 0.2 / - 0.3 | | | | | + 0.2 / - 0.3 | | | | |
| 2.0H | + 0.2 / - 0.3 | | | | | + 0.2 / - 0.4 | | | | |

依据CIE Pub.117计算, 表格已按323.3lm光源光通进行修正 ($81\log(F/F_0) = -3.9$)。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: HXJ
测试日期: 2022-04-29

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

UF利用系数表

| | | |
|---|---------------|-----------------|
| 实测参数: U:24.00V I:0.2352A P:5.644W PF:1.000 实检光通:323.34x1 lm | | |
| 灯具名称: SF18-24V-5050-70-SPI4-RGBW-4000-W | 灯具类型:硅胶 | 灯具重量: |
| 外型尺寸: 16.5mm*16.5mm | 灯具规格: | 测试编号:2022042901 |
| 制造厂商: OLYMPIA | 发光口面:1*0.0165 | 保护角: |


| 反 射 比 / REFLECTANCE | | | | | | | | | | |
|----------------------------|--|-----|-----|-----|-----|-----|---------------------|-----|-----|---------|
| 天花板 | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| 墙壁 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| 室形指数 | 利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$ | | | | | | | | | |
| $k = 0.60$ | 45 | 32 | 25 | 44 | 32 | 25 | 41 | 31 | 24 | 17 |
| 0.80 | 54 | 41 | 33 | 52 | 40 | 32 | 49 | 38 | 31 | 23 |
| 1.00 | 62 | 49 | 40 | 60 | 47 | 39 | 55 | 47 | 38 | 29 |
| 1.25 | 69 | 56 | 47 | 66 | 54 | 46 | 61 | 51 | 44 | 34 |
| 1.50 | 74 | 62 | 53 | 71 | 60 | 52 | 65 | 56 | 49 | 37 |
| 2.00 | 82 | 70 | 62 | 78 | 68 | 60 | 71 | 63 | 56 | 43 |
| 2.50 | 86 | 76 | 68 | 82 | 73 | 66 | 75 | 67 | 61 | 47 |
| 3.00 | 90 | 81 | 73 | 86 | 77 | 71 | 78 | 71 | 66 | 50 |
| 4.00 | 95 | 87 | 80 | 90 | 83 | 77 | 82 | 76 | 71 | 55 |
| 5.00 | 98 | 91 | 85 | 93 | 87 | 82 | 84 | 80 | 75 | 58 |
| ROOM INDEX | UF (总) | | | | | | | | | UF (直接) |
| 依据标准文件 DIN EN 13032-2 2004 | | | 悬挂灯 | | | | 安装距高比 SHRNOM = 1.25 | | | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: HXJ
测试日期: 2022-04-29

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

灯具等光强曲线

| | | |
|---|----------------|------------------|
| 实测参数: U:24.00V I:0.2352A P:5.644W PF:1.000 实检光通:323.34x1 lm | | |
| 灯具名称: SF18-24V-5050-70-SPI4-RGBW-4000-W | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5mm*16.5mm | 灯具规格: | 测试编号: 2022042901 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

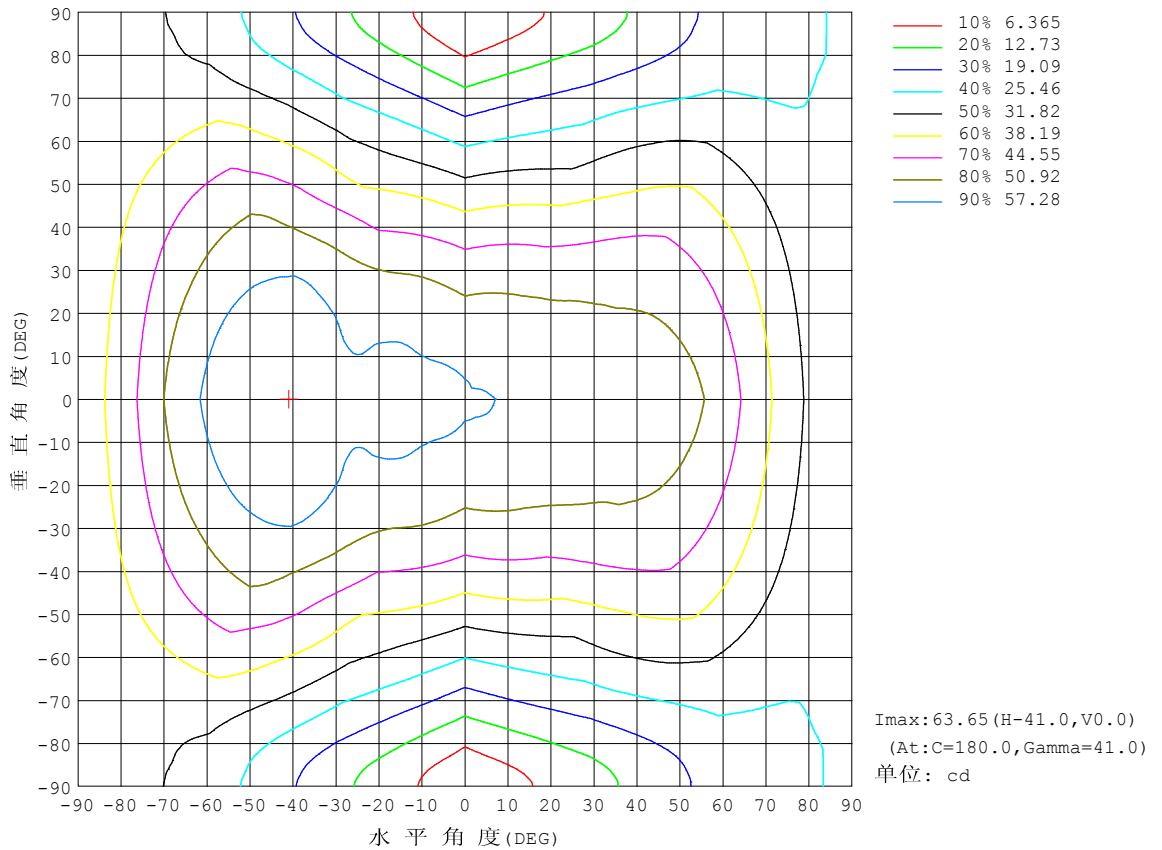


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: HXJ
测试日期: 2022-04-29

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

灯具有效平均照度曲线

| | | |
|---|----------------|------------------|
| 实测参数: U:24.00V I:0.2352A P:5.644W PF:1.000 实检光通:323.34x1 lm | | |
| 灯具名称: SF18-24V-5050-70-SPI4-RGBW-4000-W | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5mm*16.5mm | 灯具规格: | 测试编号: 2022042901 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

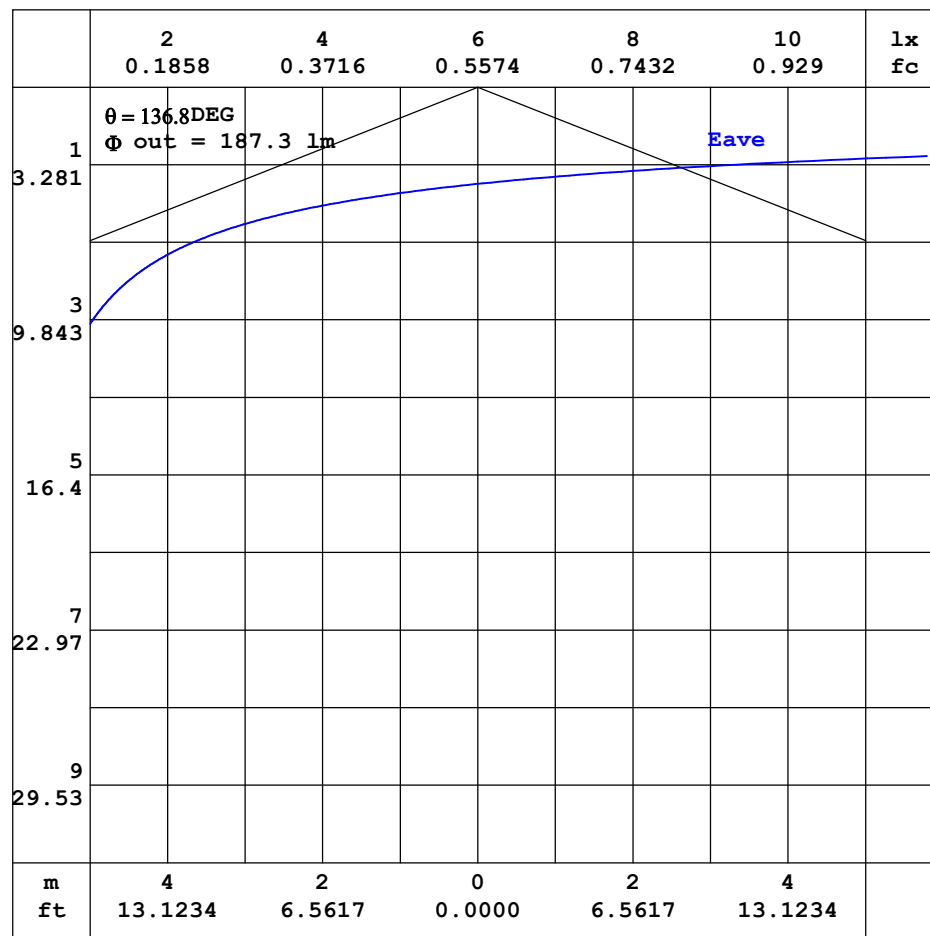


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: HXJ
测试日期: 2022-04-29

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

平面等照度曲线


| | | |
|---|----------------|------------------|
| 实测参数: U:24.00V I:0.2352A P:5.644W PF:1.000 实检光通:323.34x1 lm | | |
| 灯具名称: SF18-24V-5050-70-SPI4-RGBW-4000-W | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5mm*16.5mm | 灯具规格: | 测试编号: 2022042901 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

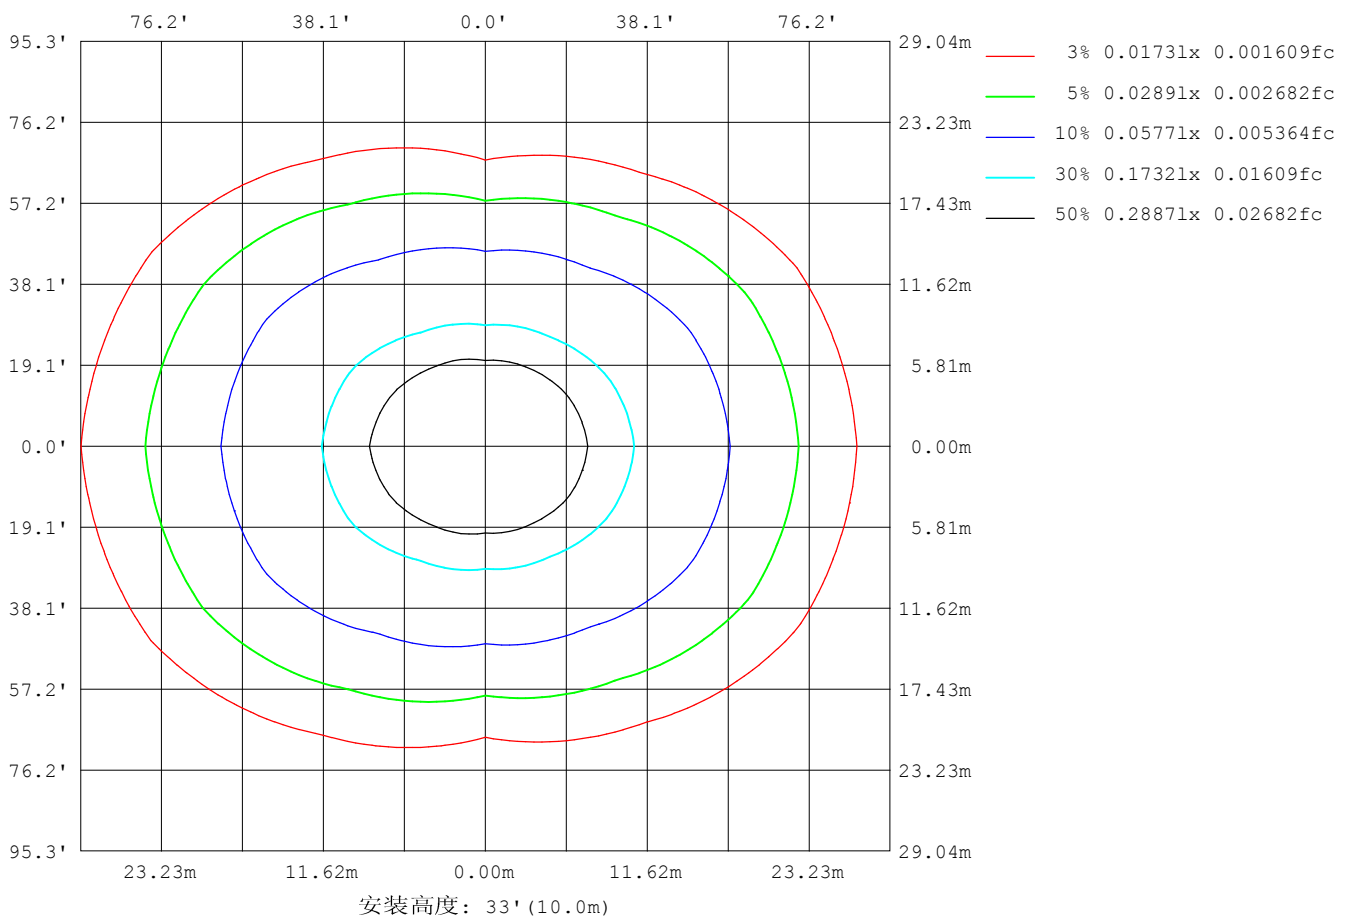

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: HXJ
测试日期: 2022-04-29

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

平面照度曲线

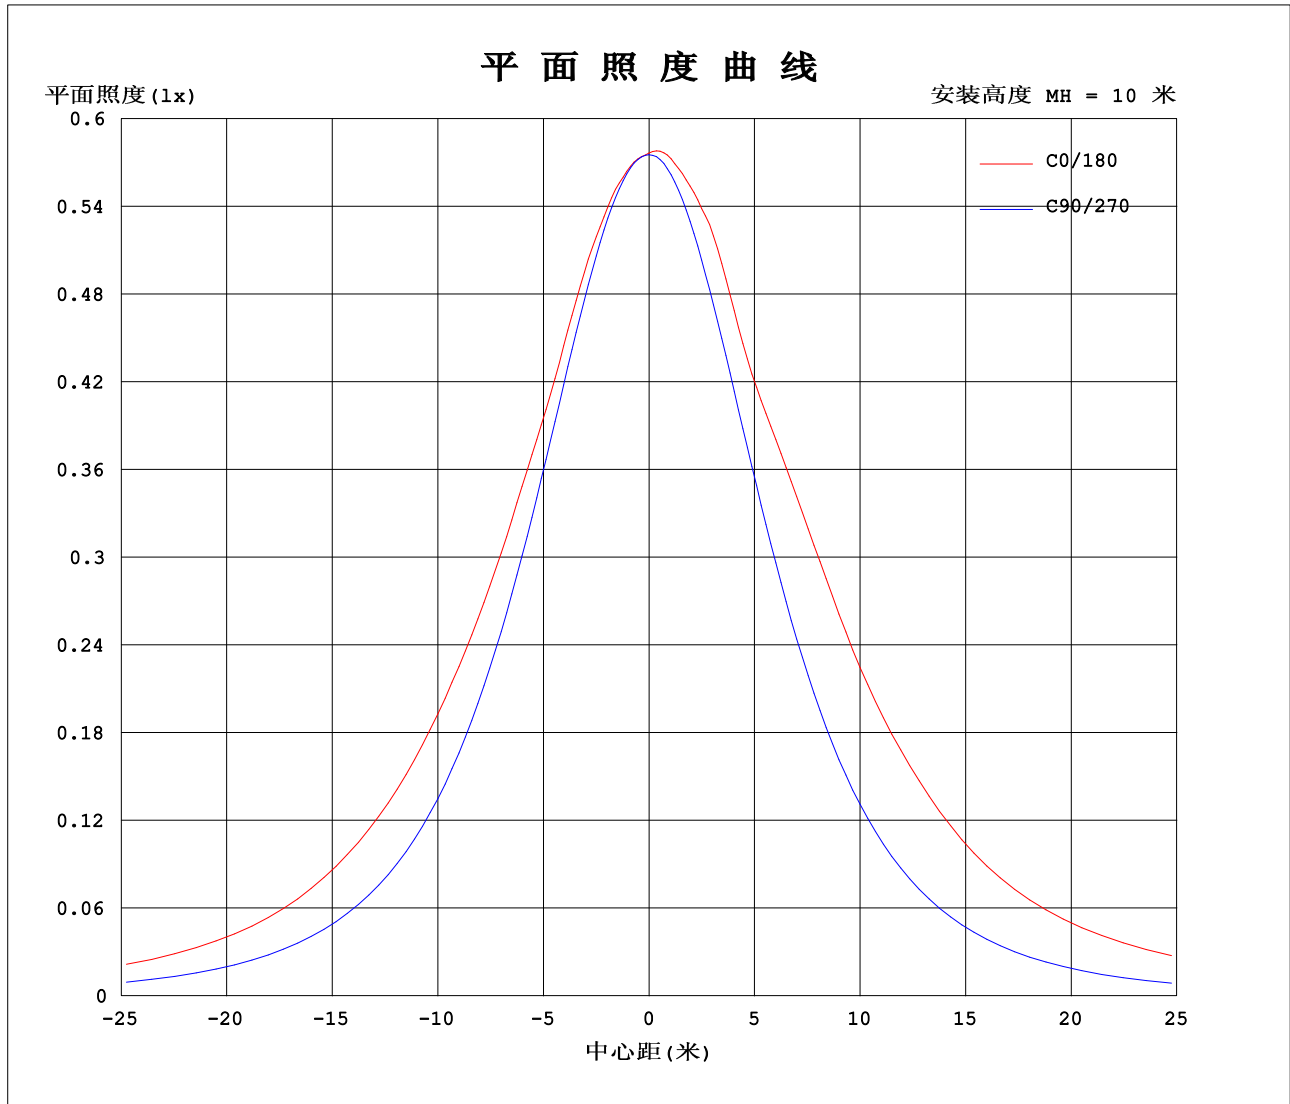

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: HXJ
测试日期: 2022-04-29

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

光强分布数据表格

| | | |
|---|----------------|------------------|
| 实测参数: U:24.00V I:0.2352A P:5.644W PF:1.000 实检光通:323.34x1 lm | | |
| 灯具名称: SF18-24V-5050-70-SPI4-RGBW-4000-W | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5mm*16.5mm | 灯具规格: | 测试编号: 2022042901 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

表--1

单位: cd

| C (DEG) γ (DEG) | 0 | 30 | 60 | 90 | 120 | 150 | 180 | 210 | 240 | 270 | 300 | 330 | | | | | | |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|--|--|--|--|--|--|
| 0 | 57.7 | 57.6 | 57.6 | 57.5 | 57.5 | 57.6 | 57.7 | 57.6 | 57.6 | 57.5 | 57.5 | 57.6 | | | | | | |
| 5 | 57.4 | 57.4 | 57.3 | 57.3 | 57.6 | 58.0 | 58.2 | 58.0 | 57.6 | 57.2 | 57.1 | 57.2 | | | | | | |
| 10 | 57.2 | 57.0 | 56.6 | 56.5 | 57.3 | 58.0 | 58.4 | 58.1 | 57.2 | 56.3 | 56.4 | 56.8 | | | | | | |
| 15 | 56.8 | 56.4 | 55.6 | 55.1 | 56.4 | 58.3 | 59.2 | 58.2 | 56.2 | 54.8 | 55.3 | 56.1 | | | | | | |
| 20 | 56.1 | 55.7 | 54.2 | 53.3 | 55.5 | 58.5 | 59.1 | 58.4 | 55.1 | 52.8 | 53.7 | 55.3 | | | | | | |
| 25 | 55.3 | 54.5 | 52.4 | 51.0 | 54.5 | 57.3 | 58.5 | 57.1 | 54.0 | 50.4 | 51.8 | 54.0 | | | | | | |
| 30 | 55.4 | 53.3 | 50.3 | 48.4 | 52.8 | 56.6 | 60.0 | 56.4 | 52.5 | 47.6 | 49.6 | 52.7 | | | | | | |
| 35 | 55.1 | 52.6 | 47.8 | 45.3 | 50.1 | 57.4 | 62.2 | 57.2 | 49.7 | 44.4 | 47.0 | 52.0 | | | | | | |
| 40 | 55.0 | 51.3 | 44.9 | 42.0 | 47.1 | 58.1 | 63.5 | 57.8 | 46.6 | 40.9 | 44.1 | 50.6 | | | | | | |
| 45 | 54.6 | 50.4 | 41.9 | 38.2 | 44.2 | 58.1 | 63.6 | 57.9 | 43.6 | 37.1 | 40.9 | 49.5 | | | | | | |
| 50 | 53.3 | 49.0 | 38.5 | 34.2 | 41.0 | 56.9 | 63.4 | 56.6 | 40.5 | 33.0 | 37.5 | 48.1 | | | | | | |
| 55 | 51.3 | 46.9 | 34.6 | 29.9 | 37.6 | 55.0 | 61.8 | 54.7 | 37.0 | 28.7 | 33.5 | 45.8 | | | | | | |
| 60 | 47.9 | 43.8 | 31.2 | 25.6 | 34.6 | 52.6 | 58.5 | 52.3 | 34.0 | 24.3 | 30.0 | 42.9 | | | | | | |
| 65 | 43.8 | 40.4 | 28.0 | 21.0 | 31.6 | 48.9 | 54.8 | 48.6 | 31.1 | 19.7 | 26.8 | 39.5 | | | | | | |
| 70 | 39.4 | 36.4 | 24.3 | 16.3 | 27.8 | 44.7 | 51.0 | 44.4 | 27.4 | 15.0 | 23.2 | 35.5 | | | | | | |
| 75 | 35.1 | 31.3 | 20.2 | 11.5 | 23.9 | 40.1 | 45.8 | 40.0 | 23.6 | 10.4 | 19.3 | 30.5 | | | | | | |
| 80 | 30.8 | 26.7 | 16.0 | 6.97 | 19.9 | 35.0 | 41.1 | 34.9 | 19.8 | 6.01 | 15.2 | 26.0 | | | | | | |
| 85 | 27.5 | 23.2 | 12.3 | 3.42 | 16.2 | 31.0 | 37.5 | 31.1 | 16.2 | 2.50 | 11.6 | 22.6 | | | | | | |
| 90 | 26.5 | 21.9 | 10.6 | 1.68 | 14.5 | 29.3 | 36.8 | 29.5 | 14.3 | 1.03 | 9.73 | 21.3 | | | | | | |
| 95 | 27.4 | 22.6 | 10.4 | 1.68 | 14.0 | 29.9 | 37.4 | 30.0 | 13.8 | 1.09 | 9.41 | 22.1 | | | | | | |
| 100 | 27.8 | 23.1 | 8.95 | 1.66 | 13.4 | 30.9 | 36.8 | 31.0 | 13.3 | 1.10 | 8.05 | 22.6 | | | | | | |
| 105 | 27.4 | 21.4 | 8.12 | 1.65 | 13.0 | 30.8 | 36.2 | 30.9 | 13.0 | 1.10 | 7.44 | 21.4 | | | | | | |
| 110 | 26.0 | 19.9 | 7.07 | 1.60 | 12.9 | 30.0 | 35.6 | 30.1 | 13.0 | 1.11 | 7.28 | 19.6 | | | | | | |
| 115 | 24.7 | 18.5 | 7.71 | 1.57 | 12.8 | 27.6 | 34.5 | 27.7 | 12.7 | 1.11 | 7.26 | 18.5 | | | | | | |
| 120 | 22.8 | 17.1 | 7.59 | 1.57 | 11.8 | 25.1 | 31.6 | 25.1 | 11.8 | 1.14 | 6.97 | 17.0 | | | | | | |
| 125 | 20.7 | 15.3 | 6.33 | 1.56 | 10.6 | 22.9 | 28.3 | 22.9 | 10.6 | 1.17 | 5.80 | 14.8 | | | | | | |
| 130 | 18.1 | 12.3 | 5.43 | 1.56 | 9.11 | 20.5 | 25.2 | 20.5 | 9.07 | 1.19 | 4.88 | 12.4 | | | | | | |
| 135 | 15.7 | 10.6 | 4.72 | 1.55 | 7.73 | 17.8 | 22.0 | 17.8 | 7.66 | 1.24 | 4.16 | 10.7 | | | | | | |
| 140 | 13.2 | 8.20 | 3.97 | 1.56 | 6.50 | 14.9 | 18.5 | 14.8 | 6.36 | 1.27 | 3.45 | 8.27 | | | | | | |
| 145 | 10.4 | 6.59 | 3.37 | 1.56 | 5.34 | 11.8 | 15.0 | 11.7 | 5.25 | 1.31 | 2.94 | 6.15 | | | | | | |
| 150 | 7.56 | 5.34 | 2.78 | 1.56 | 4.17 | 9.31 | 11.4 | 9.24 | 4.09 | 1.34 | 2.42 | 4.76 | | | | | | |
| 155 | 5.90 | 4.12 | 2.33 | 1.56 | 3.31 | 7.23 | 8.46 | 7.12 | 3.23 | 1.39 | 2.00 | 3.87 | | | | | | |
| 160 | 4.95 | 3.05 | 1.98 | 1.56 | 2.71 | 5.26 | 6.30 | 5.15 | 2.60 | 1.42 | 1.78 | 2.83 | | | | | | |
| 165 | 3.29 | 2.21 | 1.73 | 1.57 | 2.20 | 3.50 | 3.92 | 3.41 | 2.08 | 1.47 | 1.64 | 2.05 | | | | | | |
| 170 | 1.85 | 1.76 | 1.66 | 1.57 | 1.99 | 2.44 | 2.00 | 2.37 | 1.87 | 1.49 | 1.58 | 1.76 | | | | | | |
| 175 | 1.61 | 1.58 | 1.59 | 1.58 | 1.91 | 1.96 | 1.66 | 1.96 | 1.81 | 1.52 | 1.57 | 1.65 | | | | | | |
| 180 | 1.55 | 1.58 | 1.56 | 1.58 | 1.63 | 1.64 | 1.58 | 1.64 | 1.61 | 1.57 | 1.58 | 1.62 | | | | | | |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: HXJ

测试日期: 2022-04-29

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269

环境湿度: 65.0%

测试距离: 9.200米 [K=1.0000]

备注:

Photometric Data Table [cd]

| G/C | 0.0 | 30.0 | 60.0 | 90.0 | 120.0 | 150.0 | 180.0 | 210.0 | 240.0 | 270.0 |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 0.0 | 57.66 | 57.63 | 57.63 | 57.53 | 57.52 | 57.57 | 57.66 | 57.63 | 57.63 | 57.53 |
| 3.0 | 57.48 | 57.44 | 57.42 | 57.45 | 57.67 | 57.86 | 58.01 | 57.90 | 57.68 | 57.44 |
| 6.0 | 57.34 | 57.30 | 57.19 | 57.17 | 57.58 | 57.99 | 58.20 | 58.00 | 57.58 | 57.09 |
| 9.0 | 57.27 | 57.08 | 56.80 | 56.67 | 57.45 | 58.02 | 58.36 | 58.05 | 57.31 | 56.53 |
| 12.0 | 56.94 | 56.82 | 56.27 | 55.99 | 57.01 | 58.09 | 58.72 | 58.10 | 56.85 | 55.74 |
| 15.0 | 56.82 | 56.39 | 55.63 | 55.11 | 56.44 | 58.32 | 59.20 | 58.18 | 56.23 | 54.76 |
| 18.0 | 56.44 | 56.08 | 54.82 | 54.06 | 55.82 | 58.60 | 59.41 | 58.48 | 55.56 | 53.63 |
| 21.0 | 55.97 | 55.46 | 53.81 | 52.89 | 55.28 | 58.27 | 58.94 | 58.16 | 54.93 | 52.37 |
| 24.0 | 55.41 | 54.77 | 52.79 | 51.52 | 54.69 | 57.53 | 58.53 | 57.38 | 54.27 | 50.90 |
| 27.0 | 55.23 | 53.93 | 51.63 | 50.02 | 53.95 | 56.79 | 58.84 | 56.62 | 53.54 | 49.34 |
| 30.0 | 55.36 | 53.26 | 50.29 | 48.39 | 52.82 | 56.61 | 60.00 | 56.38 | 52.45 | 47.62 |
| 33.0 | 55.21 | 52.98 | 48.82 | 46.61 | 51.25 | 57.04 | 61.29 | 56.79 | 50.86 | 45.72 |
| 36.0 | 55.09 | 52.40 | 47.28 | 44.70 | 49.51 | 57.52 | 62.44 | 57.28 | 49.12 | 43.74 |
| 39.0 | 54.98 | 51.56 | 45.53 | 42.67 | 47.75 | 58.01 | 63.32 | 57.70 | 47.25 | 41.63 |
| 42.0 | 54.90 | 50.99 | 43.72 | 40.50 | 45.93 | 58.24 | 63.65 | 57.95 | 45.36 | 39.39 |
| 45.0 | 54.61 | 50.35 | 41.89 | 38.20 | 44.17 | 58.13 | 63.56 | 57.88 | 43.58 | 37.10 |
| 48.0 | 53.93 | 49.64 | 39.88 | 35.85 | 42.37 | 57.49 | 63.50 | 57.15 | 41.84 | 34.67 |
| 51.0 | 53.01 | 48.69 | 37.69 | 33.36 | 40.34 | 56.62 | 63.27 | 56.24 | 39.82 | 32.18 |
| 54.0 | 51.84 | 47.39 | 35.31 | 30.83 | 38.24 | 55.46 | 62.30 | 55.15 | 37.69 | 29.63 |
| 57.0 | 50.14 | 45.70 | 33.21 | 28.27 | 36.27 | 54.17 | 60.51 | 53.85 | 35.72 | 27.01 |
| 60.0 | 47.88 | 43.83 | 31.17 | 25.58 | 34.60 | 52.57 | 58.47 | 52.28 | 34.05 | 24.26 |
| 63.0 | 45.51 | 41.85 | 29.30 | 22.82 | 32.84 | 50.41 | 56.23 | 50.04 | 32.37 | 21.56 |
| 66.0 | 43.00 | 39.68 | 27.28 | 20.07 | 30.86 | 48.02 | 54.12 | 47.71 | 30.40 | 18.81 |
| 69.0 | 40.36 | 37.24 | 25.05 | 17.20 | 28.60 | 45.51 | 51.85 | 45.29 | 28.17 | 15.97 |
| 72.0 | 37.65 | 34.31 | 22.71 | 14.32 | 26.26 | 43.01 | 48.96 | 42.69 | 25.87 | 13.17 |
| 75.0 | 35.08 | 31.29 | 20.18 | 11.51 | 23.88 | 40.11 | 45.83 | 39.98 | 23.60 | 10.38 |
| 78.0 | 32.48 | 28.43 | 17.64 | 8.707 | 21.50 | 36.95 | 42.87 | 36.93 | 21.36 | 7.662 |
| 81.0 | 30.05 | 25.94 | 15.19 | 6.226 | 19.08 | 34.10 | 40.24 | 34.07 | 19.02 | 5.223 |
| 84.0 | 27.96 | 23.80 | 12.96 | 4.110 | 16.87 | 31.69 | 38.03 | 31.70 | 16.82 | 3.117 |
| 87.0 | 27.00 | 22.38 | 11.30 | 2.350 | 15.24 | 30.12 | 36.98 | 30.30 | 15.10 | 1.592 |
| 90.0 | 26.48 | 21.89 | 10.57 | 1.684 | 14.52 | 29.28 | 36.77 | 29.48 | 14.30 | 1.030 |
| 93.0 | 27.11 | 22.27 | 10.49 | 1.719 | 14.20 | 29.53 | 37.31 | 29.69 | 14.02 | 1.080 |
| 96.0 | 27.52 | 22.72 | 10.09 | 1.679 | 13.90 | 30.02 | 37.32 | 30.20 | 13.76 | 1.090 |
| 99.0 | 27.69 | 23.20 | 9.140 | 1.664 | 13.51 | 30.69 | 36.96 | 30.83 | 13.42 | 1.096 |
| 102.0 | 27.84 | 22.69 | 8.621 | 1.658 | 13.22 | 30.98 | 36.52 | 31.04 | 13.13 | 1.100 |
| 105.0 | 27.40 | 21.37 | 8.118 | 1.652 | 13.03 | 30.82 | 36.17 | 30.91 | 13.03 | 1.104 |
| 108.0 | 26.39 | 20.53 | 7.146 | 1.633 | 12.97 | 30.37 | 35.87 | 30.46 | 12.99 | 1.107 |
| 111.0 | 25.75 | 19.61 | 7.245 | 1.593 | 12.93 | 29.71 | 35.38 | 29.80 | 12.96 | 1.109 |
| 114.0 | 24.97 | 18.79 | 7.708 | 1.578 | 12.89 | 28.16 | 34.81 | 28.28 | 12.87 | 1.112 |
| 117.0 | 23.95 | 18.04 | 7.639 | 1.571 | 12.44 | 26.41 | 33.56 | 26.55 | 12.40 | 1.115 |
| 120.0 | 22.83 | 17.05 | 7.594 | 1.568 | 11.82 | 25.10 | 31.64 | 25.12 | 11.79 | 1.141 |
| 123.0 | 21.58 | 16.08 | 6.803 | 1.565 | 11.14 | 23.81 | 29.55 | 23.88 | 11.12 | 1.166 |
| 126.0 | 20.18 | 14.76 | 6.153 | 1.563 | 10.29 | 22.42 | 27.74 | 22.49 | 10.24 | 1.166 |
| 129.0 | 18.62 | 12.74 | 5.580 | 1.560 | 9.402 | 21.01 | 25.81 | 20.99 | 9.364 | 1.186 |
| 132.0 | 17.10 | 11.75 | 5.128 | 1.557 | 8.532 | 19.47 | 23.88 | 19.42 | 8.486 | 1.221 |
| 135.0 | 15.71 | 10.60 | 4.721 | 1.555 | 7.733 | 17.81 | 21.96 | 17.75 | 7.656 | 1.239 |
| 138.0 | 14.15 | 9.332 | 4.248 | 1.555 | 6.948 | 16.08 | 19.86 | 16.01 | 6.847 | 1.256 |
| 141.0 | 12.74 | 7.848 | 3.856 | 1.556 | 6.275 | 14.27 | 17.81 | 14.17 | 6.139 | 1.281 |
| 144.0 | 11.09 | 6.888 | 3.474 | 1.556 | 5.606 | 12.42 | 15.74 | 12.35 | 5.501 | 1.312 |
| 147.0 | 8.198 | 5.929 | 3.172 | 1.556 | 4.857 | 10.75 | 13.57 | 10.67 | 4.777 | 1.326 |
| 150.0 | 7.556 | 5.335 | 2.781 | 1.557 | 4.169 | 9.309 | 11.40 | 9.236 | 4.093 | 1.338 |
| 153.0 | 6.624 | 4.561 | 2.454 | 1.557 | 3.591 | 8.032 | 9.527 | 7.940 | 3.506 | 1.362 |
| 156.0 | 5.542 | 3.934 | 2.257 | 1.557 | 3.183 | 6.862 | 7.971 | 6.743 | 3.084 | 1.397 |
| 159.0 | 5.193 | 3.285 | 2.051 | 1.558 | 2.831 | 5.681 | 6.670 | 5.582 | 2.713 | 1.412 |
| 162.0 | 4.251 | 2.667 | 1.855 | 1.560 | 2.499 | 4.449 | 5.380 | 4.361 | 2.391 | 1.437 |
| 165.0 | 3.291 | 2.210 | 1.729 | 1.568 | 2.197 | 3.501 | 3.917 | 3.405 | 2.080 | 1.467 |
| 168.0 | 2.455 | 1.899 | 1.699 | 1.568 | 2.046 | 2.813 | 2.991 | 2.771 | 1.930 | 1.488 |
| 171.0 | 1.770 | 1.708 | 1.639 | 1.571 | 1.975 | 2.230 | 1.894 | 2.203 | 1.874 | 1.498 |
| 174.0 | 1.639 | 1.613 | 1.603 | 1.574 | 1.935 | 1.985 | 1.683 | 1.986 | 1.839 | 1.518 |
| 177.0 | 1.583 | 1.568 | 1.573 | 1.578 | 1.840 | 1.909 | 1.648 | 1.915 | 1.754 | 1.523 |
| 180.0 | 1.548 | 1.578 | 1.558 | 1.578 | 1.633 | 1.643 | 1.578 | 1.638 | 1.613 | 1.568 |
| G/C | 300.0 | 330.0 | | | | | | | | |
| 0.0 | 57.52 | 57.57 | | | | | | | | |
| 3.0 | 57.28 | 57.34 | | | | | | | | |
| 6.0 | 56.98 | 57.16 | | | | | | | | |
| 9.0 | 56.56 | 56.91 | | | | | | | | |
| 12.0 | 55.98 | 56.57 | | | | | | | | |
| 15.0 | 55.26 | 56.06 | | | | | | | | |
| 18.0 | 54.44 | 55.72 | | | | | | | | |
| 21.0 | 53.35 | 55.03 | | | | | | | | |
| 24.0 | 52.21 | 54.30 | | | | | | | | |
| 27.0 | 51.02 | 53.43 | | | | | | | | |
| 30.0 | 49.63 | 52.75 | | | | | | | | |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: HXJ

测试日期: 2022-04-29

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269

环境湿度: 65.0%

测试距离: 9.200米 [K=1.0000]

备注:


Photometric Data Table [cd]

| | | |
|-------|-------|-------|
| 33.0 | 48.13 | 52.44 |
| 36.0 | 46.51 | 51.72 |
| 39.0 | 44.79 | 50.82 |
| 42.0 | 42.83 | 50.17 |
| 45.0 | 40.88 | 49.55 |
| 48.0 | 38.91 | 48.78 |
| 51.0 | 36.69 | 47.75 |
| 54.0 | 34.30 | 46.40 |
| 57.0 | 32.09 | 44.67 |
| 60.0 | 30.01 | 42.89 |
| 63.0 | 28.05 | 40.98 |
| 66.0 | 26.15 | 38.73 |
| 69.0 | 23.97 | 36.32 |
| 72.0 | 21.65 | 33.56 |
| 75.0 | 19.25 | 30.51 |
| 78.0 | 16.82 | 27.69 |
| 81.0 | 14.40 | 25.21 |
| 84.0 | 12.18 | 23.13 |
| 87.0 | 10.50 | 21.85 |
| 90.0 | 9.730 | 21.31 |
| 93.0 | 9.754 | 21.76 |
| 96.0 | 9.145 | 22.29 |
| 99.0 | 8.280 | 22.68 |
| 102.0 | 7.678 | 22.36 |
| 105.0 | 7.437 | 21.44 |
| 108.0 | 7.172 | 20.61 |
| 111.0 | 7.438 | 19.28 |
| 114.0 | 7.312 | 18.85 |
| 117.0 | 7.247 | 18.09 |
| 120.0 | 6.968 | 17.04 |
| 123.0 | 6.280 | 15.66 |
| 126.0 | 5.456 | 14.46 |
| 129.0 | 5.039 | 12.78 |
| 132.0 | 4.567 | 11.99 |
| 135.0 | 4.165 | 10.70 |
| 138.0 | 3.722 | 9.342 |
| 141.0 | 3.346 | 7.799 |
| 144.0 | 3.040 | 6.507 |
| 147.0 | 2.758 | 5.585 |
| 150.0 | 2.416 | 4.757 |
| 153.0 | 2.110 | 4.133 |
| 156.0 | 1.965 | 3.730 |
| 159.0 | 1.819 | 3.063 |
| 162.0 | 1.678 | 2.454 |
| 165.0 | 1.643 | 2.052 |
| 168.0 | 1.593 | 1.840 |
| 171.0 | 1.575 | 1.724 |
| 174.0 | 1.568 | 1.664 |
| 177.0 | 1.563 | 1.623 |
| 180.0 | 1.583 | 1.618 |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: HXJ
测试日期: 2022-04-29


γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

I (cd)

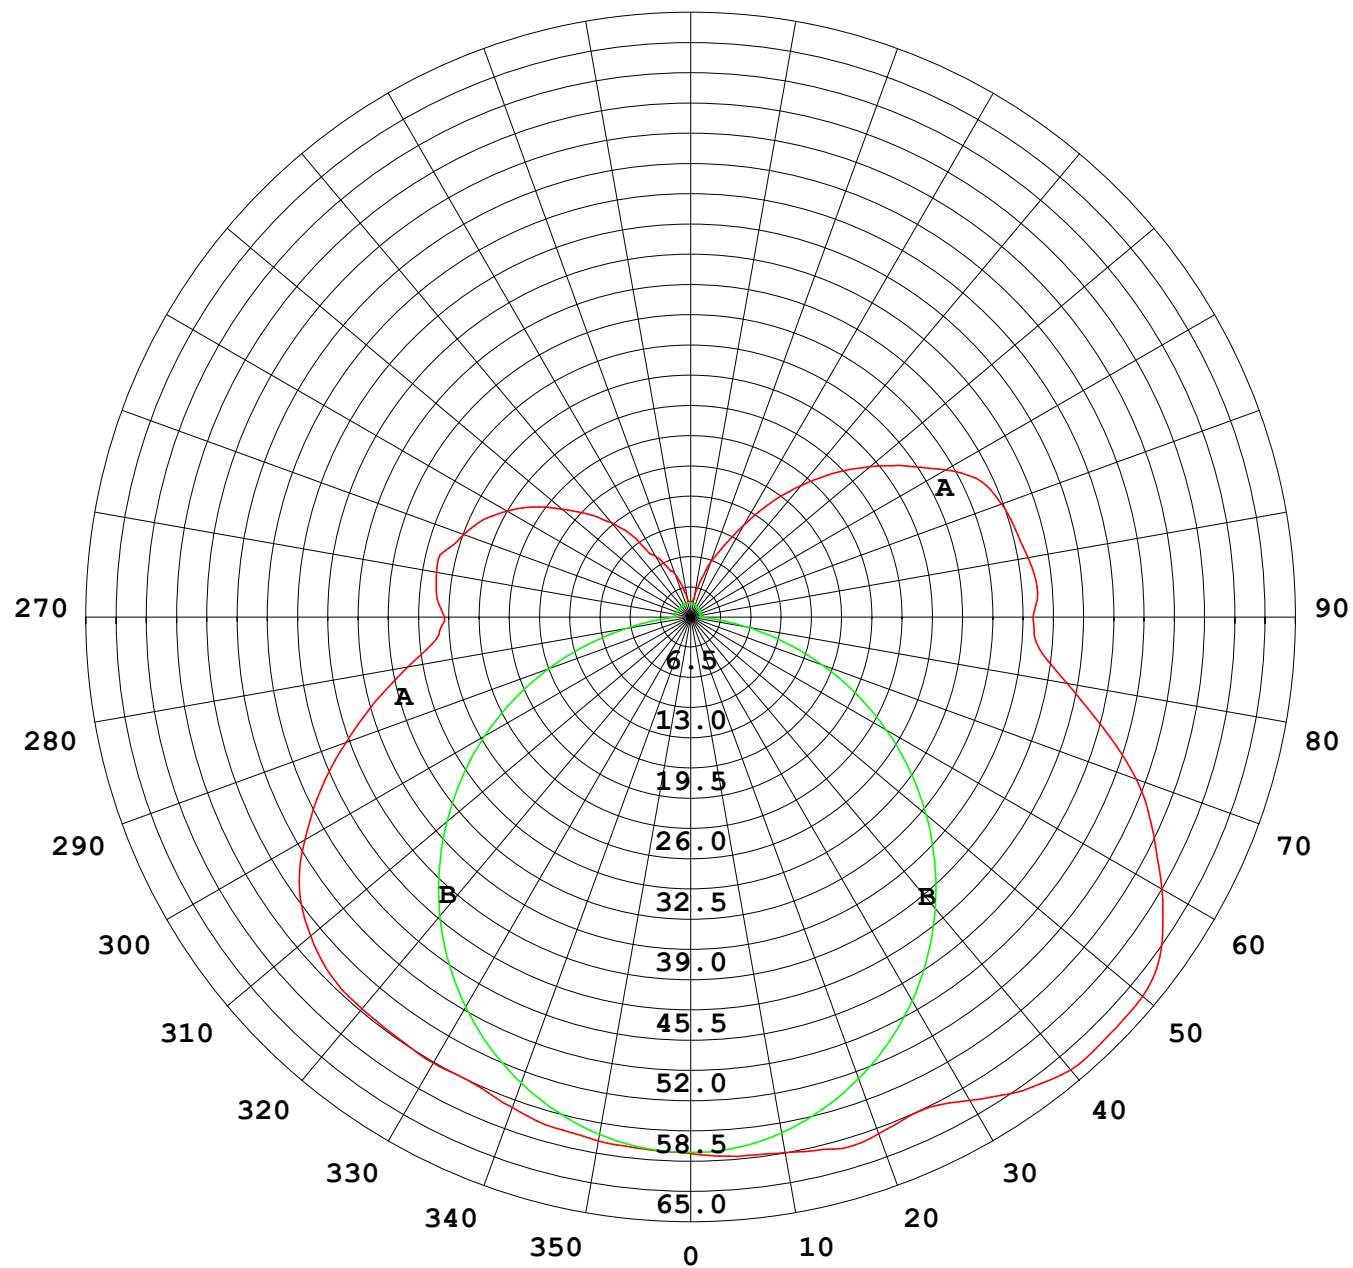

1000 lm

$\kappa = 1$

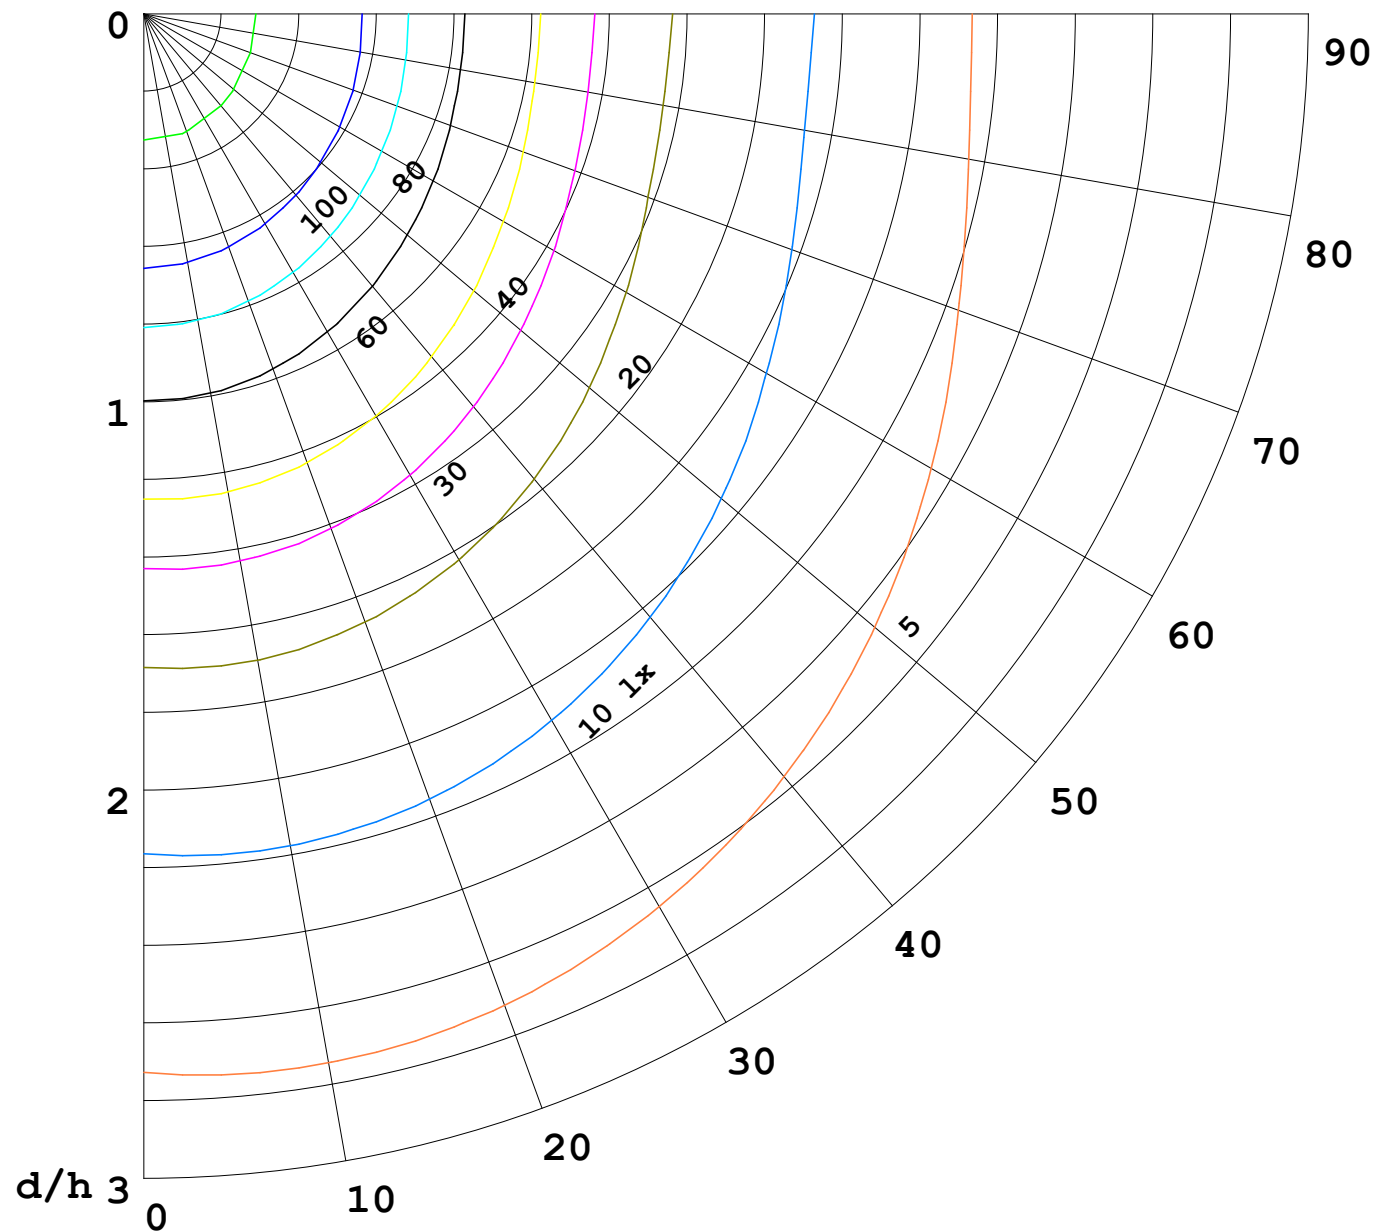

F = 5000 lm
 K = 0.7
 Hcc = 0.0 m
 Hfc = 0.0 m
 Eave = 100 lx

| | Pcc | Pw | Pfc |
|---|-----|----|-----|
| — | 70 | 50 | 30 |
| — | 50 | 30 | 20 |

