


室内灯具光度数据

实测参数: U:24.00V I:0.2030A P:4.872W PF:1.000 Freq:0Hz 实检光通: 288.646x1 lm		
灯具名称: SF18-24V-5050-72-RGBW (2700K)-80	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商:	发光口面:	遮光角:

光源数据		光度数据		光效: 59.25 lm/W	
型号		峰值光强 (cd)	49.92	S/MH (C0/180)	1.73
标称功率 (W)		灯具效率 (%)	100.0	S/MH (C90/270)	1.24
额定电源电压 (V)		总光通量 (lm)	288.65	η UP, DN (C0-180)	13.0, 37.3
额定光通量 (lm)	288.646	CIE分类	半直接	η UP, DN (C180-360)	12.8, 36.9
灯具内光源数 (只)	1	上射光通比 (%)	25.8	CIBSE SHR NOM	1.50
实测电源电压 (V)		下射光通比 (%)	74.2	CIBSE SHR MAX	1.55

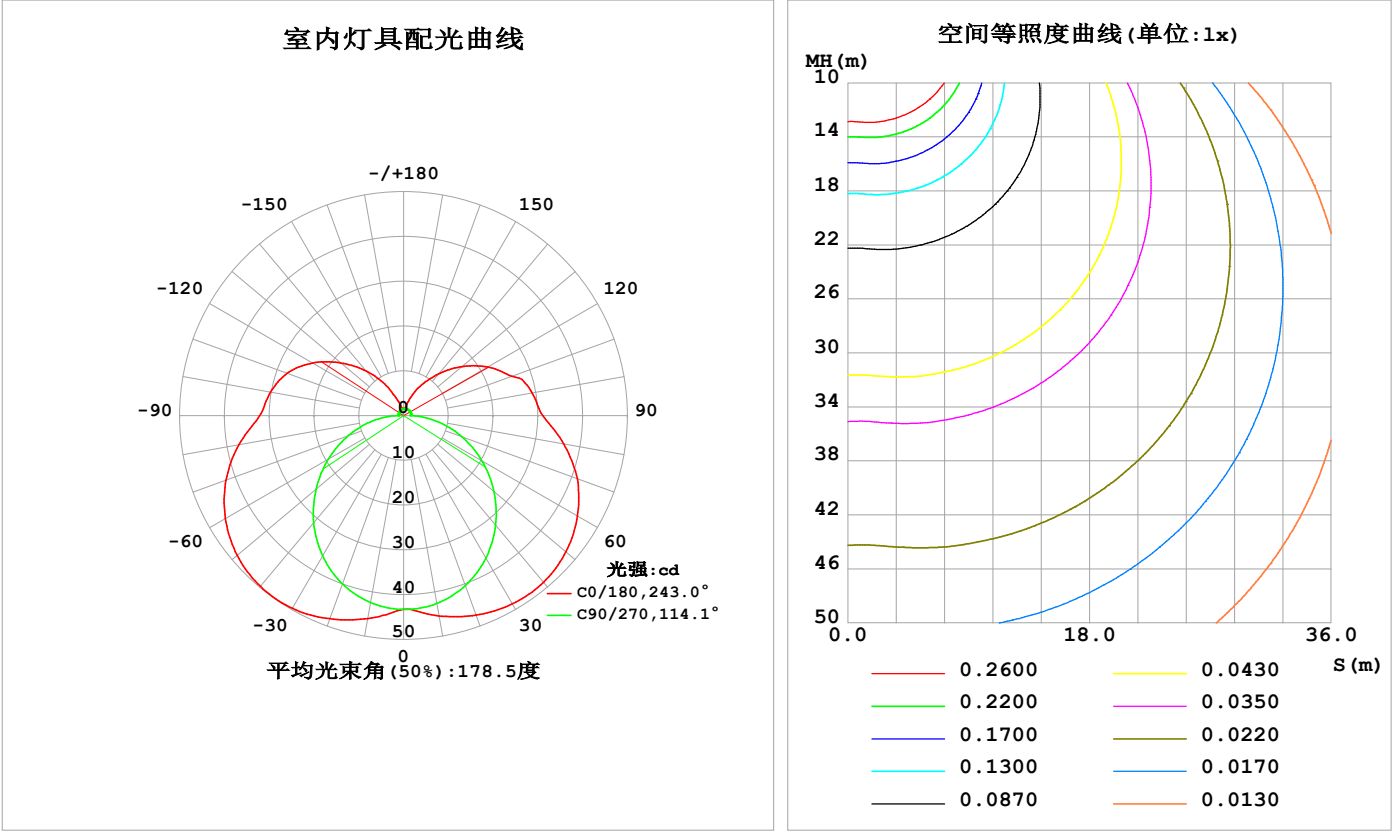

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: Cloud
测试日期: 2024-10-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注: WHITE

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	45.43	44.27	42.61	44.97	46.01	44.81	42.38	44.10	0- 10	4.194	4.194	1.45,1.45
20	47.41	44.91	40.38	45.67	48.26	45.38	40.01	44.53	10- 20	12.64	16.84	5.83,5.83
30	48.56	44.44	36.74	45.28	49.69	44.84	36.17	43.80	20- 30	20.52	37.36	12.9,12.9
40	48.59	42.83	31.97	43.72	49.77	43.19	31.24	42.01	30- 40	26.97	64.32	22.3,22.3
50	47.30	40.14	26.37	40.89	48.53	40.38	25.53	39.28	40- 50	31.30	95.62	33.1,33.1
60	44.80	36.41	20.19	36.98	45.94	36.60	19.40	35.64	50- 60	33.10	128.7	44.6,44.6
70	41.32	31.87	13.85	32.16	42.20	32.04	13.15	31.09	60- 70	32.32	161.0	55.8,55.8
80	36.28	26.72	7.541	26.76	37.32	26.81	6.973	26.00	70- 80	29.10	190.1	65.9,65.9
90	31.08	21.31	1.589	21.51	32.15	21.68	1.192	20.79	80- 90	23.98	214.1	74.2,74.2
100	29.18	19.94	1.628	20.30	30.20	20.45	1.189	19.50	90-100	20.47	234.6	81.3,81.3
110	25.75	16.05	1.717	18.27	27.69	18.34	1.227	13.75	100-110	17.90	252.5	87.5,87.5
120	21.74	13.17	1.715	14.86	23.55	14.86	1.302	11.89	110-120	14.15	266.6	92.4,92.4
130	17.07	9.349	1.712	11.14	18.31	11.12	1.351	8.300	120-130	10.14	276.8	95.9,95.9
140	12.14	6.068	1.683	7.332	12.98	7.337	1.423	5.656	130-140	6.408	283.2	98.1,98.1
150	7.819	3.689	1.657	4.015	7.719	4.019	1.469	3.275	140-150	3.375	286.6	99.3,99.3
160	3.897	2.006	1.619	1.738	3.330	1.703	1.533	1.816	150-160	1.428	288.0	99.8,99.8
170	1.606	1.612	1.591	1.619	1.583	1.604	1.579	1.621	160-170	0.5090	288.5	99.9,99.9
180	1.609	1.612	1.579	1.619	1.609	1.615	1.579	1.621	170-180	0.1529	288.6	100,100
单位:°	光强:cd									单位:lm		

锥面光通量(90度)：79.583 lm

%lum = 27.6%
%lamp = 27.6%


锥面光通量(130度)：145.13 lm

%lum = 50.3%
%lamp = 50.3%

C角度范围： 0度 - 360度 C角度间隔：22.5度 测试速度：快速 环境温度:25.3℃ 测试人员:Cloud 测试日期:2024-10-15	γ角度范围： 0度 - 180度 γ角度间隔： 1.0度 测试系统：远方(EVERFINE) GO-2000B_V1 系统 V2.00.488 环境湿度:65.0% 测试距离:6.360米 [K=1.0000] 备注：WHITE
---	---

灯具亮度限制曲线

实测参数：U:24.00V I:0.2030A P:4.872W PF:1.000 Freq:0Hz 实检光通：288.646x1 lm		
灯具名称：SF18-24V-5050-72-RGBW (2700K) -80	灯具类型：	灯具重量：
灯具规格：	外型尺寸：Length=1m	测试编号：
制造厂商：	发光口面：	遮光角：

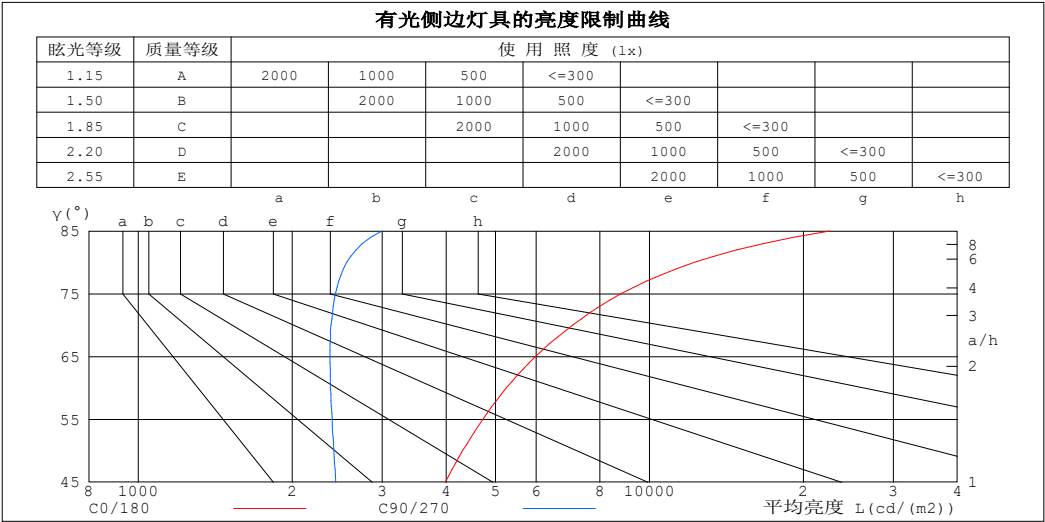

平均亮度值 cd/(m2)		
γ (°)	C0/180	C90/270
85	22541	2993
80	12238	2554
75	8791	2429
70	7077	2381
65	5981	2372
60	5248	2375
55	4721	2394
50	4310	2413
45	3987	2433


C角度范围： 0度 - 360度
C角度间隔： 22.5度
测试速度： 快速
环境温度:25.3℃
测试人员:Cloud
测试日期:2024-10-15

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统： 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注： WHITE

工作面利用系数和灯具概算曲线

实测参数: U:24.00V I:0.2030A P:4.872W PF:1.000 Freq:0Hz 实检光通: 288.646x1 lm																	
灯具名称: SF18-24V-5050-72-RGBW (2700K)-80						灯具类型:						灯具重量:					
灯具规格:						外型尺寸: Length=1m						测试编号:					
制造厂商:						发光口面:						遮光角:					

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.13	1.13	1.13	1.07	1.07	1.07	.97	.97	.97	.87	.87	.87	.78	.78	.78	.74
1.0	.93	.87	.82	.88	.83	.79	.79	.75	.71	.71	.67	.65	.63	.60	.58	.54
2.0	.79	.71	.64	.75	.67	.61	.67	.61	.56	.60	.55	.51	.53	.49	.46	.42
3.0	.68	.59	.52	.64	.56	.49	.58	.51	.45	.51	.46	.41	.46	.41	.37	.34
4.0	.59	.50	.43	.56	.48	.41	.51	.43	.37	.45	.39	.34	.40	.35	.31	.28
5.0	.53	.43	.36	.50	.41	.34	.45	.37	.32	.40	.34	.29	.36	.30	.26	.23
6.0	.47	.37	.31	.45	.36	.29	.40	.33	.27	.36	.30	.25	.32	.27	.23	.20
7.0	.42	.33	.27	.40	.32	.26	.36	.29	.24	.32	.26	.22	.29	.24	.20	.17
8.0	.38	.29	.23	.36	.28	.22	.33	.26	.21	.30	.24	.19	.27	.21	.18	.15
9.0	.35	.26	.21	.33	.25	.20	.30	.23	.18	.27	.21	.17	.24	.19	.16	.14
10.0	.32	.24	.18	.30	.23	.18	.28	.21	.17	.25	.19	.15	.23	.18	.14	.12

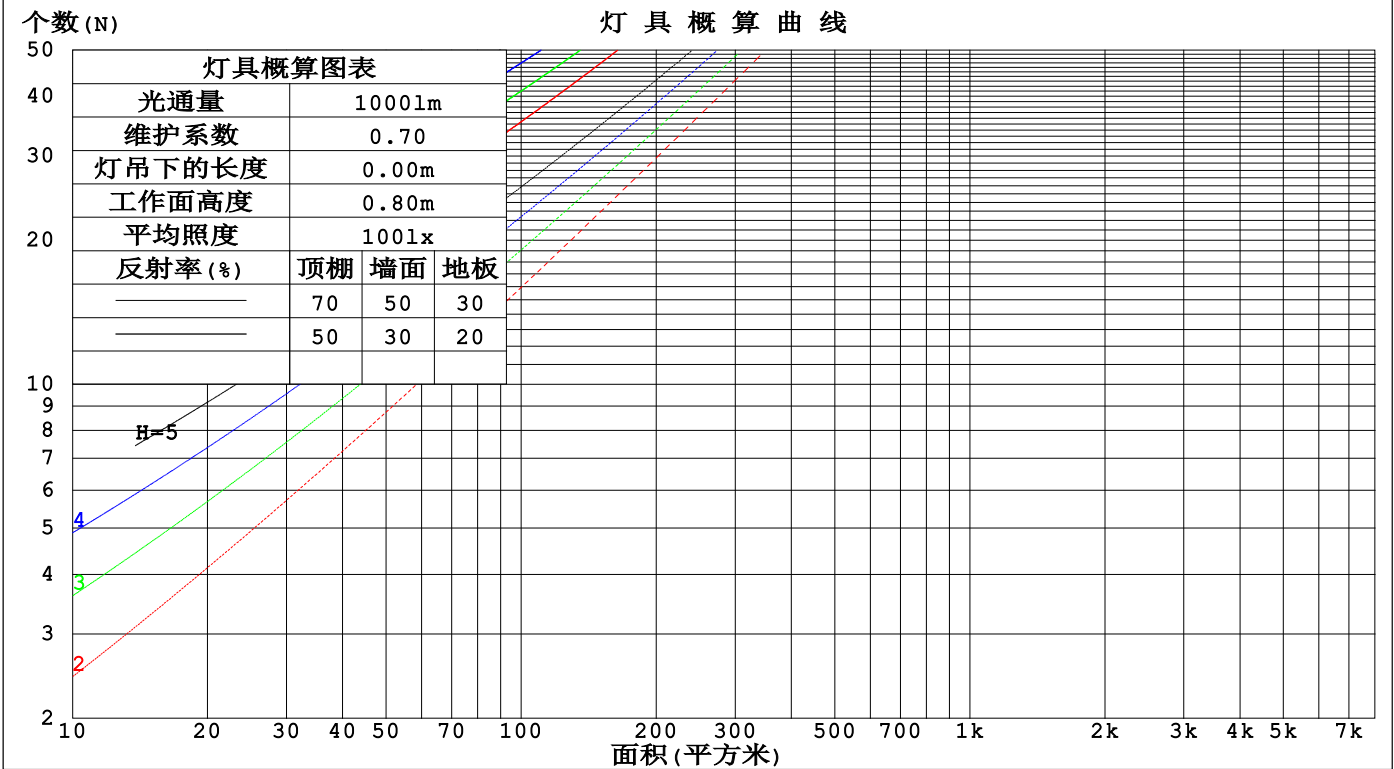

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: Cloud
测试日期: 2024-10-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注: WHITE

墙面和天花板利用系数

实测参数: U:24.00V I:0.2030A P:4.872W PF:1.000 Freq:0Hz 实检光通: 288.646x1 lm											
灯具名称: SF18-24V-5050-72-RGBW (2700K)-80						灯具类型:			灯具重量:		
灯具规格:						外型尺寸: Length=1m			测试编号:		
制造厂商:						发光口面:			遮光角:		

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.400	.228	.072	.385	.220	.070	.357	.205	.065	.331	.191	.061	.307	.178	.057	
2.0	.343	.188	.058	.329	.181	.056	.303	.169	.052	.279	.157	.049	.257	.146	.046	
3.0	.302	.161	.048	.290	.155	.047	.266	.144	.044	.245	.134	.041	.225	.124	.038	
4.0	.271	.141	.041	.259	.136	.040	.238	.126	.038	.218	.117	.035	.200	.109	.033	
5.0	.245	.125	.036	.235	.121	.035	.216	.112	.033	.197	.104	.031	.181	.096	.029	
6.0	.224	.112	.032	.215	.108	.031	.197	.101	.029	.180	.094	.028	.165	.087	.026	
7.0	.206	.102	.029	.198	.098	.028	.181	.092	.026	.166	.085	.025	.152	.079	.023	
8.0	.191	.093	.026	.183	.090	.025	.168	.084	.024	.154	.078	.022	.140	.072	.021	
9.0	.178	.086	.024	.170	.083	.023	.156	.077	.022	.143	.072	.021	.131	.066	.019	
10.0	.166	.080	.022	.159	.077	.021	.146	.072	.020	.134	.067	.019	.123	.062	.018	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.387	.387	.387	.331	.331	.331	.226	.226	.226	.130	.130	.130	.041	.041	.041	
1.0	.385	.354	.326	.329	.304	.280	.225	.209	.194	.130	.121	.113	.042	.039	.036	
2.0	.379	.331	.292	.324	.285	.252	.222	.197	.176	.128	.115	.103	.041	.037	.034	
3.0	.371	.315	.271	.318	.272	.235	.219	.189	.165	.126	.110	.097	.041	.036	.032	
4.0	.364	.303	.257	.312	.262	.223	.215	.183	.157	.124	.107	.093	.040	.035	.031	
5.0	.356	.294	.247	.306	.254	.215	.211	.177	.152	.122	.104	.090	.039	.034	.030	
6.0	.349	.286	.241	.300	.248	.210	.207	.173	.148	.120	.102	.088	.039	.033	.029	
7.0	.342	.279	.236	.294	.242	.205	.203	.170	.146	.118	.100	.087	.038	.033	.029	
8.0	.335	.274	.232	.288	.238	.202	.200	.167	.143	.116	.098	.085	.038	.032	.028	
9.0	.329	.269	.229	.283	.234	.200	.196	.164	.142	.114	.097	.085	.037	.032	.028	
10.0	.323	.265	.227	.278	.230	.198	.193	.162	.141	.113	.096	.084	.037	.031	.028	

C角度范围: 0度 - 360度 C角度间隔: 22.5度 测试速度: 快速 环境温度: 25.3℃ 测试人员: Cloud 测试日期: 2024-10-15	γ角度范围: 0度 - 180度 γ角度间隔: 1.0度 测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488 环境湿度: 65.0% 测试距离: 6.360米 [K=1.0000] 备注: WHITE
--	--

UGR(Unified Glare Rating)数据表

实测参数: U:24.00V I:0.2030A P:4.872W PF:1.000 Freq:0Hz 实检光通: 288.646x1 lm										
灯具名称: SF18-24V-5050-72-RGBW (2700K)-80					灯具类型:			灯具重量:		
灯具规格:					外型尺寸: Length=1m			测试编号:		
制造厂商:					发光口面:			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	横向(Viewed crosswise)					纵向(Viewed endwise)				
x = 2H y = 2H	21.7	23.0	22.3	23.6	24.3	18.7	20.0	19.3	20.6	21.3
3H	24.6	25.8	25.2	26.4	27.2	20.4	21.6	21.1	22.3	23.0
4H	26.2	27.3	26.8	28.0	28.8	21.2	22.4	21.9	23.0	23.8
6H	27.9	29.0	28.6	29.7	30.5	21.9	23.0	22.6	23.7	24.5
8H	28.8	29.9	29.5	30.6	31.4	22.2	23.2	22.9	23.9	24.7
12H	29.9	30.9	30.6	31.6	32.5	22.4	23.4	23.1	24.1	24.9
4H 2H	22.2	23.4	22.9	24.0	24.8	20.2	21.3	20.9	22.0	22.8
3H	25.4	26.4	26.1	27.1	27.9	22.2	23.2	22.9	23.9	24.8
4H	27.2	28.1	27.9	28.8	29.7	23.2	24.1	23.9	24.9	25.7
6H	29.1	30.0	29.9	30.7	31.6	24.1	24.9	24.8	25.7	26.6
8H	30.2	31.0	31.0	31.7	32.6	24.5	25.2	25.2	26.0	26.9
12H	31.4	32.1	32.2	32.9	33.8	24.8	25.5	25.5	26.3	27.2
8H 4H	27.5	28.3	28.3	29.1	30.0	24.5	25.3	25.3	26.0	26.9
6H	29.8	30.5	30.6	31.2	32.2	25.8	26.5	26.6	27.2	28.2
8H	31.1	31.7	31.9	32.5	33.4	26.4	27.0	27.2	27.8	28.8
12H	32.6	33.1	33.4	33.9	34.9	27.0	27.5	27.8	28.3	29.3
12H 4H	27.6	28.3	28.3	29.0	30.0	24.9	25.6	25.7	26.4	27.3
6H	29.9	30.5	30.7	31.3	32.3	26.5	27.0	27.2	27.8	28.8
8H	31.3	31.8	32.1	32.7	33.6	27.2	27.8	28.1	28.6	29.6
不同间隔布灯时,观察者位置引起的UGR变化(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.5				

依据CIE Pub.117计算, 288.6lm光源光通表格中的数据需要进行修正(8log(F/F0) = -4.3)。
出光口面积: 0.017 m2

C角度范围: 0度 - 360度	γ角度范围: 0度 - 180度
C角度间隔: 22.5度	γ角度间隔: 1.0度
测试速度: 快速	测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.00.488
环境温度:25.3℃	环境湿度:65.0%
测试人员:Cloud	测试距离:6.360米 [K=1.0000]
测试日期:2024-10-15	备注: WHITE

UF利用系数表

实测参数: U:24.00V I:0.2030A P:4.872W PF:1.000 Freq:0Hz 实检光通: 288.646x1 lm		
灯具名称: SF18-24V-5050-72-RGBW(2700K)-80	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商:	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	44	31	24	42	31	23	40	29	23	16
0.80	53	39	31	51	38	30	48	37	29	21
1.00	60	47	38	58	46	37	54	46	36	26
1.25	67	54	45	65	52	44	60	49	42	31
1.50	73	60	50	69	58	49	64	54	47	35
2.00	80	68	59	76	66	58	70	61	54	41
2.50	85	74	65	81	71	63	73	65	59	44
3.00	89	79	71	84	75	68	77	69	63	48
4.00	94	85	78	89	81	75	81	75	69	53
5.00	97	89	83	92	85	80	83	78	73	56
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHR _{NOM} = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度:25.3℃
测试人员:Cloud
测试日期:2024-10-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注: WHITE

灯 具 等 光 强 曲 线

实测参数: U:24.00V I:0.2030A P:4.872W PF:1.000 Freq:0Hz 实检光通: 288.646x1 lm		
灯具名称: SF18-24V-5050-72-RGBW (2700K) -80	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商:	发光口面:	遮光角:

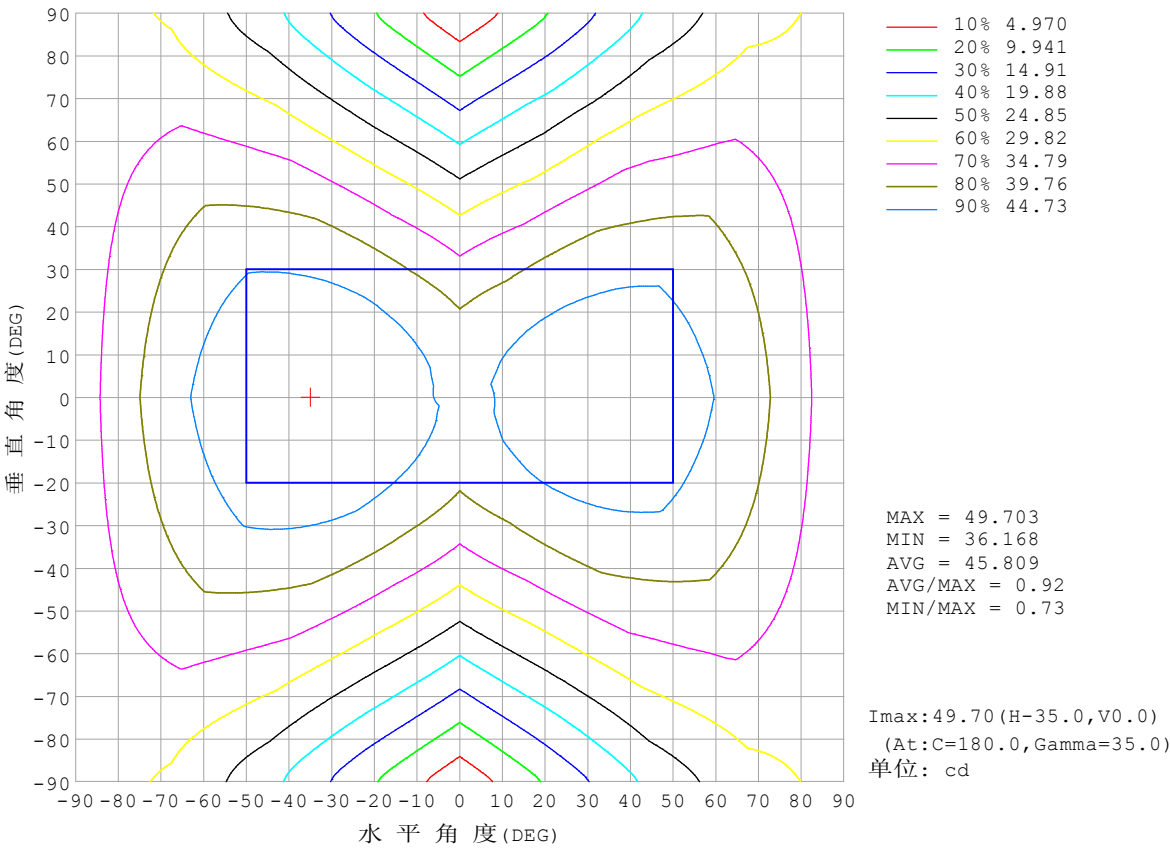


C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: Cloud
测试日期: 2024-10-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注: WHITE

灯 具 有 效 平 均 照 度 图

实测参数: U:24.00V I:0.2030A P:4.872W PF:1.000 Freq:0Hz 实检光通: 288.646x1 lm		
灯具名称: SF18-24V-5050-72-RGBW (2700K)-80	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商:	发光口面:	遮光角:

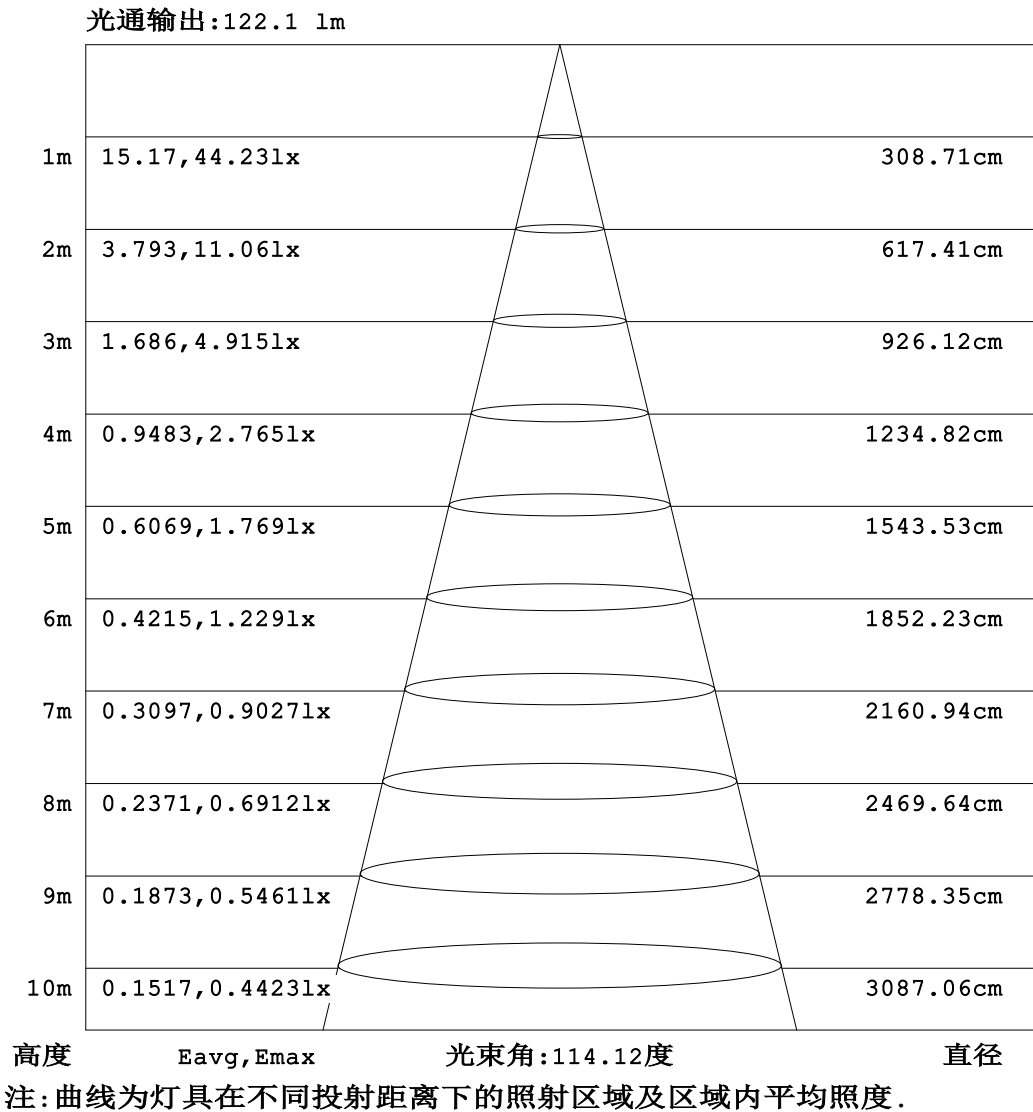


C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度:25.3℃
测试人员:Cloud
测试日期:2024-10-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注: WHITE

平面等照度曲线

实测参数: U:24.00V I:0.2030A P:4.872W PF:1.000 Freq:0Hz 实检光通: 288.646x1 lm		
灯具名称: SF18-24V-5050-72-RGBW (2700K) -80	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商:	发光口面:	遮光角:

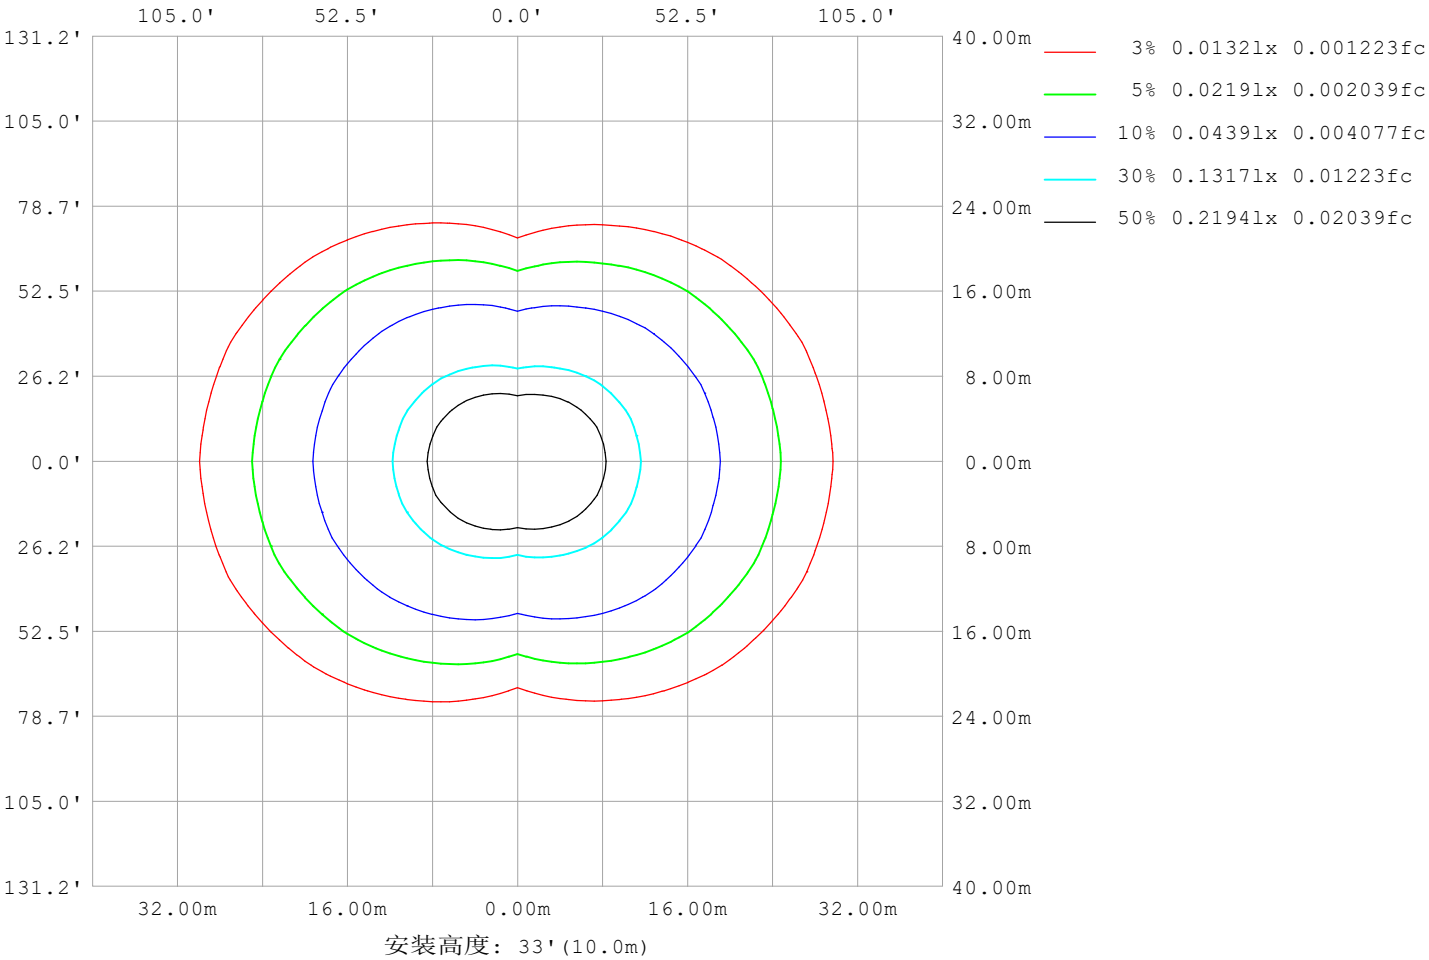

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: Cloud
测试日期: 2024-10-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注: WHITE

LED筒灯平均亮度报告


实测参数: U:24.00V I:0.2030A P:4.872W PF:1.000 Freq:0Hz 实检光通: 288.646x1 lm		
灯具名称: SF18-24V-5050-72-RGBW(2700K)-80	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商:	发光口面:	遮光角:

平均亮度	数值 (cd/m2)
L横 (65) av	6082
L横 (75) av	8947
L横 (85) av	22967
L纵 (65) av	2319
L纵 (75) av	2356
L纵 (85) av	2822
L45 (65) av	4762
L45 (75) av	6648
L45 (85) av	16034

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度 C角度间隔: 22.5度 测试速度: 快速 环境温度:25.3℃ 测试人员:Cloud 测试日期:2024-10-15	γ角度范围: 0度 - 180度 γ角度间隔: 1.0度 测试系统: 远方(EVERFINE) GO-2000B_V1 系统 V2.00.488 环境湿度:65.0% 测试距离:6.360米 [K=1.0000] 备注: WHITE
---	---

平面照度曲线

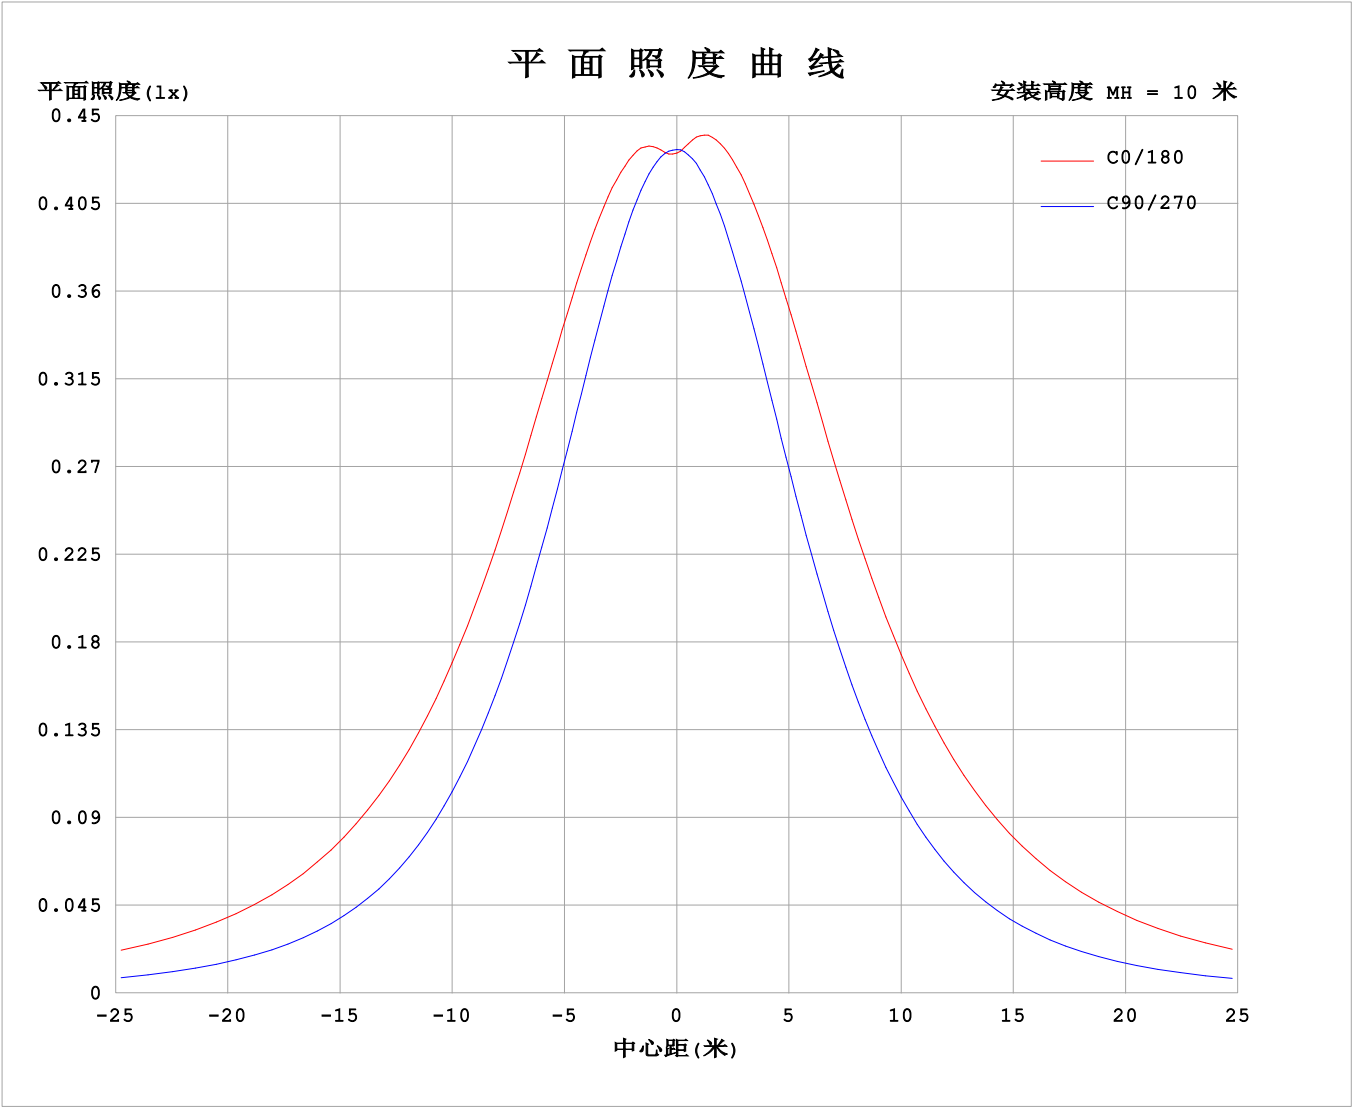

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: Cloud
测试日期: 2024-10-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注: WHITE

光 强 分 布 数 据 表 格

实测参数: U:24.00V I:0.2030A P:4.872W PF:1.000 Freq:0Hz 实检光通: 288.646x1 lm																	
灯具名称: SF18-24V-5050-72-RGBW (2700K) -80									灯具类型:						灯具重量:		
灯具规格:									外型尺寸: Length=1m						测试编号:		
制造厂商:									发光口面:						遮光角:		


表--1单位: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	43.3	43.3	43.3	43.3	43.3	43.3	43.3	43.3	43.3	43.3	43.3	43.3	43.3	43.3	43.3	43.3			
5	44.0	43.9	43.5	43.1	43.1	43.6	44.1	44.5	44.6	44.4	44.0	43.4	43.1	43.0	43.4	43.8			
10	45.4	45.2	44.3	43.0	42.6	43.7	45.0	45.7	46.0	45.6	44.8	43.5	42.4	42.8	44.1	45.0			
15	46.5	46.1	44.8	42.8	41.7	43.5	45.5	46.8	47.2	46.7	45.2	43.2	41.4	42.5	44.5	45.9			
20	47.4	46.8	44.9	42.3	40.4	43.0	45.7	47.6	48.3	47.4	45.4	42.6	40.0	41.8	44.5	46.5			
25	48.1	47.3	44.8	41.4	38.7	42.0	45.6	48.2	49.1	48.0	45.2	41.6	38.2	40.8	44.3	46.9			
30	48.6	47.5	44.4	40.1	36.7	40.8	45.3	48.6	49.7	48.4	44.8	40.3	36.2	39.4	43.8	47.1			
35	48.7	47.5	43.8	38.6	34.5	39.2	44.7	48.5	49.9	48.3	44.2	38.7	33.9	37.8	43.0	47.1			
40	48.6	47.1	42.8	36.9	32.0	37.5	43.7	48.2	49.8	48.0	43.2	36.8	31.2	35.9	42.0	46.7			
45	48.1	46.5	41.6	34.9	29.3	35.4	42.4	47.5	49.3	47.3	41.9	34.7	28.5	33.8	40.8	46.0			
50	47.3	45.5	40.1	32.7	26.4	33.2	40.9	46.4	48.5	46.3	40.4	32.5	25.5	31.6	39.3	45.0			
55	46.2	44.2	38.4	30.4	23.4	30.9	39.1	45.1	47.4	45.0	38.6	30.2	22.5	29.2	37.5	43.7			
60	44.8	42.6	36.4	27.9	20.2	28.3	37.0	43.4	45.9	43.4	36.6	27.6	19.4	26.8	35.6	42.2			
65	43.2	40.8	34.2	25.3	17.0	25.6	34.6	41.5	44.2	41.5	34.4	25.0	16.3	24.3	33.6	40.4			
70	41.3	38.8	31.9	22.6	13.8	22.8	32.2	39.3	42.2	39.4	32.0	22.3	13.2	21.6	31.1	38.3			
75	38.8	36.5	29.4	19.8	10.7	19.8	29.5	36.9	39.9	37.1	29.5	19.4	10.0	18.7	28.6	36.0			
80	36.3	33.9	26.7	17.0	7.54	16.8	26.8	34.2	37.3	34.5	26.8	16.6	6.97	15.9	26.0	33.5			
85	33.5	31.0	23.9	14.1	4.44	13.9	23.8	31.4	34.5	31.7	24.0	13.7	3.93	13.1	23.2	30.7			
90	31.1	28.5	21.3	11.5	1.59	11.4	21.5	29.1	32.2	29.4	21.7	11.3	1.19	10.7	20.8	28.3			
95	30.0	27.4	20.5	11.1	1.58	11.1	20.8	28.1	31.1	28.4	21.0	11.0	1.19	10.4	20.1	27.2			
100	29.2	26.7	19.9	9.33	1.63	10.7	20.3	27.3	30.2	27.6	20.4	10.6	1.19	6.70	19.5	26.6			
105	28.1	25.5	17.6	7.98	1.69	9.79	19.5	26.3	29.1	26.6	19.7	9.64	1.20	6.03	17.6	25.4			
110	25.7	23.0	16.1	7.23	1.72	8.71	18.3	25.0	27.7	25.2	18.3	8.52	1.23	5.85	13.7	23.2			
115	23.7	21.3	14.5	6.56	1.71	7.58	16.7	23.2	25.8	23.4	16.7	7.40	1.27	5.69	12.5	20.7			
120	21.7	19.4	13.2	5.48	1.71	6.44	14.9	21.1	23.5	21.2	14.9	6.26	1.30	5.17	11.9	17.1			
125	19.4	17.3	11.4	4.77	1.71	5.19	13.0	18.7	21.0	18.8	13.0	5.03	1.33	4.26	10.1	15.2			
130	17.1	15.2	9.35	4.05	1.71	4.15	11.1	16.2	18.3	16.3	11.1	4.00	1.35	3.44	8.30	14.2			
135	14.6	13.2	7.72	3.33	1.70	3.24	9.27	13.8	15.6	13.9	9.24	3.11	1.39	2.76	7.00	11.9			
140	12.1	11.0	6.07	2.67	1.68	2.43	7.33	11.4	13.0	11.4	7.34	2.33	1.42	2.23	5.66	9.81			
145	9.87	7.94	4.78	2.16	1.67	1.80	5.56	8.98	10.4	9.02	5.54	1.71	1.45	1.80	4.37	7.48			
150	7.82	5.75	3.69	1.76	1.66	1.62	4.01	6.56	7.72	6.59	4.02	1.48	1.47	1.52	3.28	5.56			
155	5.77	4.06	2.72	1.61	1.63	1.60	2.71	4.54	4.97	4.59	2.71	1.49	1.50	1.51	2.43	3.86			
160	3.90	2.81	2.01	1.60	1.62	1.59	1.74	2.84	3.33	2.88	1.70	1.52	1.53	1.53	1.82	2.60			
165	2.29	1.88	1.63	1.59	1.61	1.59	1.63	1.63	1.86	1.66	1.58	1.54	1.56	1.56	1.62	1.80			
170	1.61	1.61	1.61	1.59	1.59	1.59	1.62	1.61	1.58	1.59	1.60	1.56	1.58	1.57	1.62	1.64			
175	1.60	1.62	1.61	1.59	1.58	1.59	1.62	1.63	1.61	1.59	1.62	1.57	1.58	1.59	1.62	1.64			
180	1.61	1.62	1.61	1.59	1.58	1.59	1.62	1.64	1.61	1.62	1.62	1.58	1.58	1.59	1.62	1.64			

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: Cloud
测试日期: 2024-10-15


γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注: WHITE

I (cd)

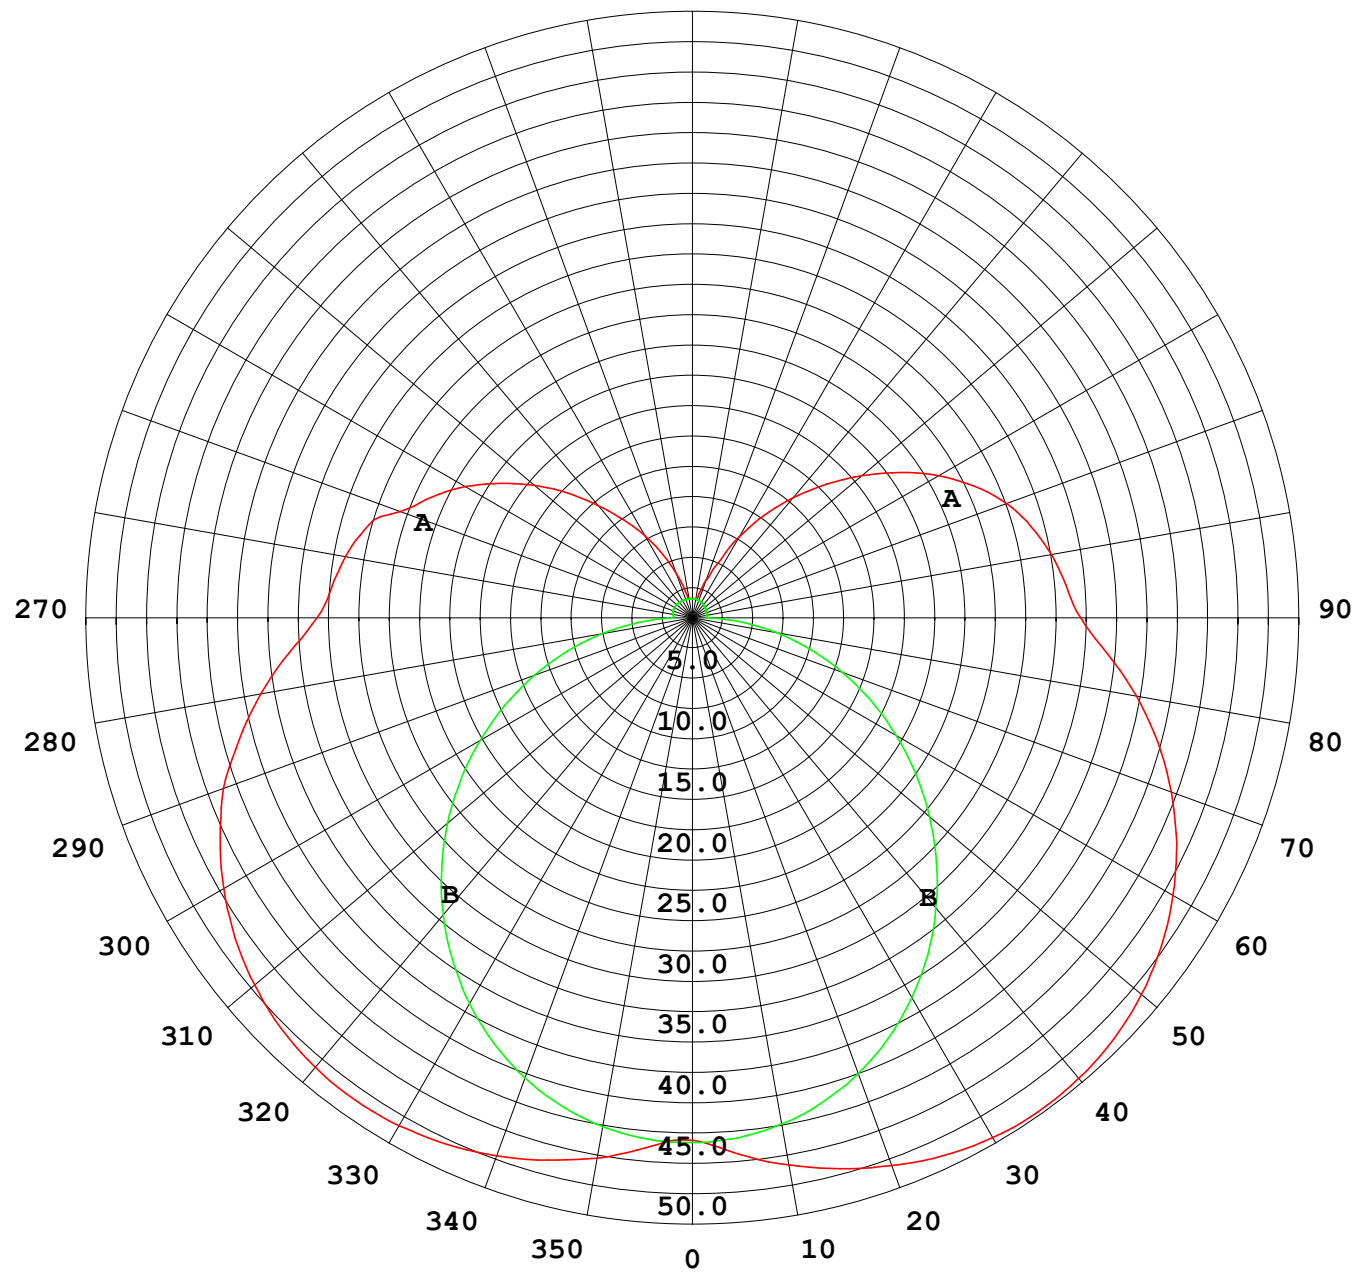

1000 lm

$\kappa = 1$

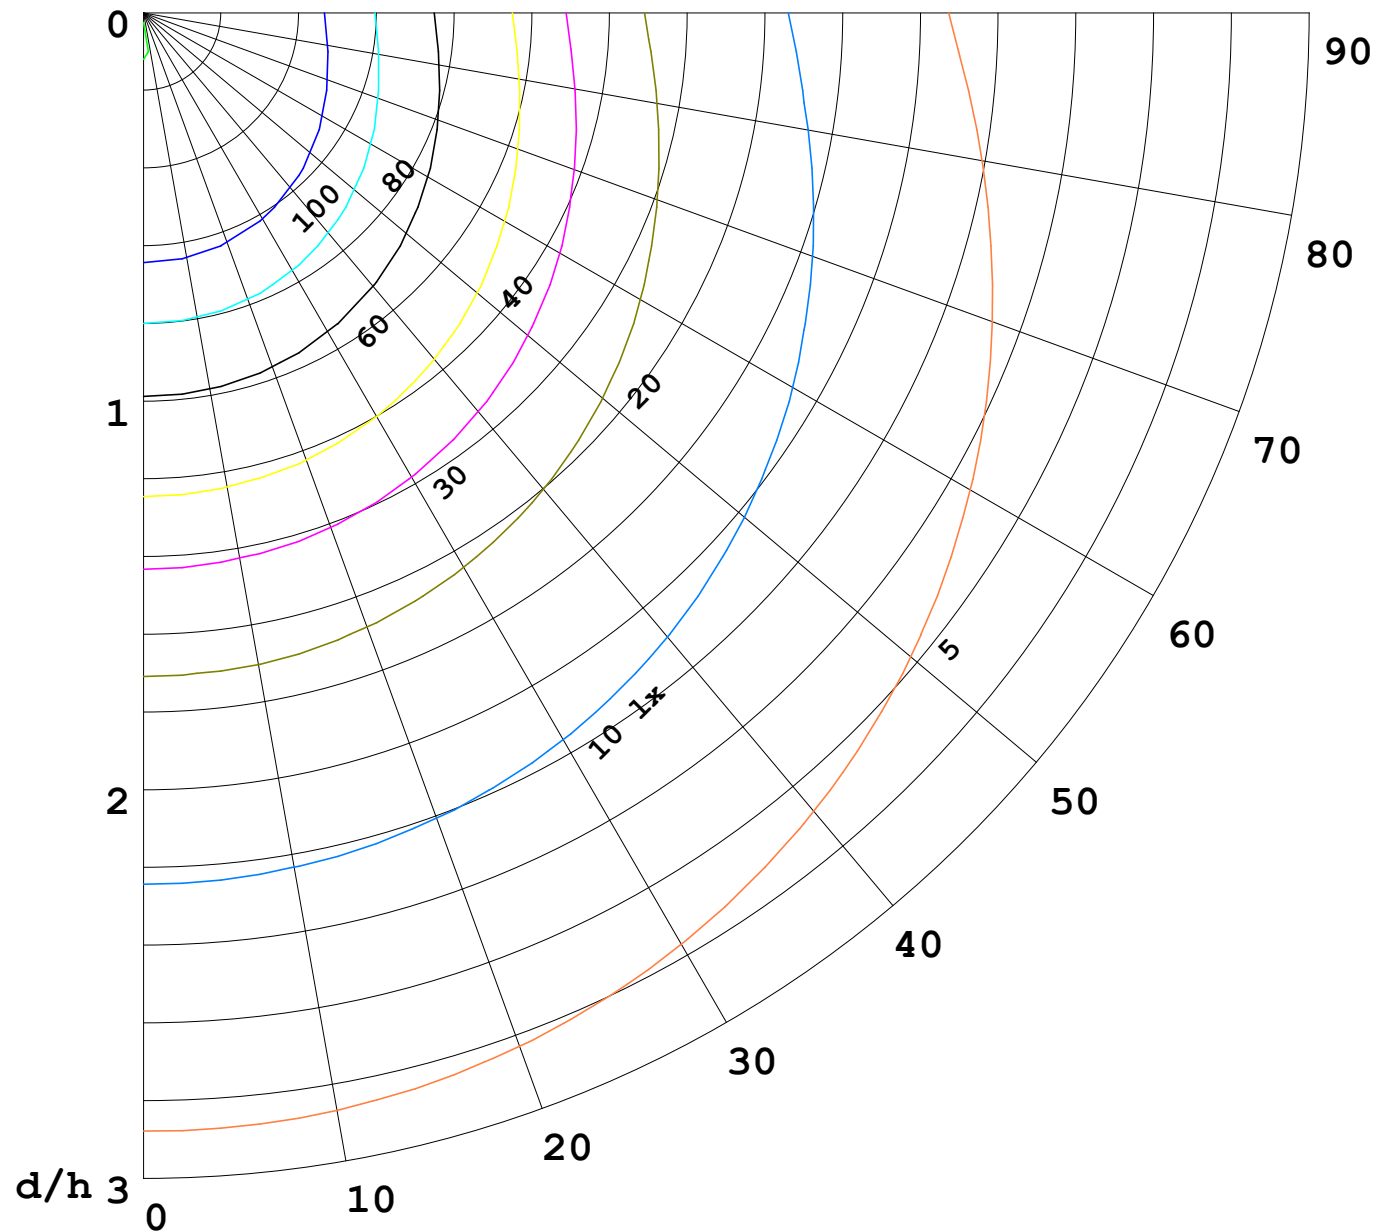

F = 1000 lm
 K = 0.7
 Hcc = 0.8 m
 Hfc = 0.0 m
 Eave = 100 lx

	Pcc	Pw	Pfc
—————	70	50	30
—————	50	30	20

