


室内灯具光度数据


| | | |
|--|----------------|------------------|
| 实测参数: U:24.00V I:0.3318A P:7.963W PF:1.000 实检光通:348.235x1 lm | | |
| 灯具名称: SF18-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5*16.5MM | 灯具规格: | 测试编号: 2022011002 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

| 光源数据 | | 光度数据 | | | | 光效: 49.69 lm/W |
|-----------|---------|----------|--------|------------------------|------------|----------------|
| 型号 | 2835 | 峰值光强(cd) | 78.21 | S/MH(C0/180) | 1.63 | |
| 标称功率(W) | 8 | 灯具效率(%) | 113.6 | S/MH(C90/270) | 1.21 | |
| 额定电源电压(V) | 24 | 总光通量(lm) | 395.71 | η UP,DN(C0-180) | 15.0, 42.2 | |
| 额定光通量(lm) | 348.235 | CIE分类 | 半直接 | η UP,DN(C180-360) | 14.7, 41.8 | |
| 灯具内光源数(只) | 1 | 上射光通比(%) | 29.6 | CIBSE SHR NOM | 1.50 | |
| 实测电源电压(V) | 24.0 | 下射光通比(%) | 84.0 | CIBSE SHR MAX | 1.55 | |

室内灯具配光曲线

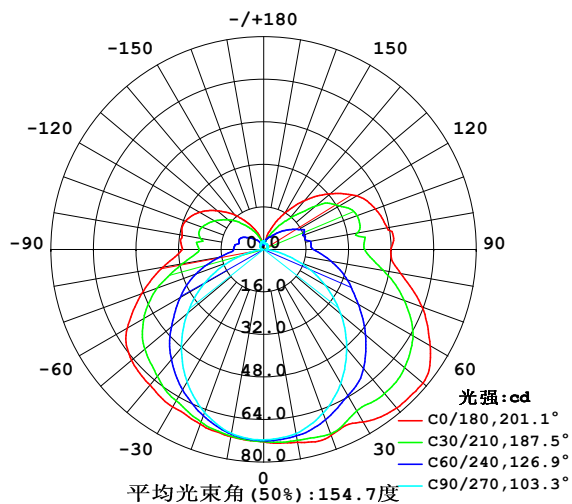

空间等照度曲线(单位:lx)

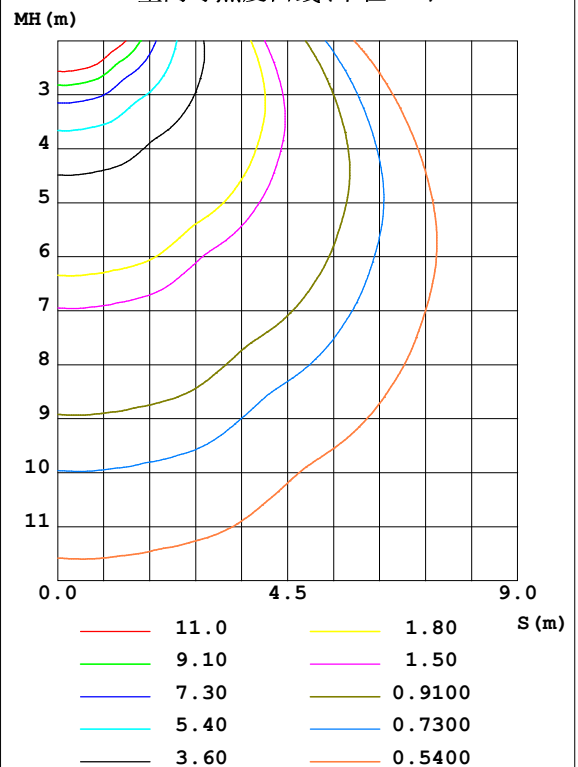


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2022-01-10

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

灯具环带光通量和亮度限制曲线

环带光通量:

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | $\gamma(^{\circ})$ | $\Phi_{\text{环}}$ | $\Phi_{\text{总}}$ | %lum, lamp |
|----------|-------|-------|-------|-------|-------|-------|--------|-------|--------------------|-------------------|-------------------|------------|
| 10 | 73.61 | 72.06 | 70.32 | 69.73 | 71.53 | 70.96 | 70.23 | 71.52 | 0- 10 | 6.830 | 6.830 | 1.73,1.96 |
| 20 | 74.37 | 70.96 | 65.48 | 66.38 | 69.94 | 67.79 | 65.17 | 69.59 | 10- 20 | 19.83 | 26.66 | 6.74,7.66 |
| 30 | 74.94 | 66.78 | 58.12 | 61.93 | 68.42 | 63.42 | 57.63 | 67.40 | 20- 30 | 30.83 | 57.49 | 14.5,16.5 |
| 40 | 77.86 | 64.61 | 48.58 | 56.48 | 66.56 | 58.17 | 48.20 | 63.27 | 30- 40 | 39.42 | 96.91 | 24.5,27.8 |
| 50 | 78.21 | 59.60 | 37.98 | 48.99 | 64.88 | 51.87 | 37.47 | 60.08 | 40- 50 | 44.75 | 141.7 | 35.8,40.7 |
| 60 | 72.31 | 52.99 | 26.61 | 39.72 | 59.27 | 44.20 | 25.90 | 54.97 | 50- 60 | 45.99 | 187.7 | 47.4,53.9 |
| 70 | 63.42 | 44.87 | 14.87 | 28.76 | 48.94 | 34.95 | 14.15 | 48.80 | 60- 70 | 42.32 | 230.0 | 58.1,66 |
| 80 | 52.35 | 35.74 | 4.562 | 20.03 | 38.46 | 23.96 | 3.776 | 41.44 | 70- 80 | 35.01 | 265.0 | 67,76.1 |
| 90 | 47.80 | 28.36 | 1.071 | 19.63 | 30.60 | 17.89 | 0.7941 | 32.83 | 80- 90 | 27.57 | 292.5 | 73.9,84 |
| 100 | 47.21 | 26.86 | 1.272 | 17.80 | 31.19 | 17.51 | 0.9845 | 27.18 | 90-100 | 24.58 | 317.1 | 80.1,91.1 |
| 110 | 44.68 | 26.49 | 1.387 | 15.51 | 31.32 | 17.30 | 1.101 | 28.08 | 100-110 | 22.62 | 339.7 | 85.9,97.6 |
| 120 | 40.43 | 24.02 | 1.598 | 12.41 | 27.95 | 15.31 | 1.472 | 27.52 | 110-120 | 20.22 | 360.0 | 91,103 |
| 130 | 32.60 | 18.43 | 1.779 | 8.786 | 22.70 | 12.19 | 1.799 | 23.46 | 120-130 | 15.70 | 375.7 | 94.9,108 |
| 140 | 24.15 | 11.68 | 1.970 | 5.686 | 17.05 | 8.847 | 2.070 | 16.52 | 130-140 | 10.16 | 385.8 | 97.5,111 |
| 150 | 15.60 | 7.286 | 2.287 | 3.396 | 11.19 | 5.896 | 2.523 | 11.47 | 140-150 | 5.735 | 391.6 | 99,112 |
| 160 | 8.360 | 4.744 | 2.327 | 2.070 | 6.630 | 3.565 | 2.849 | 7.804 | 150-160 | 2.786 | 394.3 | 99.7,113 |
| 170 | 2.655 | 3.108 | 2.407 | 1.870 | 2.230 | 2.119 | 3.121 | 5.669 | 160-170 | 1.096 | 395.4 | 99.9,114 |
| 180 | 1.975 | 2.073 | 2.382 | 3.350 | 1.975 | 1.983 | 3.367 | 3.325 | 170-180 | 0.2652 | 395.7 | 100,114 |
| 单位:° | 光强:cd | | | | | | | | | 单位:lm | | |

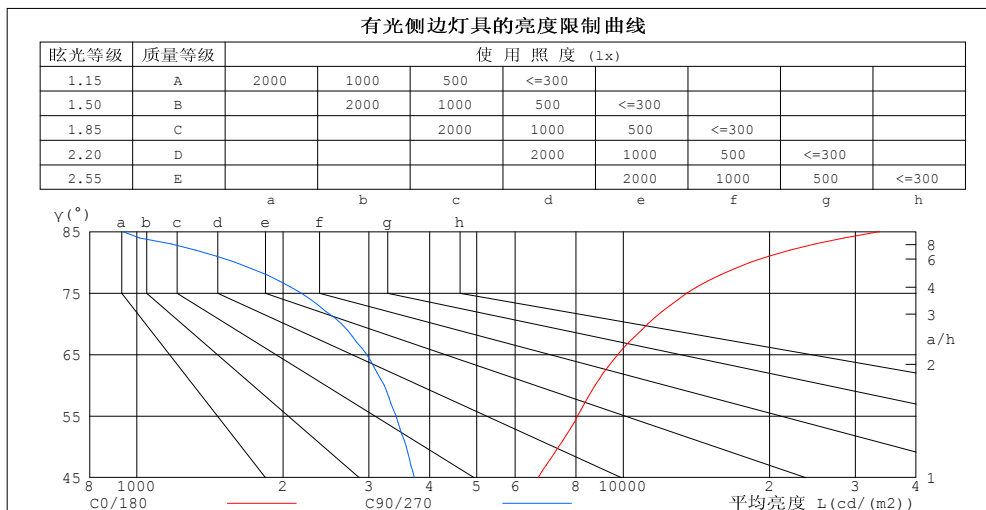

| 平均亮度值 L (cd/(m²)) | | |
|---------------------|--------|---------|
| $\gamma(^{\circ})$ | C0/180 | C90/270 |
| 85 | 33750 | 936 |
| 80 | 18271 | 1592 |
| 75 | 13534 | 2178 |
| 70 | 11238 | 2635 |
| 65 | 9754 | 2971 |
| 60 | 8765 | 3225 |
| 55 | 8059 | 3413 |
| 50 | 7374 | 3581 |
| 45 | 6688 | 3720 |


C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2022-01-10

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

工作面利用系数和灯具概算曲线

| | | |
|--|----------------|------------------|
| 实测参数: U:24.00V I:0.3318A P:7.963W PF:1.000 实检光通:348.235x1 lm | | |
| 灯具名称: SF18-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5*16.5MM | 灯具规格: | 测试编号: 2022011002 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|---------------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 工 作 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | 1.28 | 1.28 | 1.28 | 1.22 | 1.22 | 1.22 | 1.10 | 1.10 | 1.10 | .99 | .99 | .99 | .89 | .89 | .89 | .84 |
| 1.0 | 1.07 | 1.01 | .95 | 1.01 | .96 | .91 | .91 | .87 | .83 | .81 | .78 | .75 | .73 | .70 | .68 | .63 |
| 2.0 | .91 | .82 | .75 | .87 | .79 | .72 | .78 | .71 | .66 | .69 | .64 | .60 | .62 | .58 | .54 | .50 |
| 3.0 | .79 | .69 | .61 | .75 | .66 | .58 | .67 | .60 | .54 | .60 | .54 | .49 | .54 | .49 | .45 | .41 |
| 4.0 | .69 | .59 | .51 | .66 | .56 | .49 | .59 | .51 | .45 | .53 | .46 | .41 | .47 | .42 | .37 | .34 |
| 5.0 | .61 | .51 | .43 | .58 | .49 | .41 | .53 | .44 | .38 | .47 | .40 | .35 | .42 | .36 | .32 | .29 |
| 6.0 | .55 | .44 | .37 | .52 | .42 | .35 | .47 | .39 | .33 | .42 | .35 | .30 | .38 | .32 | .28 | .25 |
| 7.0 | .49 | .39 | .32 | .47 | .38 | .31 | .43 | .35 | .29 | .38 | .32 | .26 | .34 | .29 | .24 | .21 |
| 8.0 | .45 | .35 | .28 | .43 | .34 | .27 | .39 | .31 | .25 | .35 | .28 | .23 | .32 | .26 | .22 | .19 |
| 9.0 | .41 | .31 | .25 | .39 | .30 | .24 | .35 | .28 | .23 | .32 | .26 | .21 | .29 | .23 | .19 | .17 |
| 10.0 | .37 | .28 | .22 | .36 | .27 | .22 | .33 | .25 | .20 | .30 | .23 | .19 | .27 | .21 | .17 | .15 |

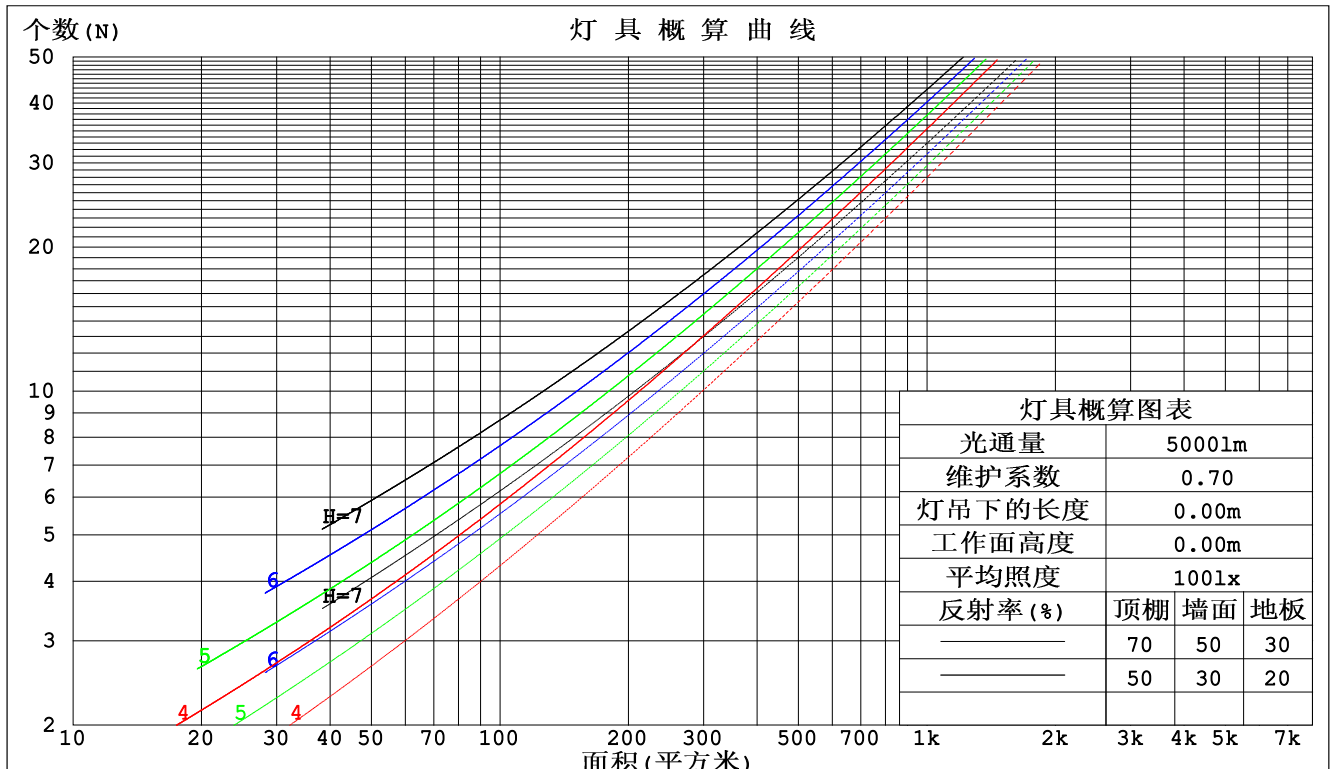

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2022-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

墙面和天花板利用系数

| | | |
|--|----------------|------------------|
| 实测参数: U:24.00V I:0.3318A P:7.963W PF:1.000 实检光通:348.235x1 lm | | |
| 灯具名称: SF18-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5*16.5MM | 灯具规格: | 测试编号: 2022011002 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 墙 壁 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .430 | .245 | .077 | .413 | .236 | .075 | .381 | .218 | .070 | .351 | .202 | .065 | .324 | .188 | .060 | |
| 2.0 | .373 | .205 | .063 | .358 | .197 | .061 | .328 | .183 | .057 | .301 | .169 | .053 | .276 | .156 | .049 | |
| 3.0 | .332 | .177 | .053 | .318 | .170 | .051 | .291 | .158 | .048 | .267 | .146 | .045 | .244 | .135 | .042 | |
| 4.0 | .299 | .155 | .046 | .286 | .150 | .044 | .262 | .139 | .042 | .240 | .129 | .039 | .219 | .119 | .036 | |
| 5.0 | .272 | .139 | .040 | .260 | .134 | .039 | .238 | .124 | .037 | .218 | .115 | .034 | .199 | .106 | .032 | |
| 6.0 | .249 | .125 | .036 | .239 | .121 | .035 | .219 | .112 | .033 | .200 | .104 | .030 | .182 | .096 | .028 | |
| 7.0 | .230 | .114 | .032 | .220 | .110 | .031 | .202 | .102 | .029 | .184 | .094 | .027 | .168 | .087 | .026 | |
| 8.0 | .213 | .104 | .029 | .204 | .101 | .028 | .187 | .094 | .027 | .171 | .087 | .025 | .156 | .080 | .023 | |
| 9.0 | .199 | .096 | .027 | .191 | .093 | .026 | .175 | .086 | .024 | .160 | .080 | .023 | .146 | .074 | .021 | |
| 10.0 | .186 | .089 | .025 | .178 | .086 | .024 | .164 | .080 | .023 | .150 | .074 | .021 | .137 | .069 | .020 | |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 天 花 板 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | .442 | .442 | .442 | .378 | .378 | .378 | .258 | .258 | .258 | .148 | .148 | .148 | .047 | .047 | .047 | |
| 1.0 | .438 | .404 | .374 | .375 | .347 | .322 | .256 | .239 | .223 | .148 | .138 | .129 | .047 | .044 | .042 | |
| 2.0 | .430 | .379 | .335 | .369 | .326 | .290 | .253 | .226 | .202 | .146 | .131 | .119 | .047 | .042 | .039 | |
| 3.0 | .422 | .360 | .311 | .362 | .311 | .270 | .248 | .216 | .189 | .143 | .126 | .112 | .046 | .041 | .037 | |
| 4.0 | .414 | .346 | .295 | .355 | .299 | .256 | .244 | .209 | .181 | .141 | .122 | .107 | .045 | .040 | .035 | |
| 5.0 | .405 | .336 | .284 | .348 | .290 | .247 | .240 | .203 | .175 | .139 | .119 | .104 | .045 | .039 | .034 | |
| 6.0 | .397 | .327 | .276 | .341 | .283 | .241 | .235 | .198 | .170 | .136 | .116 | .101 | .044 | .038 | .033 | |
| 7.0 | .389 | .319 | .271 | .335 | .277 | .236 | .231 | .194 | .167 | .134 | .114 | .099 | .043 | .037 | .033 | |
| 8.0 | .381 | .313 | .266 | .328 | .272 | .232 | .227 | .191 | .165 | .132 | .112 | .098 | .043 | .037 | .032 | |
| 9.0 | .374 | .308 | .263 | .323 | .267 | .229 | .223 | .188 | .163 | .130 | .111 | .097 | .042 | .036 | .032 | |
| 10.0 | .368 | .303 | .260 | .317 | .263 | .227 | .220 | .185 | .161 | .128 | .110 | .096 | .042 | .036 | .032 | |

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2022-01-10

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

UGR(Unified Glare Rating) 数据表

| | | | | | | | | | | |
|--|-----------------------|------|------|------|----------------|---------------------|------|------------------|------|------|
| 实测参数: U:24.00V I:0.3318A P:7.963W PF:1.000 实检光通:348.235x1 lm | | | | | | | | | | |
| 灯具名称: SF18-24V-2835-120-2200+5700-80-5700 | | | | | 灯具类型: 硅胶 | | | 灯具重量: | | |
| 外型尺寸: 16.5*16.5MM | | | | | 灯具规格: | | | 测试编号: 2022011002 | | |
| 制造厂商: OLYMPIA | | | | | 发光口面: 1*0.0165 | | | 保护角: | | |
| 反射比: 天花板 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| 墙面 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| 房间尺寸 | 交叉 (Viewed crosswise) | | | | | 向前 (Viewed endwise) | | | | |
| x = 2H y = 2H | 19.5 | 20.8 | 20.1 | 21.4 | 22.2 | 15.6 | 16.9 | 16.2 | 17.5 | 18.2 |
| 3H | 22.3 | 23.5 | 23.0 | 24.1 | 24.9 | 17.0 | 18.2 | 17.7 | 18.8 | 19.6 |
| 4H | 23.8 | 24.9 | 24.5 | 25.6 | 26.4 | 17.5 | 18.7 | 18.2 | 19.3 | 20.1 |
| 6H | 25.4 | 26.4 | 26.1 | 27.1 | 27.9 | 17.9 | 18.9 | 18.5 | 19.6 | 20.4 |
| 8H | 26.3 | 27.3 | 26.9 | 28.0 | 28.8 | 17.9 | 19.0 | 18.6 | 19.6 | 20.5 |
| 12H | 27.3 | 28.3 | 28.0 | 29.0 | 29.8 | 18.0 | 18.9 | 18.7 | 19.6 | 20.5 |
| 4H 2H | 20.0 | 21.1 | 20.7 | 21.8 | 22.6 | 17.3 | 18.4 | 17.9 | 19.1 | 19.8 |
| 3H | 23.1 | 24.0 | 23.8 | 24.7 | 25.6 | 19.0 | 20.0 | 19.7 | 20.7 | 21.5 |
| 4H | 24.8 | 25.6 | 25.5 | 26.4 | 27.2 | 19.7 | 20.6 | 20.5 | 21.4 | 22.2 |
| 6H | 26.6 | 27.3 | 27.3 | 28.1 | 29.0 | 20.3 | 21.1 | 21.1 | 21.9 | 22.7 |
| 8H | 27.5 | 28.3 | 28.3 | 29.0 | 30.0 | 20.5 | 21.2 | 21.3 | 22.0 | 22.9 |
| 12H | 28.7 | 29.4 | 29.5 | 30.2 | 31.1 | 20.6 | 21.3 | 21.4 | 22.1 | 23.0 |
| 8H 4H | 25.0 | 25.8 | 25.8 | 26.5 | 27.4 | 21.2 | 22.0 | 22.0 | 22.7 | 23.6 |
| 6H | 27.2 | 27.8 | 27.9 | 28.6 | 29.5 | 22.3 | 22.9 | 23.0 | 23.7 | 24.6 |
| 8H | 28.4 | 28.9 | 29.2 | 29.7 | 30.7 | 22.7 | 23.3 | 23.5 | 24.1 | 25.0 |
| 12H | 29.8 | 30.3 | 30.6 | 31.1 | 32.1 | 23.0 | 23.5 | 23.9 | 24.4 | 25.3 |
| 12H 4H | 25.0 | 25.7 | 25.8 | 26.5 | 27.4 | 21.7 | 22.4 | 22.5 | 23.1 | 24.1 |
| 6H | 27.2 | 27.8 | 28.0 | 28.6 | 29.6 | 23.0 | 23.6 | 23.8 | 24.4 | 25.3 |
| 8H | 28.6 | 29.1 | 29.4 | 29.9 | 30.9 | 23.6 | 24.1 | 24.5 | 25.0 | 25.9 |
| 不同间隔布灯时, 观察者位置引起的UGR变化: | | | | | | | | | | |
| S = 1.0H | + 0.1 / - 0.1 | | | | | + 0.1 / - 0.1 | | | | |
| 1.5H | + 0.2 / - 0.3 | | | | | + 0.2 / - 0.3 | | | | |
| 2.0H | + 0.2 / - 0.3 | | | | | + 0.2 / - 0.4 | | | | |

依据CIE Pub.117计算, 表格已按348.2lm光源光通进行修正 ($81\log(F/F_0) = -3.7$)。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2022-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

UF利用系数表

| | | |
|--|----------------|------------------|
| 实测参数: U:24.00V I:0.3318A P:7.963W PF:1.000 实检光通:348.235x1 lm | | |
| 灯具名称: SF18-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5*16.5MM | 灯具规格: | 测试编号: 2022011002 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |


| 反 射 比 / REFLECTANCE | | | | | | | | | | |
|----------------------------|---|-----|-----|-----|-----|-----|---------------------|-----|-----|---------|
| 天花板 | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| 墙壁 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| 室形指数 | 利用系数 UTILIZATION FACTORS (%) $k(RI) \times RCR = 5$ | | | | | | | | | |
| $k = 0.60$ | 51 | 37 | 29 | 50 | 36 | 28 | 47 | 35 | 28 | 20 |
| 0.80 | 62 | 47 | 37 | 59 | 46 | 37 | 56 | 43 | 36 | 26 |
| 1.00 | 70 | 55 | 46 | 68 | 54 | 45 | 63 | 54 | 43 | 32 |
| 1.25 | 78 | 64 | 54 | 75 | 62 | 52 | 69 | 58 | 50 | 38 |
| 1.50 | 84 | 70 | 60 | 81 | 68 | 58 | 74 | 63 | 55 | 42 |
| 2.00 | 93 | 80 | 70 | 88 | 77 | 68 | 81 | 71 | 64 | 49 |
| 2.50 | 98 | 86 | 77 | 93 | 83 | 74 | 85 | 76 | 69 | 53 |
| 3.00 | 102 | 91 | 83 | 97 | 88 | 80 | 88 | 81 | 74 | 57 |
| 4.00 | 108 | 98 | 91 | 102 | 94 | 87 | 93 | 86 | 81 | 62 |
| 5.00 | 111 | 103 | 96 | 106 | 98 | 92 | 95 | 90 | 85 | 65 |
| ROOM INDEX | UF (总) | | | | | | | | | UF (直接) |
| 依据标准文件 DIN EN 13032-2 2004 | | | 悬挂灯 | | | | 安装距高比 SHRNOM = 1.25 | | | |

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2022-01-10

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

灯具等光强曲线

| | | |
|--|----------------|------------------|
| 实测参数: U:24.00V I:0.3318A P:7.963W PF:1.000 实检光通:348.235x1 lm | | |
| 灯具名称: SF18-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5*16.5MM | 灯具规格: | 测试编号: 2022011002 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

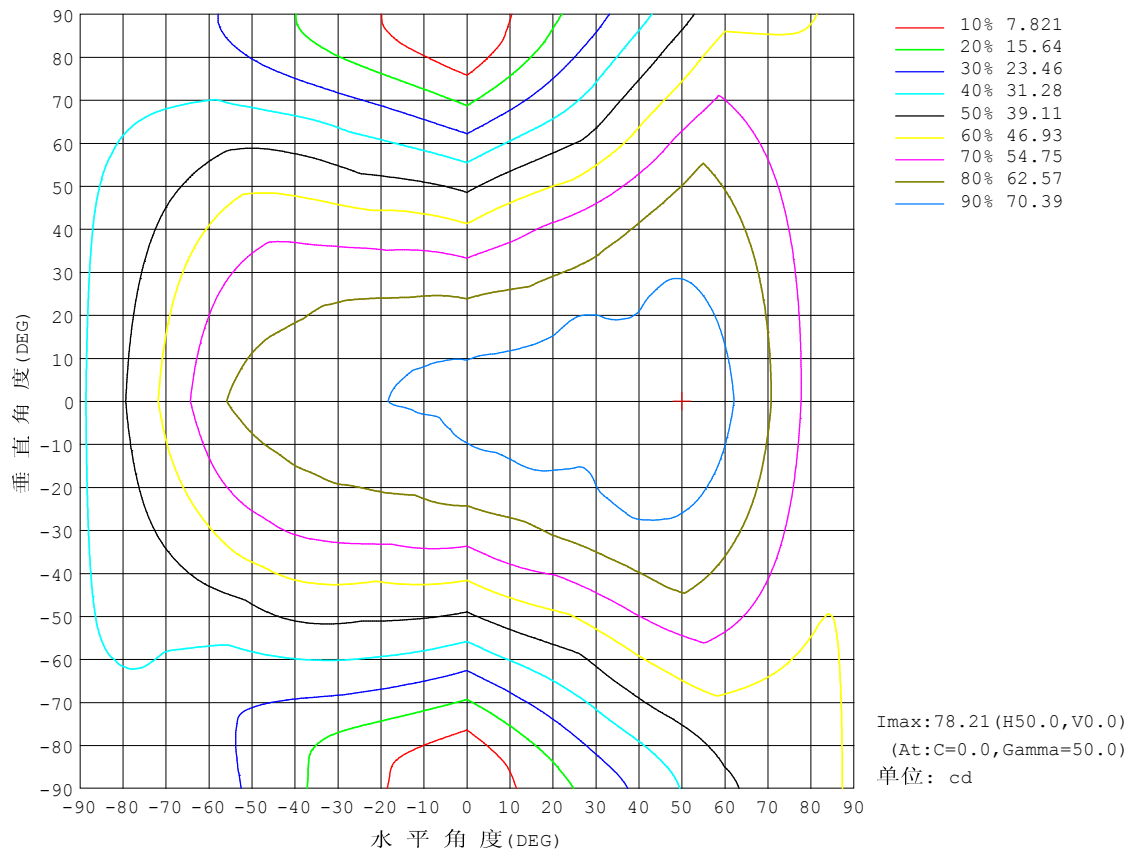


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2022-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

灯具有效平均照度曲线

| | | |
|--|----------------|------------------|
| 实测参数: U:24.00V I:0.3318A P:7.963W PF:1.000 实检光通:348.235x1 lm | | |
| 灯具名称: SF18-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5*16.5MM | 灯具规格: | 测试编号: 2022011002 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

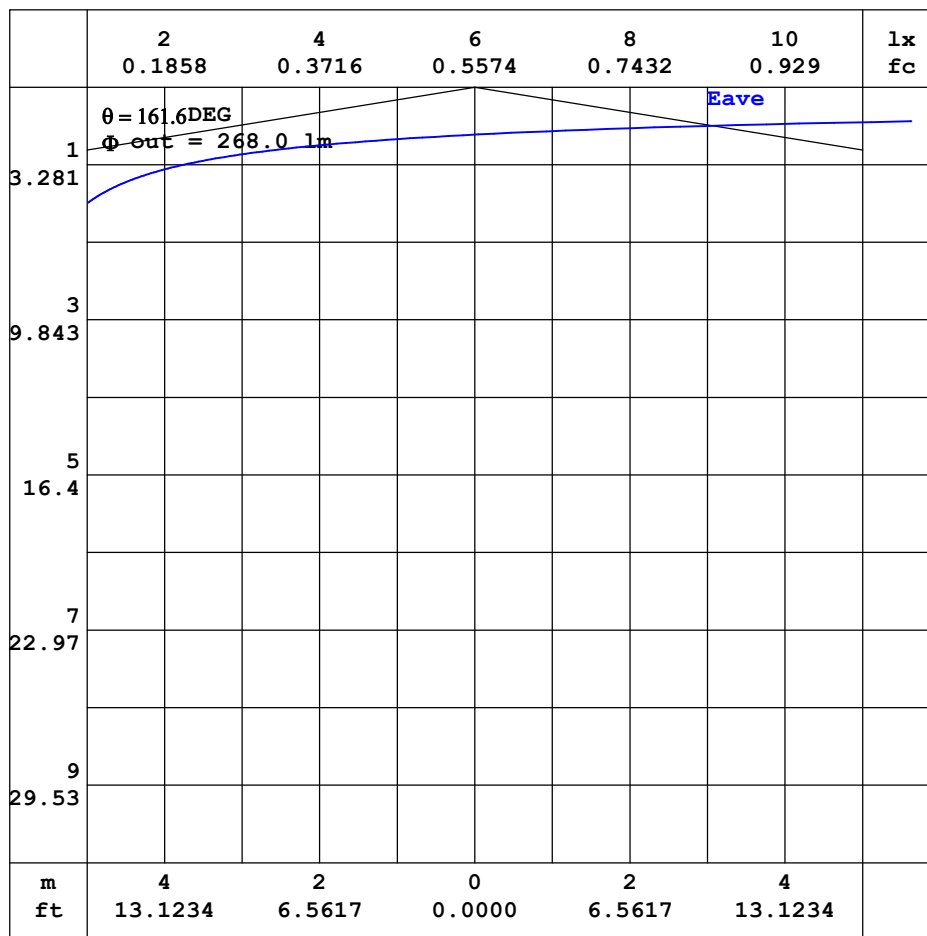


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2022-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

平面等照度曲线


| | | |
|--|----------------|------------------|
| 实测参数: U:24.00V I:0.3318A P:7.963W PF:1.000 实检光通:348.235x1 lm | | |
| 灯具名称: SF18-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5*16.5MM | 灯具规格: | 测试编号: 2022011002 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

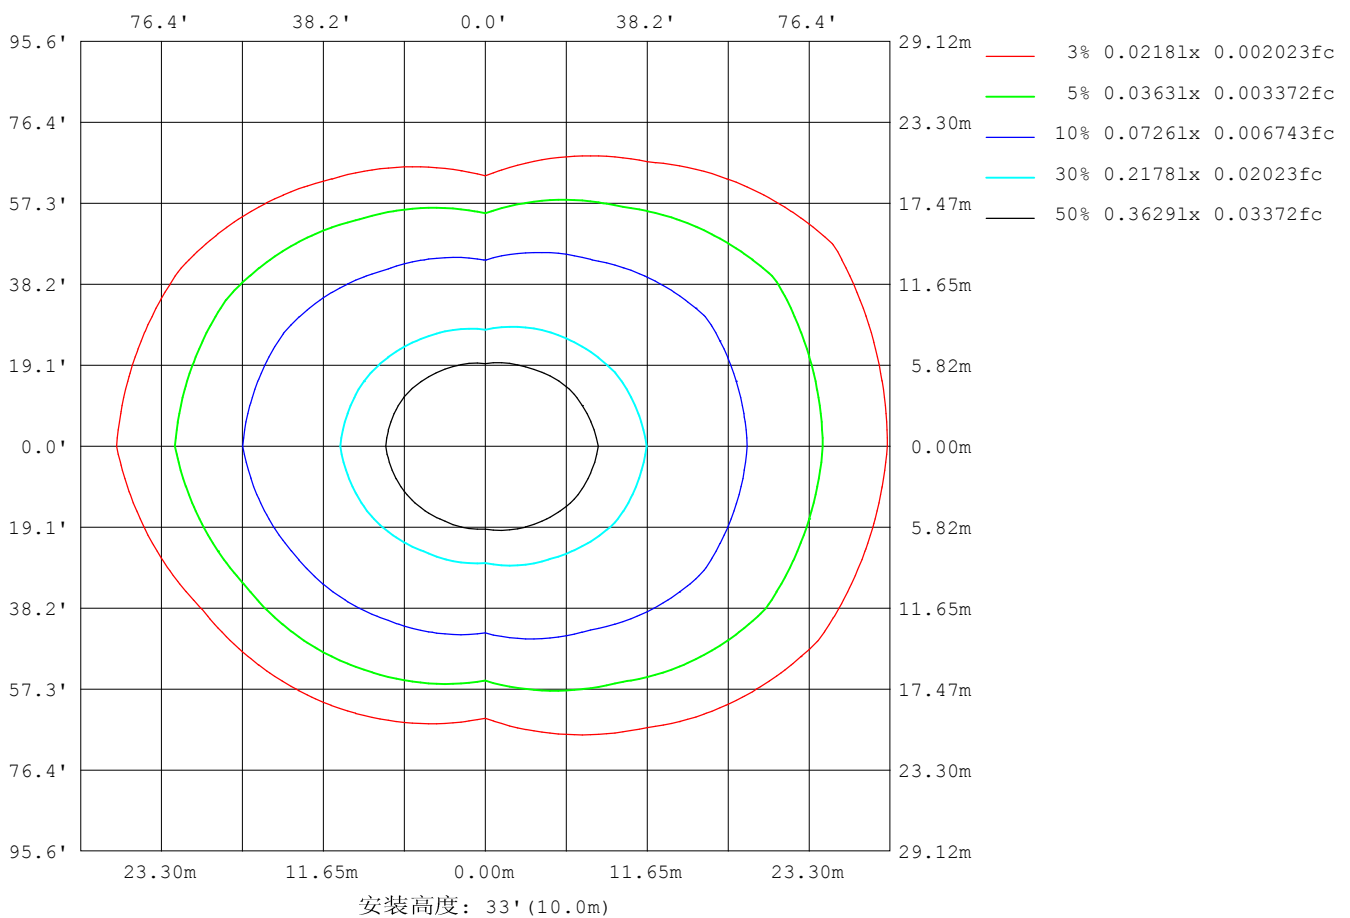

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: LPC
 测试日期: 2022-01-10

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
 环境湿度: 65.0%
 测试距离: 9.200米 [K=1.0000]
 备注:

平面照度曲线

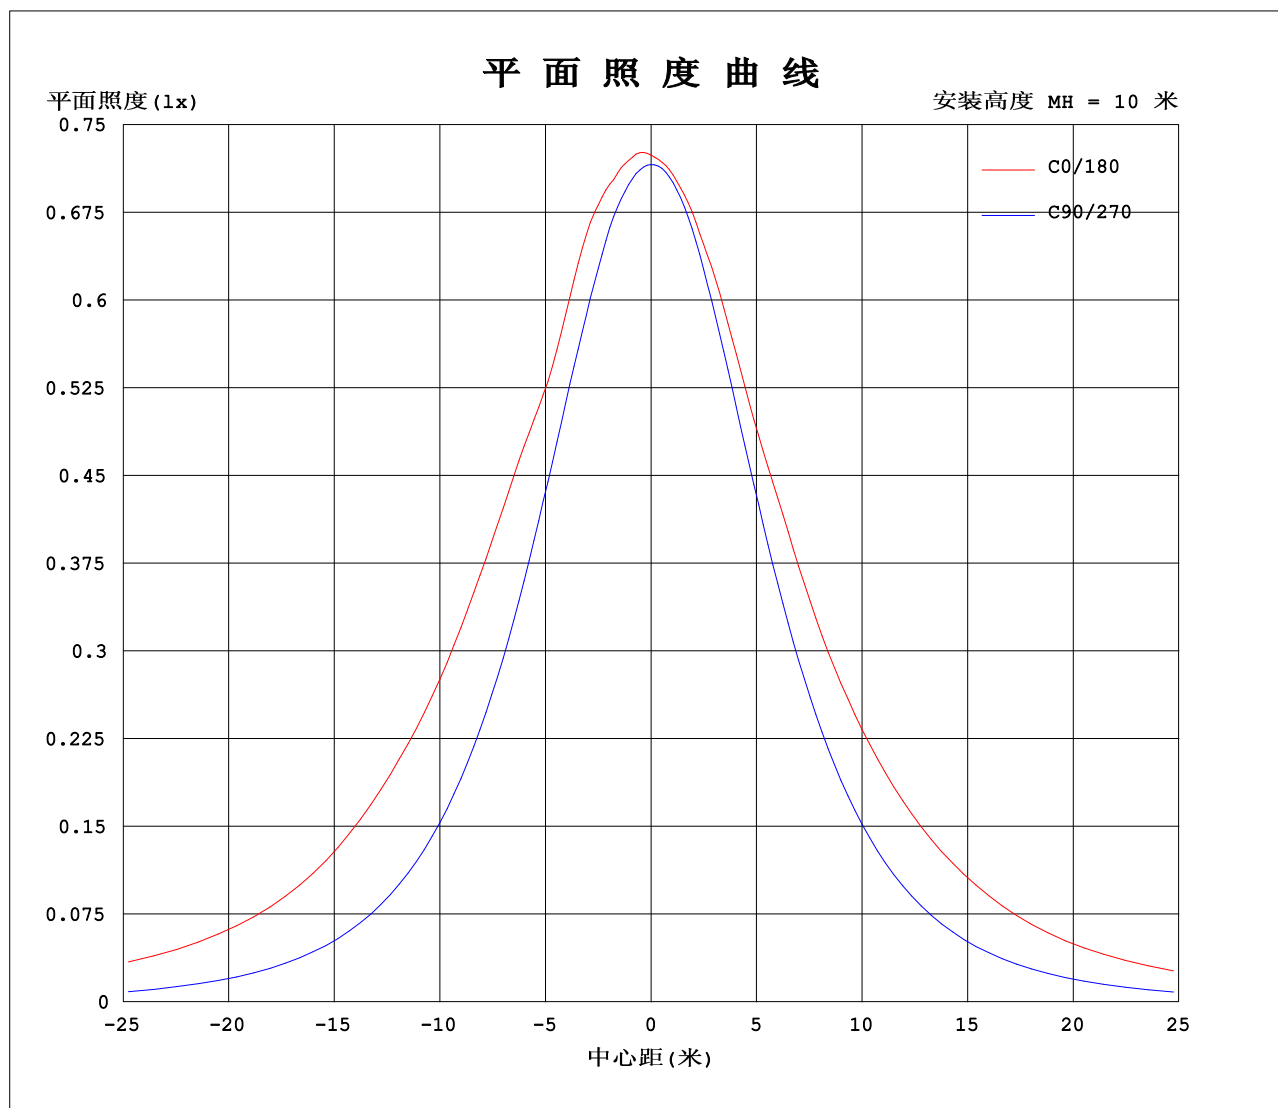

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2022-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

光强分布数据表格

| | | |
|--|----------------|------------------|
| 实测参数: U:24.00V I:0.3318A P:7.963W PF:1.000 实检光通:348.235x1 lm | | |
| 灯具名称: SF18-24V-2835-120-2200+5700-80-5700 | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 16.5*16.5MM | 灯具规格: | 测试编号: 2022011002 |
| 制造厂商: OLYMPIA | 发光口面: 1*0.0165 | 保护角: |

表--1

单位: cd

| C (DEG) γ (DEG) | 0 | 30 | 60 | 90 | 120 | 150 | 180 | 210 | 240 | 270 | 300 | 330 | | | | | | |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|--|--|--|--|--|--|
| 0 | 72.4 | 72.3 | 71.9 | 71.6 | 71.4 | 71.5 | 72.4 | 72.3 | 71.9 | 71.6 | 71.4 | 71.5 | | | | | | |
| 5 | 73.1 | 72.8 | 71.8 | 71.2 | 70.8 | 70.9 | 72.0 | 71.9 | 71.5 | 71.3 | 71.6 | 71.9 | | | | | | |
| 10 | 73.6 | 72.9 | 71.2 | 70.3 | 69.8 | 69.6 | 71.5 | 71.3 | 70.6 | 70.2 | 71.0 | 72.0 | | | | | | |
| 15 | 74.9 | 73.3 | 70.0 | 68.2 | 67.7 | 68.3 | 70.8 | 70.3 | 68.8 | 68.1 | 69.6 | 72.0 | | | | | | |
| 20 | 74.4 | 73.8 | 68.2 | 65.5 | 65.3 | 67.4 | 69.9 | 69.0 | 66.6 | 65.2 | 67.3 | 71.8 | | | | | | |
| 25 | 73.0 | 72.2 | 65.8 | 62.0 | 62.5 | 66.2 | 68.8 | 67.4 | 63.9 | 61.7 | 64.9 | 71.7 | | | | | | |
| 30 | 74.9 | 70.1 | 63.5 | 58.1 | 59.7 | 64.2 | 68.4 | 65.8 | 61.1 | 57.6 | 62.6 | 72.2 | | | | | | |
| 35 | 76.9 | 70.4 | 61.6 | 53.5 | 56.4 | 62.6 | 67.7 | 64.5 | 57.7 | 53.1 | 59.9 | 70.9 | | | | | | |
| 40 | 77.9 | 70.7 | 58.5 | 48.6 | 52.3 | 60.7 | 66.6 | 62.3 | 54.1 | 48.2 | 57.9 | 68.6 | | | | | | |
| 45 | 78.0 | 70.5 | 54.4 | 43.4 | 47.8 | 58.0 | 65.9 | 60.3 | 50.1 | 43.0 | 55.5 | 68.2 | | | | | | |
| 50 | 78.2 | 69.2 | 50.0 | 38.0 | 43.4 | 54.6 | 64.9 | 58.4 | 45.4 | 37.5 | 51.6 | 68.6 | | | | | | |
| 55 | 76.3 | 67.3 | 45.6 | 32.3 | 39.2 | 50.0 | 63.0 | 55.7 | 40.7 | 31.8 | 47.2 | 68.4 | | | | | | |
| 60 | 72.3 | 64.9 | 41.1 | 26.6 | 34.7 | 44.8 | 59.3 | 52.0 | 36.4 | 25.9 | 42.7 | 67.2 | | | | | | |
| 65 | 68.0 | 61.0 | 37.0 | 20.7 | 29.7 | 38.4 | 54.1 | 47.7 | 32.0 | 20.0 | 38.3 | 65.4 | | | | | | |
| 70 | 63.4 | 56.2 | 33.5 | 14.9 | 24.4 | 33.1 | 48.9 | 42.6 | 27.3 | 14.2 | 34.5 | 63.1 | | | | | | |
| 75 | 57.8 | 51.4 | 29.7 | 9.30 | 19.0 | 28.5 | 43.6 | 36.4 | 22.0 | 8.58 | 31.2 | 59.5 | | | | | | |
| 80 | 52.3 | 45.7 | 25.8 | 4.56 | 14.5 | 25.6 | 38.5 | 31.0 | 16.9 | 3.78 | 27.8 | 55.0 | | | | | | |
| 85 | 48.5 | 40.9 | 22.0 | 1.35 | 12.4 | 26.2 | 33.6 | 26.5 | 12.8 | 0.98 | 24.3 | 50.4 | | | | | | |
| 90 | 47.8 | 38.0 | 18.7 | 1.07 | 12.0 | 27.3 | 30.6 | 24.4 | 11.4 | 0.79 | 20.9 | 44.7 | | | | | | |
| 95 | 49.1 | 38.1 | 18.0 | 1.13 | 11.4 | 27.6 | 31.4 | 25.3 | 11.2 | 0.79 | 18.6 | 40.3 | | | | | | |
| 100 | 47.2 | 35.7 | 18.0 | 1.27 | 10.8 | 24.8 | 31.2 | 24.1 | 10.9 | 0.98 | 18.7 | 35.6 | | | | | | |
| 105 | 46.0 | 37.4 | 16.2 | 1.32 | 9.72 | 23.5 | 31.8 | 25.3 | 9.70 | 1.02 | 17.9 | 37.0 | | | | | | |
| 110 | 44.7 | 37.4 | 15.6 | 1.39 | 9.34 | 21.7 | 31.3 | 24.6 | 9.97 | 1.10 | 17.6 | 38.6 | | | | | | |
| 115 | 43.0 | 36.0 | 17.0 | 1.49 | 8.51 | 19.6 | 29.9 | 23.3 | 9.83 | 1.26 | 17.9 | 38.3 | | | | | | |
| 120 | 40.4 | 32.9 | 15.1 | 1.60 | 7.31 | 17.5 | 28.0 | 21.5 | 9.16 | 1.47 | 17.3 | 37.8 | | | | | | |
| 125 | 36.7 | 30.3 | 13.3 | 1.70 | 6.08 | 15.2 | 25.6 | 19.4 | 7.96 | 1.65 | 16.5 | 36.3 | | | | | | |
| 130 | 32.6 | 25.4 | 11.5 | 1.78 | 4.79 | 12.8 | 22.7 | 17.4 | 6.93 | 1.80 | 14.9 | 32.1 | | | | | | |
| 135 | 28.5 | 19.5 | 9.88 | 1.86 | 3.89 | 10.4 | 19.8 | 15.3 | 5.95 | 1.94 | 13.0 | 26.1 | | | | | | |
| 140 | 24.2 | 15.2 | 8.20 | 1.97 | 3.10 | 8.27 | 17.0 | 12.7 | 5.00 | 2.07 | 11.3 | 21.8 | | | | | | |
| 145 | 19.8 | 12.0 | 6.80 | 2.08 | 2.44 | 6.45 | 14.0 | 10.5 | 4.26 | 2.22 | 9.62 | 18.5 | | | | | | |
| 150 | 15.6 | 8.97 | 5.60 | 2.29 | 2.19 | 4.61 | 11.2 | 8.46 | 3.33 | 2.52 | 7.96 | 15.0 | | | | | | |
| 155 | 11.9 | 6.68 | 5.19 | 2.30 | 2.06 | 3.00 | 8.64 | 6.83 | 2.52 | 2.70 | 7.36 | 11.9 | | | | | | |
| 160 | 8.36 | 4.87 | 4.61 | 2.33 | 1.87 | 2.27 | 6.63 | 5.01 | 2.12 | 2.85 | 6.68 | 8.92 | | | | | | |
| 165 | 5.85 | 3.52 | 4.00 | 2.38 | 1.87 | 2.01 | 4.06 | 3.22 | 2.00 | 3.00 | 5.98 | 6.97 | | | | | | |
| 170 | 2.66 | 2.84 | 3.37 | 2.41 | 1.86 | 1.87 | 2.23 | 2.34 | 1.90 | 3.12 | 5.37 | 5.97 | | | | | | |
| 175 | 2.12 | 2.29 | 2.81 | 2.41 | 1.85 | 1.85 | 1.99 | 2.08 | 1.85 | 3.23 | 4.63 | 4.88 | | | | | | |
| 180 | 1.98 | 1.99 | 2.16 | 2.38 | 3.49 | 3.21 | 1.98 | 1.98 | 1.99 | 3.37 | 3.41 | 3.24 | | | | | | |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: LPC

测试日期: 2022-01-10

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269

环境湿度: 65.0%

测试距离: 9.200米 [K=1.0000]

备注:

Photometric Data Table [cd]

| G/C | 0.0 | 30.0 | 60.0 | 90.0 | 120.0 | 150.0 | 180.0 | 210.0 | 240.0 | 270.0 |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| 0.0 | 72.41 | 72.28 | 71.94 | 71.59 | 71.36 | 71.49 | 72.41 | 72.28 | 71.94 | 71.59 |
| 3.0 | 72.91 | 72.60 | 71.93 | 71.43 | 71.06 | 71.04 | 72.09 | 72.09 | 71.76 | 71.56 |
| 6.0 | 73.14 | 72.86 | 71.68 | 71.06 | 70.63 | 70.74 | 71.88 | 71.80 | 71.36 | 71.19 |
| 9.0 | 73.54 | 72.88 | 71.33 | 70.53 | 70.08 | 69.90 | 71.60 | 71.45 | 70.84 | 70.55 |
| 12.0 | 74.18 | 72.97 | 70.90 | 69.58 | 69.13 | 69.19 | 71.23 | 70.88 | 69.95 | 69.49 |
| 15.0 | 74.89 | 73.28 | 70.01 | 68.23 | 67.74 | 68.28 | 70.83 | 70.29 | 68.75 | 68.07 |
| 18.0 | 74.94 | 73.63 | 68.97 | 66.62 | 66.39 | 67.64 | 70.49 | 69.72 | 67.47 | 66.41 |
| 21.0 | 74.03 | 73.70 | 67.70 | 64.90 | 64.76 | 67.33 | 69.71 | 68.67 | 66.05 | 64.54 |
| 24.0 | 73.21 | 72.71 | 66.25 | 62.81 | 63.03 | 66.56 | 69.05 | 67.78 | 64.45 | 62.40 |
| 27.0 | 73.42 | 71.25 | 64.72 | 60.59 | 61.30 | 65.37 | 68.44 | 66.62 | 62.75 | 60.15 |
| 30.0 | 74.94 | 70.08 | 63.48 | 58.12 | 59.68 | 64.19 | 68.42 | 65.78 | 61.05 | 57.63 |
| 33.0 | 76.21 | 69.95 | 62.47 | 55.37 | 57.80 | 63.16 | 68.19 | 65.15 | 59.08 | 54.96 |
| 36.0 | 77.10 | 70.58 | 61.17 | 52.49 | 55.64 | 62.23 | 67.52 | 64.13 | 57.01 | 52.15 |
| 39.0 | 77.66 | 70.76 | 59.22 | 49.57 | 53.16 | 61.05 | 66.72 | 62.70 | 54.76 | 49.19 |
| 42.0 | 78.02 | 70.70 | 56.89 | 46.57 | 50.46 | 59.85 | 66.38 | 61.33 | 52.59 | 46.14 |
| 45.0 | 78.03 | 70.45 | 54.37 | 43.40 | 47.81 | 58.03 | 65.91 | 60.25 | 50.13 | 43.02 |
| 48.0 | 78.18 | 69.85 | 51.76 | 40.17 | 45.16 | 56.05 | 65.42 | 59.19 | 47.35 | 39.70 |
| 51.0 | 78.05 | 68.86 | 49.12 | 36.84 | 42.59 | 53.72 | 64.58 | 57.95 | 44.41 | 36.34 |
| 54.0 | 76.96 | 67.77 | 46.48 | 33.42 | 40.07 | 50.89 | 63.45 | 56.38 | 41.54 | 32.94 |
| 57.0 | 74.81 | 66.45 | 43.73 | 29.94 | 37.39 | 47.93 | 61.84 | 54.28 | 38.89 | 29.45 |
| 60.0 | 72.31 | 64.92 | 41.05 | 26.61 | 34.66 | 44.78 | 59.27 | 52.04 | 36.36 | 25.90 |
| 63.0 | 69.65 | 62.72 | 38.52 | 23.03 | 31.74 | 41.04 | 56.12 | 49.57 | 33.80 | 22.43 |
| 66.0 | 67.09 | 60.12 | 36.32 | 19.52 | 28.70 | 37.31 | 53.02 | 46.73 | 31.05 | 18.89 |
| 69.0 | 64.49 | 57.21 | 34.22 | 16.02 | 25.50 | 34.17 | 49.98 | 43.75 | 28.27 | 15.30 |
| 72.0 | 61.26 | 54.29 | 32.00 | 12.49 | 22.24 | 31.10 | 46.70 | 40.16 | 25.14 | 11.89 |
| 75.0 | 57.80 | 51.40 | 29.71 | 9.300 | 18.99 | 28.49 | 43.61 | 36.45 | 21.97 | 8.583 |
| 78.0 | 54.44 | 48.03 | 27.34 | 6.350 | 16.07 | 26.45 | 40.49 | 33.04 | 18.86 | 5.512 |
| 81.0 | 51.43 | 44.65 | 24.99 | 3.763 | 13.85 | 25.65 | 37.45 | 30.04 | 15.93 | 2.981 |
| 84.0 | 49.08 | 41.78 | 22.68 | 1.745 | 12.55 | 26.07 | 34.53 | 27.29 | 13.46 | 1.110 |
| 87.0 | 47.96 | 39.41 | 20.51 | 1.125 | 12.30 | 26.59 | 32.12 | 25.16 | 11.72 | 0.8348 |
| 90.0 | 47.80 | 38.02 | 18.70 | 1.071 | 11.98 | 27.29 | 30.60 | 24.37 | 11.41 | 0.7941 |
| 93.0 | 48.75 | 37.78 | 17.93 | 1.101 | 11.61 | 27.72 | 31.04 | 24.85 | 11.32 | 0.7941 |
| 96.0 | 49.07 | 38.34 | 17.98 | 1.136 | 11.23 | 27.46 | 31.50 | 25.48 | 11.14 | 0.7941 |
| 99.0 | 47.47 | 35.05 | 17.99 | 1.212 | 10.90 | 25.00 | 31.08 | 23.61 | 10.98 | 0.9240 |
| 102.0 | 46.73 | 36.96 | 16.63 | 1.297 | 10.16 | 24.22 | 31.46 | 24.79 | 9.987 | 1.005 |
| 105.0 | 46.04 | 37.42 | 16.16 | 1.322 | 9.725 | 23.49 | 31.84 | 25.25 | 9.700 | 1.015 |
| 108.0 | 45.33 | 37.48 | 16.56 | 1.357 | 9.565 | 22.47 | 31.64 | 25.10 | 9.766 | 1.075 |
| 111.0 | 44.37 | 37.26 | 15.95 | 1.397 | 9.253 | 21.21 | 31.10 | 24.39 | 10.01 | 1.140 |
| 114.0 | 43.44 | 36.54 | 16.63 | 1.463 | 8.732 | 20.02 | 30.26 | 23.55 | 9.915 | 1.236 |
| 117.0 | 42.15 | 34.89 | 16.62 | 1.528 | 8.044 | 18.73 | 29.22 | 22.57 | 9.633 | 1.332 |
| 120.0 | 40.43 | 32.95 | 15.09 | 1.598 | 7.310 | 17.52 | 27.95 | 21.46 | 9.155 | 1.472 |
| 123.0 | 38.12 | 31.35 | 14.08 | 1.669 | 6.582 | 16.11 | 26.55 | 20.26 | 8.541 | 1.573 |
| 126.0 | 35.91 | 29.71 | 12.85 | 1.719 | 5.793 | 14.72 | 25.03 | 19.05 | 7.748 | 1.683 |
| 129.0 | 33.45 | 26.54 | 11.84 | 1.769 | 4.998 | 13.31 | 23.30 | 17.85 | 7.159 | 1.769 |
| 132.0 | 30.95 | 22.87 | 10.77 | 1.814 | 4.385 | 11.80 | 21.47 | 16.58 | 6.517 | 1.864 |
| 135.0 | 28.52 | 19.49 | 9.883 | 1.860 | 3.892 | 10.37 | 19.78 | 15.27 | 5.953 | 1.940 |
| 138.0 | 25.85 | 17.03 | 8.834 | 1.925 | 3.404 | 9.088 | 18.15 | 13.79 | 5.355 | 2.015 |
| 141.0 | 23.27 | 14.48 | 7.939 | 1.985 | 2.952 | 7.881 | 16.46 | 12.23 | 4.843 | 2.095 |
| 144.0 | 20.64 | 12.60 | 7.069 | 2.051 | 2.565 | 6.732 | 14.46 | 10.89 | 4.446 | 2.201 |
| 147.0 | 18.07 | 10.78 | 6.320 | 2.172 | 2.277 | 5.786 | 12.82 | 9.603 | 3.888 | 2.356 |
| 150.0 | 15.60 | 8.971 | 5.601 | 2.287 | 2.186 | 4.606 | 11.19 | 8.456 | 3.335 | 2.523 |
| 153.0 | 13.32 | 7.534 | 5.313 | 2.297 | 2.141 | 3.635 | 9.608 | 7.461 | 2.828 | 2.603 |
| 156.0 | 11.22 | 6.274 | 5.112 | 2.297 | 2.011 | 2.747 | 8.203 | 6.526 | 2.371 | 2.709 |
| 159.0 | 9.009 | 5.169 | 4.741 | 2.312 | 1.875 | 2.316 | 6.942 | 5.411 | 2.136 | 2.804 |
| 162.0 | 7.404 | 4.210 | 4.369 | 2.347 | 1.870 | 2.135 | 5.879 | 4.186 | 2.085 | 2.924 |
| 165.0 | 5.851 | 3.522 | 3.997 | 2.382 | 1.870 | 2.010 | 4.064 | 3.224 | 2.005 | 3.005 |
| 168.0 | 2.990 | 3.110 | 3.595 | 2.402 | 1.870 | 1.895 | 2.481 | 2.535 | 1.940 | 3.096 |
| 171.0 | 2.475 | 2.692 | 3.258 | 2.407 | 1.865 | 1.864 | 2.145 | 2.272 | 1.884 | 3.156 |
| 174.0 | 2.162 | 2.322 | 2.921 | 2.407 | 1.855 | 1.849 | 2.020 | 2.106 | 1.854 | 3.201 |
| 177.0 | 2.091 | 2.236 | 2.584 | 2.407 | 2.113 | 1.850 | 1.985 | 2.026 | 1.855 | 3.287 |
| 180.0 | 1.975 | 1.985 | 2.161 | 2.382 | 3.488 | 3.211 | 1.975 | 1.980 | 1.985 | 3.367 |
| G/C | 300.0 | 330.0 | | | | | | | | |
| 0.0 | 71.36 | 71.49 | | | | | | | | |
| 3.0 | 71.61 | 71.81 | | | | | | | | |
| 6.0 | 71.48 | 71.96 | | | | | | | | |
| 9.0 | 71.16 | 72.04 | | | | | | | | |
| 12.0 | 70.55 | 72.00 | | | | | | | | |
| 15.0 | 69.61 | 71.99 | | | | | | | | |
| 18.0 | 68.28 | 72.00 | | | | | | | | |
| 21.0 | 66.89 | 71.78 | | | | | | | | |
| 24.0 | 65.42 | 71.68 | | | | | | | | |
| 27.0 | 63.95 | 71.91 | | | | | | | | |
| 30.0 | 62.59 | 72.22 | | | | | | | | |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: LPC

测试日期: 2022-01-10

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269

环境湿度: 65.0%

测试距离: 9.200米 [K=1.0000]

备注:

Photometric Data Table [cd]

| | | |
|-------|-------|-------|
| 33.0 | 61.00 | 71.82 |
| 36.0 | 59.47 | 70.37 |
| 39.0 | 58.26 | 68.95 |
| 42.0 | 57.16 | 68.11 |
| 45.0 | 55.46 | 68.18 |
| 48.0 | 53.21 | 68.58 |
| 51.0 | 50.74 | 68.59 |
| 54.0 | 48.10 | 68.47 |
| 57.0 | 45.35 | 68.08 |
| 60.0 | 42.71 | 67.24 |
| 63.0 | 40.03 | 66.24 |
| 66.0 | 37.45 | 64.94 |
| 69.0 | 35.15 | 63.59 |
| 72.0 | 33.18 | 61.85 |
| 75.0 | 31.21 | 59.50 |
| 78.0 | 29.24 | 56.83 |
| 81.0 | 27.13 | 54.12 |
| 84.0 | 25.01 | 51.37 |
| 87.0 | 22.89 | 48.08 |
| 90.0 | 20.93 | 44.74 |
| 93.0 | 19.24 | 41.86 |
| 96.0 | 18.50 | 39.64 |
| 99.0 | 18.76 | 35.61 |
| 102.0 | 17.77 | 36.20 |
| 105.0 | 17.90 | 37.03 |
| 108.0 | 17.54 | 37.93 |
| 111.0 | 17.44 | 38.71 |
| 114.0 | 17.24 | 38.32 |
| 117.0 | 17.68 | 38.06 |
| 120.0 | 17.26 | 37.78 |
| 123.0 | 17.08 | 37.01 |
| 126.0 | 16.18 | 35.88 |
| 129.0 | 15.22 | 33.22 |
| 132.0 | 14.10 | 29.48 |
| 135.0 | 12.99 | 26.13 |
| 138.0 | 12.01 | 23.81 |
| 141.0 | 10.95 | 20.77 |
| 144.0 | 9.943 | 19.05 |
| 147.0 | 8.892 | 17.24 |
| 150.0 | 7.958 | 14.98 |
| 153.0 | 7.488 | 13.16 |
| 156.0 | 7.185 | 11.25 |
| 159.0 | 6.803 | 9.392 |
| 162.0 | 6.426 | 8.026 |
| 165.0 | 5.984 | 6.973 |
| 168.0 | 5.627 | 6.485 |
| 171.0 | 5.235 | 5.756 |
| 174.0 | 4.768 | 5.113 |
| 177.0 | 4.285 | 4.390 |
| 180.0 | 3.412 | 3.237 |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: LPC

测试日期: 2022-01-10

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度


测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269

环境湿度: 65.0%

测试距离: 9.200米 [K=1.0000]


备注:

I (cd)

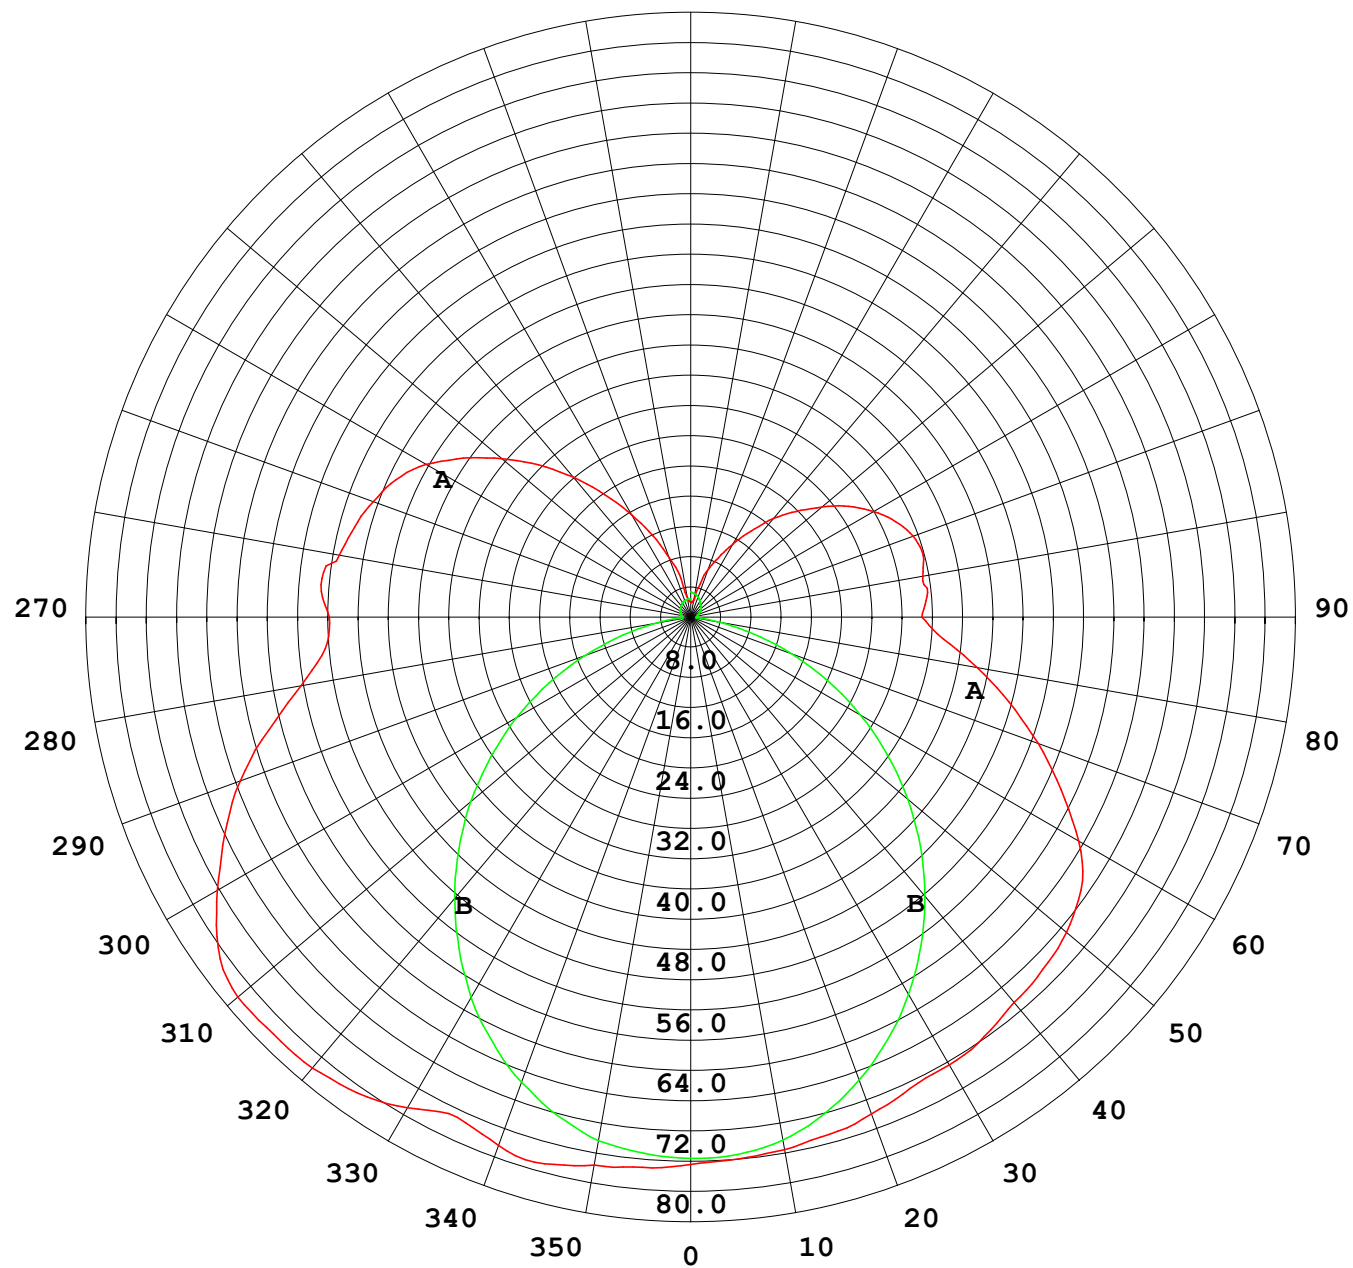

1000 lm

$\kappa = 1$

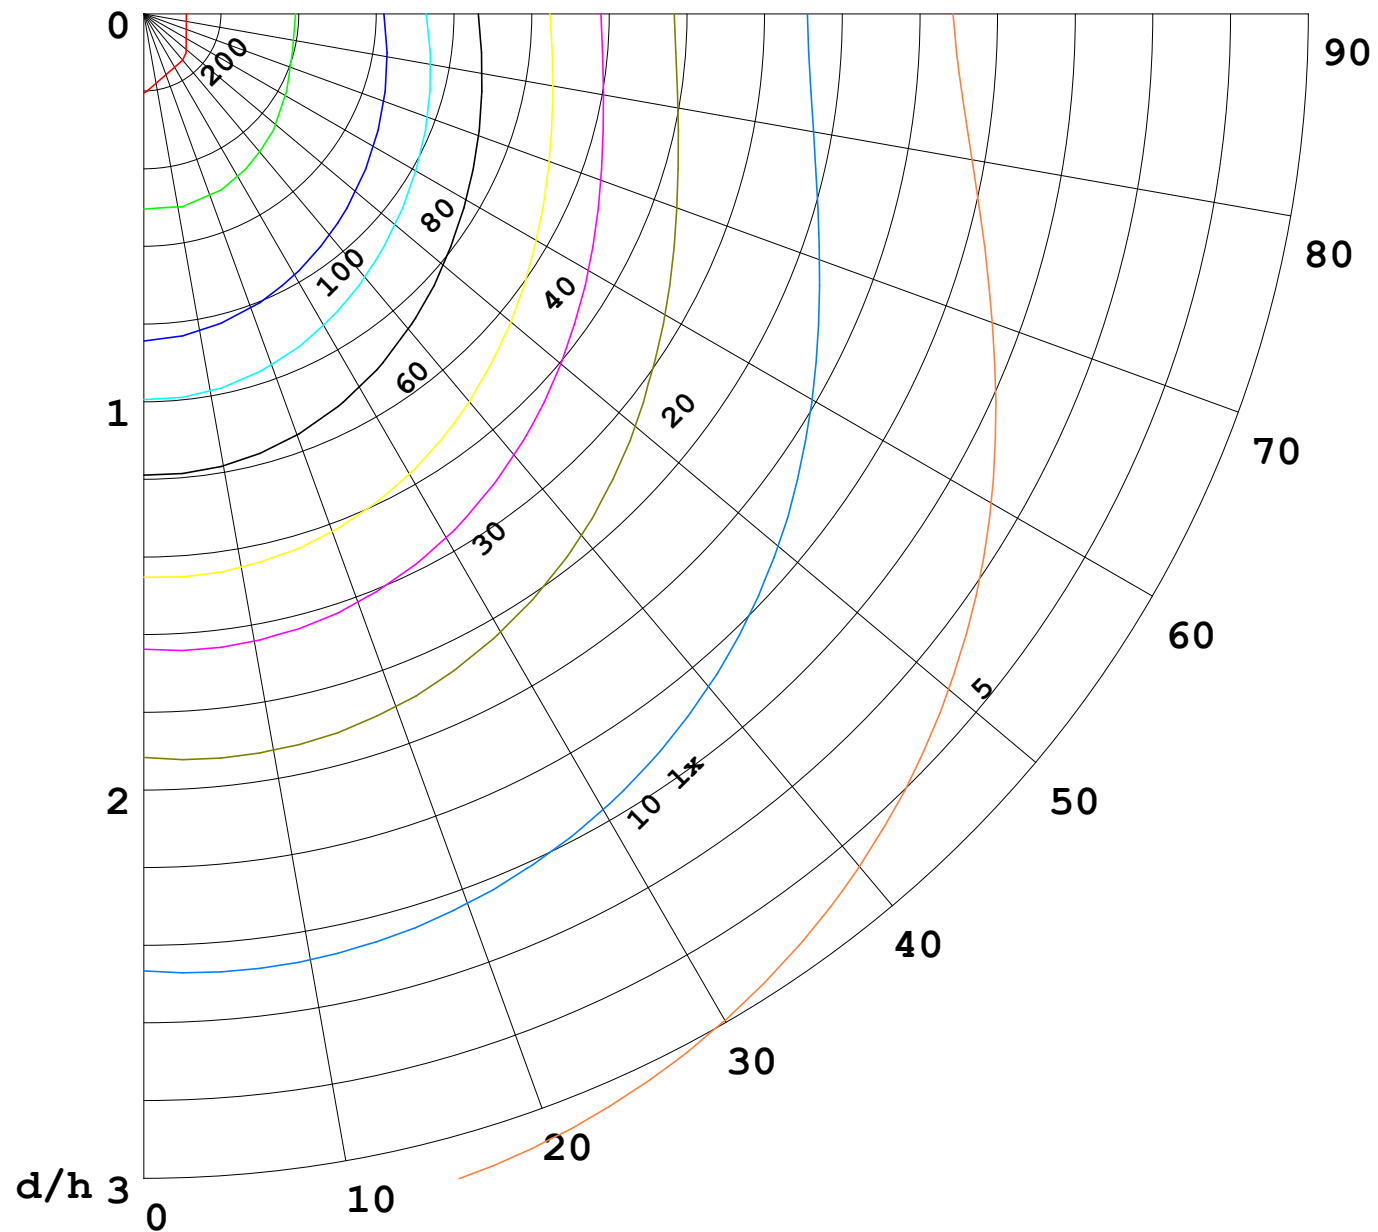

F = 5000 lm
 K = 0.7
 Hcc = 0.0 m
 Hfc = 0.0 m
 Eave = 100 lx

| | Pcc | Pw | Pfc |
|---|-----|----|-----|
| — | 70 | 50 | 30 |
| — | 50 | 30 | 20 |

