
















## 灯具等光强曲线

实测参数: U:24.00V I:0.3206A P:7.694W PF:1.000 Freq:50.00Hz 实检光通:122.868x1 lm		
灯具名称: SF21-24V-5050-70-DMX4-RGBW(2700)-W	灯具类型: 硅胶	灯具重量:
灯具规格:	外型尺寸: 28mm*11.5mm	测试编号: 2021121605
制造厂商: OLYMPIA	发光口面: 1*0.016	遮光角:

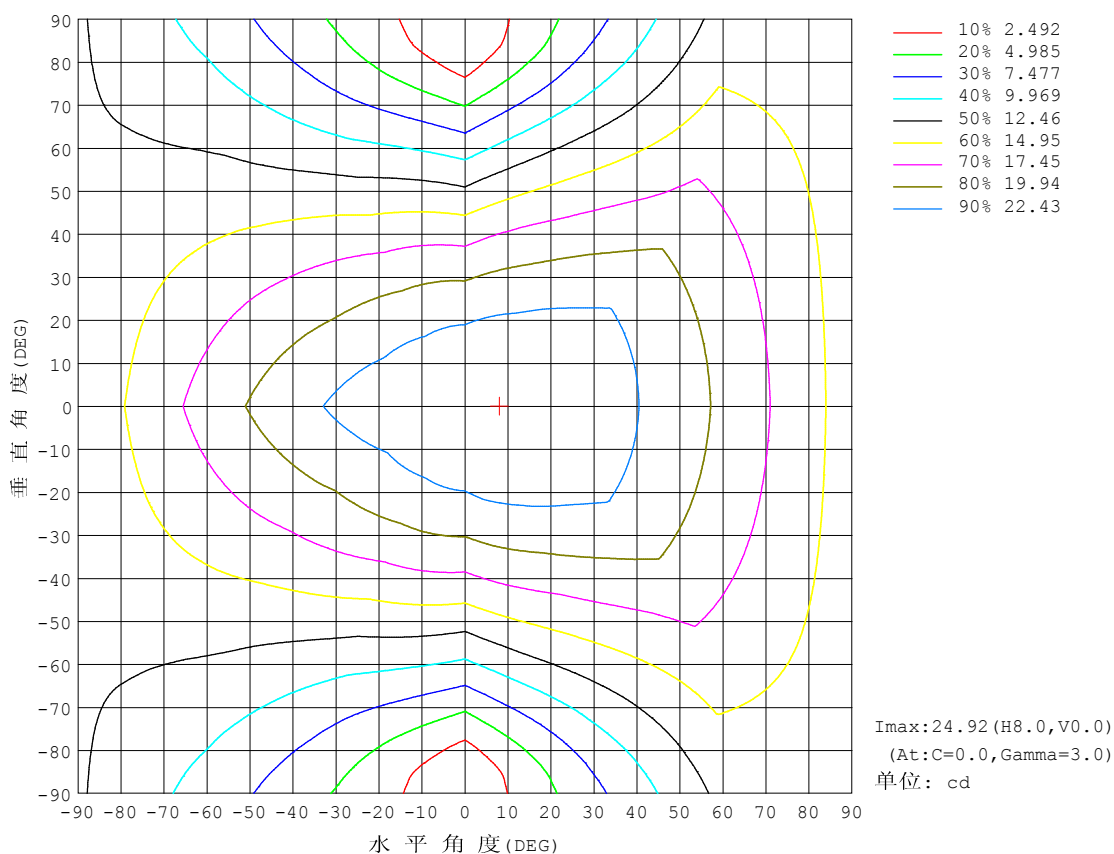

C角度范围: 0度 - 360度  
C角度间隔: 30.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: LPC  
测试日期: 2021-12-16

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方(EVERFINE)GO-2000B\_V1系统 V2.0.362  
环境湿度: 65.0%  
测试距离: 9.200米 [K=1.0000]  
备注:
















## Photometric Data Table [cd]

33.0	20.84	23.27
36.0	20.21	22.91
39.0	19.56	22.56
42.0	18.87	22.18
45.0	18.13	21.78
48.0	17.33	21.33
51.0	16.54	20.84
54.0	15.74	20.32
57.0	14.92	19.76
60.0	14.09	19.16
63.0	13.25	18.60
66.0	12.40	18.07
69.0	11.56	17.50
72.0	10.72	16.93
75.0	9.933	16.33
78.0	9.195	15.74
81.0	8.476	15.15
84.0	7.813	14.58
87.0	7.240	14.00
90.0	6.743	13.44
93.0	6.341	12.89
96.0	5.984	12.33
99.0	5.658	11.23
102.0	5.345	10.45
105.0	4.713	10.07
108.0	4.478	9.641
111.0	4.356	9.208
114.0	4.293	8.590
117.0	3.995	8.198
120.0	3.777	7.811
123.0	3.523	7.449
126.0	3.321	7.107
129.0	3.246	6.741
132.0	3.090	6.138
135.0	2.909	5.570
138.0	2.688	4.722
141.0	2.502	4.463
144.0	2.362	3.835
147.0	2.211	3.584
150.0	2.065	3.227
153.0	2.015	2.986
156.0	2.061	2.634
159.0	2.087	2.383
162.0	2.096	2.112
165.0	2.106	1.900
168.0	2.076	1.915
171.0	2.045	1.907
174.0	1.995	1.903
177.0	1.965	1.890
180.0	1.593	1.312

C角度范围: 0度 - 360度  
C角度间隔: 30.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: LPC  
测试日期: 2021-12-16

γ角度范围: 0度 - 180度  
 γ角度间隔: 1.0度  
 测试系统: 远方(EVERFINE)GO-2000B\_V1系统 V2.0.362  
 环境湿度: 65.0%  
 测试距离: 9.200米 [K=1.0000]  
 备注:


I (cd)

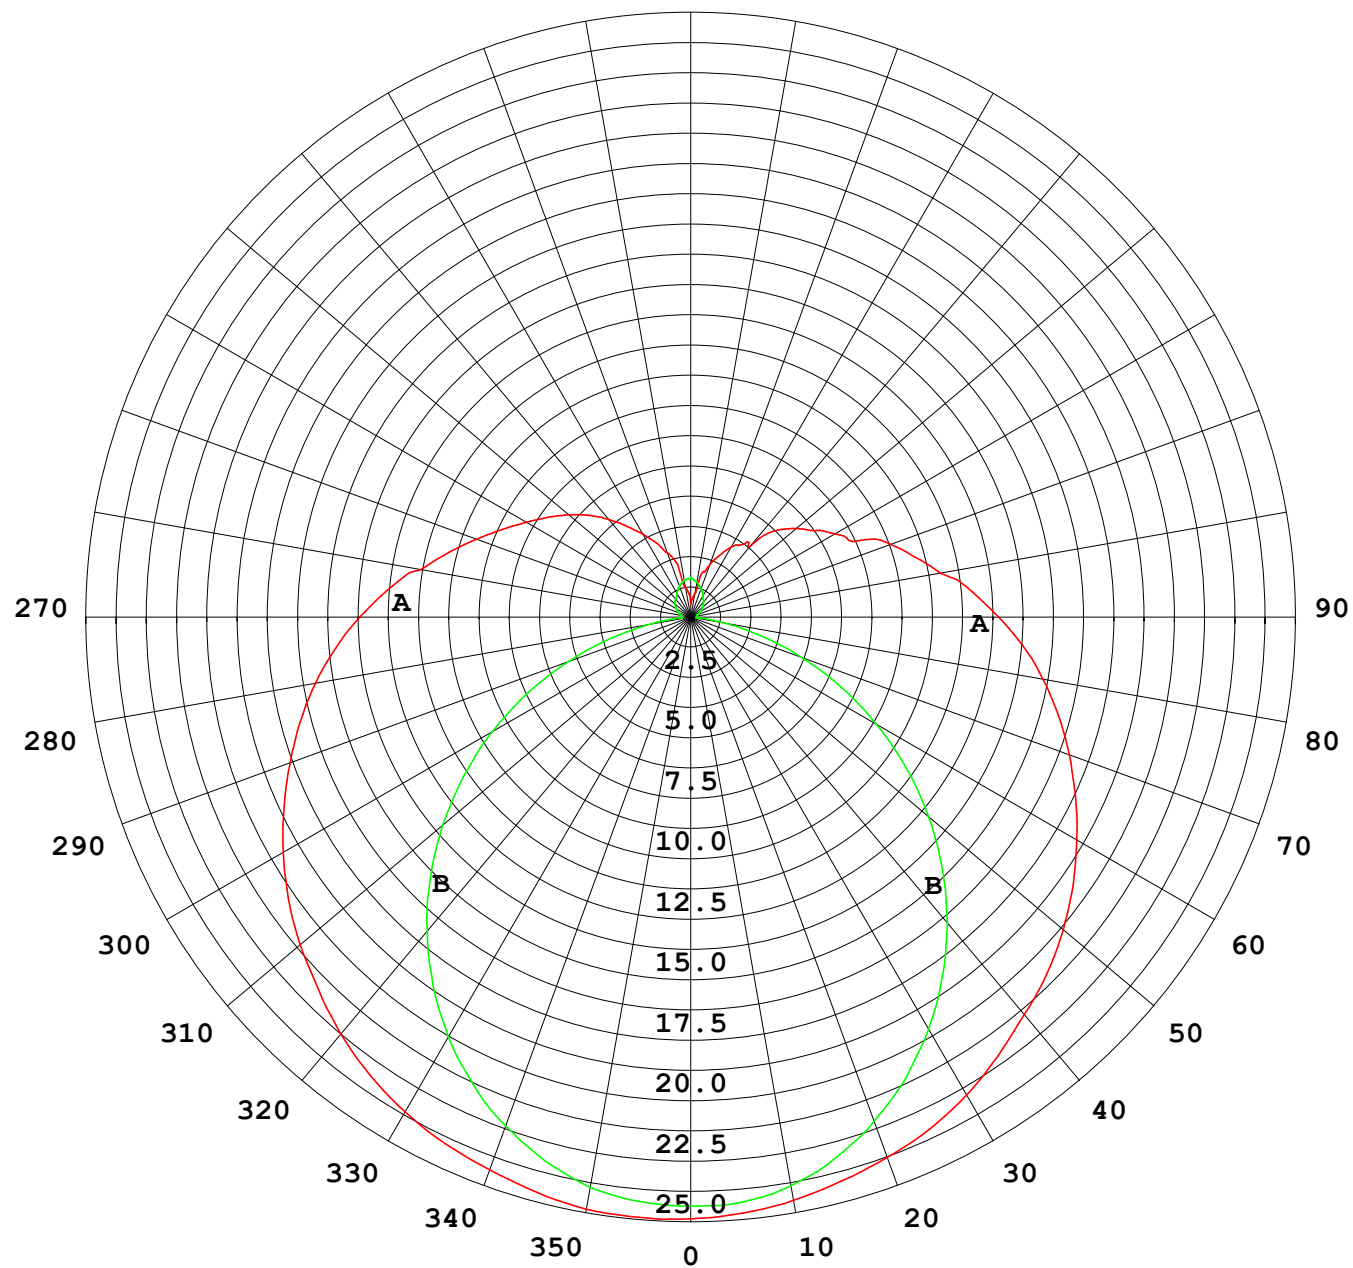



1000 lm

$\kappa = 1$

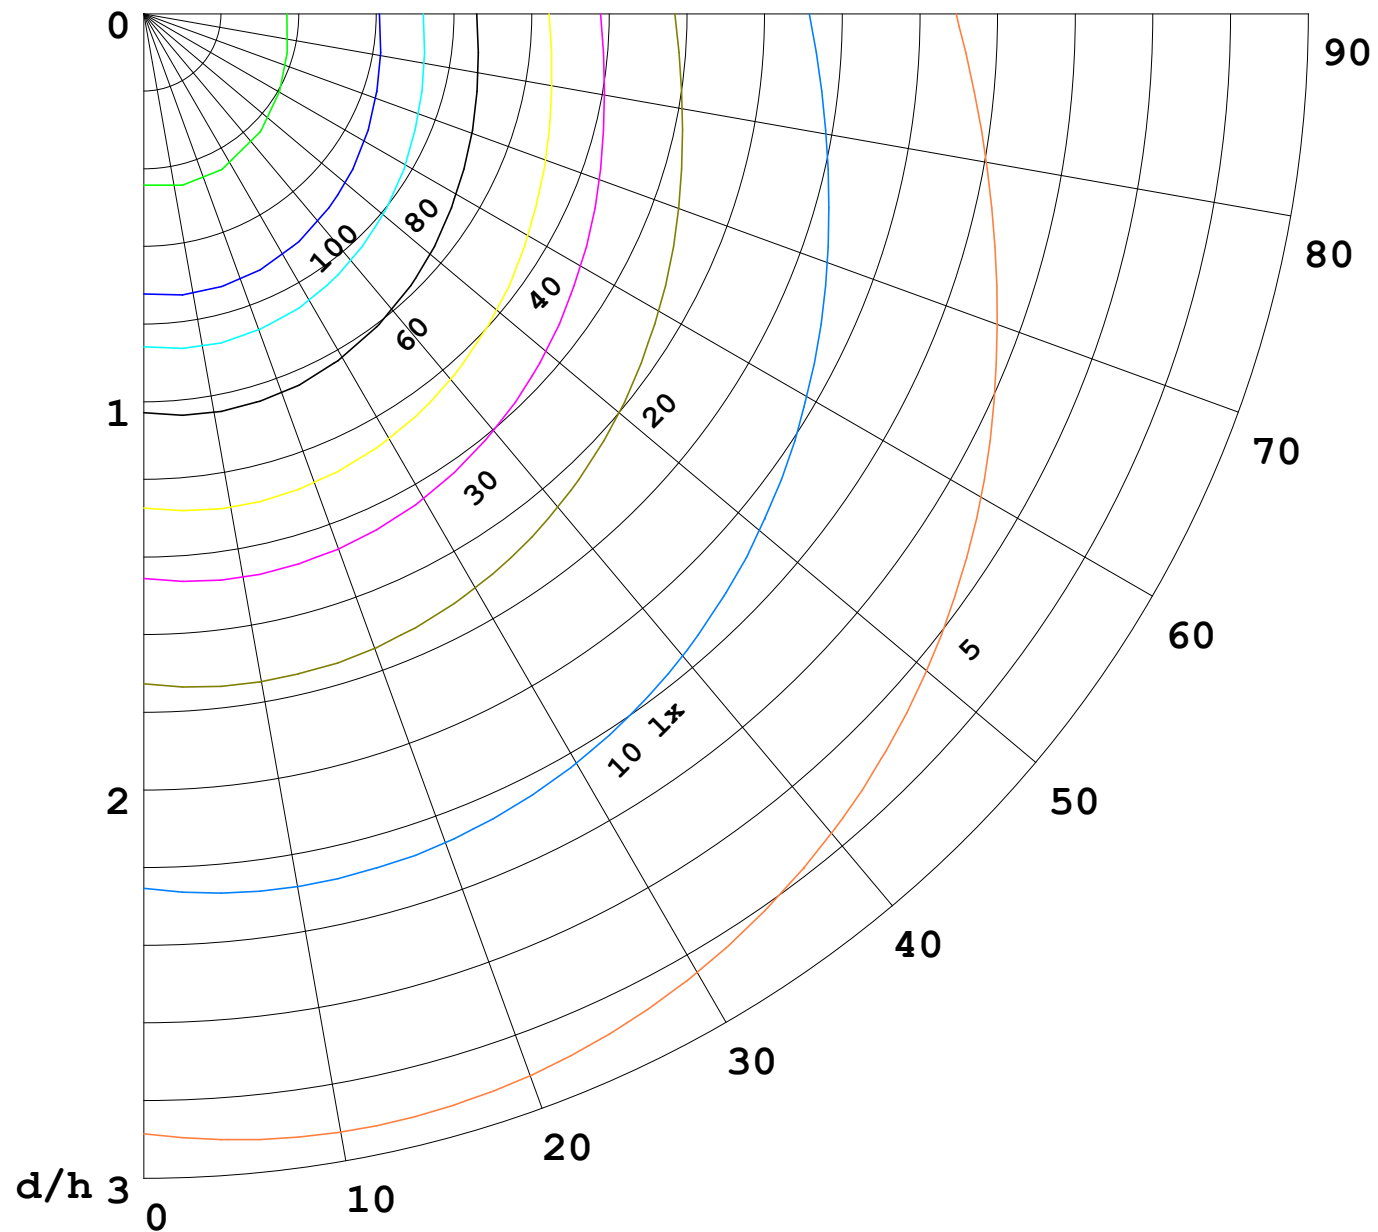

F = 5000 lm  
 K = 0.7  
 Hcc = 0.0 m  
 Hfc = 0.0 m  
 Eave = 100 lx

	Pcc	Pw	Pfc
—	70	50	30
—	50	30	20

