


平面照度曲线

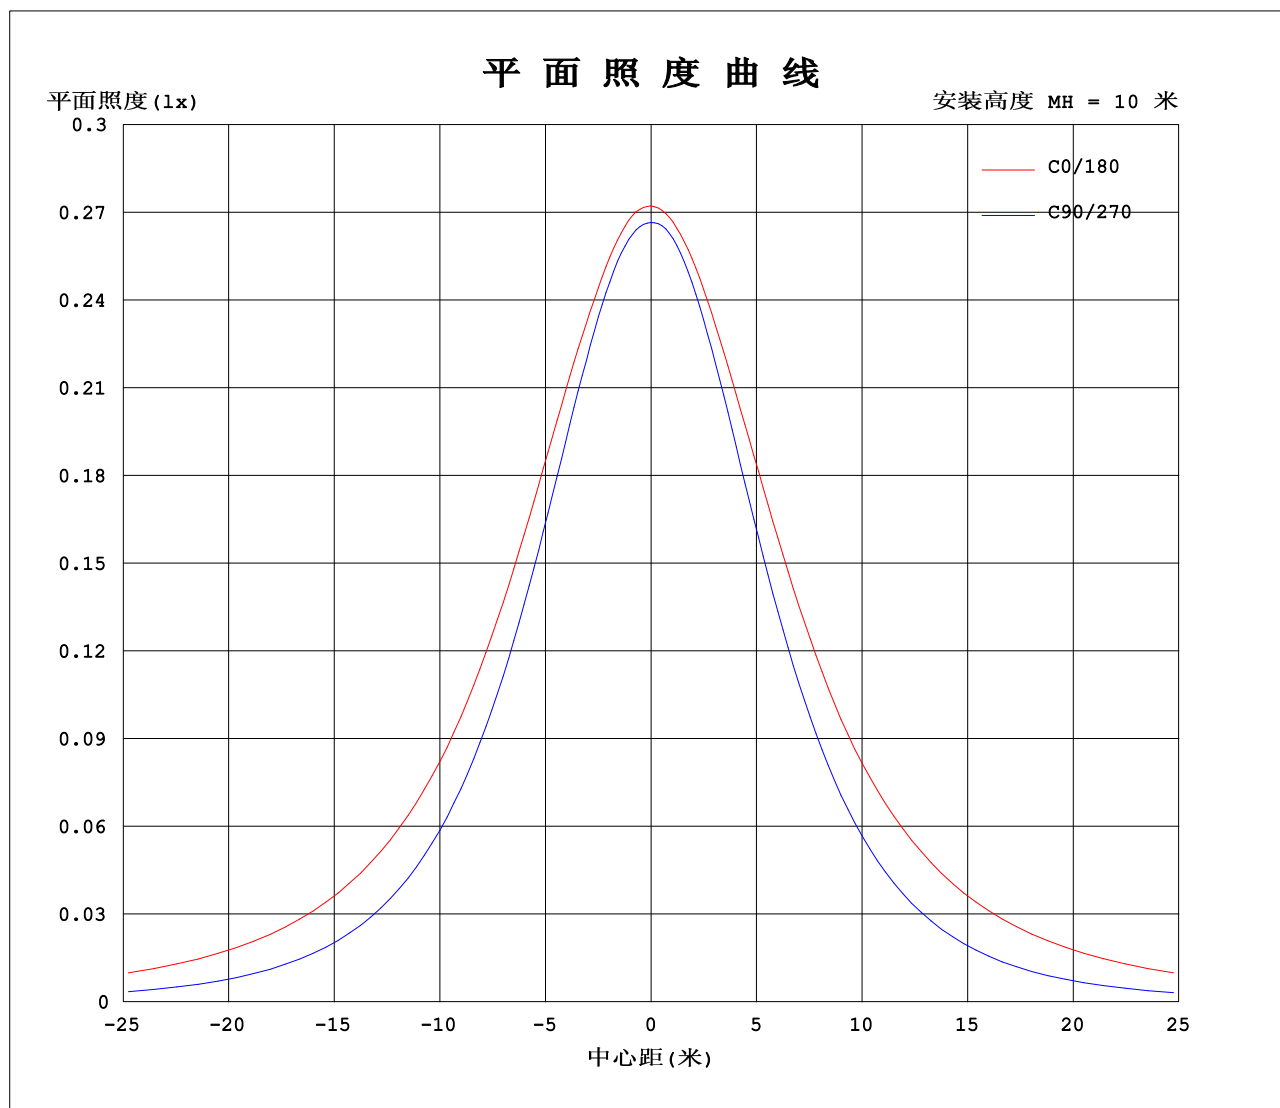

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LPC
测试日期: 2021-12-17

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

Photometric Data Table [cd]

G/C	0.0	30.0	60.0	90.0	120.0	150.0	180.0	210.0	240.0	270.0
0.0	27.22	26.97	26.75	26.66	26.69	26.64	27.22	26.97	26.75	26.66
3.0	27.22	27.07	26.81	26.63	26.57	26.46	27.18	26.80	26.65	26.66
6.0	27.18	27.09	26.80	26.51	26.36	26.24	27.11	26.58	26.43	26.53
9.0	27.04	27.09	26.74	26.29	26.08	25.98	26.98	26.34	26.15	26.26
12.0	26.87	27.03	26.51	25.92	25.69	25.71	26.81	26.04	25.76	25.85
15.0	26.67	26.90	26.19	25.48	25.24	25.41	26.61	25.73	25.28	25.35
18.0	26.49	26.73	25.79	24.92	24.73	25.06	26.37	25.40	24.73	24.76
21.0	26.31	26.47	25.31	24.29	24.16	24.64	26.13	24.99	24.15	24.07
24.0	26.07	26.13	24.77	23.57	23.54	24.16	25.90	24.53	23.50	23.28
27.0	25.80	25.77	24.16	22.75	22.87	23.63	25.64	24.02	22.81	22.45
30.0	25.48	25.42	23.48	21.91	22.14	23.06	25.32	23.46	22.09	21.53
33.0	25.12	25.06	22.77	20.95	21.36	22.44	24.96	22.85	21.31	20.54
36.0	24.72	24.67	22.03	19.93	20.52	21.85	24.55	22.22	20.48	19.51
39.0	24.27	24.24	21.23	18.89	19.64	21.27	24.07	21.62	19.61	18.39
42.0	23.77	23.77	20.42	17.78	18.72	20.66	23.57	21.01	18.71	17.24
45.0	23.27	23.25	19.57	16.61	17.76	20.01	23.11	20.39	17.75	16.07
48.0	22.78	22.70	18.70	15.44	16.79	19.36	22.67	19.73	16.80	14.83
51.0	22.26	22.10	17.86	14.19	15.83	18.66	22.20	19.05	15.81	13.57
54.0	21.72	21.47	16.95	12.91	14.85	17.96	21.70	18.35	14.83	12.29
57.0	21.15	20.81	16.07	11.63	13.88	17.27	21.16	17.64	13.87	10.98
60.0	20.56	20.17	15.13	10.34	12.89	16.61	20.58	16.95	12.89	9.638
63.0	19.96	19.53	14.20	9.002	11.92	15.92	20.02	16.26	11.92	8.337
66.0	19.38	18.89	13.25	7.656	10.97	15.26	19.45	15.60	10.96	7.005
69.0	18.76	18.22	12.31	6.359	10.04	14.61	18.85	14.92	10.03	5.668
72.0	18.15	17.54	11.41	5.022	9.195	13.95	18.26	14.28	9.159	4.397
75.0	17.53	16.89	10.55	3.796	8.391	13.32	17.67	13.62	8.345	3.185
78.0	16.90	16.25	9.708	2.600	7.657	12.69	17.07	12.97	7.611	2.064
81.0	16.25	15.61	8.948	1.561	7.008	12.01	16.47	12.33	6.938	1.133
84.0	15.58	14.98	8.255	0.7517	6.405	11.39	15.83	11.69	6.340	0.4091
87.0	14.87	14.35	7.661	0.3769	5.852	10.76	15.18	11.04	5.778	0.2516
90.0	14.17	13.71	7.138	0.3669	5.384	10.16	14.50	10.44	5.301	0.2436
93.0	13.46	13.11	6.706	0.3780	4.997	9.603	13.83	9.862	4.904	0.2470
96.0	12.76	12.49	6.304	0.3870	4.685	9.100	13.17	9.324	4.572	0.2504
99.0	12.10	11.22	5.957	0.4021	4.414	8.770	12.29	8.146	4.281	0.2539
102.0	11.23	10.47	5.595	0.4726	3.832	7.618	11.65	7.851	3.771	0.2713
105.0	10.62	10.06	4.971	0.4976	3.177	7.311	11.05	7.479	3.247	0.2914
108.0	10.03	9.633	4.880	0.5178	3.146	6.827	10.42	6.928	3.110	0.2935
111.0	9.476	9.196	4.624	0.5429	2.981	6.311	9.506	6.600	2.894	0.2966
114.0	8.978	8.744	4.478	0.5731	2.865	5.934	8.970	6.308	2.739	0.3115
117.0	8.510	8.321	4.313	0.6183	2.764	5.623	8.552	5.937	2.683	0.3618
120.0	8.083	7.945	3.662	0.6535	2.669	5.352	8.115	5.565	2.593	0.4370
123.0	7.661	7.583	3.148	0.7087	2.508	5.090	7.693	5.198	2.447	0.4823
126.0	7.199	7.246	2.870	0.7389	2.408	4.789	7.291	4.886	2.327	0.5326
129.0	6.656	6.837	2.845	0.7791	2.292	4.442	6.879	4.605	2.146	0.5929
132.0	6.058	5.933	2.845	0.8092	2.161	4.171	6.484	4.288	2.095	0.6531
135.0	5.515	4.852	2.729	0.8494	2.056	3.894	5.773	3.871	1.980	0.6934
138.0	5.042	4.129	2.614	0.8796	1.930	3.537	5.427	3.600	1.829	0.7588
141.0	4.720	3.577	2.473	0.8998	1.830	3.186	5.104	3.363	1.769	0.8289
144.0	4.479	3.407	2.332	0.9248	1.699	2.984	4.526	3.132	1.718	0.8543
147.0	4.198	3.241	2.187	0.9552	1.589	2.653	4.086	2.815	1.588	0.9145
150.0	3.876	2.964	2.071	1.046	1.373	2.437	3.795	2.534	1.411	0.9848
153.0	3.544	2.693	2.005	1.116	1.182	2.201	3.768	2.347	1.195	1.020
156.0	3.198	2.447	2.050	1.176	1.051	2.005	3.482	2.186	1.020	1.085
159.0	2.850	2.160	2.056	1.231	0.8451	1.743	3.145	1.951	0.9087	1.116
162.0	2.584	1.919	2.036	1.292	0.6437	1.391	2.838	1.599	0.7336	1.181
165.0	2.243	1.787	2.025	1.342	0.6404	1.115	2.436	1.312	0.7075	1.226
168.0	1.252	1.740	1.970	1.372	0.6283	0.7877	1.386	1.076	0.6814	1.266
171.0	1.111	1.708	1.915	1.397	0.6197	0.7295	1.211	0.6394	0.6553	1.307
174.0	0.9455	1.593	1.840	1.422	0.6111	0.6713	1.014	0.6363	0.6292	1.357
177.0	0.8046	1.513	1.769	1.427	0.6031	0.6131	0.8691	0.6332	0.6031	1.427
180.0	0.6332	0.6232	1.352	1.422	1.407	1.186	0.6332	0.6433	1.086	1.493
G/C	300.0	330.0								
0.0	26.69	26.64								
3.0	26.69	26.77								
6.0	26.67	26.85								
9.0	26.54	26.85								
12.0	26.29	26.83								
15.0	25.95	26.70								
18.0	25.52	26.50								
21.0	25.01	26.26								
24.0	24.44	25.99								
27.0	23.82	25.68								
30.0	23.19	25.33								

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: LPC

测试日期: 2021-12-17

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.362

环境湿度: 65.0%


测试距离: 9.200米 [K=1.0000]

备注:

33.0	22.51	24.96
36.0	21.82	24.60
39.0	21.09	24.19
42.0	20.32	23.74
45.0	19.50	23.25
48.0	18.65	22.73
51.0	17.79	22.17
54.0	16.91	21.57
57.0	16.00	20.92
60.0	15.07	20.26
63.0	14.14	19.65
66.0	13.19	19.01
69.0	12.24	18.36
72.0	11.33	17.70
75.0	10.47	17.05
78.0	9.631	16.42
81.0	8.853	15.79
84.0	8.154	15.16
87.0	7.537	14.53
90.0	7.014	13.92
93.0	6.572	13.31
96.0	6.165	12.72
99.0	5.814	11.42
102.0	5.490	10.73
105.0	4.854	10.32
108.0	4.719	9.852
111.0	4.499	9.384
114.0	4.345	8.927
117.0	4.164	8.490
120.0	3.844	8.093
123.0	3.728	7.731
126.0	3.497	7.399
129.0	3.326	6.998
132.0	3.170	6.344
135.0	2.964	5.544
138.0	2.723	4.870
141.0	2.532	4.209
144.0	2.367	4.001
147.0	2.231	3.675
150.0	2.075	3.328
153.0	1.995	2.986
156.0	1.995	2.679
159.0	1.995	2.428
162.0	1.995	2.102
165.0	1.990	1.920
168.0	1.914	1.879
171.0	1.819	1.856
174.0	1.759	1.815
177.0	1.734	1.694
180.0	1.447	1.206


Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.362
环境湿度:65.0%
测试距离:9.200米 [K=1.0000]
备注:

I (cd)

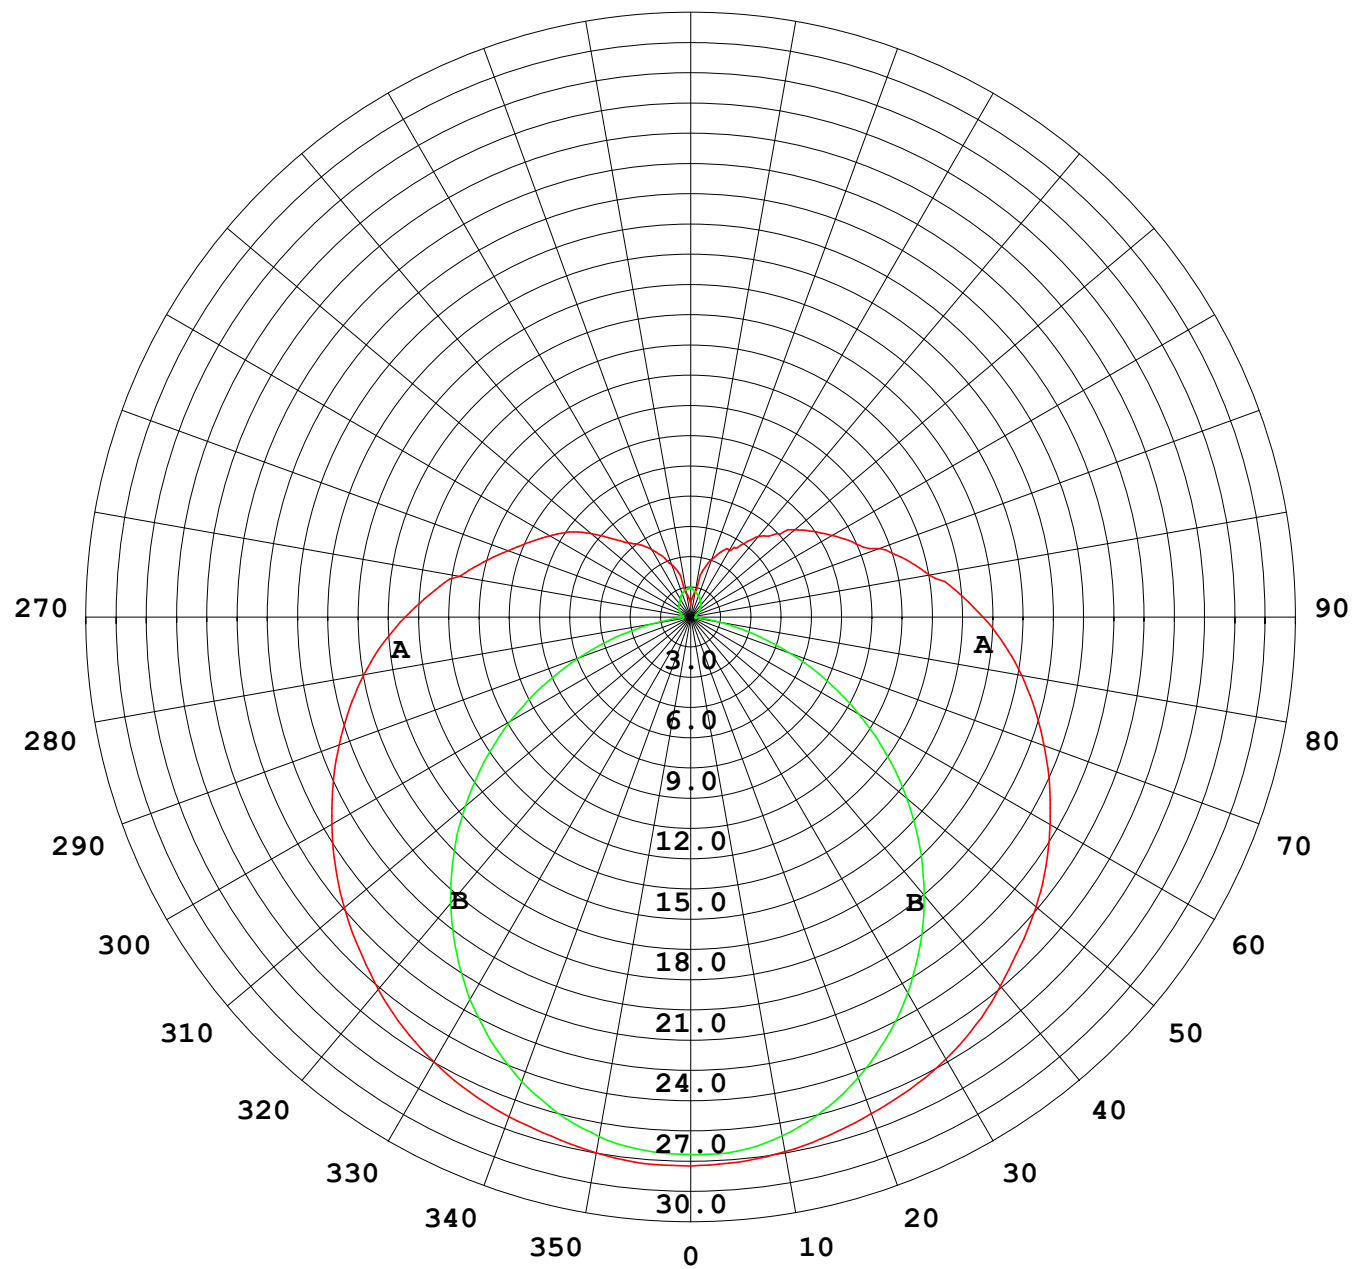

1000 lm

$\kappa = 1$

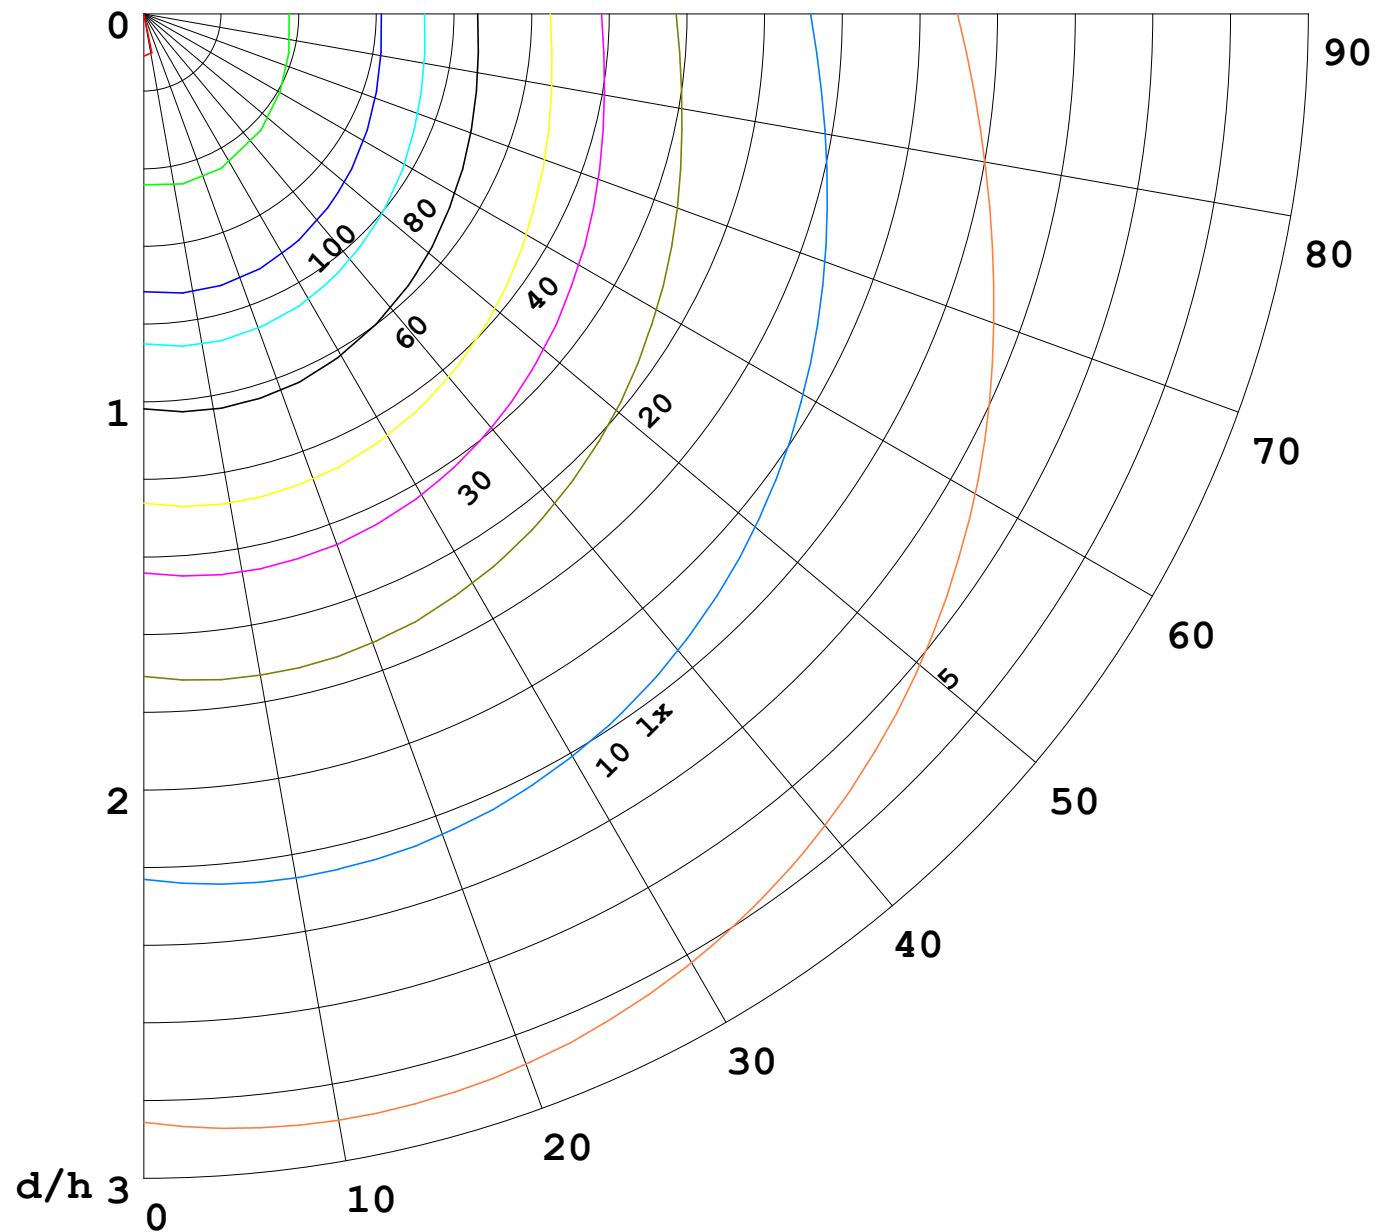

F = 5000 lm
 K = 0.7
 Hcc = 0.0 m
 Hfc = 0.0 m
 Eave = 100 lx

	Pcc	Pw	Pfc
—	70	50	30
—	50	30	20

