
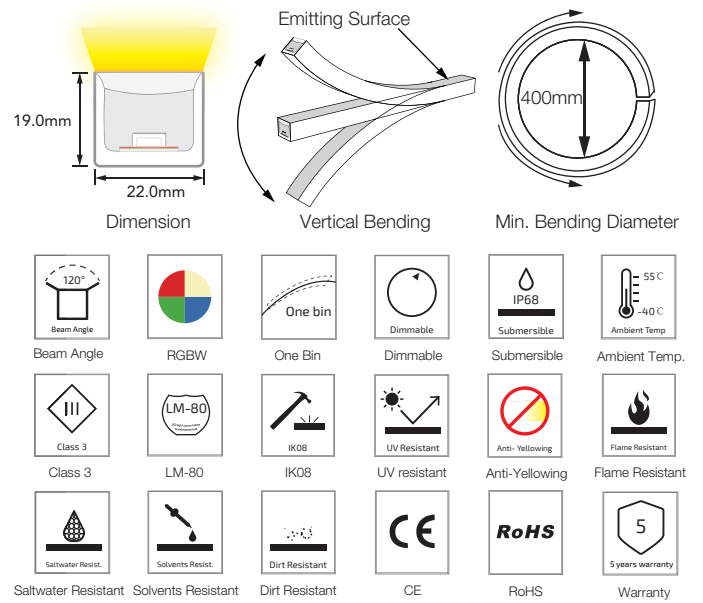


SF34 Multi Color RGBW Silicone LED Linear Flex

SF34-24V-5050-72-RGBW

Specification

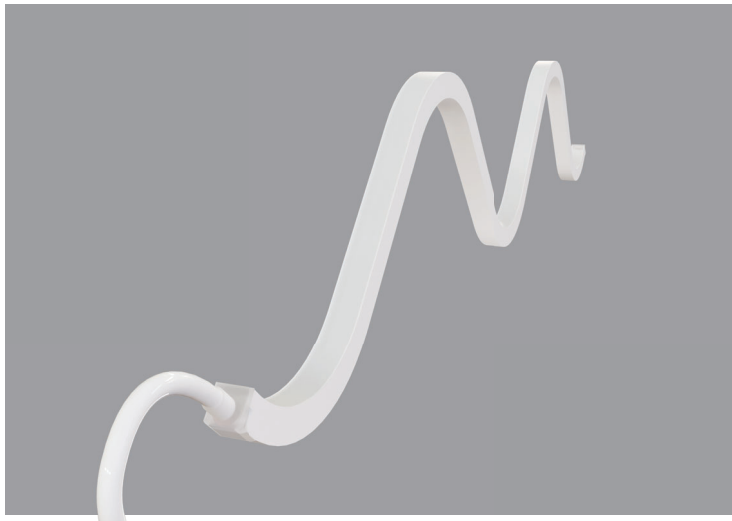


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	17W/m
Physical	
LED Count	72 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	83.3mm
Minimum Bend Diameter	400mm
Output	
LED Light	Epistar SMD LED 5050
Color	RGBW(2700/3000/4000K/5000K)
Max Run Length*	
Single Feed	8 M
Double Feed	16 M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68 Wet location submersible <2m


Emitting Color	
	Red
	Green
	Blue
	RGB(White)
	3000K

Illuminance Distribution

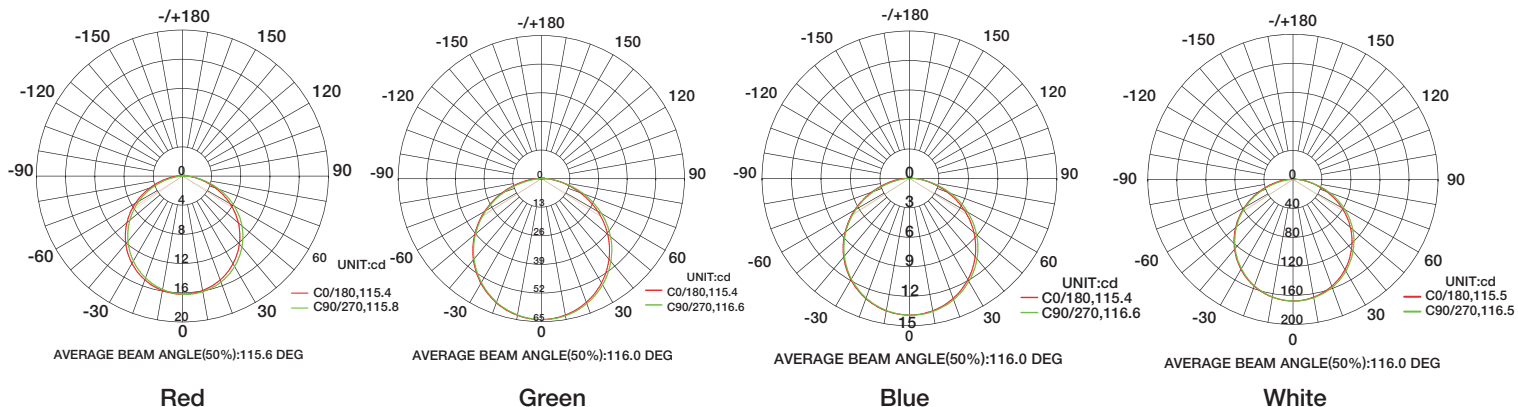

SF34 Multi Color RGBW Silicone LED Linear Flex

Connection

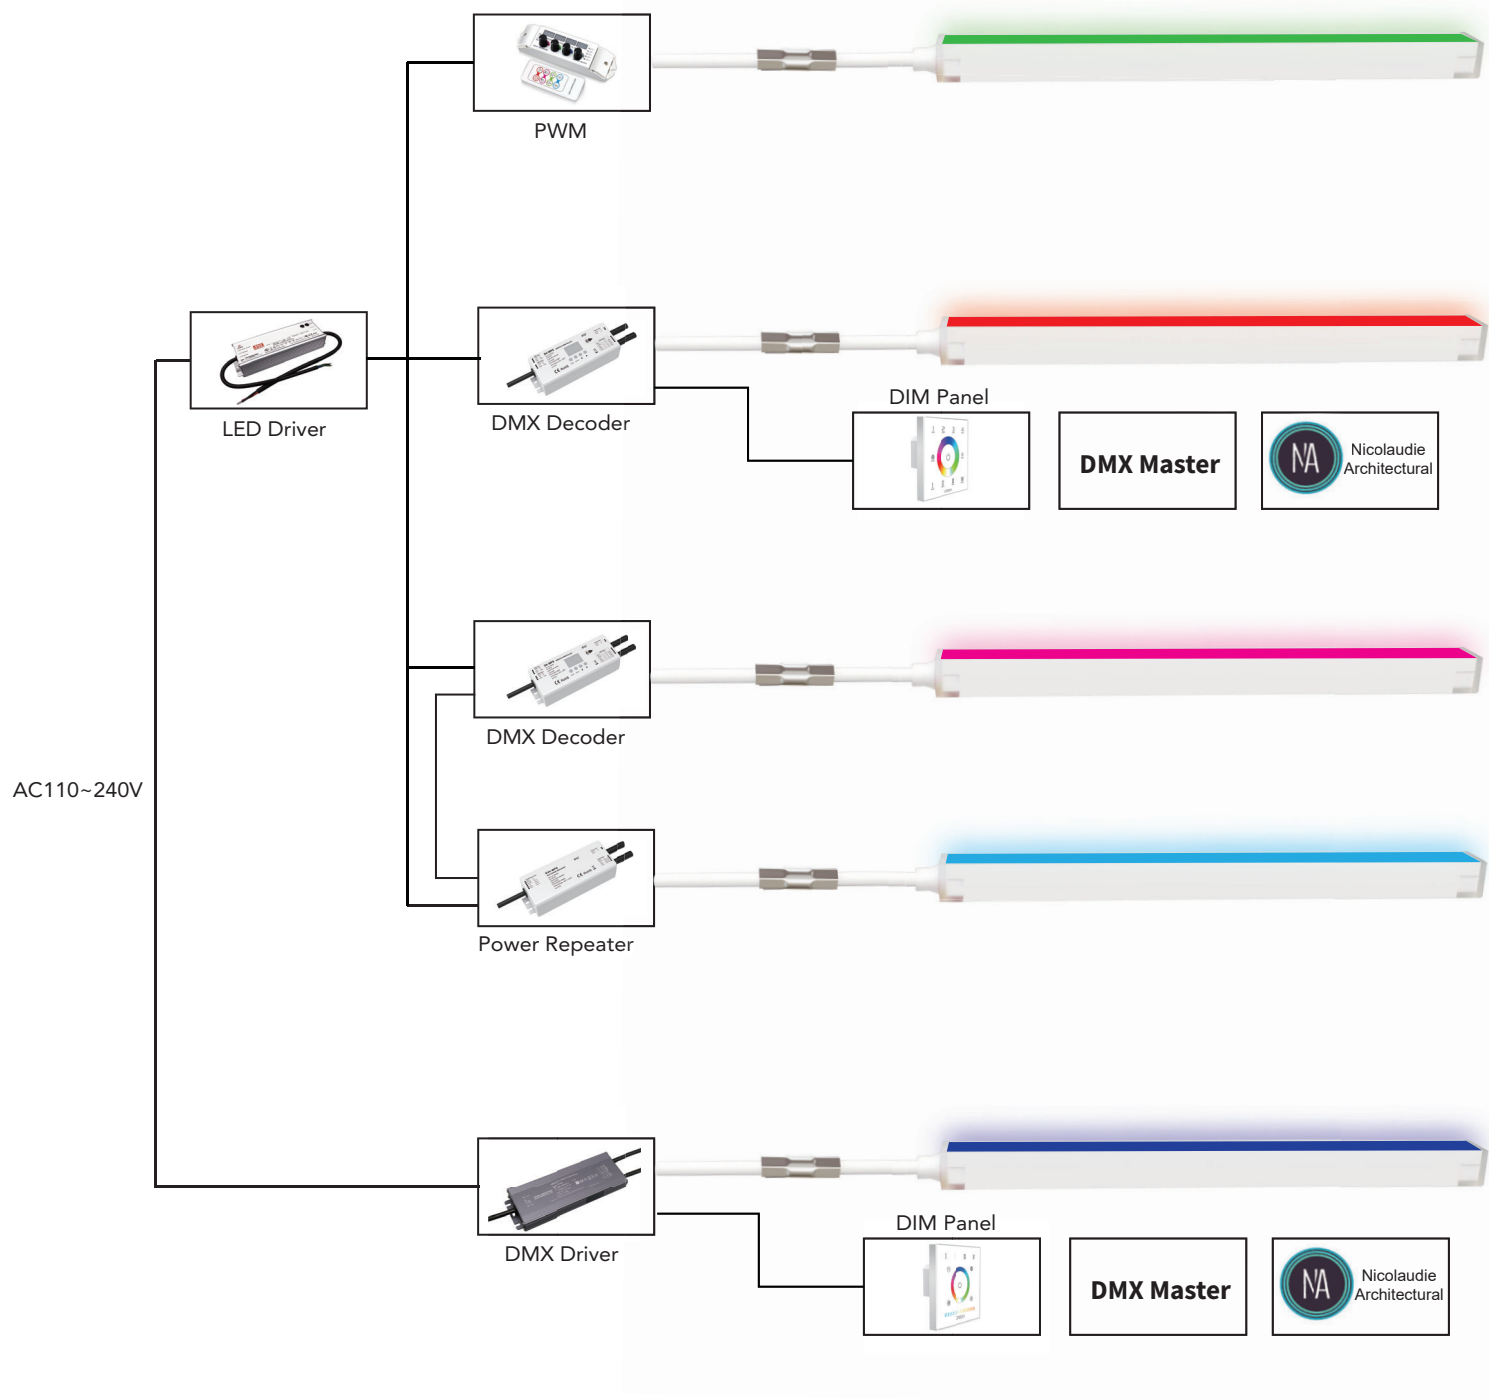


SF34 Configuration and Accessories

Mold injection Connector



(IP68 Factory Assembly Only)





Direct Entry Connector
MJ-SF34-RGBW-D01/02/03
MJ-SF34-RGBW-D01SM
MJ-SF34-RGBW-D02SF
MJ-SF34-RGBW-D03SFM

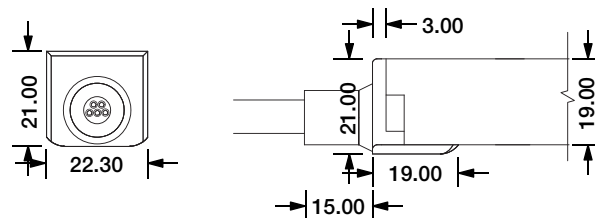



Side Entry Connector
MJ-SF34-RGBW-S01/02/03
MJ-SF34-RGBW-S01SM
MJ-SF34-RGBW-S02SF
MJ-SF34-RGBW-S03SFM

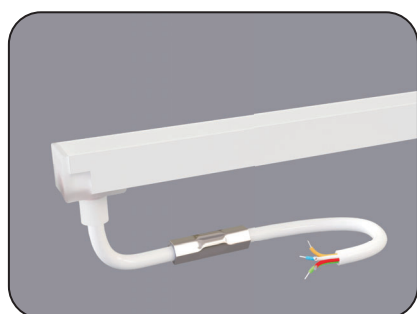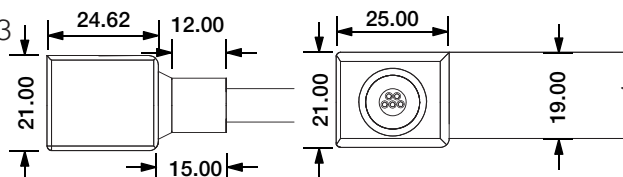


Bottom Entry Connector
MJ-SF34-RGBW-B01/02/03
MJ-SF34-RGBW-B01SM
MJ-SF34-RGBW-B02SF
MJ-SF34-RGBW-B03SFM

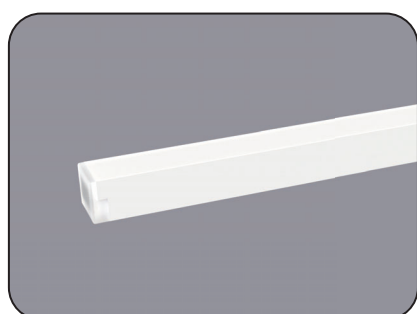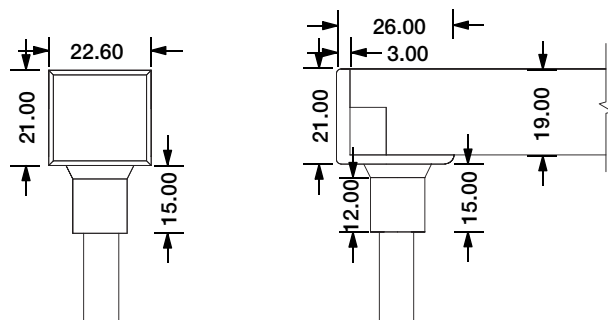


End Cap

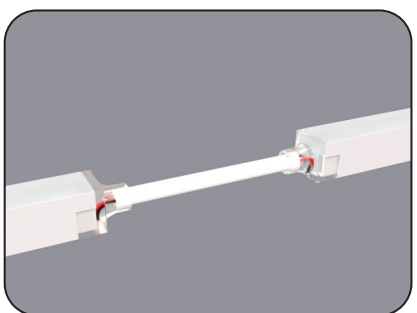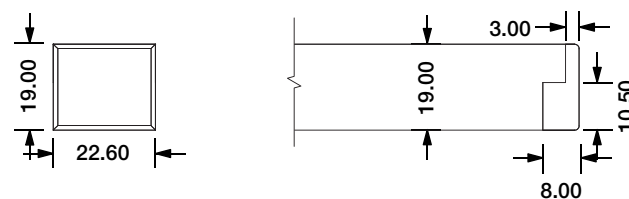


Jumper
MJ-SF34-RGBW-D-JC

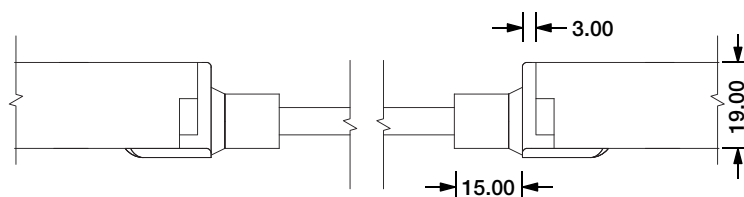



SF34 Configuration and Accessories

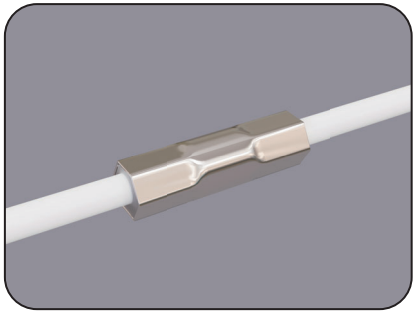


Waterproof Interrupter

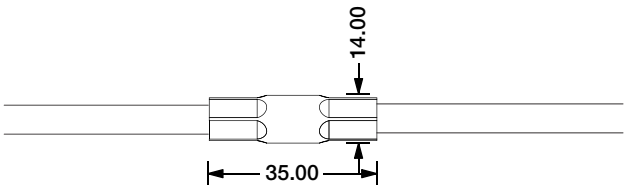

Male Connector
SQ19-M-5C-20AWG-D8-W-0327-S

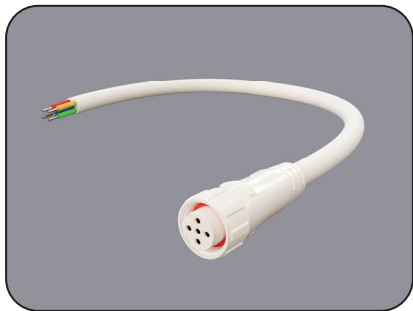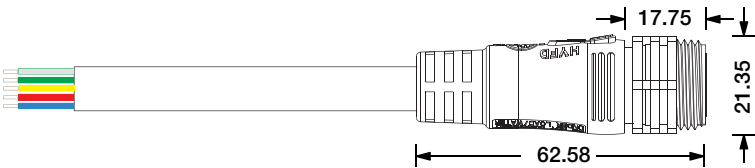


Female Connector
SQ19-F-5C-20AWG-D8-W-0327-S

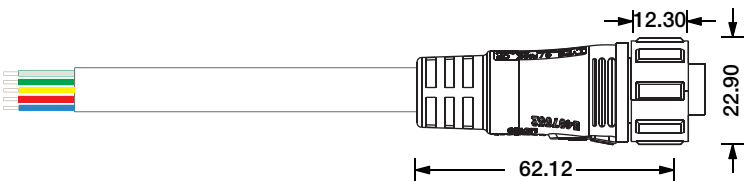


LED Linear Flex Mounting Channel


1. Aluminum Channel





Installation Way




Surface Mounted




Recessed

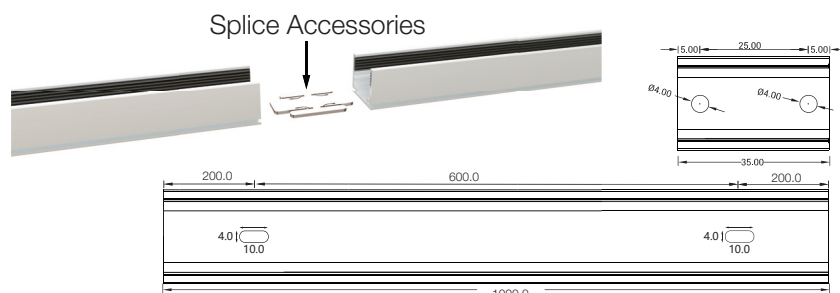


Splice Accessories: ALC34S01-SP

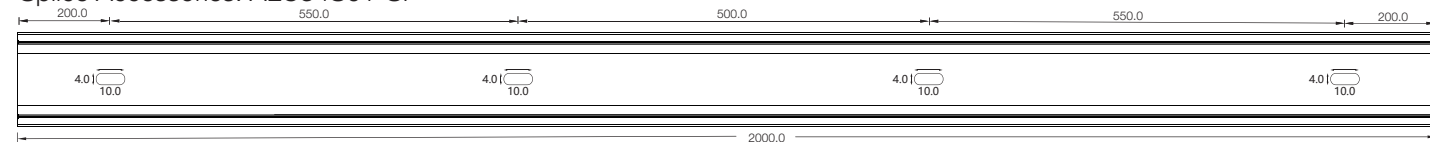


Model	W x H(mm)	Standard Length	Screw Holes	Holes Numbers	Suitable Product
ALC34S01-035	27.69*23.28	35mm	Φ4.0mm	2	SF34
ALC34S01-100		1000mm	○4.0mm	2	SF34
ALC34S01-200		2000mm	○4.0mm	4	SF34




Installation Way



Surface Mounted






Recessed

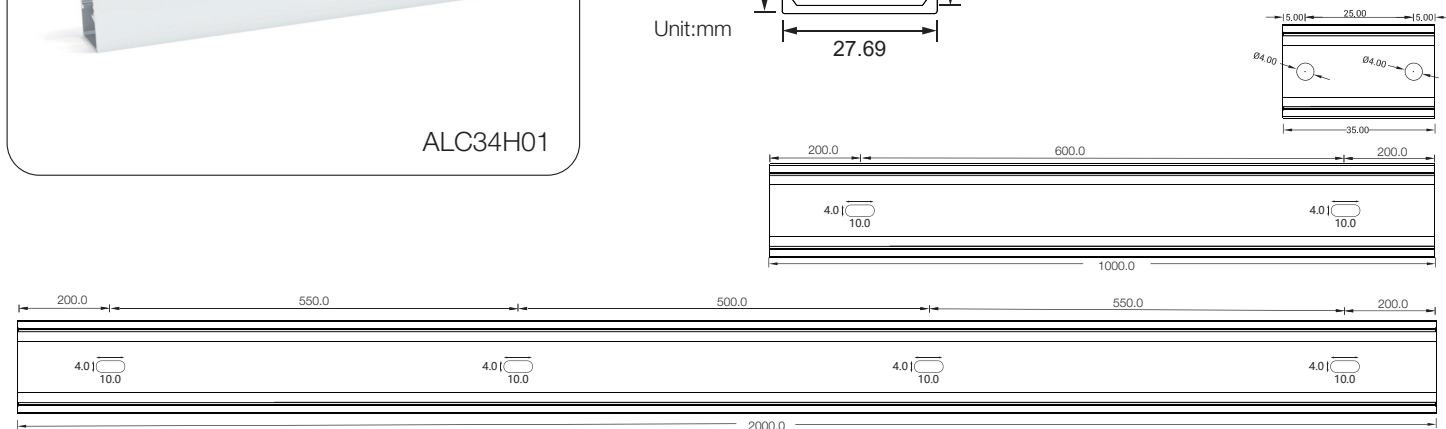

Model	W x H(mm)	Standard Length	Screw Holes	Holes Numbers	Suitable Product
ALC34H01-035	27.69*36.38	35mm	Φ4.0mm	2	SF34
ALC34H01-100		1000mm	○4.0mm	2	SF34
ALC34H01-200		2000mm	○4.0mm	4	SF34

2. Flexible Aluminum Channel

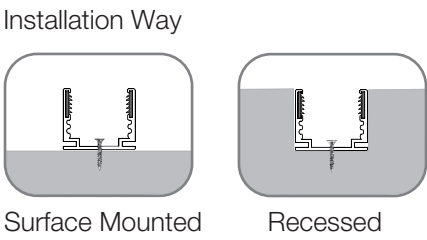

Model	W x H(mm)	Standard Length	Suitable Product
ALC34S01FLX-05	27.69*23.28	500mm	SF34
ALC34S01FLX-10		1000mm	SF34

Product Packing Details



Standard : Carton (White Carton+Paper Reel Inside)

Product	Max.length/Reel	Carton Size	Net Weight	Gross Weight
F15/SF15	30m	35*35*19cm	12.0kg	13.6kg
F16/SF16	28m	35*35*19cm	12.9kg	14.5kg
SF17	28m	35*35*19cm	12.9kg	14.5kg
SF18	28m	35*35*19cm	12.9kg	14.5kg
F21/SF21	20m	35*35*19cm	10.4kg	12.0kg
SF10	35m	35*35*19cm	11.2kg	12.8kg
SF09	45m	35*35*19cm	7.7kg	9.3kg
SF08	60m	35*35*19cm	14.4kg	16.0kg
SF06	60m	35*35*19cm	14.4kg	16.0kg



Standard : Carton (White Carton+ Roll up packing Inside)

Product	Coiling Max. length	Quantity (Roll)	Carton Size	Net Weight	Gross Weight
SP01	10m	10	35*35*19cm	20.0kg	21.6kg
SP05	11m	10	35*35*19cm	19.8kg	21.4kg
SF05	11m	10	35*35*19cm	18.0kg	19.6kg
SF06	8m	14	35*35*19cm	26.8kg	28.4kg
SF08	8m	14	35*35*19cm	26.8kg	28.4kg
SF09	8m	10	35*35*19cm	14.4kg	16.0kg
SF10	6m	11	35*35*19cm	21.2kg	22.8kg
F15/SF15	6m	7	35*35*19cm	16.8kg	18.4kg
F16/SF16	4.5m	9	35*35*19cm	18.7kg	20.3kg
SF17	4.5m	9	35*35*19cm	18.7kg	20.3kg
SF18	4.5m	9	35*35*19cm	18.7kg	20.3kg
F21/SF21	4.5m	9	35*35*19cm	21.0kg	22.6kg
SF24	13m	2	41*41*19cm	15.6kg	17.5kg

Product Packing Details



Custom : Carton (White Box+Plastic Plate Inside)

Product	Packing 1				Packing 2			
	Packing 1 Max. Length	Quantity (Plate)	Carton Size	Gross Weight	Packing 2 Max. Length	Quantity (Plate)	Carton Size	Gross Weight
F15/SF15	5m	1	41*41*5cm	2.5kg	10m	1	57*48*6cm	5.0kg
		4	41*41*19cm	10.6kg		5	57*48*19cm	25.0kg
F16/SF16	5m	1	41*41*5cm	2.5kg	10m	1	63*53*6cm	5.0kg
		4	41*41*19cm	10.0kg		3	63*53*16cm	15.0kg
SF17	5m	1	41*41*5cm	2.5kg	10m	1	63*53*6cm	5.0kg
		4	41*41*19cm	10.6kg		3	63*53*16cm	15.0kg
SF18	5m	1	41*41*5cm	2.5kg	10m	1	63*53*6cm	5.0kg
		4	41*41*19cm	10.6kg		3	63*53*16cm	15.0kg
F21/SF21	5m	1	41*41*5cm	3.1kg	10m	1	63*53*6cm	6.2kg
		4	41*41*19cm	13.0kg		3	63*53*16cm	18.6kg
SP01	10m	1	41*41*5cm	2.6kg	20m	1	57*48*6cm	5.0kg
		4	41*41*19cm	11.0kg		5	57*48*19cm	25.0kg
SP05	10m	1	41*41*5cm	2.4kg	20m	1	57*48*6cm	3.6kg
		4	41*41*19cm	9.6kg		5	57*48*19cm	18.0kg
SF05	10m	1	41*41*5cm	2.0kg	20m	1	57*48*6cm	4.0kg
		4	41*41*19cm	8.0kg		5	57*48*19cm	20.0kg
SF06	7m	1	41*41*5cm	2.3kg	14m	1	57*48*6cm	4.4kg
		4	41*41*19cm	9.2kg		5	57*48*19cm	22.0kg
SF08	7m	1	41*41*5cm	2.3kg	14m	1	57*48*6cm	4.4kg
		4	41*41*19cm	9.2kg		5	57*48*19cm	22.0kg
SF09	9m	1	41*41*5cm	2.0kg	18m	1	57*48*6cm	3.9kg
		4	41*41*19cm	8.0kg		5	57*48*19cm	19.5kg
SF10	5m	1	41*41*5cm	2.3kg	10m	1	57*48*6cm	4.2kg
		4	41*41*19cm	9.2kg		5	57*48*19cm	21.0kg
SF24	5m	1	57*48*6cm	2.3kg	10m	1	63*53*6cm	4.2kg
		4	57*48*19cm	9.2kg		5	63*53*16cm	21.0kg
SF33	3m	1	63*53*6cm	3.4kg	10m	1	85*73*6cm	11.5kg
		3	63*53*16cm	10.2kg		2	85*73*11cm	23.0kg
SF34	3m	1	63*53*6cm	3.2kg	10m	1	85*73*6cm	11.0kg
		3	63*53*16cm	9.6kg		2	85*73*11cm	22.0kg