


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.8313A P:19.95W PF:1.000 Freq:50.00Hz Lamp Flux:10.3436x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 36.29 lm/W			
MODEL	5050	I _{max} (cd)	274.3	S/MH (C0/180)	1.24
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.25
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	724.05	η UP, DN (C0-180)	0.9, 48.2
NOMINAL FLUX (lm)	10.3436	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 50.2
LAMPS INSIDE	70	η up (%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	98.4	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

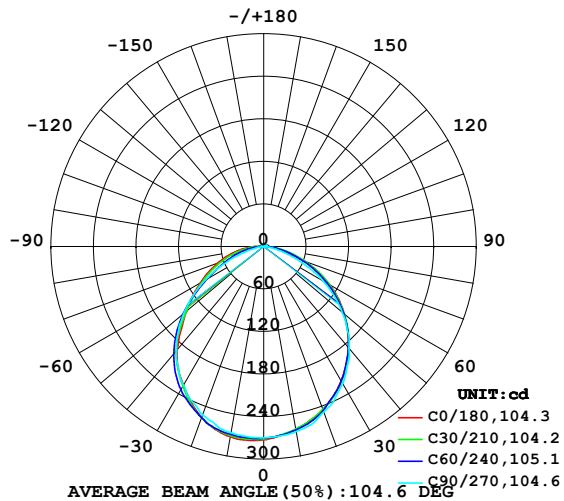

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

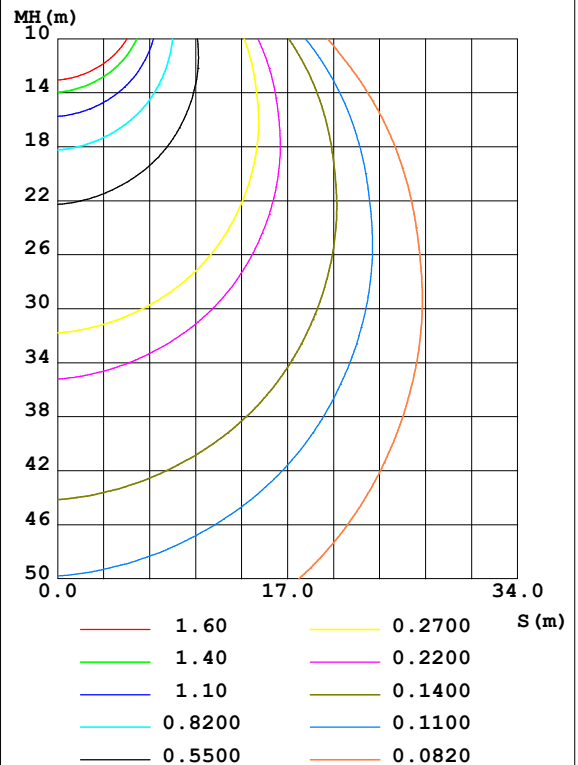

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LPC
 Test Date: 2021-10-22

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 9.200m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	261.8	262.1	265.1	265.9	272.5	270.1	267.0	262.7	0- 10	25.58	25.58	3.53,3.53
20	244.6	245.3	248.5	250.3	256.7	256.9	252.7	246.7	10- 20	73.16	98.74	13.6,13.6
30	218.8	219.6	223.3	221.3	226.2	230.7	226.3	223.5	20- 30	109.6	208.3	28.8,28.8
40	186.3	186.4	187.2	183.4	189.7	195.0	191.3	193.5	30- 40	129.8	338.1	46.7,46.7
50	148.5	147.8	144.8	135.0	142.5	145.6	147.8	155.4	40- 50	129.6	467.7	64.6,64.6
60	107.0	105.1	95.94	89.26	103.5	96.66	95.42	111.8	50- 60	110.2	578.0	79.8,79.8
70	61.66	61.19	43.73	53.72	69.51	58.29	42.39	66.91	60- 70	78.06	656.0	90.6,90.6
80	23.13	23.72	10.80	25.08	38.28	27.88	7.510	27.18	70- 80	41.91	697.9	96.4,96.4
90	6.061	5.618	2.488	6.894	11.63	6.907	1.287	5.889	80- 90	14.57	712.5	98.4,98.4
100	3.448	4.194	2.997	4.244	2.422	2.825	1.823	2.970	90-100	4.275	716.8	99,99
110	3.653	4.352	3.418	4.422	2.619	3.109	2.151	3.046	100-110	3.492	720.3	99.5,99.5
120	3.960	4.305	3.764	4.687	3.096	3.463	2.618	3.078	110-120	3.606	723.9	100,100
130	0	0	0	0	0	0	0	0	120-130	0.1752	724.0	100,100
140	0	0	0	0	0	0	0	0	130-140	0	724.0	100,100
150	0	0	0	0	0	0	0	0	140-150	0	724.0	100,100
160	0	0	0	0	0	0	0	0	150-160	0	724.0	100,100
170	0	0	0	0	0	0	0	0	160-170	0	724.0	100,100
180	0	0	0	0	0	0	0	0	170-180	0	724.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 404.31 lm

%lum = 55.8%

%lamp = 55.8%

Conical surface Flux(120deg): 577.96 lm

%lum = 79.8%


%lamp = 79.8%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-22

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.8313A P:19.95W PF:1.000 Freq:50.00Hz Lamp Flux:10.3436x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

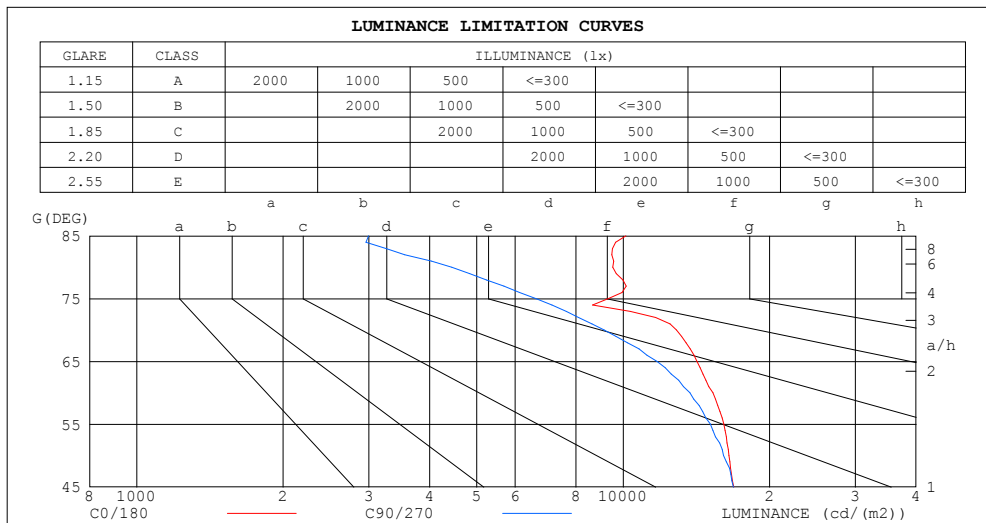

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	10132	2994
80	9516	4441
75	9323	6617
70	12877	9132
65	14176	11732
60	15285	13706
55	16093	15117
50	16505	16086
45	16887	16849


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-22

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.8313A P:19.95W PF:1.000 Freq:50.00Hz Lamp Flux:10.3436x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.79	.89	.83	.78	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.66	.79	.71	.65	.75	.69	.64	.72	.67	.63	.70	.65	.61	.59
4.0	.71	.63	.56	.70	.62	.56	.67	.60	.55	.65	.59	.54	.62	.57	.53	.51
5.0	.64	.55	.49	.63	.54	.48	.60	.53	.48	.58	.52	.47	.56	.51	.46	.44
6.0	.58	.49	.43	.57	.48	.42	.55	.47	.42	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.44	.38	.51	.43	.37	.50	.42	.37	.48	.42	.37	.47	.41	.36	.34
8.0	.48	.39	.34	.47	.39	.34	.46	.38	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.34	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.32	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

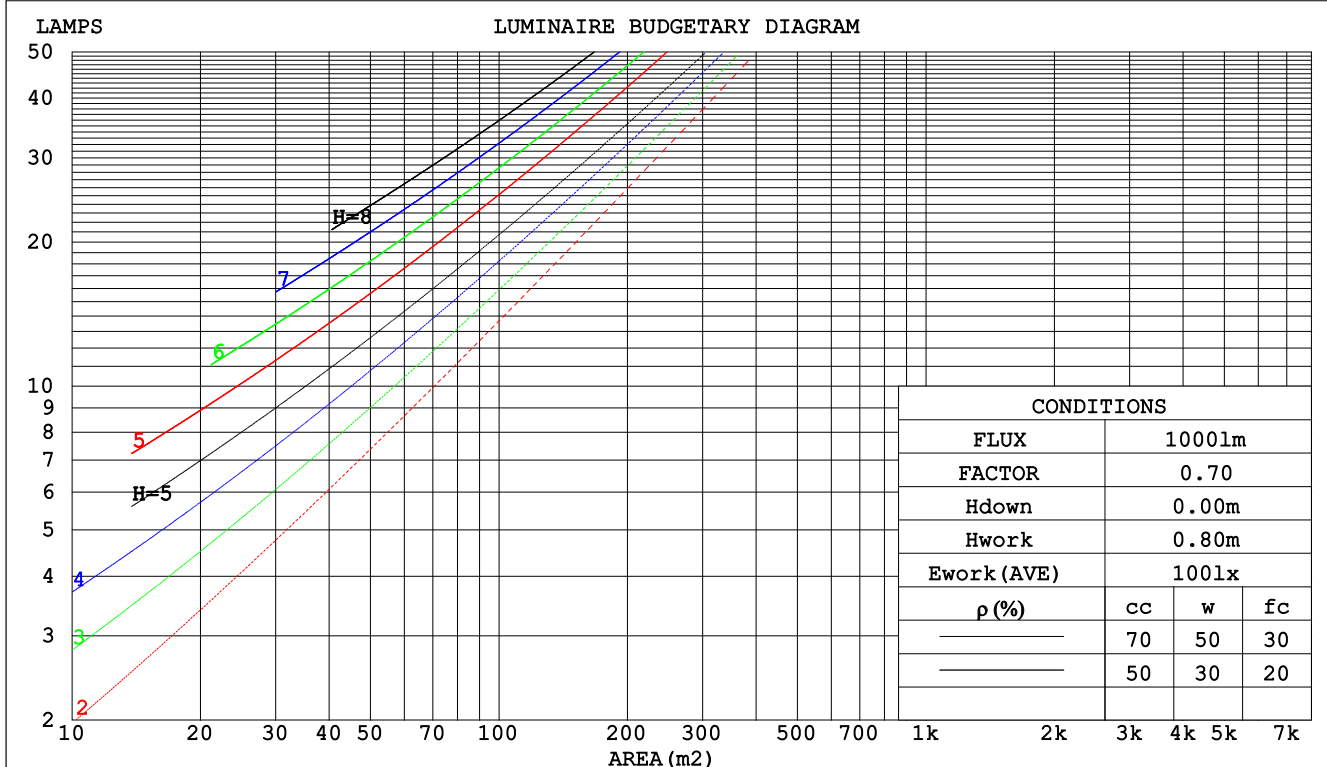

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-22

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.8313A P:19.95W PF:1.000 Freq:50.00Hz Lamp Flux:10.3436x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.300	.171	.054	.293	.167	.053	.278	.160	.051	.265	.153	.049	.253	.147	.047		
2.0	.282	.155	.047	.275	.152	.047	.263	.146	.045	.251	.141	.044	.241	.136	.043		
3.0	.262	.139	.042	.256	.137	.041	.245	.133	.040	.234	.128	.039	.225	.125	.039		
4.0	.242	.126	.037	.237	.124	.037	.227	.120	.036	.218	.117	.035	.210	.114	.035		
5.0	.224	.114	.033	.220	.113	.033	.211	.110	.032	.203	.107	.032	.195	.104	.031		
6.0	.209	.105	.030	.204	.103	.030	.197	.101	.029	.189	.098	.029	.183	.096	.029		
7.0	.195	.096	.027	.191	.095	.027	.184	.093	.027	.177	.091	.026	.171	.089	.026		
8.0	.182	.089	.025	.179	.088	.025	.172	.086	.025	.167	.084	.024	.161	.083	.024		
9.0	.171	.083	.023	.168	.082	.023	.162	.080	.023	.157	.079	.023	.152	.077	.022		
10.0	.161	.077	.021	.158	.076	.021	.153	.075	.021	.148	.074	.021	.144	.072	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.147	.164	.145	.127	.112	.099	.088	.065	.058	.051	.021	.019	.016	
2.0	.183	.144	.112	.157	.124	.096	.108	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.175	.127	.088	.150	.109	.076	.103	.076	.053	.060	.044	.032	.019	.014	.010	
4.0	.168	.113	.072	.144	.098	.062	.099	.068	.044	.057	.040	.026	.018	.013	.009	
5.0	.160	.103	.061	.138	.089	.053	.095	.062	.037	.055	.036	.022	.018	.012	.007	
6.0	.153	.094	.052	.132	.082	.046	.091	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.146	.088	.046	.126	.076	.040	.087	.053	.029	.051	.031	.017	.016	.010	.006	
8.0	.140	.082	.042	.121	.071	.036	.083	.050	.026	.049	.029	.015	.016	.010	.005	
9.0	.134	.077	.038	.116	.067	.033	.080	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.129	.073	.035	.111	.063	.031	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-22

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.8313A P:19.95W PF:1.000 Freq:50.00Hz Lamp Flux:10.3436x70 lm										
NAME: P01-24V-5050-70-DMX-RGBW(2700K)					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: OLYMPIA					SUR.:1*0.014			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.5	25.0	23.8	25.2	25.4	23.2	24.7	23.5	24.9	25.1
3H	24.8	26.2	25.2	26.5	26.7	24.2	25.5	24.5	25.8	26.1
4H	25.2	26.5	25.5	26.8	27.1	24.4	25.7	24.8	26.0	26.3
6H	25.5	26.7	25.9	27.0	27.3	24.5	25.7	24.9	26.0	26.3
8H	25.6	26.8	26.0	27.1	27.4	24.5	25.7	24.9	26.0	26.3
12H	25.7	26.8	26.1	27.2	27.5	24.5	25.6	24.9	25.9	26.3
4H 2H	24.0	25.3	24.4	25.6	25.9	23.8	25.1	24.1	25.4	25.6
3H	25.6	26.7	25.9	27.0	27.3	25.0	26.1	25.4	26.4	26.8
4H	26.1	27.1	26.5	27.5	27.8	25.4	26.4	25.8	26.8	27.1
6H	26.5	27.4	26.9	27.8	28.2	25.6	26.5	26.0	26.9	27.3
8H	26.7	27.5	27.1	27.9	28.3	25.6	26.4	26.0	26.8	27.3
12H	26.8	27.6	27.3	28.0	28.4	25.6	26.4	26.0	26.8	27.2
8H 4H	26.3	27.1	26.7	27.5	27.9	25.7	26.5	26.1	26.9	27.3
6H	26.9	27.6	27.3	28.0	28.5	26.0	26.7	26.5	27.1	27.6
8H	27.1	27.7	27.6	28.2	28.7	26.1	26.7	26.6	27.2	27.6
12H	27.4	27.9	27.9	28.4	28.9	26.1	26.7	26.6	27.1	27.7
12H 4H	26.3	27.0	26.7	27.5	27.9	25.7	26.4	26.1	26.9	27.3
6H	26.9	27.5	27.4	28.0	28.5	26.1	26.7	26.5	27.1	27.6
8H	27.2	27.7	27.7	28.2	28.7	26.2	26.7	26.7	27.2	27.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.2					+ 0.3 / - 0.5				

CIE Pub.117, 724.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.1)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-22

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	59	47	40	58	47	40	57	46	40	34
0.80	69	57	50	68	57	50	66	56	49	43
1.00	77	66	59	76	65	59	73	67	58	51
1.25	84	74	67	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	71	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	99	95	92	83
5.00	109	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNM = 1.25		


```

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.8313A P:19.95W PF:1.000 Freq:50.00Hz Lamp Flux:10.3436x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

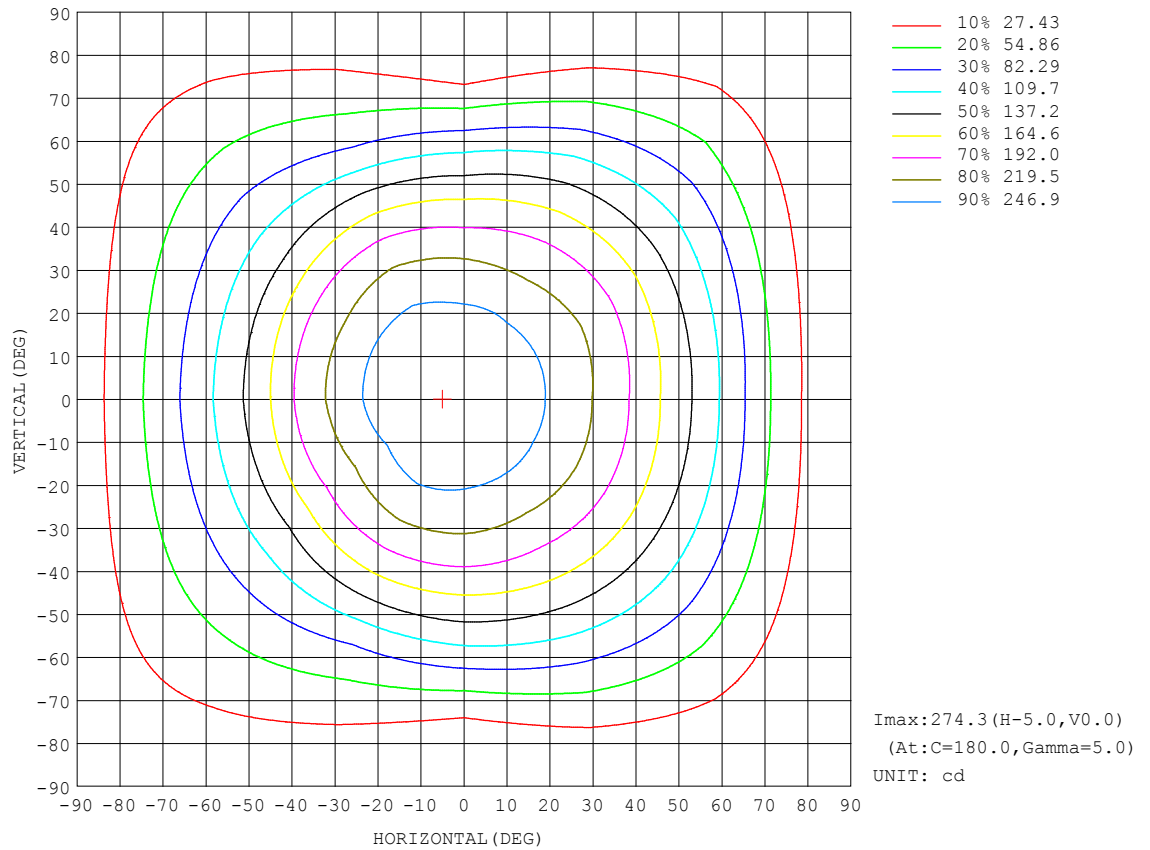


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-22

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.8313A P:19.95W PF:1.000 Freq:50.00Hz Lamp Flux:10.3436x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

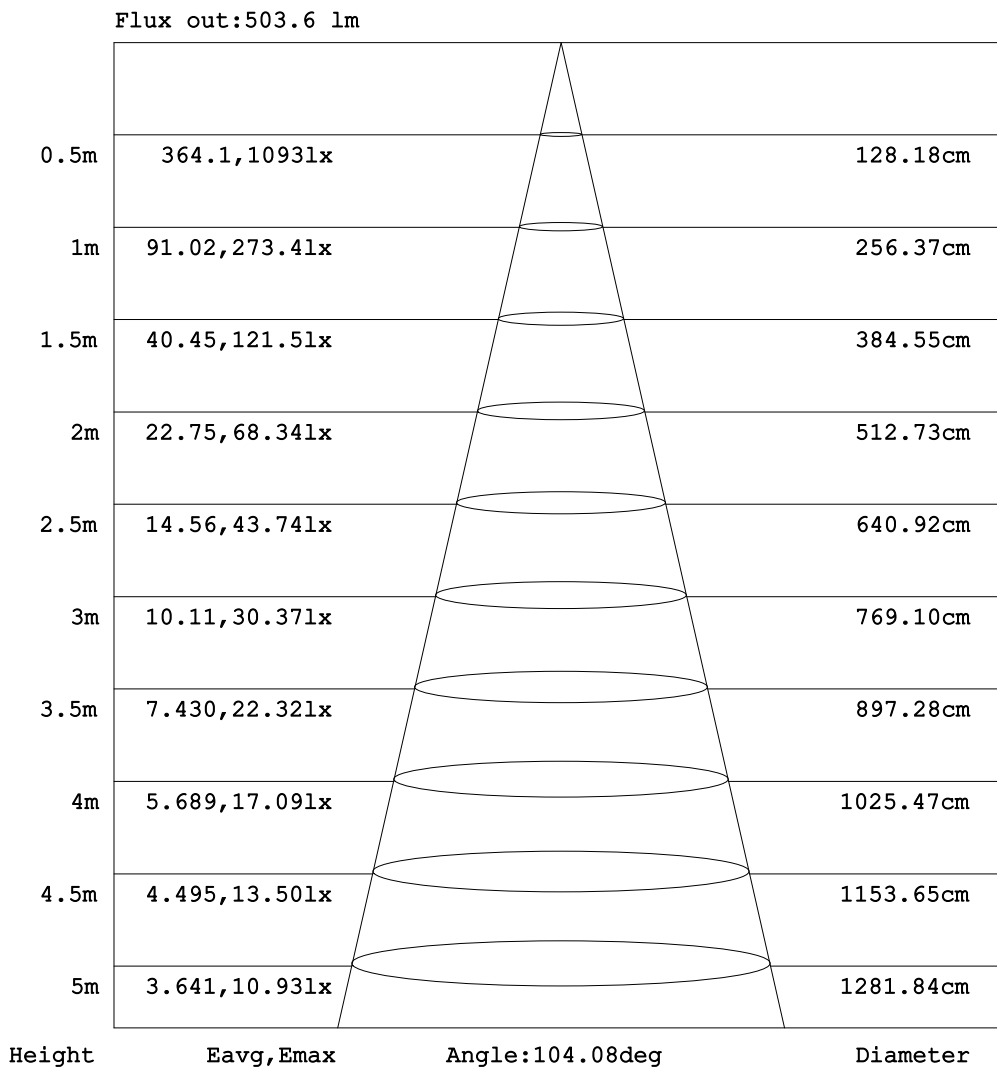


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-22

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.8313A P:19.95W PF:1.000 Freq:50.00Hz Lamp Flux:10.3436x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

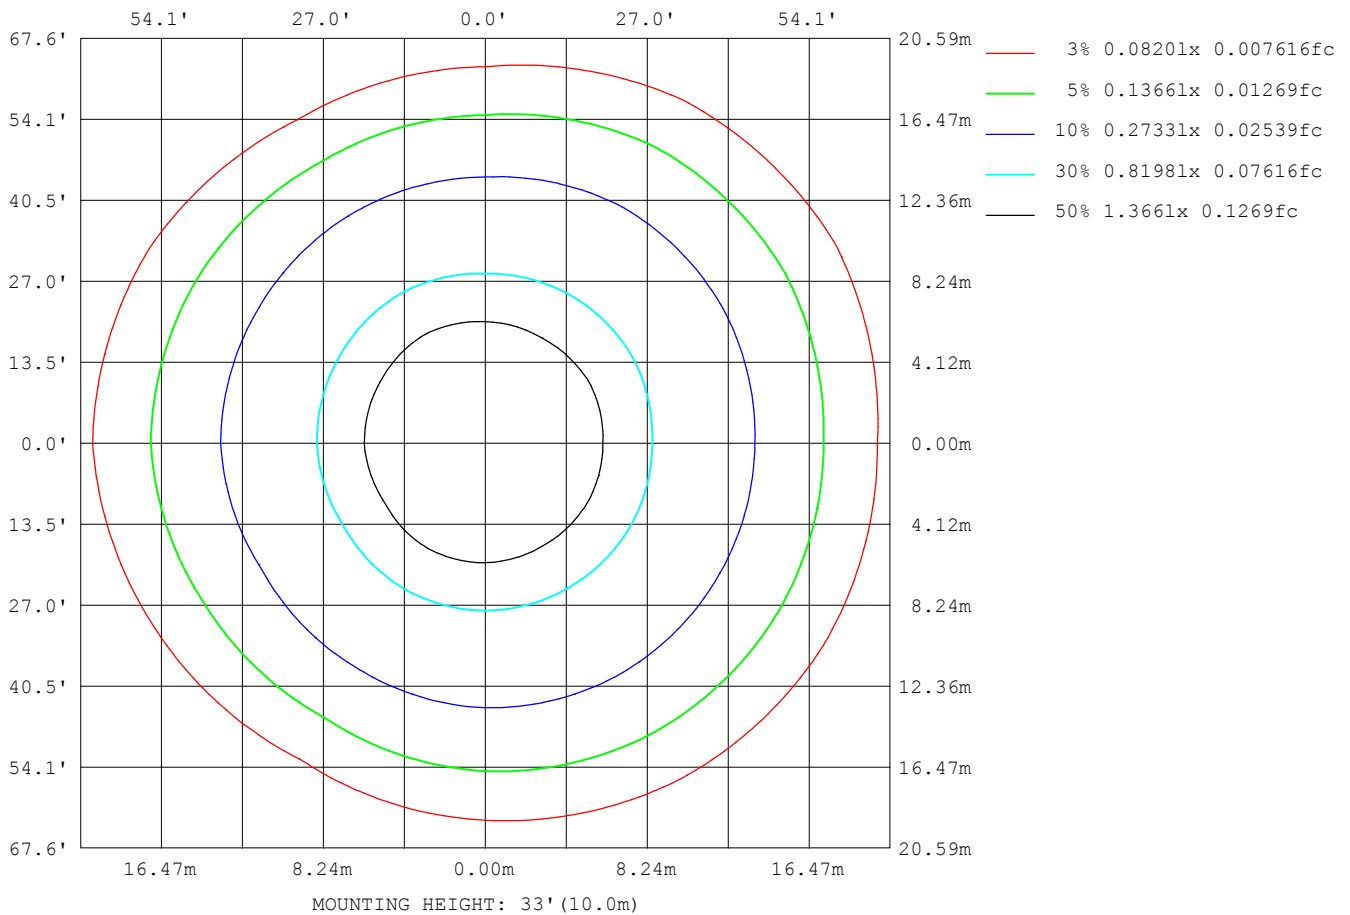

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-22

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.8313A P:19.95W PF:1.000 Freq:50.00Hz Lamp Flux:10.3436x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	14356
L_0~180 (75) av	12061
L_0~180 (85) av	14782
L_90~270 (65) av	11595
L_90~270 (75) av	6148
L_90~270 (85) av	2290
L_45 (65) av	13516
L_45 (75) av	11867
L_45 (85) av	11463

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-22

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

Planar Illuminance Curve

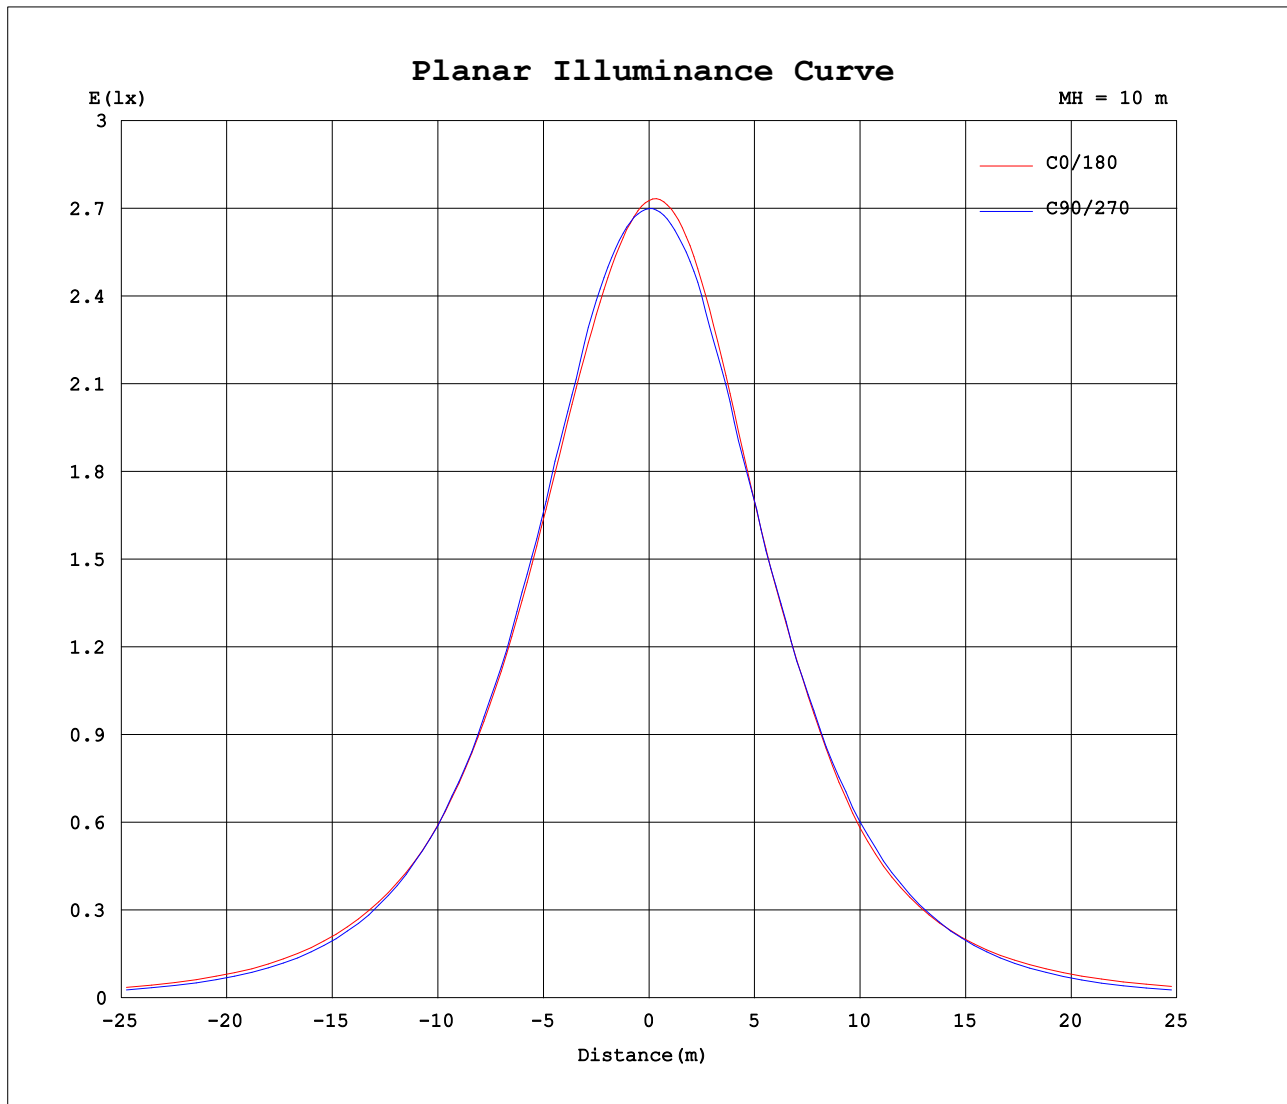

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: LPC
Test Date: 2021-10-22

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.8313A P:19.95W PF:1.000 Freq:50.00Hz Lamp Flux:10.3436x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	273	271	270	270	269	269	273	271	270	270	269	269							
5	268	267	268	268	269	269	274	273	271	269	268	266							
10	262	261	263	265	266	266	273	271	269	267	264	261							
15	254	254	256	260	261	259	267	266	265	261	258	254							
20	245	244	246	249	252	249	257	257	257	253	247	246							
25	233	233	233	237	240	234	242	244	246	240	234	236							
30	219	220	219	223	225	218	226	228	233	226	223	224							
35	203	204	203	206	207	201	210	211	217	210	207	210							
40	186	187	186	187	186	181	190	193	197	191	194	193							
45	167	168	168	167	163	155	165	168	174	170	176	175							
50	149	148	147	145	138	132	142	142	149	148	156	155							
55	129	127	126	121	111	112	122	121	120	122	133	134							
60	107	107	103	95.9	85.6	92.9	104	101	92.8	95.4	110	114							
65	83.9	85.7	80.6	69.4	65.0	74.8	86.0	82.1	69.3	67.8	86.6	92.9							
70	61.7	63.9	58.5	43.7	49.0	58.4	69.5	64.3	52.3	42.4	63.1	70.7							
75	33.8	43.4	38.3	24.0	34.1	43.2	53.6	48.1	37.0	20.6	41.3	49.8							
80	23.1	25.9	21.6	10.8	21.3	28.8	38.3	32.8	23.0	7.51	23.2	31.2							
85	12.4	13.0	9.93	3.65	11.4	16.5	23.7	19.1	12.0	1.93	10.4	16.4							
90	6.06	6.17	5.06	2.49	5.92	7.87	11.6	8.74	5.08	1.29	4.30	7.48							
95	3.67	4.09	4.18	2.68	4.42	4.52	4.36	3.55	2.90	1.49	3.05	3.64							
100	3.45	4.05	4.34	3.00	4.36	4.13	2.42	2.71	2.94	1.82	3.07	2.87							
105	3.51	4.18	4.00	3.39	4.02	4.30	2.48	2.81	2.70	2.15	2.55	2.92							
110	3.65	4.27	4.43	3.42	4.43	4.42	2.62	3.00	3.21	2.15	3.13	2.97							
115	3.78	4.41	4.70	3.57	4.65	4.54	2.82	3.18	3.45	2.39	3.31	3.09							
120	3.96	4.49	4.12	3.76	4.73	4.64	3.10	3.34	3.58	2.62	2.89	3.27							
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-22

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: