


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.3162A P:7.589W PF:1.000 Freq:50.00Hz Lamp Flux:5.90285x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 54.45 lm/W			
MODEL	5050	I _{max} (cd)	161.4	S/MH (C0/180)	1.20
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	413.20	η UP, DN (C0-180)	0.9, 47.8
NOMINAL FLUX (lm)	5.90285	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 50.5
LAMPS INSIDE	70	η up (%)	1.7	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	98.3	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

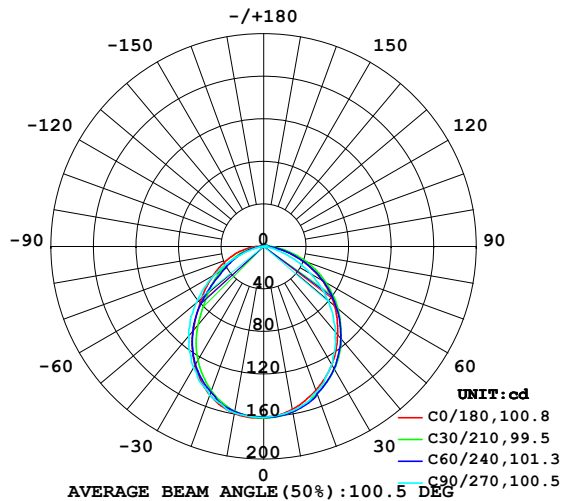

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

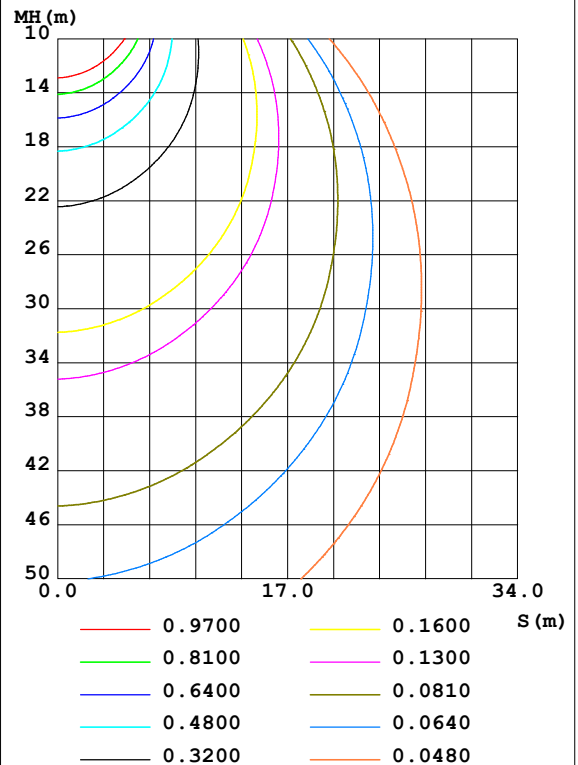

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LPC
 Test Date: 2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 9.200m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	155.6	157.9	156.8	154.1	159.4	157.4	158.8	159.8	0- 10	15.19	15.19	3.68,3.68
20	143.8	147.5	145.4	140.3	148.5	145.0	149.1	151.1	10- 20	43.06	58.25	14.1,14.1
30	128.4	132.9	128.3	118.8	129.3	126.0	131.8	138.4	20- 30	63.64	121.9	29.5,29.5
40	108.3	113.2	105.0	91.47	103.3	99.89	109.8	121.1	30- 40	73.97	195.9	47.4,47.4
50	87.10	90.39	79.31	63.70	76.24	70.20	82.75	99.53	40- 50	72.35	268.2	64.9,64.9
60	63.43	65.85	50.56	40.68	55.09	44.86	53.22	74.42	50- 60	61.22	329.4	79.7,79.7
70	37.57	40.78	23.54	23.19	36.35	26.08	23.24	48.19	60- 70	44.04	373.5	90.4,90.4
80	15.66	18.18	5.635	9.009	19.46	10.44	4.151	23.86	70- 80	24.24	397.7	96.3,96.3
90	4.012	4.736	1.417	2.619	5.831	2.408	0.7137	6.481	80- 90	8.630	406.4	98.3,98.3
100	1.895	2.375	1.690	2.498	1.885	1.854	0.9798	1.715	90-100	2.656	409.0	99.99
110	2.040	2.447	1.890	2.603	1.854	1.807	1.161	1.714	100-110	2.044	411.1	99.5,99.5
120	2.297	2.443	2.086	2.731	1.789	1.927	1.407	1.586	110-120	2.046	413.1	100,100
130	0	0	0	0	0	0	0	0	120-130	0.0982	413.2	100,100
140	0	0	0	0	0	0	0	0	130-140	0	413.2	100,100
150	0	0	0	0	0	0	0	0	140-150	0	413.2	100,100
160	0	0	0	0	0	0	0	0	150-160	0	413.2	100,100
170	0	0	0	0	0	0	0	0	160-170	0	413.2	100,100
180	0	0	0	0	0	0	0	0	170-180	0	413.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 232.91 lm

%lum = 56.4%

%lamp = 56.4%

Conical surface Flux(120deg): 329.44 lm

%lum = 79.7%


%lamp = 79.7%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.3162A P:7.589W PF:1.000 Freq:50.00Hz Lamp Flux:5.90285x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

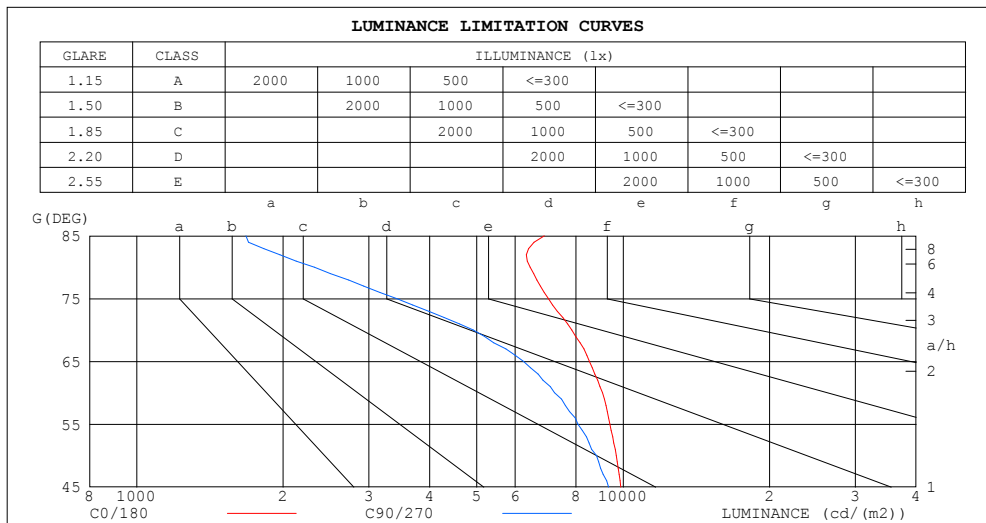

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6881	1678
80	6443	2318
75	7017	3425
70	7846	4916
65	8524	6233
60	9062	7223
55	9397	8072
50	9678	8813
45	9894	9329


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.3162A P:7.589W PF:1.000 Freq:50.00Hz Lamp Flux:5.90285x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.85	.79	.89	.83	.78	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.67	.63	.70	.65	.62	.59
4.0	.72	.63	.56	.70	.62	.56	.67	.60	.55	.65	.59	.54	.63	.57	.53	.51
5.0	.64	.55	.49	.63	.55	.49	.61	.53	.48	.59	.52	.47	.57	.51	.47	.44
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.53	.47	.42	.51	.46	.41	.39
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.34	.45	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.31	.44	.36	.31	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.37	.31	.27	.26

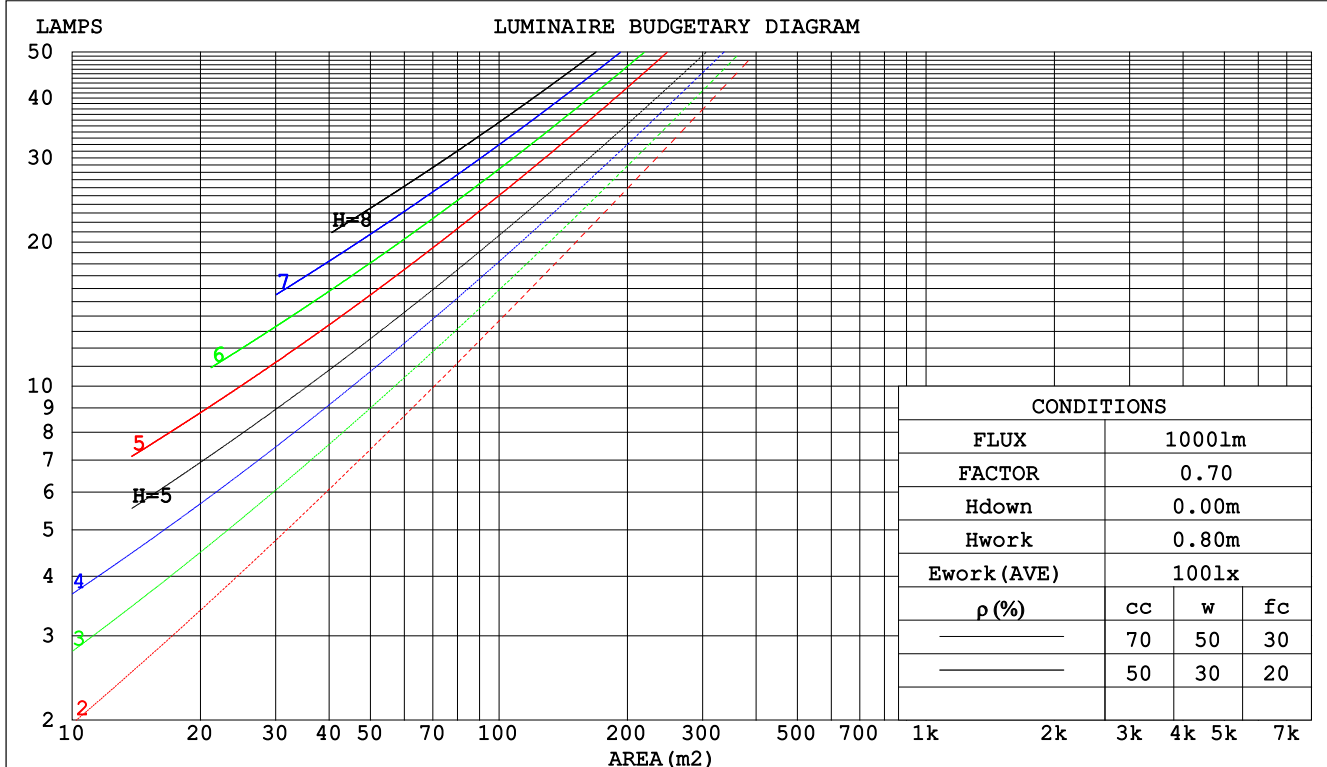

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.3162A P:7.589W PF:1.000 Freq:50.00Hz Lamp Flux:5.90285x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.300	.171	.054	.292	.167	.053	.278	.160	.051	.265	.153	.049	.253	.147	.047		
2.0	.281	.154	.047	.275	.151	.047	.262	.146	.045	.251	.141	.044	.240	.136	.043		
3.0	.261	.139	.042	.255	.136	.041	.244	.132	.040	.233	.128	.039	.224	.124	.038		
4.0	.241	.125	.037	.236	.123	.036	.226	.120	.036	.217	.116	.035	.208	.113	.034		
5.0	.223	.114	.033	.219	.112	.033	.210	.109	.032	.202	.107	.032	.194	.104	.031		
6.0	.208	.104	.030	.204	.103	.030	.196	.100	.029	.188	.098	.029	.182	.096	.028		
7.0	.194	.096	.027	.190	.095	.027	.183	.092	.027	.176	.090	.026	.170	.088	.026		
8.0	.181	.089	.025	.178	.088	.025	.172	.086	.024	.166	.084	.024	.160	.082	.024		
9.0	.170	.082	.023	.167	.081	.023	.161	.080	.023	.156	.078	.022	.151	.077	.022		
10.0	.160	.077	.021	.157	.076	.021	.152	.075	.021	.147	.073	.021	.143	.072	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.174	.174	.174	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.169	.148	.165	.145	.127	.113	.100	.088	.065	.058	.051	.021	.019	.017	
2.0	.184	.145	.112	.157	.125	.097	.108	.086	.068	.062	.050	.040	.020	.016	.013	
3.0	.176	.127	.089	.151	.110	.077	.103	.076	.054	.060	.044	.032	.019	.014	.010	
4.0	.168	.114	.072	.144	.098	.063	.099	.068	.044	.057	.040	.026	.018	.013	.009	
5.0	.160	.103	.061	.138	.089	.053	.095	.062	.038	.055	.037	.022	.018	.012	.007	
6.0	.153	.095	.053	.132	.082	.046	.091	.058	.033	.053	.034	.019	.017	.011	.006	
7.0	.147	.088	.047	.126	.076	.041	.087	.053	.029	.051	.031	.017	.016	.010	.006	
8.0	.140	.082	.042	.121	.071	.037	.083	.050	.026	.049	.030	.016	.016	.010	.005	
9.0	.134	.077	.039	.116	.067	.034	.080	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.129	.073	.036	.111	.063	.031	.077	.045	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.3162A P:7.589W PF:1.000 Freq:50.00Hz Lamp Flux:5.90285x70 lm											
NAME: P01-24V-5050-70-DMX-RGBW(3000K)-W					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: EVERFINE					SUR.:1*0.014			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.0	25.4	24.2	25.6	25.9	23.4	24.8	23.7	25.1	25.3	
	3H	25.4	26.7	25.7	27.0	27.3	24.4	25.7	24.7	26.0	26.2
	4H	25.9	27.2	26.3	27.5	27.8	24.6	25.9	24.9	26.1	26.4
	6H	26.3	27.5	26.7	27.8	28.1	24.7	25.9	25.0	26.2	26.5
	8H	26.5	27.6	26.8	27.9	28.2	24.7	25.8	25.0	26.1	26.5
	12H	26.6	27.7	26.9	28.0	28.3	24.6	25.8	25.0	26.1	26.4
4H	2H	24.6	25.8	24.9	26.1	26.4	24.1	25.4	24.4	25.7	26.0
	3H	26.2	27.4	26.6	27.7	28.0	25.4	26.5	25.7	26.8	27.1
	4H	26.9	28.0	27.3	28.3	28.7	25.8	26.8	26.2	27.1	27.5
	6H	27.5	28.4	27.9	28.8	29.2	26.0	26.9	26.4	27.3	27.7
	8H	27.7	28.5	28.1	28.9	29.3	26.0	26.9	26.5	27.2	27.7
	12H	27.8	28.6	28.3	29.0	29.5	26.0	26.8	26.5	27.2	27.6
8H	4H	27.2	28.0	27.6	28.4	28.9	26.2	27.0	26.6	27.4	27.8
	6H	28.0	28.7	28.4	29.1	29.5	26.6	27.3	27.1	27.7	28.2
	8H	28.3	28.9	28.8	29.4	29.8	26.7	27.3	27.2	27.8	28.3
	12H	28.6	29.1	29.1	29.6	30.1	26.8	27.3	27.3	27.8	28.3
12H	4H	27.2	28.0	27.7	28.4	28.8	26.2	27.0	26.7	27.4	27.9
	6H	28.0	28.6	28.5	29.1	29.6	26.7	27.3	27.2	27.8	28.3
	8H	28.4	28.9	28.9	29.4	29.9	26.9	27.5	27.4	27.9	28.4
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.3 / - 0.5					
2.0H	+ 0.2 / - 0.4					+ 0.3 / - 0.7					

CIE Pub.117, 413.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.1)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:


```

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.3162A P:7.589W PF:1.000 Freq:50.00Hz Lamp Flux:5.90285x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

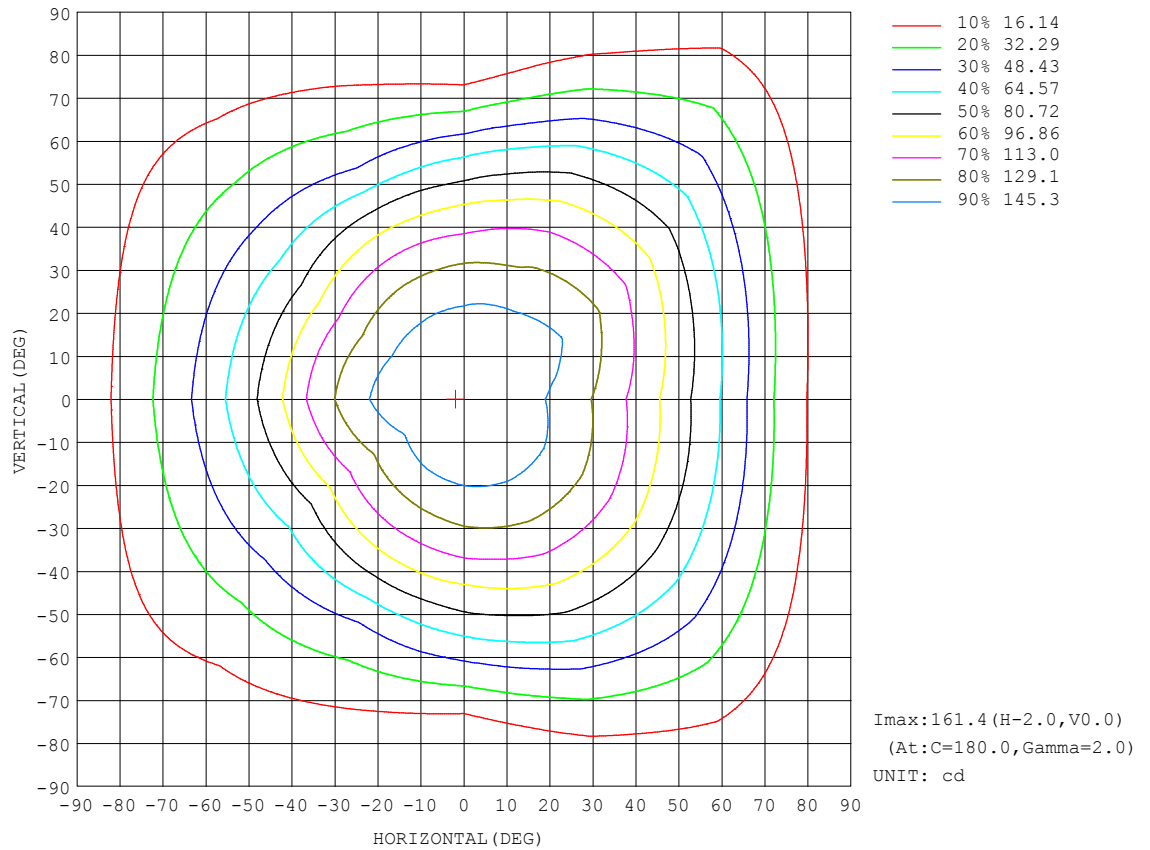


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.3162A P:7.589W PF:1.000 Freq:50.00Hz Lamp Flux:5.90285x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

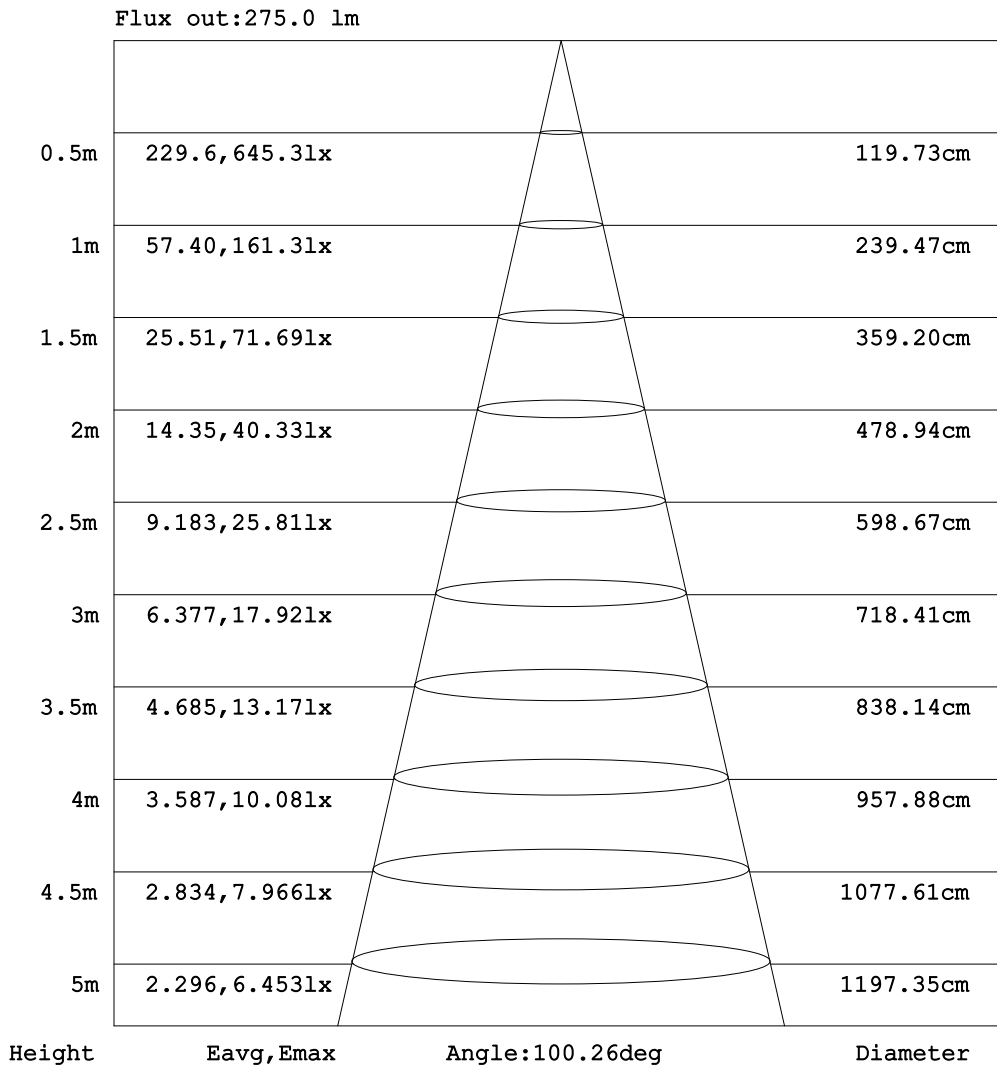


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.3162A P:7.589W PF:1.000 Freq:50.00Hz Lamp Flux:5.90285x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

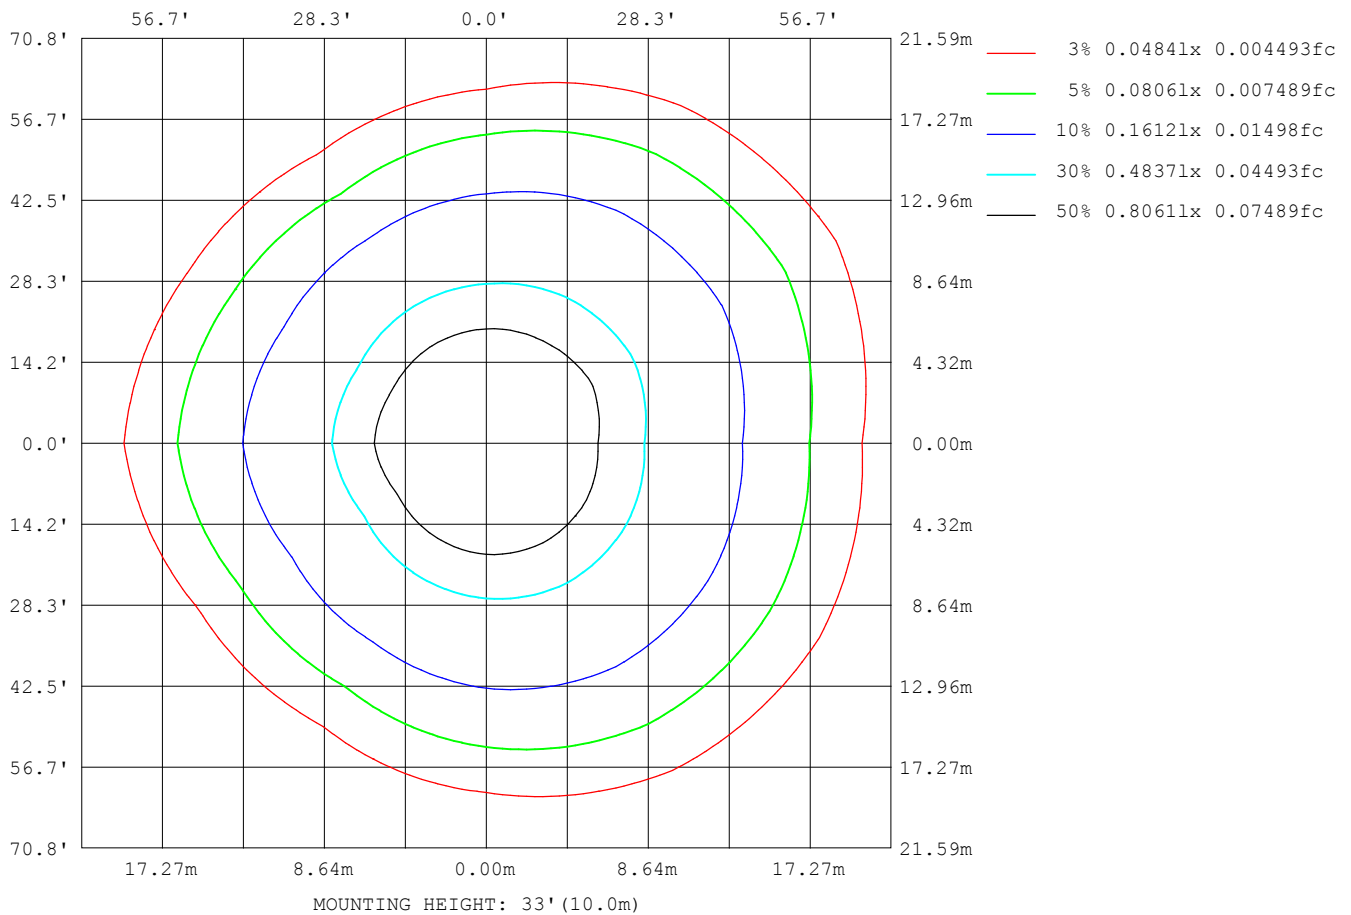

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.3162A P:7.589W PF:1.000 Freq:50.00Hz Lamp Flux:5.90285x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8092
L_0~180 (75) av	7339
L_0~180 (85) av	8274
L_90~270 (65) av	6305
L_90~270 (75) av	3290
L_90~270 (85) av	1262
L_45 (65) av	7716
L_45 (75) av	6912
L_45 (85) av	7030

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

Planar Illuminance Curve

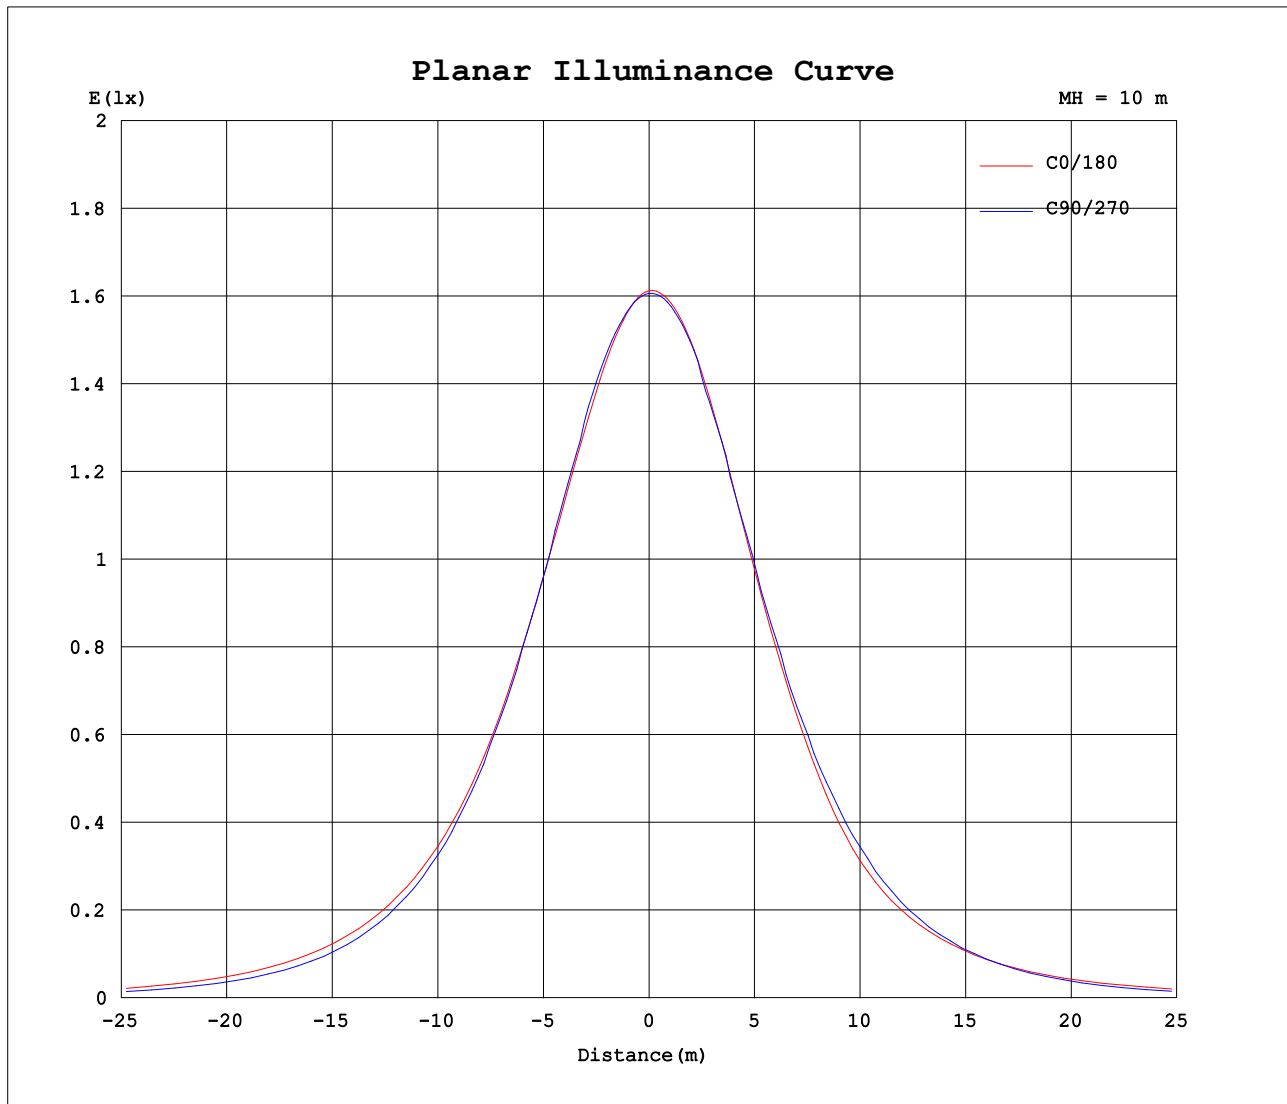

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: LPC
Test Date: 2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3162A P:7.589W PF:1.000 Freq:50.00Hz Lamp Flux:5.90285x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	161	161	161	161	160	160	161	161	161	161	160	160							
5	159	160	160	159	158	158	161	160	160	160	161	161							
10	156	158	158	157	155	153	159	157	158	159	160	160							
15	150	153	154	153	150	147	155	152	153	154	157	157							
20	144	147	148	145	142	138	149	144	146	149	151	151							
25	137	141	141	137	132	128	140	135	138	141	143	147							
30	128	133	133	128	122	116	129	124	128	132	136	141							
35	119	124	123	117	110	102	117	111	117	121	128	133							
40	108	114	113	105	96.1	86.9	103	96.0	104	110	119	123							
45	97.9	102	102	92.4	81.3	73.2	88.7	80.8	88.9	97.4	109	113							
50	87.1	91.3	89.5	79.3	65.3	62.1	76.2	68.2	72.2	82.7	97.0	102							
55	75.5	79.2	77.0	64.8	50.5	51.7	65.6	57.5	55.4	68.9	84.6	90.0							
60	63.4	67.5	64.2	50.6	39.5	41.8	55.1	46.9	42.8	53.2	71.2	77.6							
65	50.4	55.6	50.7	36.9	30.7	32.6	45.3	36.9	33.3	37.7	57.4	65.1							
70	37.6	43.5	38.0	23.5	22.3	24.1	36.3	27.8	24.4	23.2	43.8	52.6							
75	25.4	31.5	26.2	12.4	14.8	16.3	27.8	19.3	16.1	11.4	30.8	40.3							
80	15.7	20.4	15.9	5.63	8.55	9.46	19.5	11.6	9.24	4.15	19.1	28.6							
85	8.40	11.8	7.91	2.05	4.26	4.70	11.8	5.71	4.30	1.03	9.76	17.8							
90	4.01	5.82	3.65	1.42	2.63	2.60	5.83	2.70	2.12	0.71	3.78	9.18							
95	2.15	2.92	2.49	1.51	2.52	2.38	2.63	2.03	1.84	0.79	1.73	3.88							
100	1.89	2.31	2.44	1.69	2.54	2.46	1.88	1.97	1.73	0.98	1.65	1.78							
105	1.95	2.35	2.21	1.89	2.34	2.58	1.89	1.99	1.53	1.15	1.51	1.58							
110	2.04	2.44	2.46	1.89	2.57	2.64	1.85	1.88	1.73	1.16	1.85	1.57							
115	2.14	2.54	2.61	1.98	2.68	2.70	1.79	1.86	1.88	1.26	1.88	1.58							
120	2.30	2.63	2.25	2.09	2.72	2.74	1.79	1.88	1.98	1.41	1.52	1.65							
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: