


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.8405A P:20.17W PF:1.000 Freq:50.00Hz Lamp Flux:10.5838x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 36.73 lm/W			
MODEL	5050	I <sub>max</sub> (cd)	281.2	S/MH (C0/180)	1.21
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	740.87	η UP, DN (C0-180)	0.9, 49.7
NOMINAL FLUX (lm)	10.5838	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 48.8
LAMPS INSIDE	70	η up (%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	98.4	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

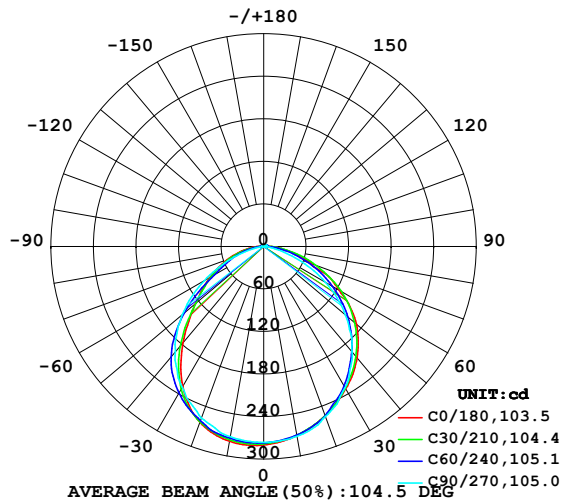

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

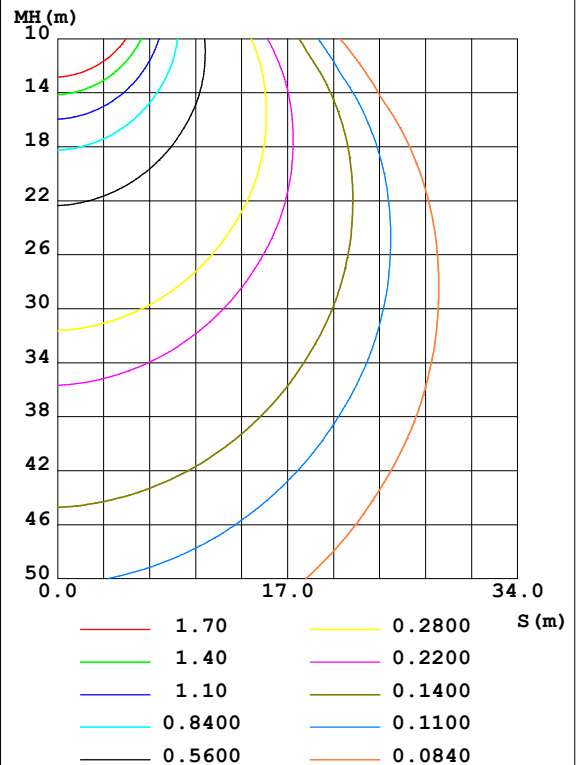

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: LPC  
 Test Date: 2021-10-22

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 9.200m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	270.8	270.1	271.9	272.8	278.9	275.9	272.3	268.7	0- 10	26.23	26.23	3.54,3.54
20	254.1	254.0	255.1	259.2	263.7	262.2	257.3	252.2	10- 20	75.11	101.3	13.7,13.7
30	231.7	228.9	229.8	230.5	228.1	235.9	229.4	228.6	20- 30	112.9	214.2	28.9,28.9
40	205.0	197.8	194.1	187.1	177.0	193.2	194.3	199.8	30- 40	133.3	347.5	46.9,46.9
50	170.8	161.3	150.2	131.6	125.5	136.0	150.3	164.0	40- 50	132.4	480.0	64.8,64.8
60	123.0	119.3	99.93	81.96	87.69	83.02	96.73	122.4	50- 60	111.9	591.9	79.9,79.9
70	73.37	72.75	47.59	48.43	54.77	48.13	44.67	76.30	60- 70	79.15	671.0	90.6,90.6
80	33.27	32.00	11.12	21.64	26.63	20.55	8.255	34.16	70- 80	43.35	714.4	96.4,96.4
90	9.670	7.257	2.508	6.186	7.126	4.669	1.322	7.605	80- 90	14.91	729.3	98.4,98.4
100	3.328	4.053	2.956	4.340	2.679	2.885	1.873	2.850	90-100	4.269	733.5	99.99
110	3.508	4.226	3.453	4.523	2.925	3.189	2.236	2.971	100-110	3.512	737.0	99.5,99.5
120	3.900	4.257	3.789	4.790	3.221	3.586	2.699	3.036	110-120	3.639	740.7	100,100
130	0	0	0	0	0	0	0	0	120-130	0.1769	740.9	100,100
140	0	0	0	0	0	0	0	0	130-140	0	740.9	100,100
150	0	0	0	0	0	0	0	0	140-150	0	740.9	100,100
160	0	0	0	0	0	0	0	0	150-160	0	740.9	100,100
170	0	0	0	0	0	0	0	0	160-170	0	740.9	100,100
180	0	0	0	0	0	0	0	0	170-180	0	740.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 415.28 lm

%lum = 56.1%

%lamp = 56.1%

Conical surface Flux(120deg): 591.86 lm

%lum = 79.9%


%lamp = 79.9%

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-10-22

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.8405A P:20.17W PF:1.000 Freq:50.00Hz Lamp Flux:10.5838x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

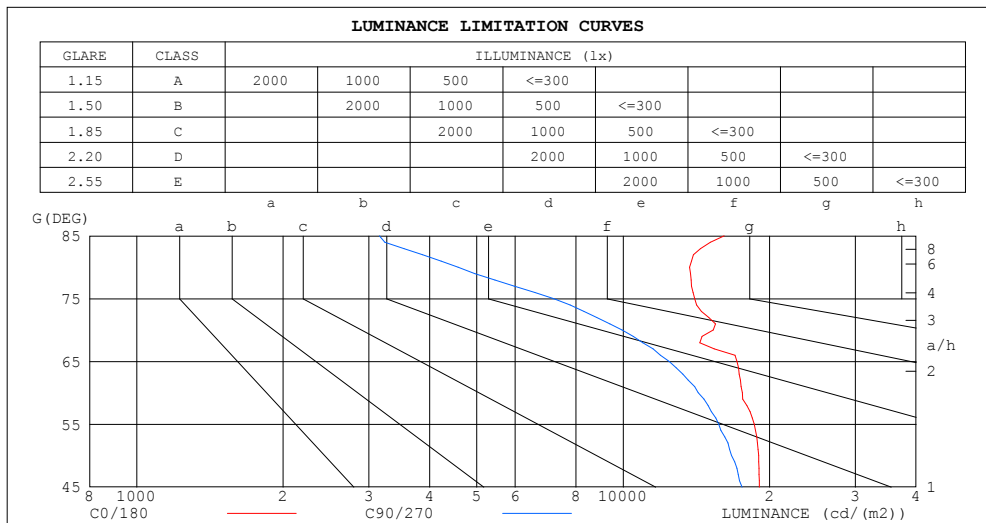

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	16127	3154
80	13685	4576
75	14037	7194
70	15322	9939
65	17135	12424
60	17570	14275
55	18584	15713
50	18985	16692
45	19043	17567


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.8405A P:20.17W PF:1.000 Freq:50.00Hz Lamp Flux:10.5838x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.79	.89	.83	.78	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.66	.79	.71	.65	.75	.69	.64	.73	.67	.63	.70	.65	.61	.59
4.0	.71	.63	.56	.70	.62	.56	.67	.60	.55	.65	.59	.54	.62	.57	.53	.51
5.0	.64	.55	.49	.63	.54	.48	.60	.53	.48	.58	.52	.47	.56	.51	.46	.44
6.0	.58	.49	.43	.57	.48	.42	.55	.47	.42	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.44	.38	.52	.43	.38	.50	.43	.37	.48	.42	.37	.47	.41	.36	.34
8.0	.48	.40	.34	.47	.39	.34	.46	.38	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.34	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

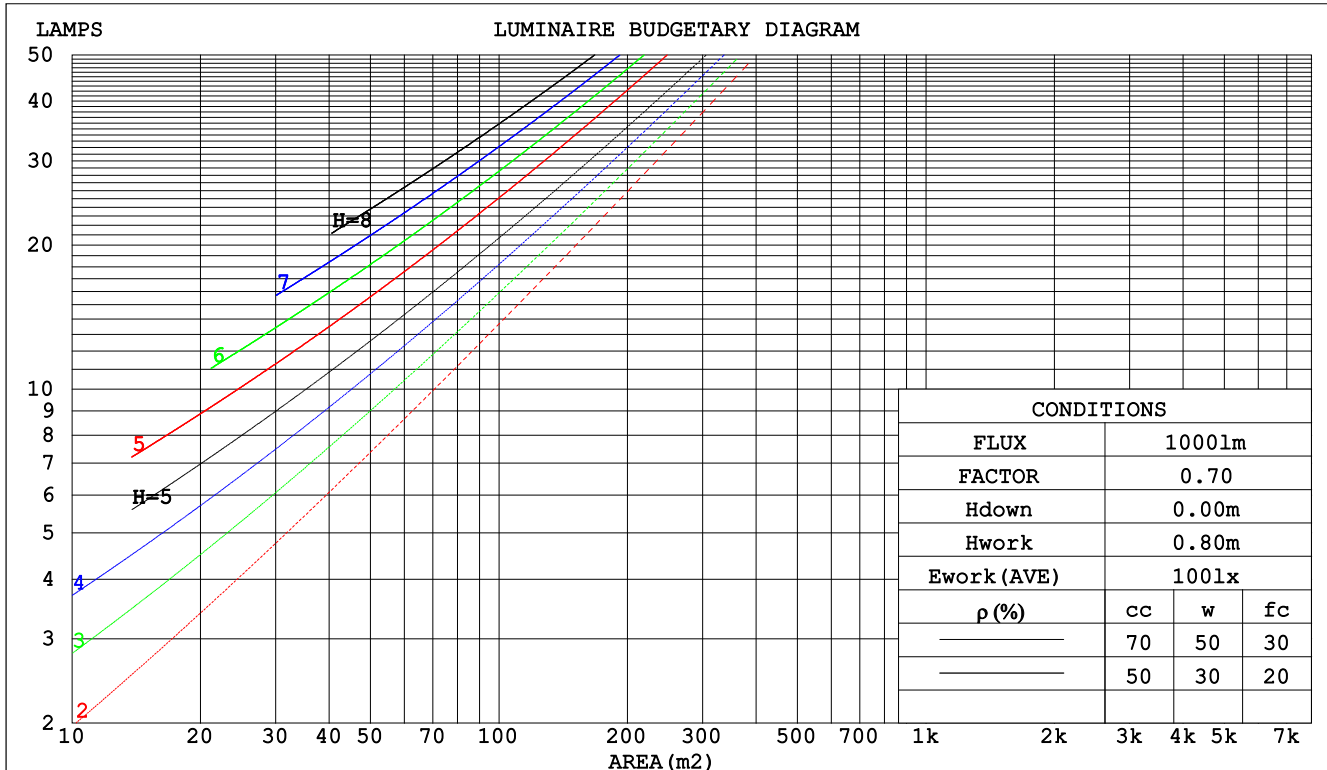

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-10-22

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

### WEC AND CCEC

Test:U:24.00V I:0.8405A P:20.17W PF:1.000 Freq:50.00Hz Lamp Flux:10.5838x70 lm					
NAME: P01-24V-5050-70-DMX-RGBW(5000K)			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: OLYMPIA			SUR.:1*0.014		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.300	.171	.054	.292	.167	.053	.278	.160	.051	.265	.153	.049	.253	.147	.047	
2.0	.282	.154	.047	.275	.152	.047	.263	.146	.045	.251	.141	.044	.241	.136	.043	
3.0	.261	.139	.042	.255	.137	.041	.244	.132	.040	.234	.128	.039	.225	.124	.039	
4.0	.242	.126	.037	.237	.124	.037	.227	.120	.036	.218	.117	.035	.209	.114	.035	
5.0	.224	.114	.033	.220	.113	.033	.211	.110	.032	.203	.107	.032	.195	.104	.031	
6.0	.208	.104	.030	.204	.103	.030	.196	.101	.029	.189	.098	.029	.182	.096	.029	
7.0	.194	.096	.027	.191	.095	.027	.184	.093	.027	.177	.091	.026	.171	.089	.026	
8.0	.182	.089	.025	.179	.088	.025	.172	.086	.025	.166	.084	.024	.161	.083	.024	
9.0	.171	.083	.023	.168	.082	.023	.162	.080	.023	.157	.079	.022	.152	.077	.022	
10.0	.161	.077	.021	.158	.076	.021	.153	.075	.021	.148	.074	.021	.143	.072	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.147	.164	.144	.127	.112	.099	.088	.065	.057	.051	.021	.019	.016	
2.0	.183	.144	.111	.157	.124	.096	.107	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.175	.126	.088	.150	.109	.076	.103	.076	.053	.059	.044	.031	.019	.014	.010	
4.0	.167	.113	.072	.144	.098	.062	.099	.068	.044	.057	.040	.026	.018	.013	.009	
5.0	.160	.103	.060	.137	.089	.053	.095	.062	.037	.055	.036	.022	.018	.012	.007	
6.0	.153	.094	.052	.131	.082	.045	.091	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.146	.087	.046	.126	.076	.040	.087	.053	.028	.050	.031	.017	.016	.010	.006	
8.0	.140	.082	.042	.120	.071	.036	.083	.050	.026	.048	.029	.015	.016	.010	.005	
9.0	.134	.077	.038	.115	.066	.033	.080	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.128	.072	.035	.111	.063	.031	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.8405A P:20.17W PF:1.000 Freq:50.00Hz Lamp Flux:10.5838x70 lm											
NAME: P01-24V-5050-70-DMX-RGBW(5000K)					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: OLYMPIA					SUR.:1*0.014			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	24.3	25.8	24.6	26.0	26.2	23.5	24.9	23.7	25.1	25.4	
	3H	25.7	27.1	26.1	27.3	27.6	24.5	25.9	24.8	26.1	26.4
	4H	26.3	27.6	26.6	27.9	28.2	24.8	26.1	25.1	26.4	26.7
	6H	26.8	28.0	27.1	28.3	28.6	24.9	26.1	25.3	26.4	26.7
	8H	26.9	28.1	27.3	28.4	28.7	24.9	26.1	25.3	26.4	26.7
	12H	27.1	28.2	27.5	28.5	28.9	24.9	26.0	25.2	26.3	26.6
4H	2H	24.8	26.1	25.2	26.4	26.7	24.2	25.5	24.5	25.7	26.0
	3H	26.5	27.6	26.9	27.9	28.3	25.5	26.6	25.9	26.9	27.3
	4H	27.2	28.3	27.6	28.6	29.0	25.9	26.9	26.3	27.3	27.6
	6H	27.8	28.7	28.3	29.1	29.5	26.1	27.0	26.5	27.4	27.8
	8H	28.1	28.9	28.5	29.3	29.7	26.2	27.0	26.6	27.4	27.8
	12H	28.3	29.1	28.8	29.5	29.9	26.2	26.9	26.6	27.3	27.8
8H	4H	27.5	28.3	27.9	28.7	29.1	26.3	27.1	26.7	27.5	28.0
	6H	28.3	29.0	28.7	29.4	29.9	26.7	27.4	27.2	27.8	28.3
	8H	28.6	29.2	29.1	29.7	30.2	26.8	27.4	27.3	27.9	28.4
	12H	29.0	29.5	29.5	30.0	30.5	26.9	27.4	27.4	27.9	28.4
12H	4H	27.5	28.2	27.9	28.7	29.1	26.4	27.1	26.8	27.5	28.0
	6H	28.3	28.9	28.8	29.4	29.9	26.8	27.4	27.3	27.9	28.4
	8H	28.7	29.3	29.2	29.7	30.2	27.0	27.5	27.5	28.0	28.5
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3					
1.5H	+ 0.3 / - 0.3					+ 0.2 / - 0.4					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.5					

CIE Pub.117, 740.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.0)

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:


```

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

```

## ISOCANDELA DIAGRAM

Test:U:24.00V I:0.8405A P:20.17W PF:1.000 Freq:50.00Hz Lamp Flux:10.5838x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

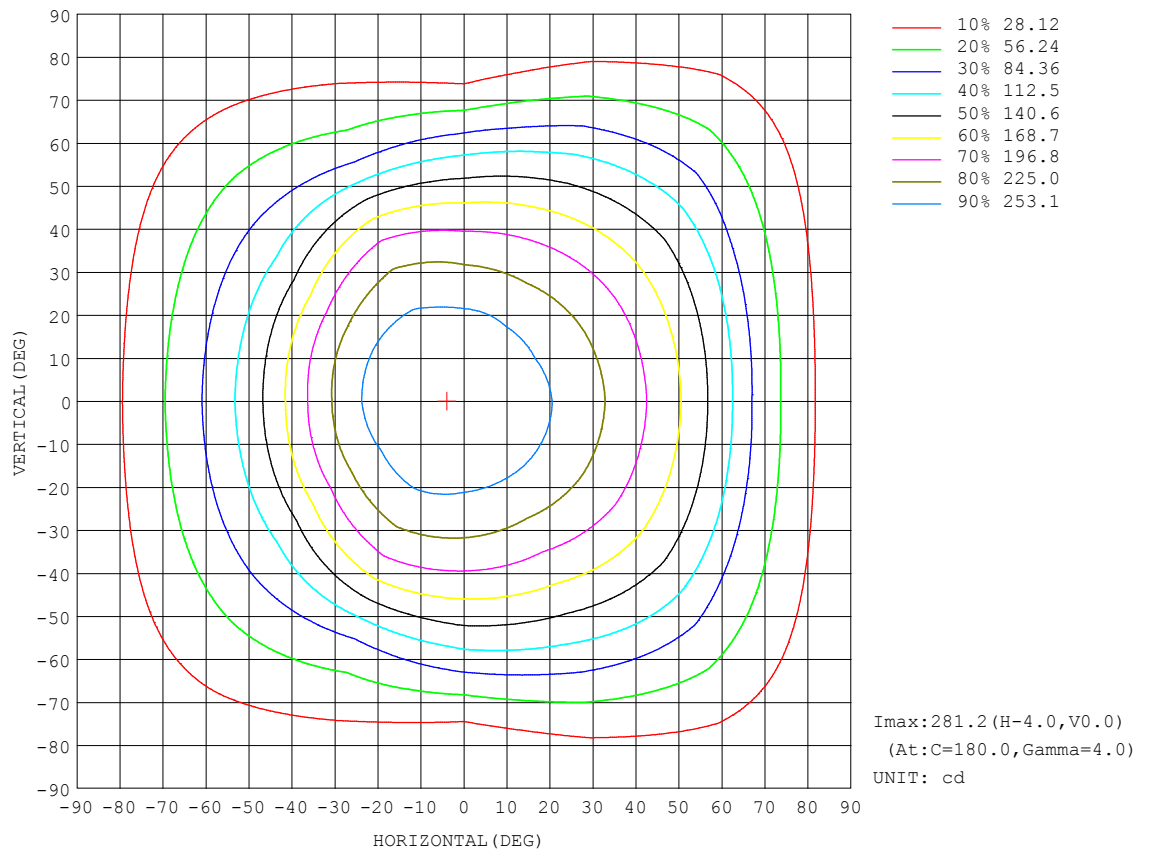


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:



### AAI Figure

Test:U:24.00V I:0.8405A P:20.17W PF:1.000 Freq:50.00Hz Lamp Flux:10.5838x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

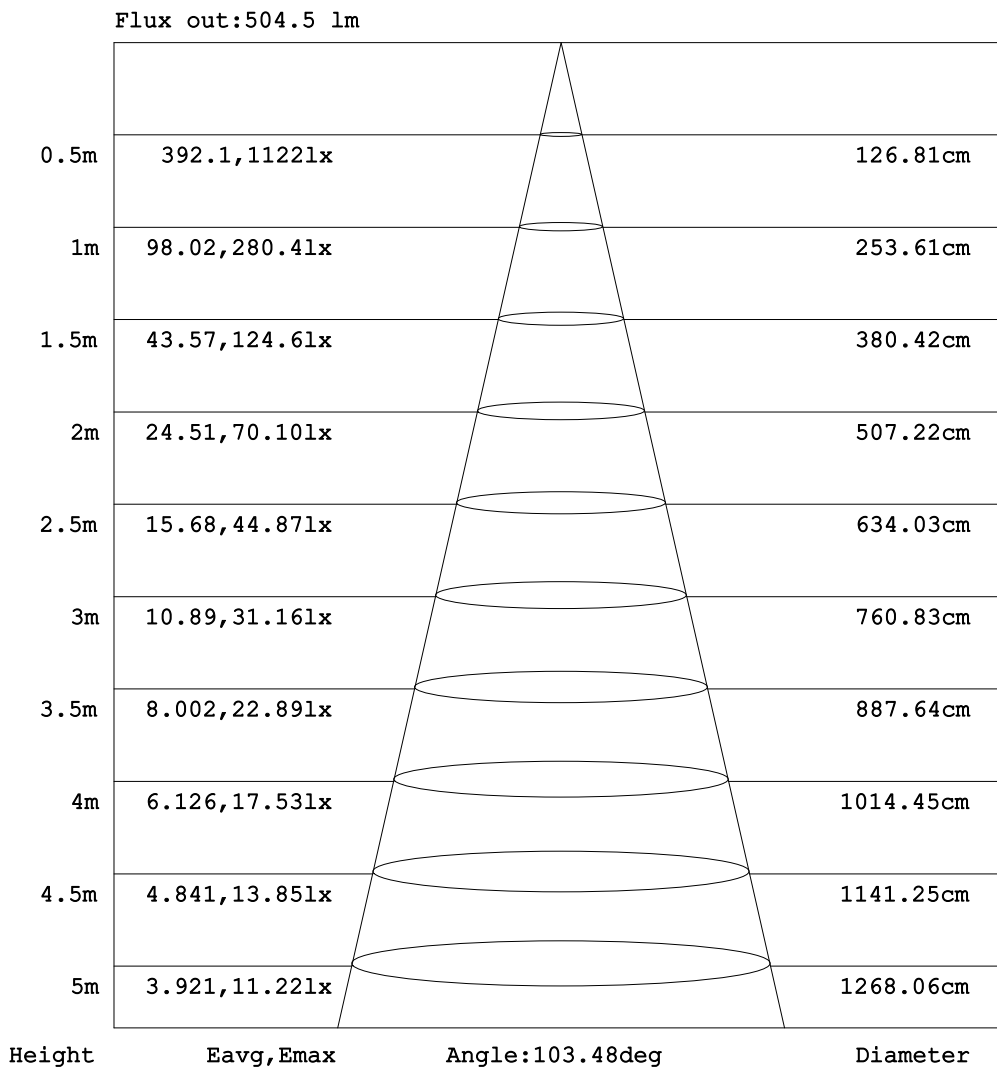


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

# ISOLUX DIAGRAM

Test:U:24.00V I:0.8405A P:20.17W PF:1.000 Freq:50.00Hz Lamp Flux:10.5838x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

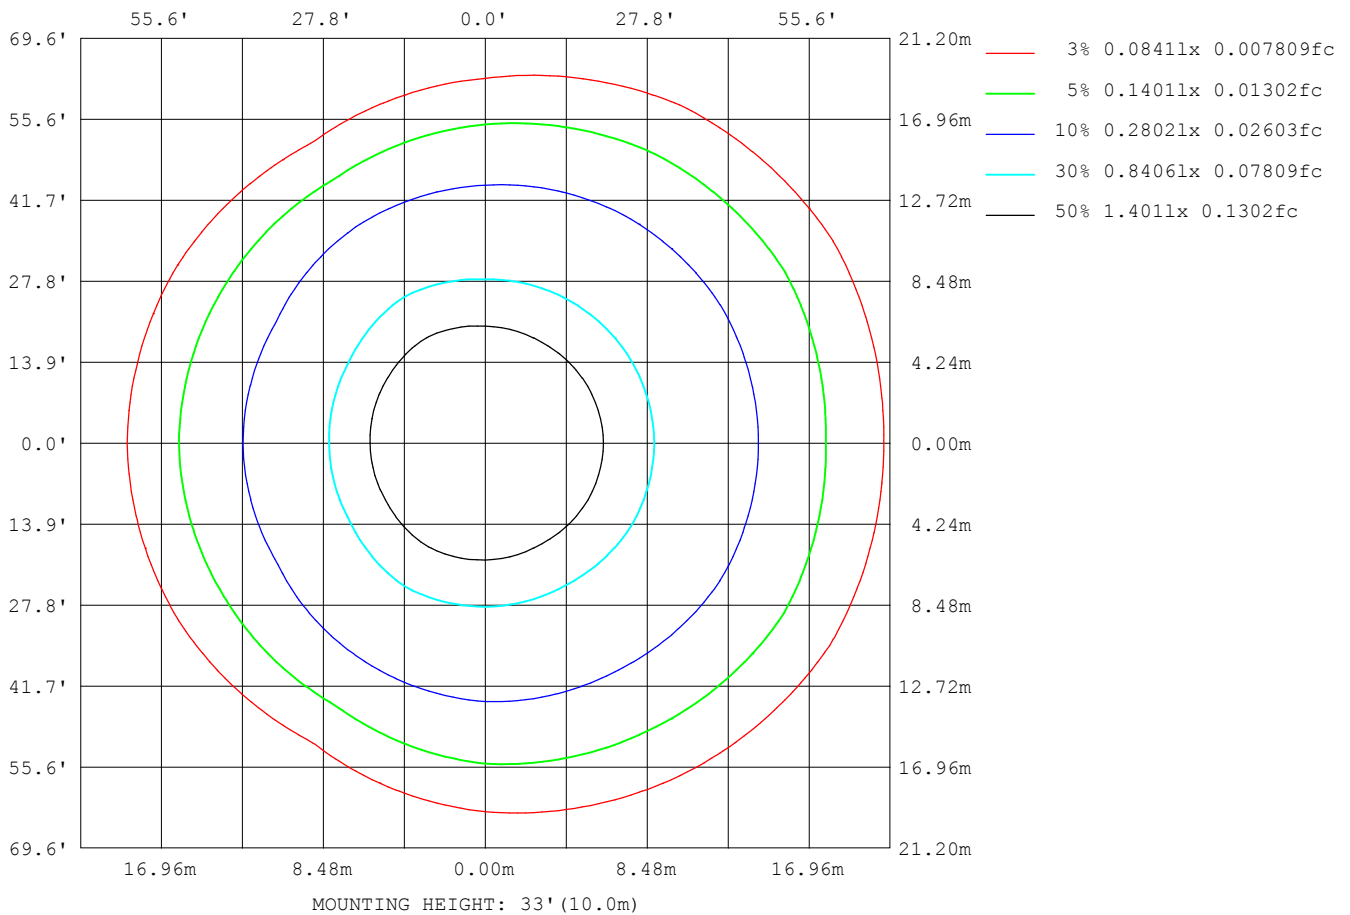

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-10-22

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

## LED Avg.L Report

Test:U:24.00V I:0.8405A P:20.17W PF:1.000 Freq:50.00Hz Lamp Flux:10.5838x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	14517
L_0~180 (75) av	12557
L_0~180 (85) av	14255
L_90~270 (65) av	12074
L_90~270 (75) av	6847
L_90~270 (85) av	2427
L_45 (65) av	13689
L_45 (75) av	12254
L_45 (85) av	11996

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

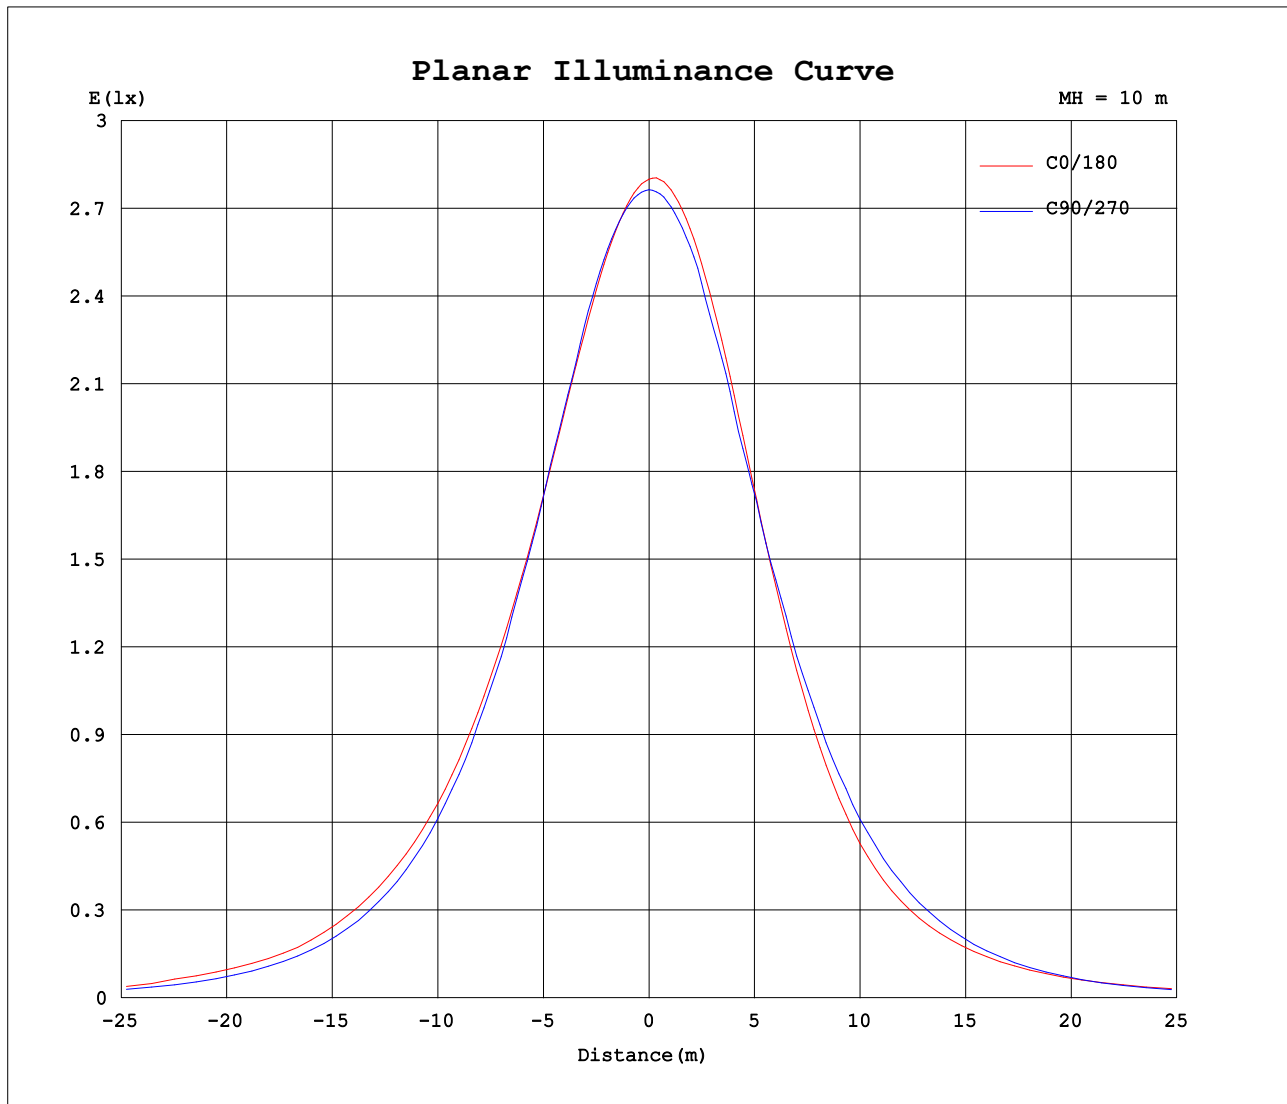

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: LPC  
Test Date: 2021-10-22

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 9.200m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.8405A P:20.17W PF:1.000 Freq:50.00Hz Lamp Flux:10.5838x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(5000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	280	278	277	276	276	275	280	278	277	276	276	275							
5	276	275	275	275	276	275	281	279	277	275	274	272							
10	271	270	270	272	273	273	279	277	275	272	270	267							
15	263	263	263	266	268	267	273	272	271	265	264	260							
20	254	254	254	255	260	258	264	263	261	257	253	252							
25	244	243	241	245	248	245	249	251	252	244	239	242							
30	232	231	227	230	234	227	228	233	239	229	227	230							
35	219	217	211	212	217	204	204	210	223	213	210	217							
40	205	202	193	194	197	178	177	183	203	194	198	202							
45	189	186	175	174	171	149	149	154	178	173	180	186							
50	171	167	155	150	140	123	125	125	147	150	160	168							
55	149	148	134	126	109	102	106	104	113	124	139	149							
60	123	127	112	99.9	79.2	84.7	87.7	85.5	80.5	96.7	117	128							
65	101	102	89.6	73.5	59.9	67.4	70.4	68.0	60.0	69.4	94.0	105							
70	73.4	78.4	67.1	47.6	45.5	51.3	54.8	51.4	44.8	44.7	71.2	81.4							
75	50.9	57.3	45.9	26.1	31.4	36.8	40.1	36.2	30.6	23.6	49.1	59.7							
80	33.3	36.6	27.4	11.1	19.4	23.9	26.6	22.8	18.3	8.25	29.6	38.8							
85	19.7	19.2	13.3	3.85	10.3	13.5	15.1	12.0	9.01	2.07	14.2	21.6							
90	9.67	8.76	5.75	2.51	5.43	6.94	7.13	5.35	3.99	1.32	5.33	9.88							
95	4.59	4.61	4.22	2.70	4.40	4.44	3.38	3.00	2.93	1.51	2.99	4.09							
100	3.33	3.90	4.21	2.96	4.46	4.22	2.68	2.74	3.03	1.87	2.96	2.74							
105	3.35	4.00	3.81	3.43	4.04	4.43	2.81	2.93	2.69	2.24	2.49	2.76							
110	3.51	4.13	4.33	3.45	4.49	4.55	2.92	3.11	3.27	2.24	3.03	2.91							
115	3.69	4.28	4.64	3.60	4.74	4.66	3.06	3.30	3.53	2.46	3.32	3.01							
120	3.90	4.39	4.13	3.79	4.82	4.76	3.22	3.50	3.67	2.70	2.94	3.13							
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks: