


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.8285A P:19.88W PF:1.000 Freq:50.00Hz Lamp Flux:12.9712x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 45.66 lm/W			
MODEL	5050	I _{max} (cd)	345.0	S/MH(C0/180)	1.24
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	907.98	η UP,DN(C0-180)	0.9,48.3
NOMINAL FLUX(lm)	12.9712	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.8,50.0
LAMPS INSIDE	70	η up(%)	1.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	98.3	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

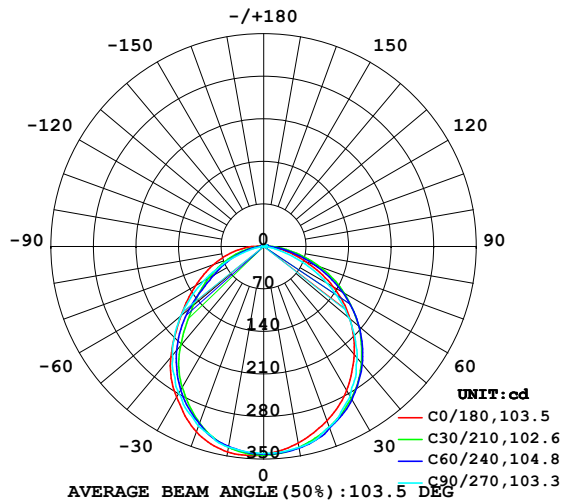

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

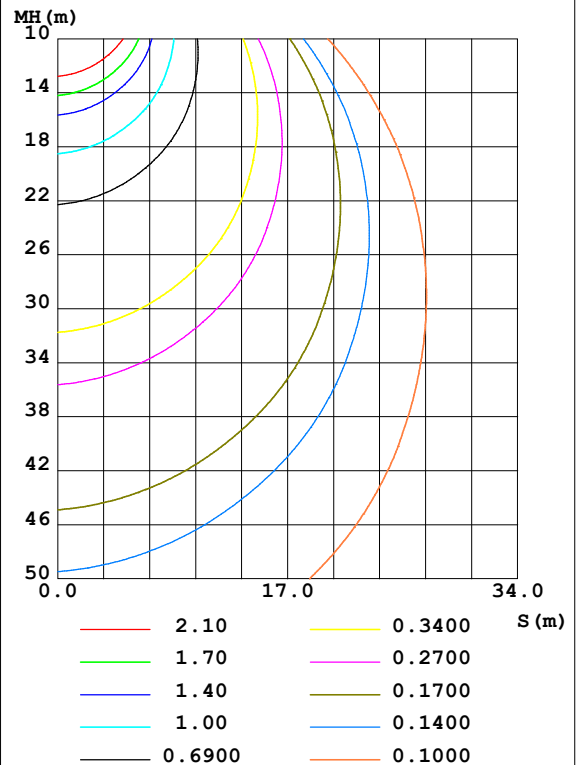

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LPC
 Test Date: 2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 9.200m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	328.4	336.3	335.7	329.4	343.2	334.7	335.2	335.0	0- 10	32.24	32.24	3.55,3.55
20	304.9	317.0	316.3	302.2	324.6	309.4	314.4	316.9	10- 20	91.80	124.0	13.7,13.7
30	273.3	289.6	284.6	262.3	286.5	270.6	279.0	290.5	20- 30	136.8	260.8	28.7,28.7
40	231.7	251.4	239.4	207.7	237.9	217.9	233.7	256.3	30- 40	161.3	422.1	46.5,46.5
50	185.4	204.7	184.0	148.2	177.3	155.7	179.1	212.5	40- 50	160.2	582.3	64.1,64.1
60	131.7	151.3	119.4	95.40	129.9	99.95	114.5	160.2	50- 60	136.7	719.0	79.2,79.2
70	74.03	94.35	55.70	55.16	88.30	58.72	50.72	104.6	60- 70	98.75	817.7	90.1,90.1
80	30.27	42.05	12.97	21.82	50.00	24.01	9.614	51.99	70- 80	54.80	872.5	96.1,96.1
90	7.863	10.95	3.046	6.059	17.01	5.822	1.708	14.30	80- 90	19.89	892.4	98.3,98.3
100	4.372	5.194	3.666	5.393	4.727	4.294	2.291	4.176	90-100	6.194	898.6	99.99
110	4.779	5.387	4.126	5.618	4.307	4.104	2.683	3.875	100-110	4.581	903.2	99.5,99.5
120	5.272	5.365	4.528	5.903	4.011	4.360	3.196	3.671	110-120	4.574	907.8	100,100
130	0	0	0	0	0	0	0	0	120-130	0.2189	908.0	100,100
140	0	0	0	0	0	0	0	0	130-140	0	908.0	100,100
150	0	0	0	0	0	0	0	0	140-150	0	908.0	100,100
160	0	0	0	0	0	0	0	0	150-160	0	908.0	100,100
170	0	0	0	0	0	0	0	0	160-170	0	908.0	100,100
180	0	0	0	0	0	0	0	0	170-180	0	908.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 503.86 lm

%lum = 55.5%

%lamp = 55.5%

Conical surface Flux(120deg): 718.96 lm

%lum = 79.2%


%lamp = 79.2%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.8285A P:19.88W PF:1.000 Freq:50.00Hz Lamp Flux:12.9712x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

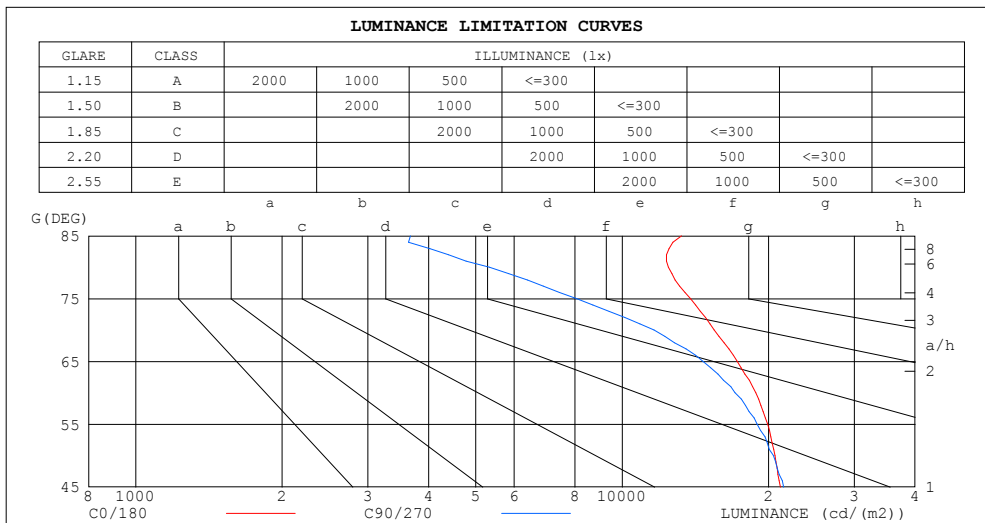

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	13236	3673
80	12453	5336
75	13813	8052
70	15461	11632
65	17227	14669
60	18817	17063
55	19910	18924
50	20605	20445
45	21144	21489


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.8285A P:19.88W PF:1.000 Freq:50.00Hz Lamp Flux:12.9712x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.79	.89	.83	.77	.85	.80	.75	.81	.77	.73	.78	.75	.72	.69
3.0	.80	.72	.66	.78	.71	.65	.75	.69	.64	.72	.67	.62	.69	.65	.61	.59
4.0	.71	.63	.56	.70	.62	.55	.67	.60	.55	.64	.58	.54	.62	.57	.53	.50
5.0	.64	.55	.48	.63	.54	.48	.60	.53	.47	.58	.52	.47	.56	.50	.46	.44
6.0	.57	.49	.42	.56	.48	.42	.54	.47	.42	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.44	.38	.51	.43	.37	.50	.42	.37	.48	.41	.37	.47	.41	.36	.34
8.0	.48	.39	.34	.47	.39	.33	.45	.38	.33	.44	.38	.33	.43	.37	.32	.31
9.0	.44	.36	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.28
10.0	.40	.33	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

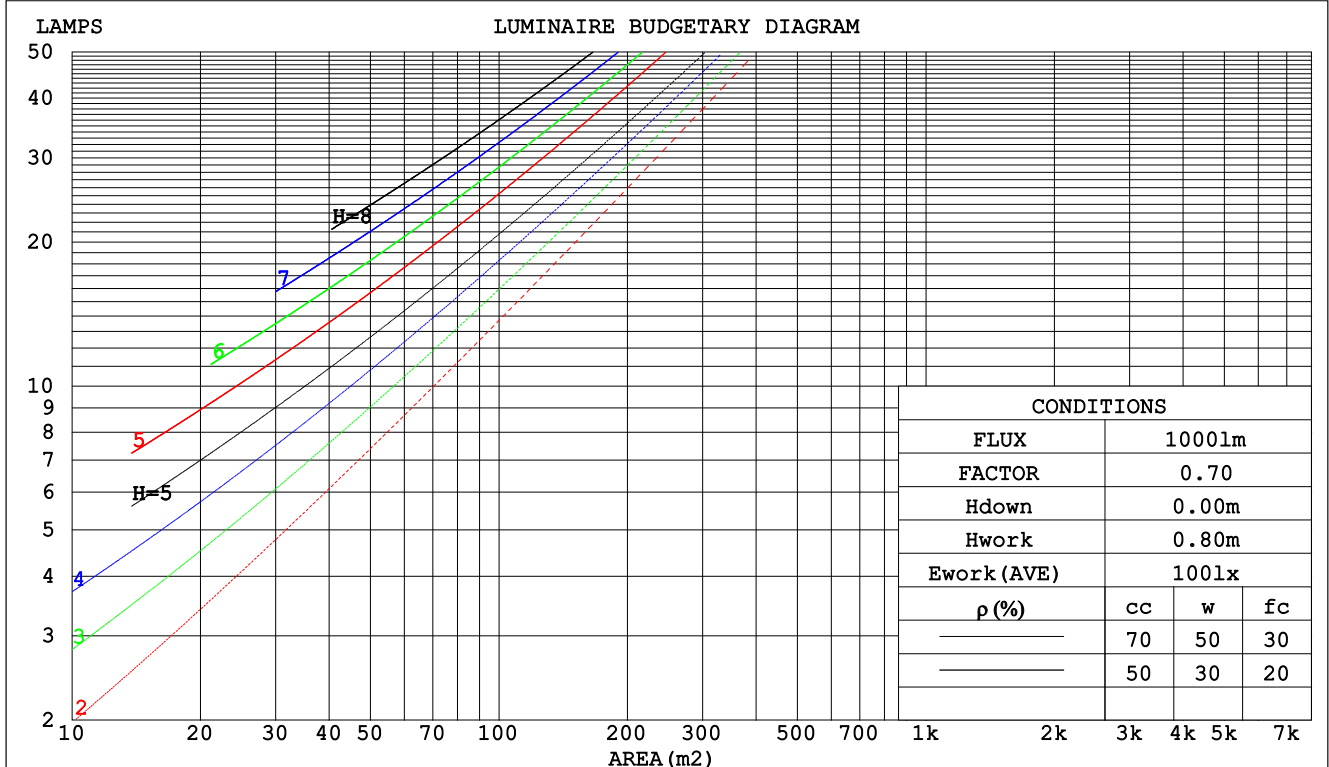

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.8285A P:19.88W PF:1.000 Freq:50.00Hz Lamp Flux:12.9712x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.303	.172	.055	.296	.169	.054	.281	.161	.052	.268	.155	.050	.256	.149	.048		
2.0	.284	.156	.048	.277	.153	.047	.265	.147	.046	.253	.142	.044	.242	.137	.043		
3.0	.263	.140	.042	.257	.138	.041	.246	.133	.040	.236	.129	.040	.226	.125	.039		
4.0	.243	.126	.037	.238	.124	.037	.228	.121	.036	.219	.117	.035	.210	.114	.035		
5.0	.225	.115	.033	.220	.113	.033	.212	.110	.032	.203	.107	.032	.196	.105	.031		
6.0	.209	.105	.030	.205	.103	.030	.197	.101	.029	.190	.099	.029	.183	.096	.029		
7.0	.195	.096	.027	.191	.095	.027	.184	.093	.027	.177	.091	.026	.171	.089	.026		
8.0	.182	.089	.025	.179	.088	.025	.173	.086	.025	.167	.084	.024	.161	.083	.024		
9.0	.171	.083	.023	.168	.082	.023	.162	.080	.023	.157	.079	.023	.152	.077	.022		
10.0	.161	.077	.021	.158	.076	.021	.153	.075	.021	.148	.074	.021	.144	.072	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.204	.204	.204	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.193	.169	.148	.165	.145	.127	.113	.100	.088	.065	.058	.051	.021	.019	.017	
2.0	.184	.145	.112	.158	.125	.097	.108	.086	.068	.062	.050	.040	.020	.016	.013	
3.0	.176	.128	.089	.151	.110	.077	.104	.076	.054	.060	.045	.032	.019	.014	.010	
4.0	.169	.114	.073	.145	.099	.063	.100	.069	.044	.058	.040	.026	.019	.013	.009	
5.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
6.0	.154	.095	.053	.132	.083	.046	.091	.058	.033	.053	.034	.020	.017	.011	.006	
7.0	.147	.089	.047	.127	.077	.041	.088	.054	.029	.051	.032	.017	.016	.010	.006	
8.0	.141	.083	.043	.121	.072	.037	.084	.050	.026	.049	.030	.016	.016	.010	.005	
9.0	.135	.078	.039	.116	.068	.034	.081	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.129	.074	.036	.112	.064	.032	.077	.045	.022	.045	.027	.013	.015	.009	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.8285A P:19.88W PF:1.000 Freq:50.00Hz Lamp Flux:12.9712x70 lm											
NAME: P01-24V-5050-70-DMX-RGBW(3000K)					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: EVERFINE					SUR.:1*0.014			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	23.9	25.4	24.2	25.6	25.9	23.7	25.2	24.0	25.4	25.7	
	3H	25.3	26.6	25.6	26.9	27.1	24.7	26.1	25.1	26.4	26.6
	4H	25.8	27.0	26.1	27.3	27.6	25.0	26.3	25.3	26.6	26.9
	6H	26.1	27.3	26.4	27.6	27.9	25.1	26.3	25.4	26.6	26.9
	8H	26.2	27.4	26.6	27.7	28.0	25.1	26.2	25.4	26.6	26.9
	12H	26.3	27.4	26.7	27.7	28.1	25.0	26.2	25.4	26.5	26.8
4H	2H	24.6	25.9	25.0	26.2	26.5	24.5	25.7	24.8	26.0	26.3
	3H	26.2	27.3	26.6	27.7	28.0	25.8	26.9	26.1	27.2	27.5
	4H	26.9	27.9	27.3	28.3	28.6	26.2	27.2	26.6	27.5	27.9
	6H	27.4	28.3	27.8	28.7	29.1	26.4	27.3	26.8	27.7	28.1
	8H	27.5	28.4	28.0	28.8	29.2	26.4	27.3	26.9	27.7	28.1
	12H	27.7	28.5	28.1	28.9	29.3	26.4	27.2	26.9	27.6	28.1
8H	4H	27.2	28.0	27.6	28.4	28.9	26.6	27.4	27.0	27.8	28.2
	6H	27.9	28.6	28.4	29.0	29.5	27.0	27.7	27.5	28.1	28.6
	8H	28.2	28.8	28.7	29.3	29.8	27.1	27.8	27.6	28.2	28.7
	12H	28.5	29.0	29.0	29.5	30.0	27.2	27.7	27.7	28.2	28.7
12H	4H	27.2	28.0	27.7	28.4	28.8	26.6	27.4	27.1	27.8	28.3
	6H	28.0	28.6	28.5	29.1	29.5	27.1	27.8	27.6	28.2	28.7
	8H	28.4	28.9	28.9	29.4	29.9	27.3	27.9	27.8	28.3	28.9
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3					
1.5H	+ 0.3 / - 0.4					+ 0.3 / - 0.5					
2.0H	+ 0.2 / - 0.5					+ 0.3 / - 0.6					

CIE Pub.117, 908.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.3)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:


```

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.8285A P:19.88W PF:1.000 Freq:50.00Hz Lamp Flux:12.9712x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

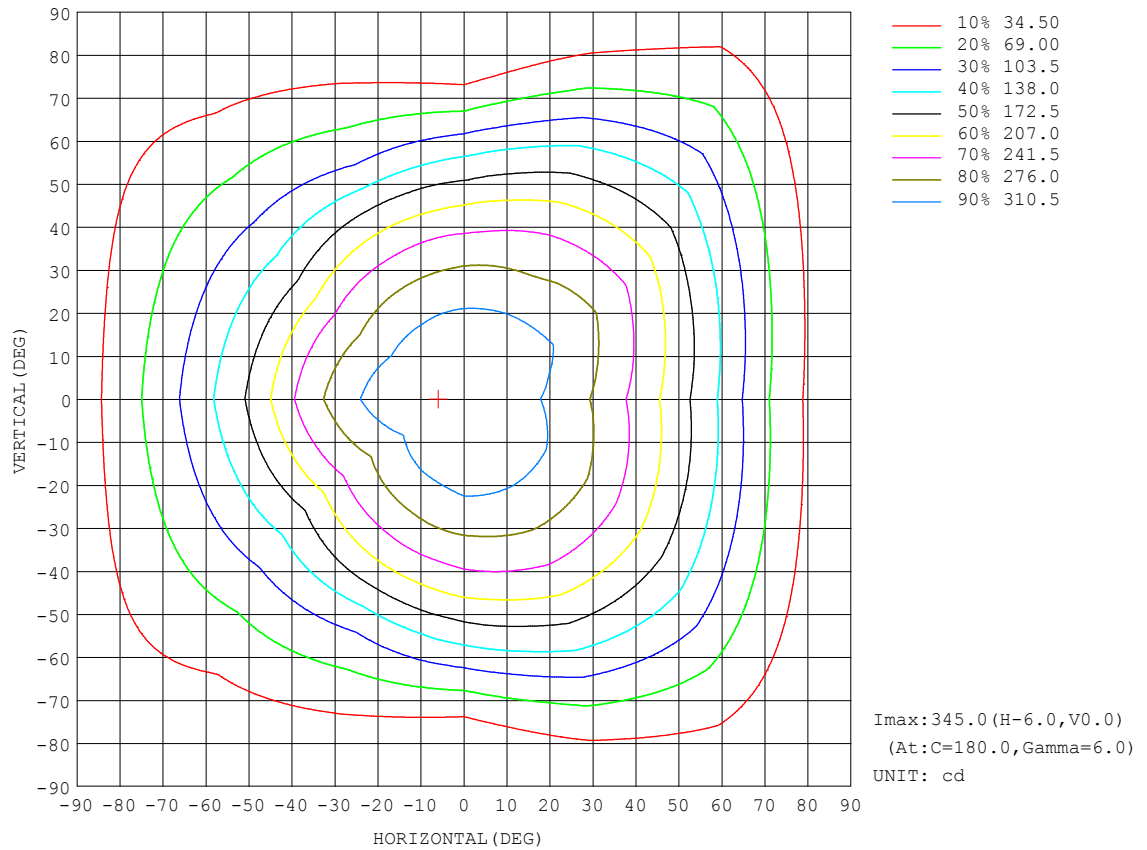


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.8285A P:19.88W PF:1.000 Freq:50.00Hz Lamp Flux:12.9712x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

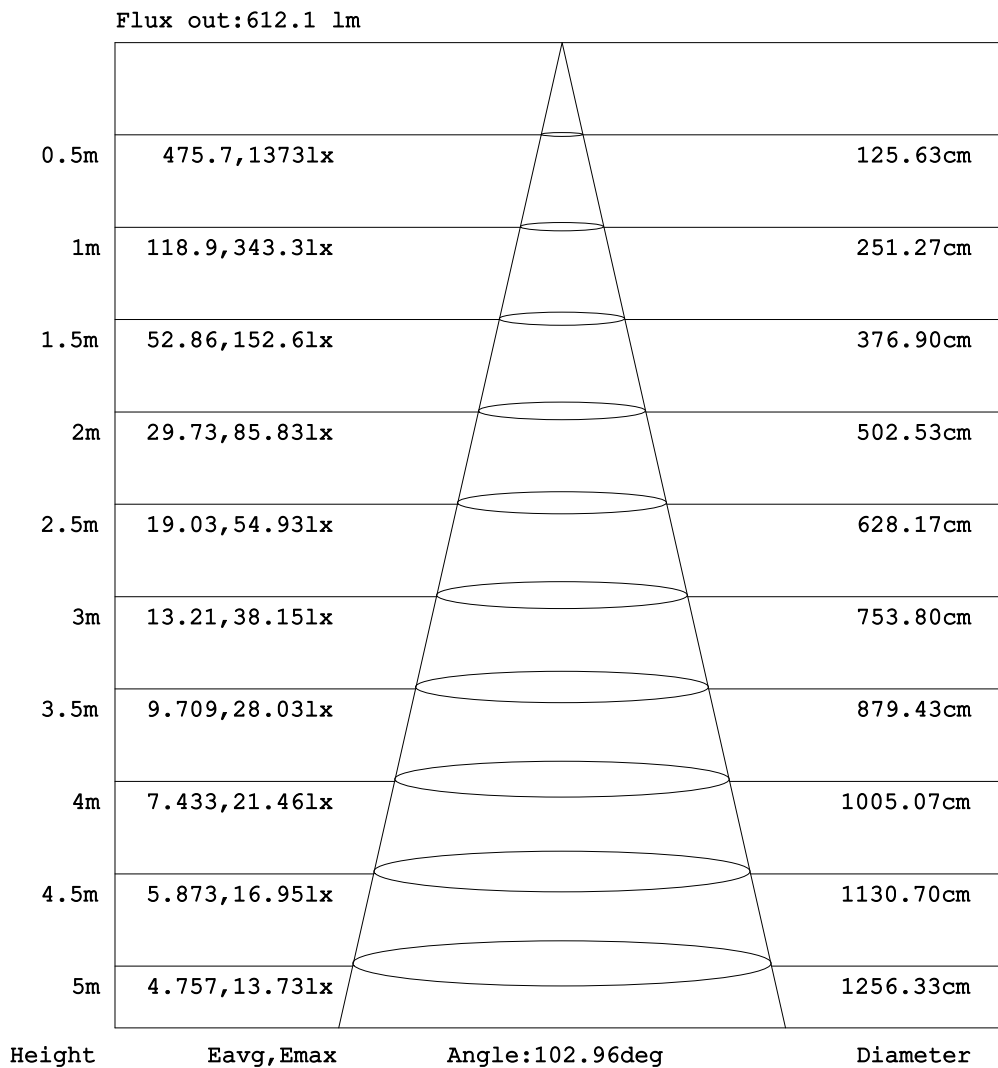


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.8285A P:19.88W PF:1.000 Freq:50.00Hz Lamp Flux:12.9712x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

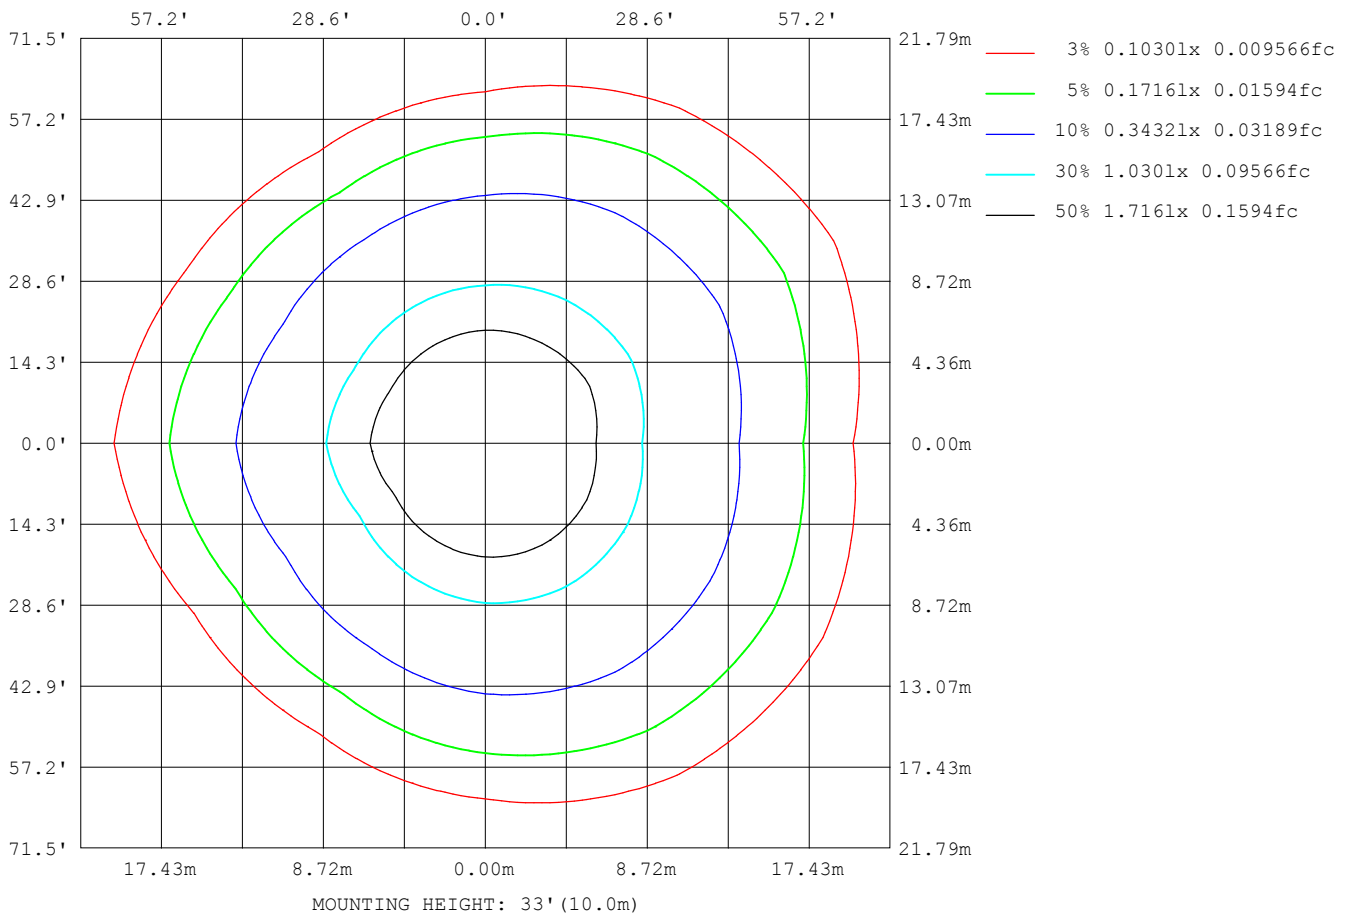

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.8285A P:19.88W PF:1.000 Freq:50.00Hz Lamp Flux:12.9712x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	17759
L_0~180 (75) av	16408
L_0~180 (85) av	19760
L_90~270 (65) av	14204
L_90~270 (75) av	7536
L_90~270 (85) av	2831
L_45 (65) av	17420
L_45 (75) av	15675
L_45 (85) av	16036

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

Planar Illuminance Curve

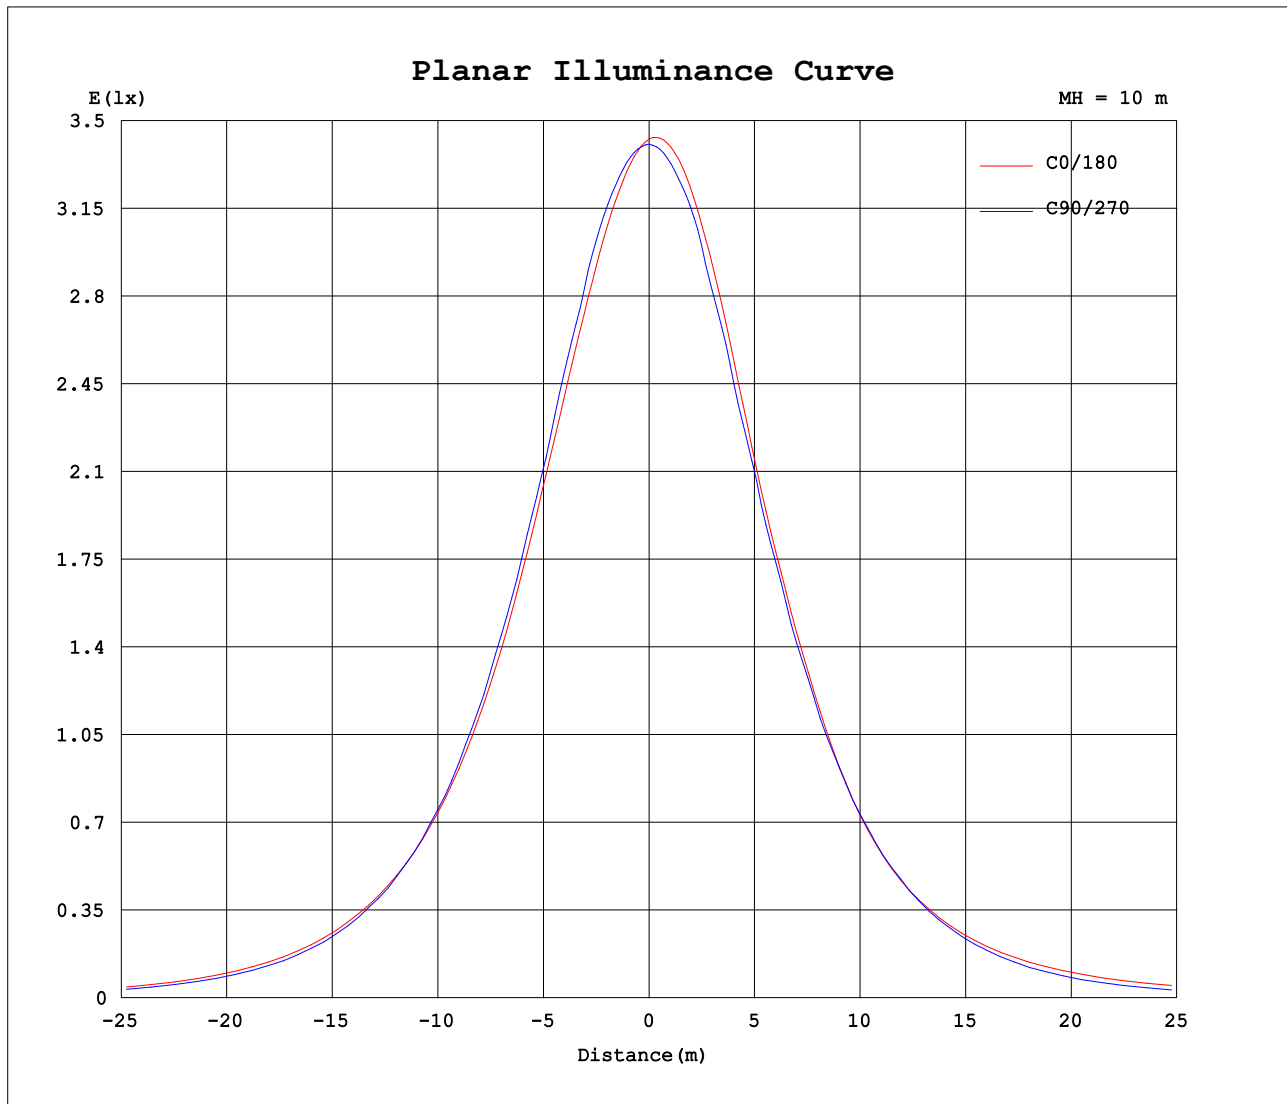

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: LPC
Test Date: 2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.8285A P:19.88W PF:1.000 Freq:50.00Hz Lamp Flux:12.9712x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	343	343	342	341	340	339	343	343	342	341	340	339							
5	337	341	341	339	337	335	345	342	339	339	339	338							
10	328	336	337	336	332	327	343	335	334	335	335	335							
15	317	327	330	329	323	315	336	325	326	325	329	328							
20	305	316	318	316	308	297	325	309	310	314	316	318							
25	291	304	306	301	290	277	307	289	293	298	299	309							
30	273	289	291	285	269	256	286	268	273	279	285	296							
35	253	271	272	263	245	229	265	244	249	257	269	280							
40	232	250	253	239	218	197	238	213	223	234	251	262							
45	209	228	230	213	189	167	207	180	193	208	230	241							
50	185	204	205	184	154	142	177	151	160	179	206	219							
55	160	178	178	152	120	119	153	128	124	147	180	194							
60	132	153	150	119	94.1	96.7	130	105	95.2	115	152	168							
65	102	127	119	86.8	73.0	76.2	108	83.1	74.0	81.3	123	142							
70	74.0	99.1	89.6	55.7	53.4	56.9	88.3	63.0	54.5	50.7	94.6	115							
75	50.1	71.4	62.0	29.2	35.5	38.9	68.9	44.1	36.2	25.4	66.8	87.6							
80	30.3	46.1	37.9	13.0	20.6	23.0	50.0	27.1	20.9	9.61	42.1	61.9							
85	16.2	26.5	19.0	4.48	10.4	11.6	32.1	13.8	9.99	2.43	21.8	38.4							
90	7.86	13.3	8.66	3.05	5.95	6.17	17.0	6.51	5.13	1.71	8.44	20.2							
95	4.68	6.77	5.55	3.26	5.41	5.19	7.74	4.70	4.37	1.95	4.45	9.04							
100	4.37	5.08	5.31	3.67	5.50	5.29	4.73	4.53	4.05	2.29	4.05	4.31							
105	4.55	5.15	4.87	4.11	5.08	5.52	4.36	4.52	3.46	2.63	3.62	3.47							
110	4.78	5.36	5.42	4.13	5.57	5.66	4.31	4.23	3.98	2.68	4.21	3.54							
115	5.04	5.59	5.74	4.30	5.83	5.79	4.08	4.17	4.30	2.92	4.18	3.73							
120	5.27	5.81	4.92	4.53	5.92	5.89	4.01	4.24	4.48	3.20	3.37	3.97							
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: