


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.8361A P:20.07W PF:1.000 Freq:50.00Hz Lamp Flux:10.6581x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 37.18 lm/W			
MODEL	5050	I <sub>max</sub> (cd)	281.4	S/MH (C0/180)	1.15
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	746.07	η UP, DN (C0-180)	0.9, 50.2
NOMINAL FLUX (lm)	10.6581	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 48.2
LAMPS INSIDE	70	η up (%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	98.4	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

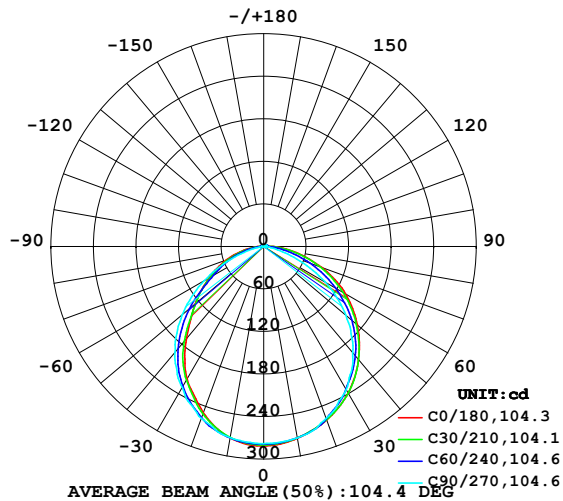

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

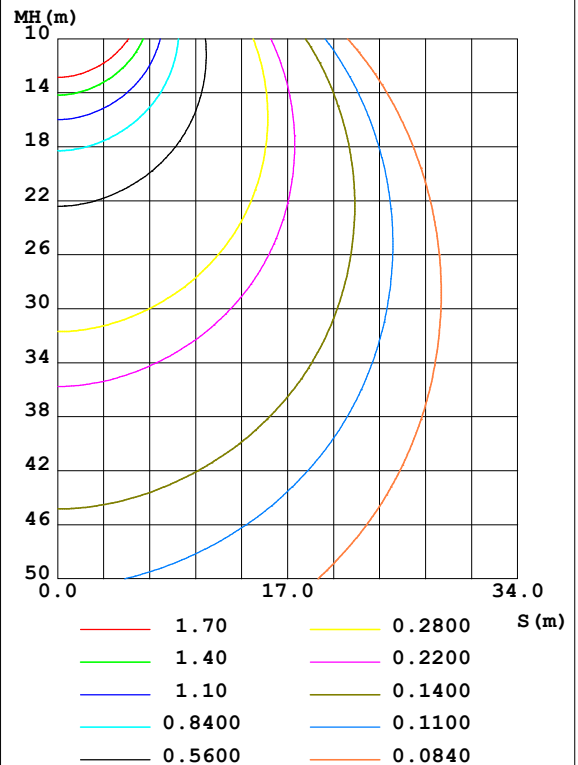

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: LPC  
 Test Date: 2021-10-22

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 9.200m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	274.7	274.0	274.2	271.4	274.1	273.8	273.9	271.9	0- 10	26.35	26.35	3.53,3.53
20	260.5	259.4	258.2	252.7	249.3	254.1	257.8	256.6	10- 20	75.05	101.4	13.6,13.6
30	238.5	235.3	233.1	220.9	216.1	223.0	229.9	234.2	20- 30	112.0	213.4	28.6,28.6
40	208.2	204.8	195.7	178.0	169.6	181.2	194.4	205.4	30- 40	132.3	345.7	46.3,46.3
50	172.6	166.6	151.4	129.5	126.3	131.2	150.3	168.3	40- 50	131.9	477.6	64,64
60	133.2	123.2	100.1	84.27	89.31	84.35	97.32	125.0	50- 60	113.4	591.0	79.2,79.2
70	86.96	77.37	45.66	50.36	56.53	49.77	43.06	79.37	60- 70	82.20	673.2	90.2,90.2
80	43.17	34.93	10.49	21.10	25.35	20.01	7.894	36.53	70- 80	45.48	718.7	96.3,96.3
90	12.69	8.805	2.523	5.284	4.635	3.907	1.327	8.747	80- 90	15.59	734.2	98.4,98.4
100	3.409	4.066	2.972	4.320	2.488	3.060	1.898	3.041	90-100	4.432	738.7	99,99
110	3.508	4.211	3.448	4.515	2.905	3.353	2.241	3.079	100-110	3.553	742.2	99.5,99.5
120	3.830	4.189	3.779	4.785	3.292	3.704	2.699	2.953	110-120	3.658	745.9	100,100
130	0	0	0	0	0	0	0	0	120-130	0.1766	746.1	100,100
140	0	0	0	0	0	0	0	0	130-140	0	746.1	100,100
150	0	0	0	0	0	0	0	0	140-150	0	746.1	100,100
160	0	0	0	0	0	0	0	0	150-160	0	746.1	100,100
170	0	0	0	0	0	0	0	0	160-170	0	746.1	100,100
180	0	0	0	0	0	0	0	0	170-180	0	746.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 412.96 lm

%lum = 55.4%

%lamp = 55.4%

Conical surface Flux(120deg): 590.97 lm

%lum = 79.2%


%lamp = 79.2%

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-10-22

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.8361A P:20.07W PF:1.000 Freq:50.00Hz Lamp Flux:10.6581x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

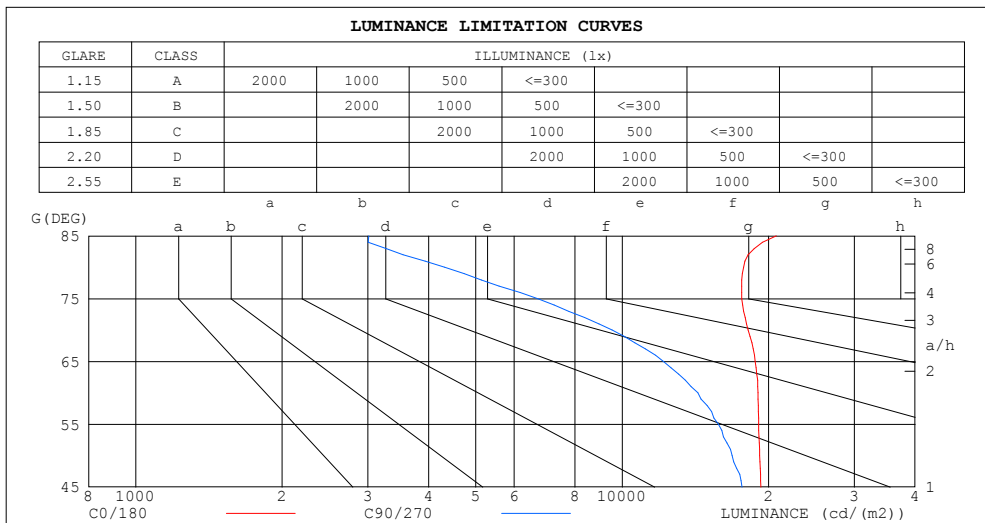

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	20726	3015
80	17758	4315
75	17623	6696
70	18160	9536
65	18764	12150
60	19024	14305
55	19087	15773
50	19179	16819
45	19293	17630


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.8361A P:20.07W PF:1.000 Freq:50.00Hz Lamp Flux:10.6581x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.79	.89	.83	.77	.85	.80	.75	.82	.77	.73	.78	.75	.72	.69
3.0	.80	.72	.66	.78	.71	.65	.75	.69	.64	.72	.67	.62	.69	.65	.61	.59
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.54	.64	.58	.54	.62	.57	.53	.50
5.0	.64	.55	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.50	.46	.44
6.0	.57	.49	.42	.56	.48	.42	.54	.47	.42	.53	.46	.41	.51	.45	.41	.38
7.0	.52	.43	.37	.51	.43	.37	.50	.42	.37	.48	.41	.36	.47	.41	.36	.34
8.0	.48	.39	.33	.47	.39	.33	.45	.38	.33	.44	.38	.33	.43	.37	.32	.31
9.0	.44	.36	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.27
10.0	.40	.33	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

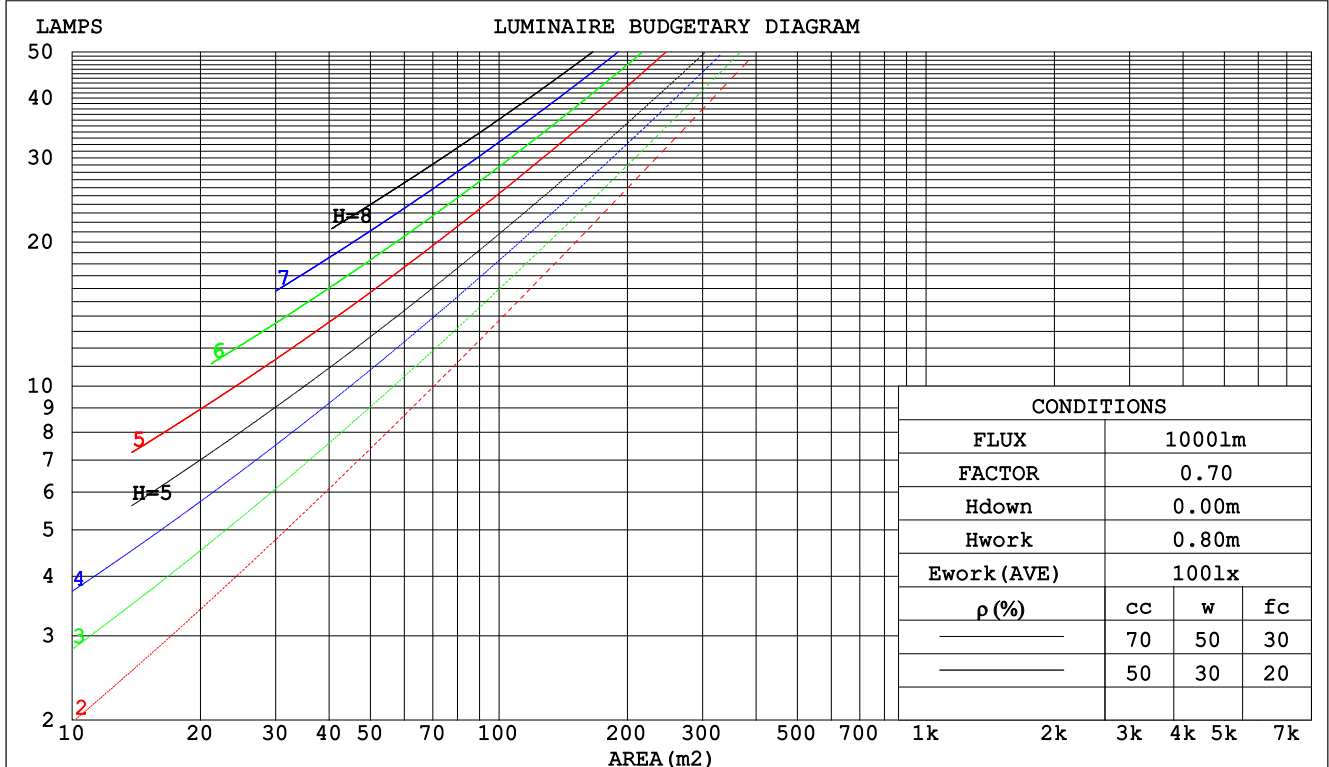

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-10-22

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

### WEC AND CCEC

Test:U:24.00V I:0.8361A P:20.07W PF:1.000 Freq:50.00Hz Lamp Flux:10.6581x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.303	.172	.055	.295	.168	.054	.281	.161	.052	.268	.155	.050	.256	.149	.048		
2.0	.284	.156	.048	.278	.153	.047	.265	.147	.046	.254	.142	.045	.243	.137	.043		
3.0	.263	.140	.042	.257	.138	.041	.246	.133	.041	.236	.129	.040	.227	.125	.039		
4.0	.243	.126	.037	.238	.125	.037	.228	.121	.036	.219	.118	.036	.211	.114	.035		
5.0	.225	.115	.033	.221	.113	.033	.212	.110	.032	.204	.108	.032	.196	.105	.032		
6.0	.209	.105	.030	.205	.104	.030	.197	.101	.029	.190	.099	.029	.183	.096	.029		
7.0	.195	.096	.027	.191	.095	.027	.184	.093	.027	.178	.091	.027	.172	.089	.026		
8.0	.182	.089	.025	.179	.088	.025	.173	.086	.025	.167	.085	.024	.161	.083	.024		
9.0	.171	.083	.023	.168	.082	.023	.163	.080	.023	.157	.079	.023	.152	.077	.022		
10.0	.161	.077	.021	.158	.077	.021	.153	.075	.021	.148	.074	.021	.144	.072	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.147	.164	.145	.127	.112	.099	.088	.065	.058	.051	.021	.019	.016	
2.0	.183	.144	.111	.157	.124	.096	.108	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.175	.127	.088	.150	.109	.076	.103	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.168	.113	.072	.144	.098	.062	.099	.068	.044	.057	.040	.026	.018	.013	.009	
5.0	.160	.103	.060	.138	.089	.052	.095	.062	.037	.055	.036	.022	.018	.012	.007	
6.0	.153	.094	.052	.132	.082	.045	.091	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.146	.088	.046	.126	.076	.040	.087	.053	.029	.051	.031	.017	.016	.010	.006	
8.0	.140	.082	.042	.121	.071	.036	.083	.050	.026	.049	.029	.015	.016	.010	.005	
9.0	.134	.077	.038	.116	.067	.033	.080	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.129	.073	.035	.111	.063	.031	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.8361A P:20.07W PF:1.000 Freq:50.00Hz Lamp Flux:10.6581x70 lm											
NAME: P01-24V-5050-70-DMX-RGBW(4000K)					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: OLYMPIA					SUR.:1*0.014			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		24.5	26.0	24.8	26.2	26.4	23.6	25.1	23.9	25.3	25.5
	3H	26.2	27.5	26.5	27.8	28.1	24.6	26.0	24.9	26.2	26.5
	4H	26.9	28.2	27.2	28.5	28.8	24.9	26.1	25.2	26.4	26.7
	6H	27.5	28.7	27.9	29.0	29.3	24.9	26.1	25.3	26.4	26.8
	8H	27.7	28.9	28.1	29.2	29.5	24.9	26.1	25.3	26.4	26.7
	12H	28.0	29.1	28.3	29.4	29.7	24.9	26.0	25.3	26.3	26.7
4H	2H	25.0	26.3	25.4	26.6	26.9	24.3	25.6	24.7	25.9	26.2
	3H	26.9	28.1	27.3	28.4	28.7	25.6	26.7	26.0	27.1	27.4
	4H	27.8	28.8	28.2	29.2	29.6	26.0	27.0	26.4	27.4	27.7
	6H	28.6	29.5	29.0	29.9	30.3	26.2	27.1	26.6	27.5	27.9
	8H	28.9	29.7	29.3	30.1	30.5	26.2	27.1	26.7	27.5	27.9
	12H	29.2	30.0	29.6	30.4	30.8	26.2	27.0	26.7	27.4	27.9
8H	4H	28.0	28.9	28.5	29.3	29.7	26.5	27.3	26.9	27.7	28.1
	6H	29.0	29.7	29.4	30.1	30.6	26.8	27.5	27.3	28.0	28.4
	8H	29.4	30.0	29.9	30.5	31.0	27.0	27.6	27.4	28.0	28.5
	12H	29.8	30.4	30.3	30.9	31.4	27.0	27.6	27.5	28.0	28.5
12H	4H	28.0	28.8	28.5	29.2	29.7	26.5	27.3	27.0	27.7	28.1
	6H	29.0	29.6	29.5	30.1	30.6	27.0	27.6	27.5	28.1	28.6
	8H	29.5	30.0	30.0	30.5	31.0	27.2	27.7	27.7	28.2	28.7
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.4					
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.6					

CIE Pub.117, 746.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.0)

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:


```

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

```

## ISOCANDELA DIAGRAM

Test:U:24.00V I:0.8361A P:20.07W PF:1.000 Freq:50.00Hz Lamp Flux:10.6581x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

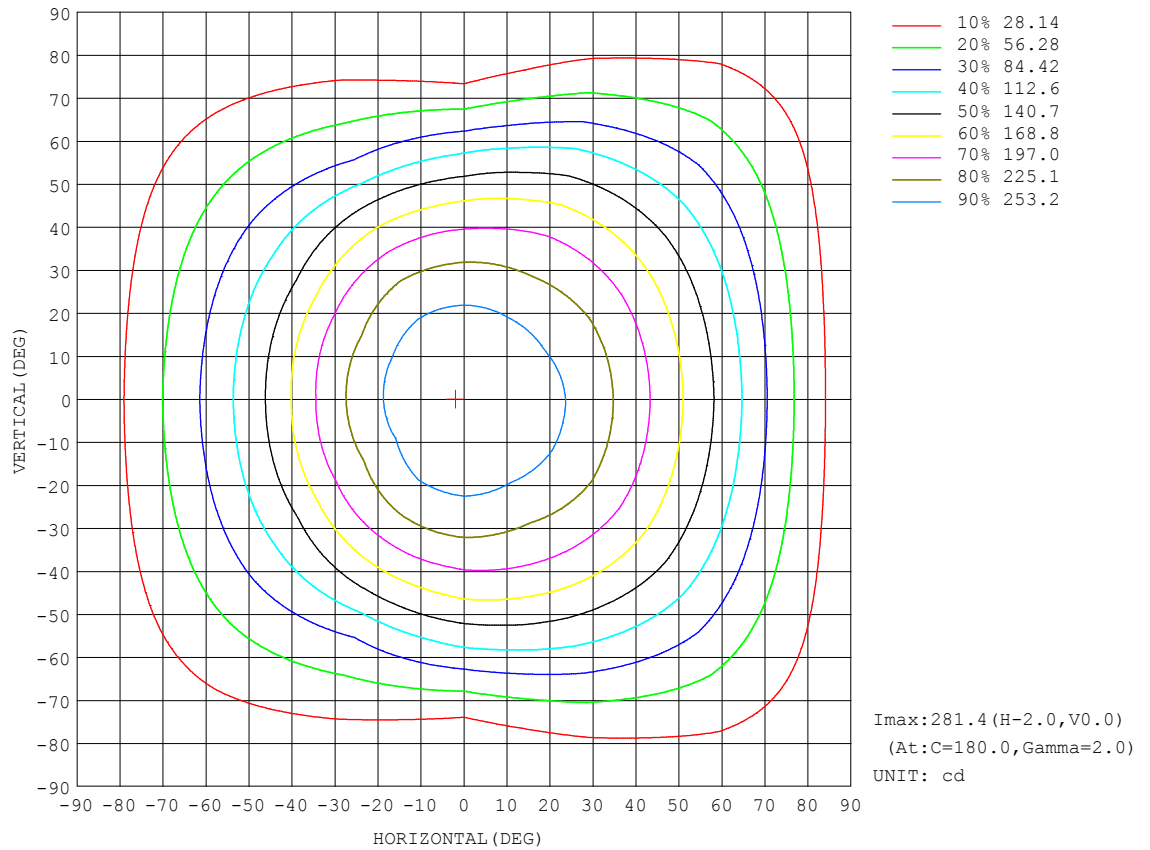


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:



AAI Figure

Test:U:24.00V I:0.8361A P:20.07W PF:1.000 Freq:50.00Hz Lamp Flux:10.6581x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

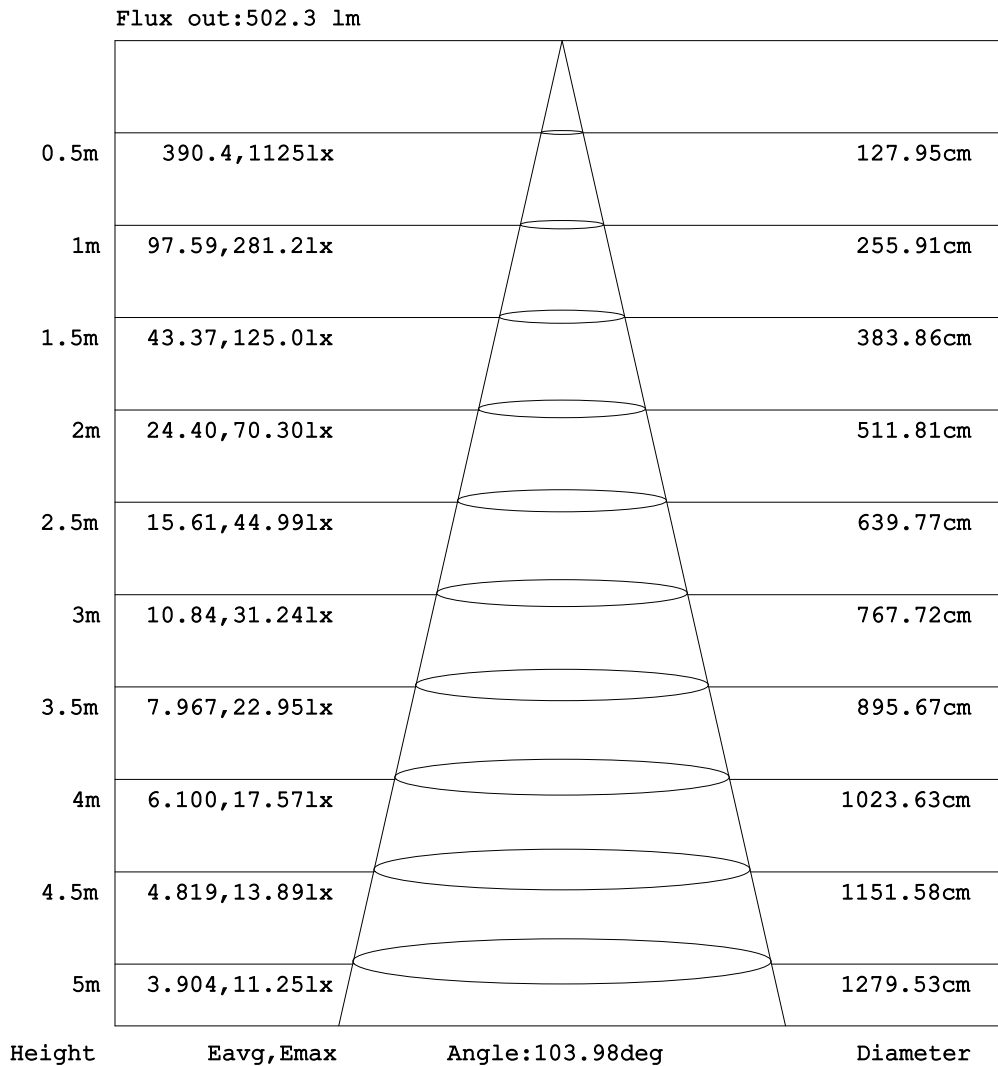


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM

Test:U:24.00V I:0.8361A P:20.07W PF:1.000 Freq:50.00Hz Lamp Flux:10.6581x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

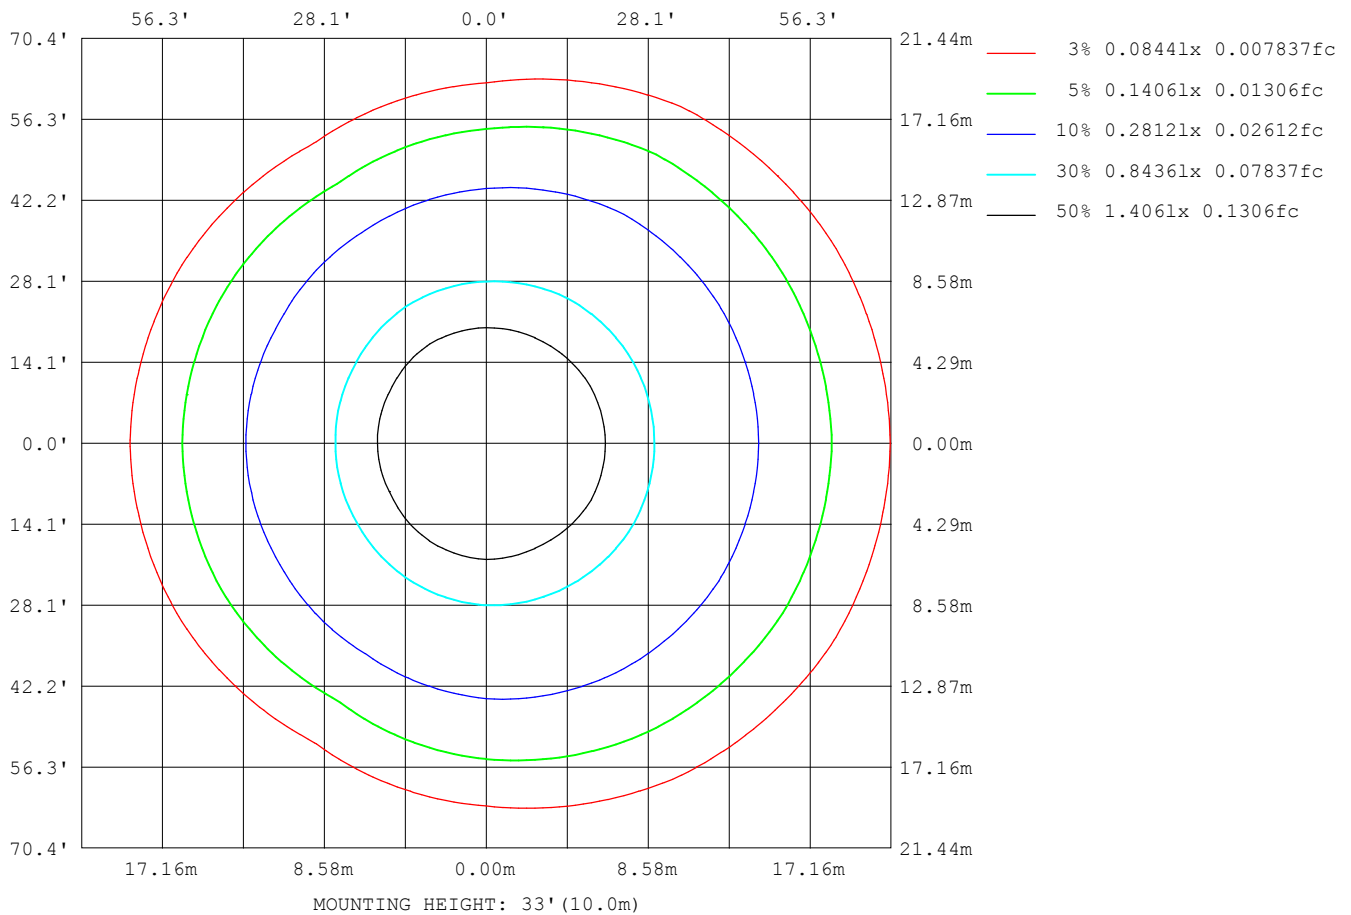

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:24.00V I:0.8361A P:20.07W PF:1.000 Freq:50.00Hz Lamp Flux:10.6581x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	15517
L_0~180 (75) av	14417
L_0~180 (85) av	15441
L_90~270 (65) av	11920
L_90~270 (75) av	6352
L_90~270 (85) av	2331
L_45 (65) av	14241
L_45 (75) av	12729
L_45 (85) av	12410

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-10-22

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

## Planar Illuminance Curve

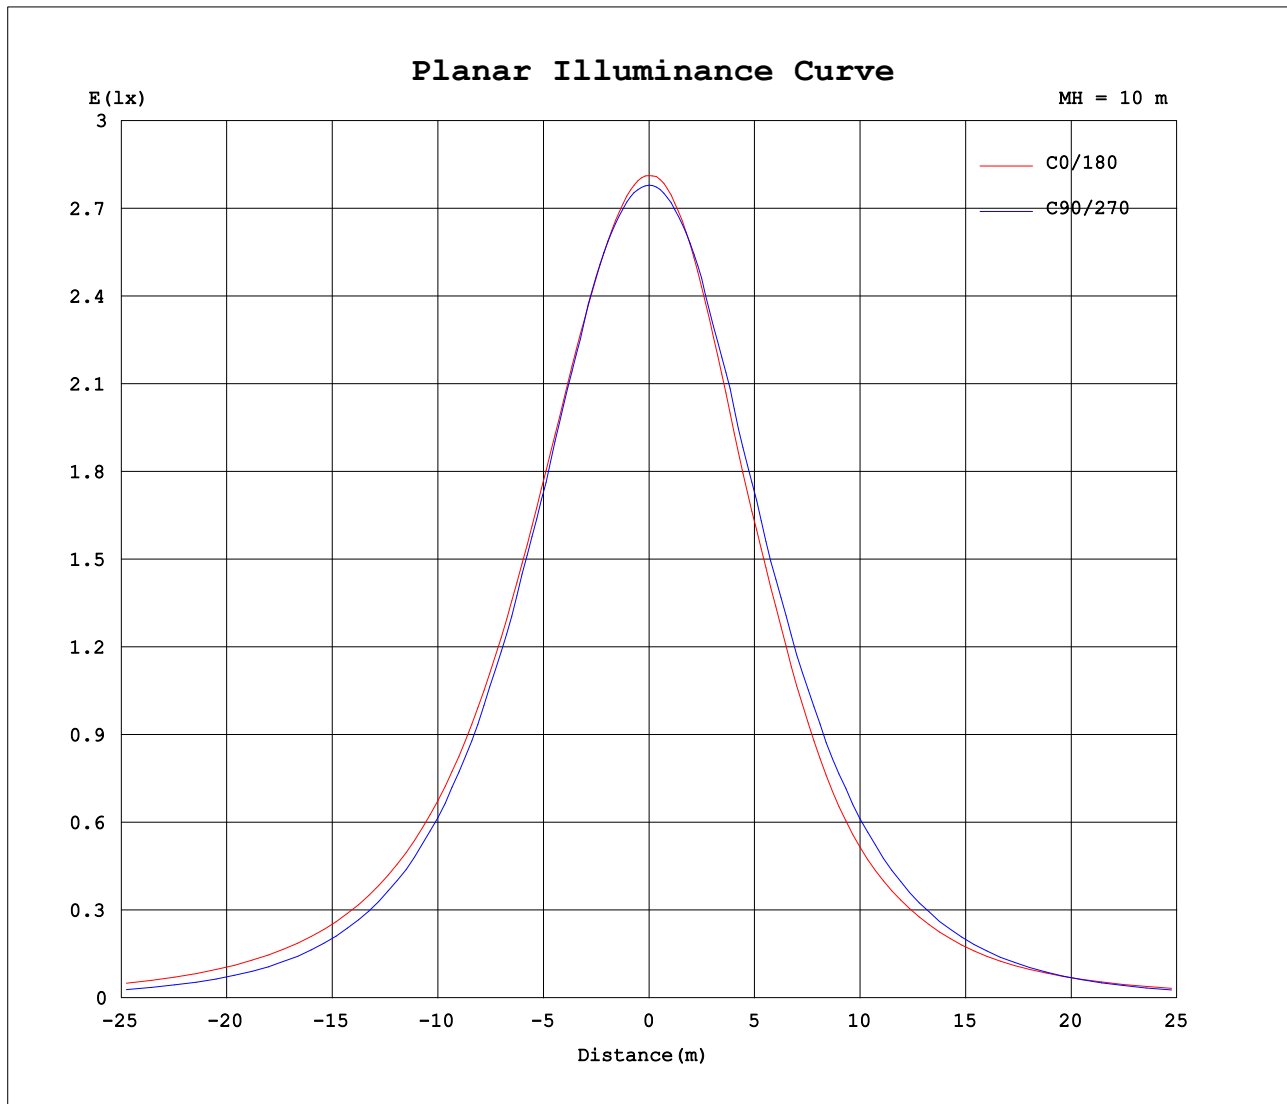

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: LPC  
Test Date: 2021-10-22

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 9.200m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.8361A P:20.07W PF:1.000 Freq:50.00Hz Lamp Flux:10.6581x70 lm		
NAME: P01-24V-5050-70-DMX-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: OLYMPIA	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	281	280	279	278	277	277	281	280	279	278	277	277							
5	279	278	278	277	276	276	280	279	278	277	276	275							
10	275	274	274	274	273	270	274	273	274	274	273	271							
15	268	268	268	269	266	261	264	264	268	267	267	265							
20	260	260	259	258	257	249	249	251	257	258	256	257							
25	251	250	247	246	243	232	232	235	244	245	243	248							
30	239	239	232	233	226	216	216	218	228	230	232	237							
35	224	225	217	216	207	196	194	199	210	213	216	223							
40	208	208	201	196	184	172	170	175	188	194	204	207							
45	191	190	183	175	160	146	146	148	163	173	186	189							
50	173	170	163	151	134	125	126	125	137	150	166	170							
55	153	150	140	127	105	106	107	106	107	124	144	151							
60	133	129	117	100	81.1	87.4	89.3	86.8	81.8	97.3	121	129							
65	111	107	93.3	71.9	63.9	69.6	72.6	69.0	63.9	69.2	96.9	107							
70	87.0	85.0	69.7	45.7	47.5	53.2	56.5	52.2	47.3	43.1	73.0	85.7							
75	63.9	62.5	47.6	24.3	32.1	37.6	40.6	36.3	31.5	21.8	50.1	63.6							
80	43.2	41.2	28.6	10.5	18.9	23.3	25.4	21.8	18.2	7.89	30.3	42.8							
85	25.3	23.7	14.1	3.68	9.34	12.0	12.4	10.4	8.36	2.01	14.8	24.7							
90	12.7	11.6	6.02	2.52	4.88	5.68	4.64	4.17	3.64	1.33	5.65	11.8							
95	5.74	5.53	4.22	2.71	4.33	4.15	2.36	2.90	3.07	1.52	3.19	4.92							
100	3.41	3.92	4.21	2.97	4.41	4.23	2.49	2.95	3.17	1.90	3.12	2.96							
105	3.37	4.00	3.85	3.43	4.07	4.42	2.69	3.12	2.89	2.24	2.72	2.91							
110	3.51	4.11	4.31	3.45	4.49	4.54	2.91	3.29	3.41	2.24	3.14	3.02							
115	3.66	4.23	4.58	3.60	4.72	4.66	3.12	3.47	3.64	2.45	3.28	3.10							
120	3.83	4.32	4.06	3.78	4.79	4.77	3.29	3.66	3.75	2.70	2.86	3.05							
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-22

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks: