


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.5775A P:13.86W PF:1.000 Freq:50.00Hz Lamp Flux:7.1304x70 lm					
NAME: P01-24V-5050-70-SPI3-RGB			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:1*0.014		Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 36.01 lm/W
MODEL	5050	I <sub>max</sub> (cd)	180.0	S/MH (C0/180)	1.37	
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.26	
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	499.13	η UP, DN (C0-180)	1.0, 47.3	
NOMINAL FLUX (lm)	7.1304	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 50.9	
LAMPS INSIDE	70	η up (%)	1.8	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	24	η down (%)	98.2	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

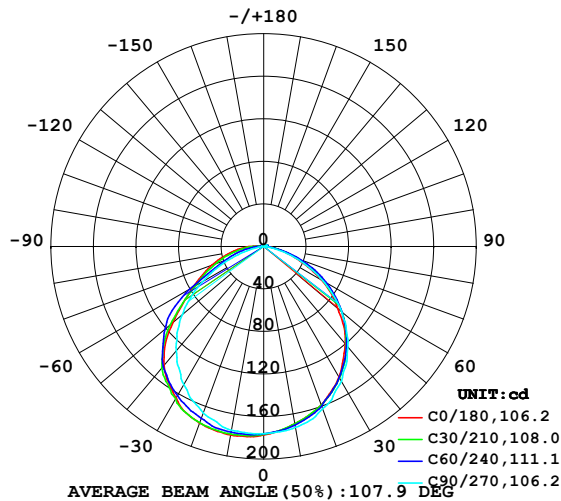

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

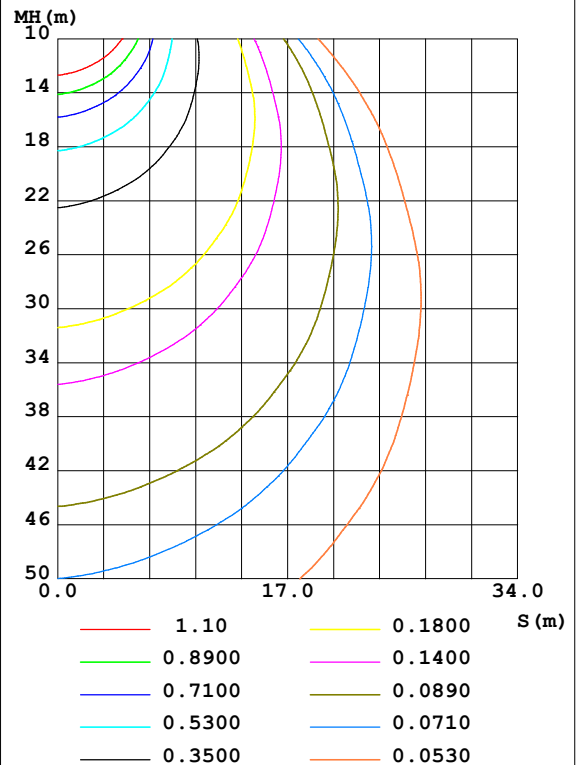

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: LPC  
 Test Date: 2021-10-19

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 9.200m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	169.3	169.9	172.7	175.4	179.9	178.2	175.3	170.6	0- 10	16.70	16.70	3.35,3.35
20	158.4	159.2	162.4	170.3	176.8	174.1	166.6	160.0	10- 20	48.17	64.87	13,13
30	141.9	142.6	146.5	157.9	164.6	163.8	150.2	144.9	20- 30	73.60	138.5	27.7,27.7
40	119.5	121.2	123.1	140.6	145.5	148.0	128.0	125.4	30- 40	89.24	227.7	45.6,45.6
50	91.27	96.13	95.99	111.7	111.2	118.0	99.90	101.2	40- 50	91.76	319.5	64,64
60	62.59	66.36	64.38	72.89	76.85	76.87	66.35	71.29	50- 60	78.35	397.8	79.7,79.7
70	31.83	36.34	32.09	41.57	51.86	43.80	31.73	40.81	60- 70	53.58	451.4	90.4,90.4
80	11.11	11.94	7.378	22.03	30.30	22.34	5.952	13.87	70- 80	28.53	479.9	96.2,96.2
90	2.772	3.209	1.749	7.769	12.45	7.275	0.9348	2.582	80- 90	10.42	490.3	98.2,98.2
100	2.332	2.940	2.077	3.216	3.027	2.170	1.326	2.066	90-100	3.626	494.0	99,99
110	2.538	3.073	2.382	3.063	1.814	2.222	1.538	2.176	100-110	2.509	496.5	99.5,99.5
120	2.769	3.031	2.613	3.229	1.970	2.427	1.829	2.224	110-120	2.525	499.0	100,100
130	0	0	0	0	0	0	0	0	120-130	0.1221	499.1	100,100
140	0	0	0	0	0	0	0	0	130-140	0	499.1	100,100
150	0	0	0	0	0	0	0	0	140-150	0	499.1	100,100
160	0	0	0	0	0	0	0	0	150-160	0	499.1	100,100
170	0	0	0	0	0	0	0	0	160-170	0	499.1	100,100
180	0	0	0	0	0	0	0	0	170-180	0	499.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 274.26 lm

%lum = 54.9%

%lamp = 54.9%

Conical surface Flux(120deg): 397.81 lm

%lum = 79.7%


%lamp = 79.7%

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-10-19

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.5775A P:13.86W PF:1.000 Freq:50.00Hz Lamp Flux:7.1304x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

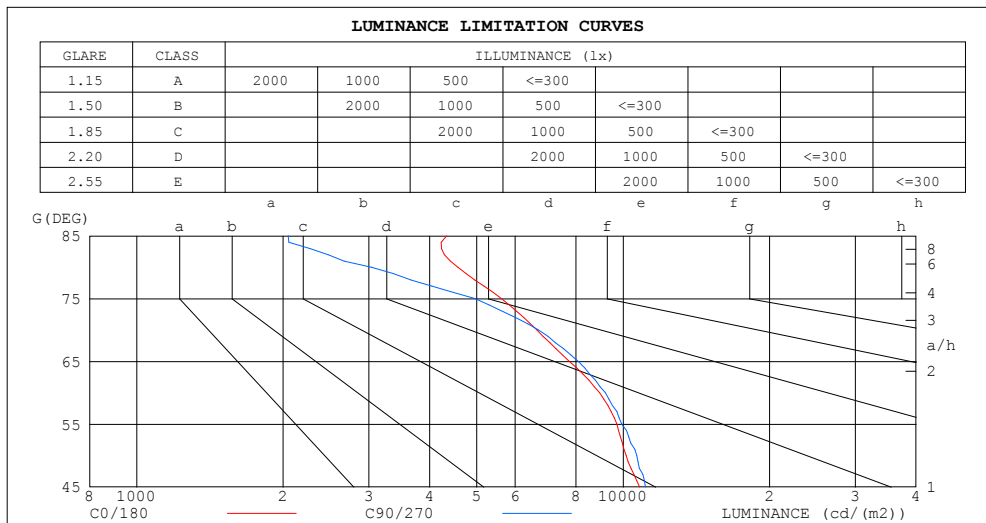

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4333	2048
80	4571	3035
75	5616	4965
70	6648	6702
65	7750	8085
60	8941	9197
55	9707	9939
50	10142	10667
45	10805	11106


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.5775A P:13.86W PF:1.000 Freq:50.00Hz Lamp Flux:7.1304x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.79	.89	.83	.77	.85	.80	.75	.81	.77	.73	.78	.75	.72	.69
3.0	.80	.72	.66	.78	.71	.65	.75	.69	.64	.72	.67	.62	.69	.65	.61	.59
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.64	.55	.48	.62	.54	.48	.60	.53	.47	.58	.51	.46	.56	.50	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.52	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.47	.39	.33	.45	.38	.33	.44	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.36	.30	.26	.25

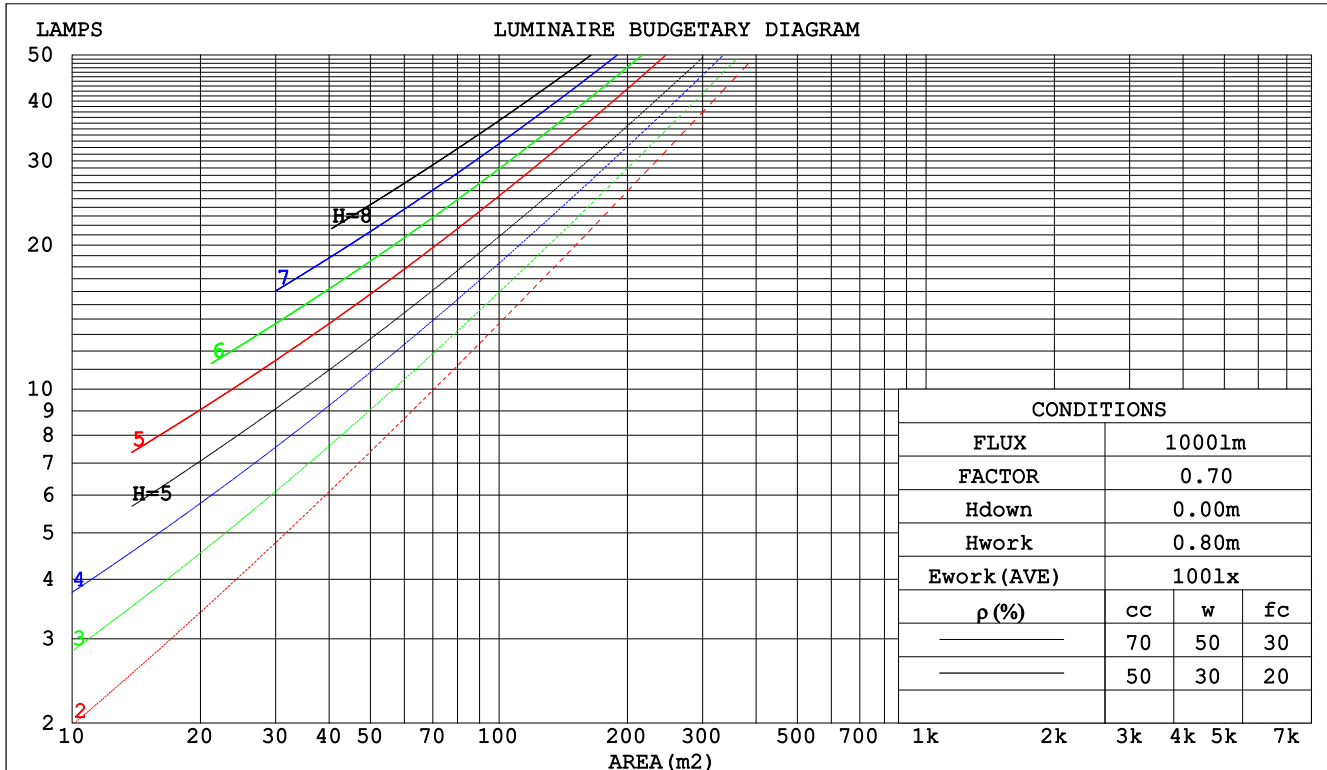

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-10-19

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

### WEC AND CCEC

Test:U:24.00V I:0.5775A P:13.86W PF:1.000 Freq:50.00Hz Lamp Flux:7.1304x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.302	.172	.054	.294	.168	.053	.280	.161	.051	.267	.154	.049	.255	.148	.048		
2.0	.284	.155	.048	.277	.153	.047	.264	.147	.046	.253	.142	.044	.242	.137	.043		
3.0	.263	.140	.042	.257	.138	.041	.246	.133	.041	.236	.129	.040	.226	.125	.039		
4.0	.244	.127	.037	.238	.125	.037	.228	.121	.036	.219	.118	.036	.211	.114	.035		
5.0	.226	.115	.033	.221	.113	.033	.212	.111	.033	.204	.108	.032	.196	.105	.032		
6.0	.210	.105	.030	.206	.104	.030	.198	.101	.029	.190	.099	.029	.184	.097	.029		
7.0	.196	.097	.027	.192	.096	.027	.185	.093	.027	.178	.091	.027	.172	.089	.026		
8.0	.183	.089	.025	.180	.088	.025	.173	.087	.025	.167	.085	.024	.162	.083	.024		
9.0	.172	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.153	.077	.022		
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.144	.073	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.204	.204	.204	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.193	.170	.149	.165	.146	.128	.113	.100	.088	.065	.058	.051	.021	.019	.017	
2.0	.185	.146	.113	.158	.125	.097	.108	.087	.068	.063	.050	.040	.020	.016	.013	
3.0	.177	.128	.089	.152	.110	.077	.104	.077	.054	.060	.045	.032	.019	.015	.010	
4.0	.169	.115	.073	.145	.099	.063	.100	.069	.045	.058	.040	.026	.019	.013	.009	
5.0	.162	.104	.062	.139	.090	.054	.096	.063	.038	.055	.037	.022	.018	.012	.007	
6.0	.155	.096	.054	.133	.083	.047	.092	.058	.033	.053	.034	.020	.017	.011	.006	
7.0	.148	.089	.047	.127	.077	.041	.088	.054	.029	.051	.032	.017	.017	.010	.006	
8.0	.142	.083	.043	.122	.072	.037	.084	.051	.027	.049	.030	.016	.016	.010	.005	
9.0	.136	.078	.039	.117	.068	.034	.081	.048	.024	.047	.028	.015	.015	.009	.005	
10.0	.130	.074	.037	.112	.064	.032	.078	.045	.023	.045	.027	.014	.015	.009	.004	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.5775A P:13.86W PF:1.000 Freq:50.00Hz Lamp Flux:7.1304x70 lm											
NAME: P01-24V-5050-70-SPI3-RGB						TYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.: EVERFINE						SUR.:1*0.014		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.7	24.2	23.0	24.4	24.6	22.9	24.3	23.2	24.6	24.8	
	3H	23.7	25.1	24.0	25.3	25.6	24.0	25.3	24.3	25.6	25.9
	4H	24.1	25.4	24.4	25.6	25.9	24.2	25.5	24.6	25.8	26.1
	6H	24.3	25.5	24.6	25.8	26.1	24.3	25.5	24.7	25.8	26.1
	8H	24.3	25.5	24.7	25.8	26.1	24.3	25.5	24.7	25.8	26.1
	12H	24.3	25.5	24.7	25.8	26.1	24.3	25.4	24.7	25.7	26.1
4H	2H	23.2	24.5	23.6	24.8	25.1	23.4	24.7	23.7	25.0	25.3
	3H	24.4	25.6	24.8	25.9	26.2	24.7	25.8	25.1	26.1	26.5
	4H	24.9	25.9	25.3	26.2	26.6	25.1	26.1	25.5	26.5	26.8
	6H	25.2	26.1	25.6	26.4	26.8	25.2	26.1	25.7	26.5	26.9
	8H	25.2	26.1	25.7	26.5	26.9	25.3	26.1	25.7	26.5	26.9
	12H	25.3	26.1	25.8	26.5	26.9	25.2	26.0	25.7	26.4	26.9
8H	4H	25.0	25.9	25.5	26.3	26.7	25.2	26.1	25.7	26.5	26.9
	6H	25.4	26.1	25.9	26.6	27.0	25.5	26.2	26.0	26.6	27.1
	8H	25.6	26.2	26.1	26.7	27.1	25.6	26.2	26.1	26.7	27.1
	12H	25.7	26.2	26.2	26.7	27.2	25.6	26.2	26.1	26.6	27.1
12H	4H	25.0	25.8	25.5	26.2	26.7	25.2	26.0	25.7	26.4	26.8
	6H	25.5	26.1	25.9	26.5	27.0	25.5	26.2	26.0	26.6	27.1
	8H	25.6	26.2	26.1	26.6	27.2	25.6	26.2	26.1	26.6	27.2
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.5					

CIE Pub.117, 499.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.4)

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:


```

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

```

# ISOCANDELA DIAGRAM

Test:U:24.00V I:0.5775A P:13.86W PF:1.000 Freq:50.00Hz Lamp Flux:7.1304x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

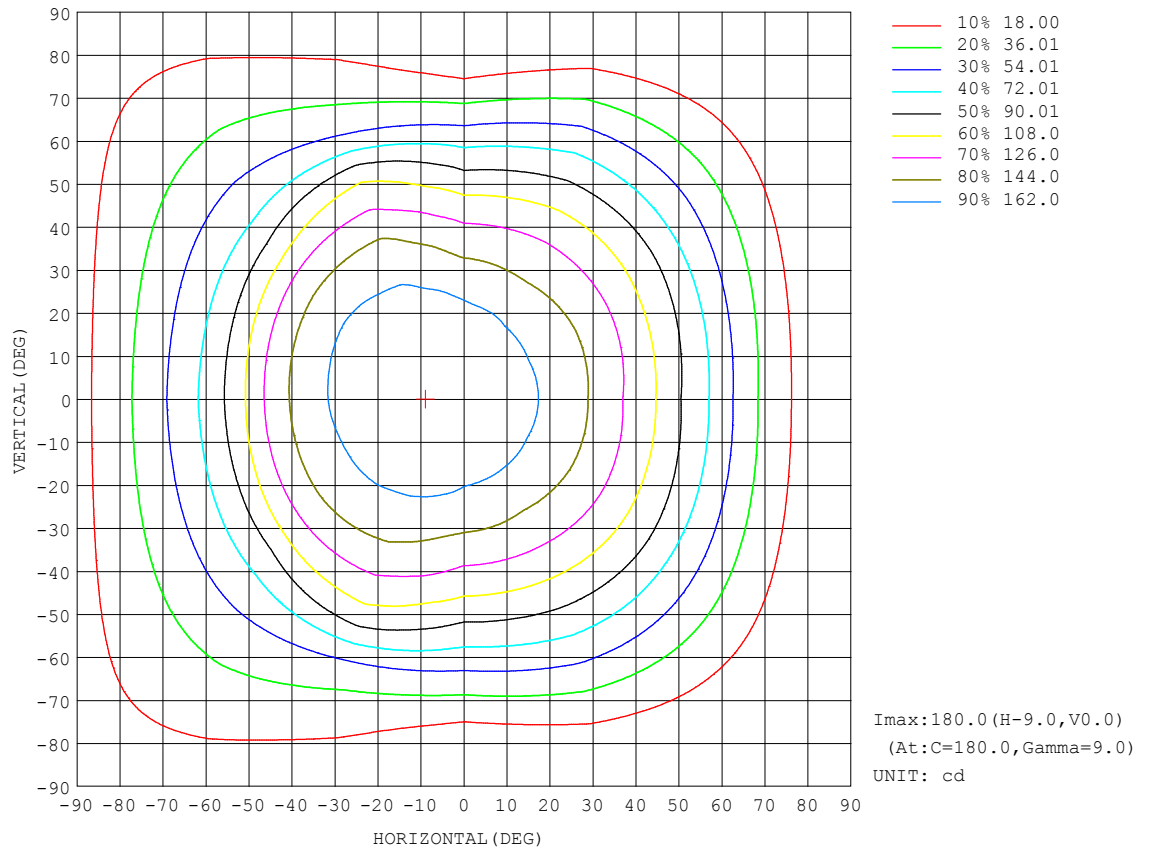


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:



### AAI Figure

Test:U:24.00V I:0.5775A P:13.86W PF:1.000 Freq:50.00Hz Lamp Flux:7.1304x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

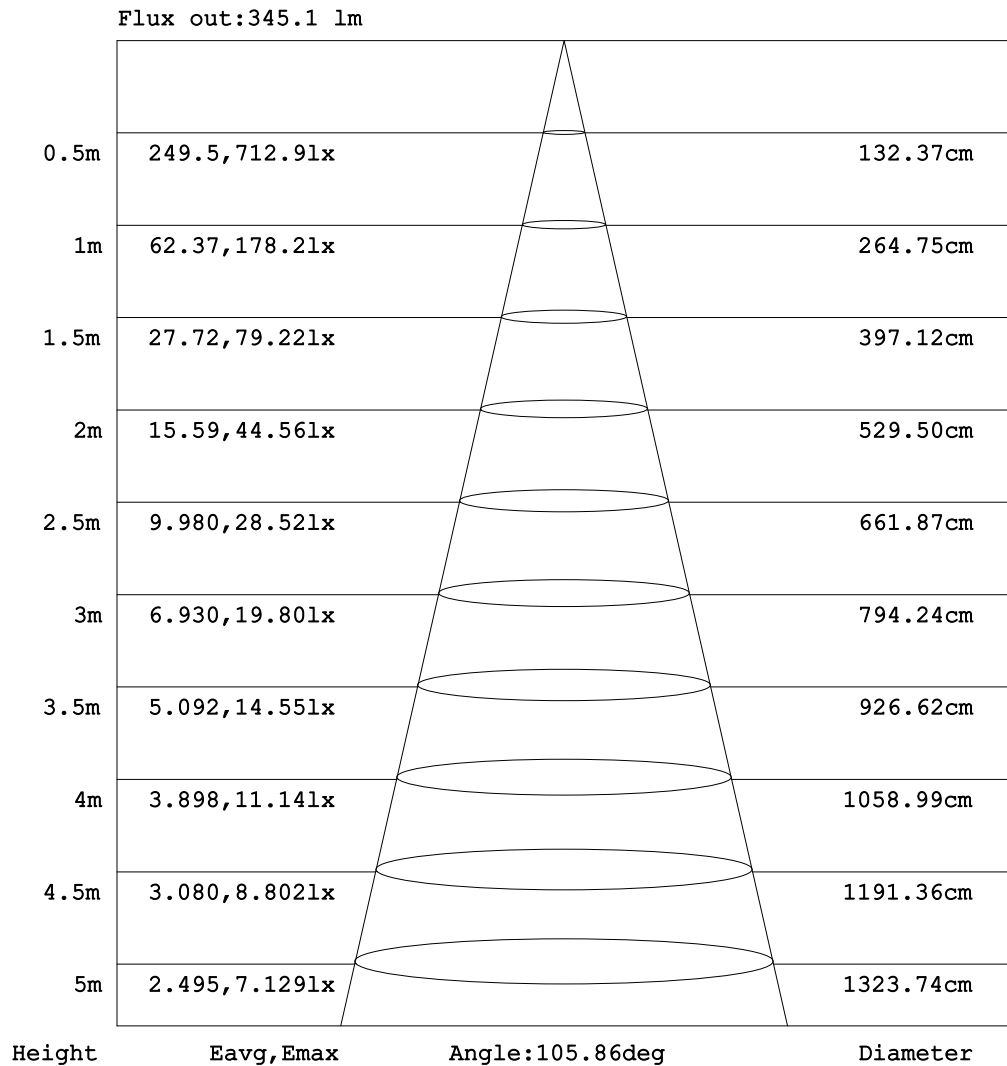


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

# ISOLUX DIAGRAM

Test:U:24.00V I:0.5775A P:13.86W PF:1.000 Freq:50.00Hz Lamp Flux:7.1304x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

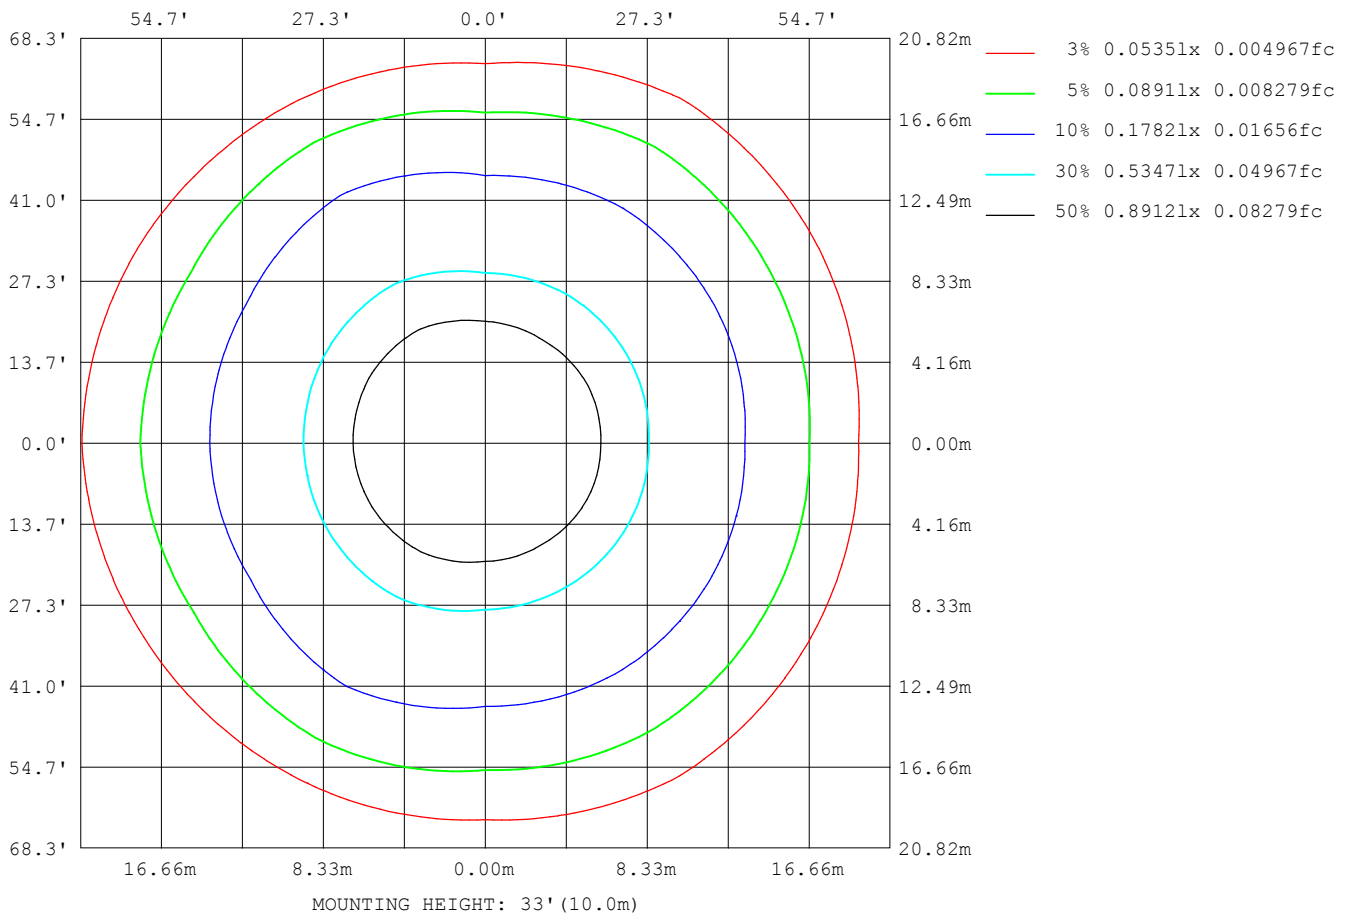

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:24.00V I:0.5775A P:13.86W PF:1.000 Freq:50.00Hz Lamp Flux:7.1304x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	9244
L_0~180 (75) av	8443
L_0~180 (85) av	10736
L_90~270 (65) av	8193
L_90~270 (75) av	4778
L_90~270 (85) av	1592
L_45 (65) av	9362
L_45 (75) av	7895
L_45 (85) av	8203

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

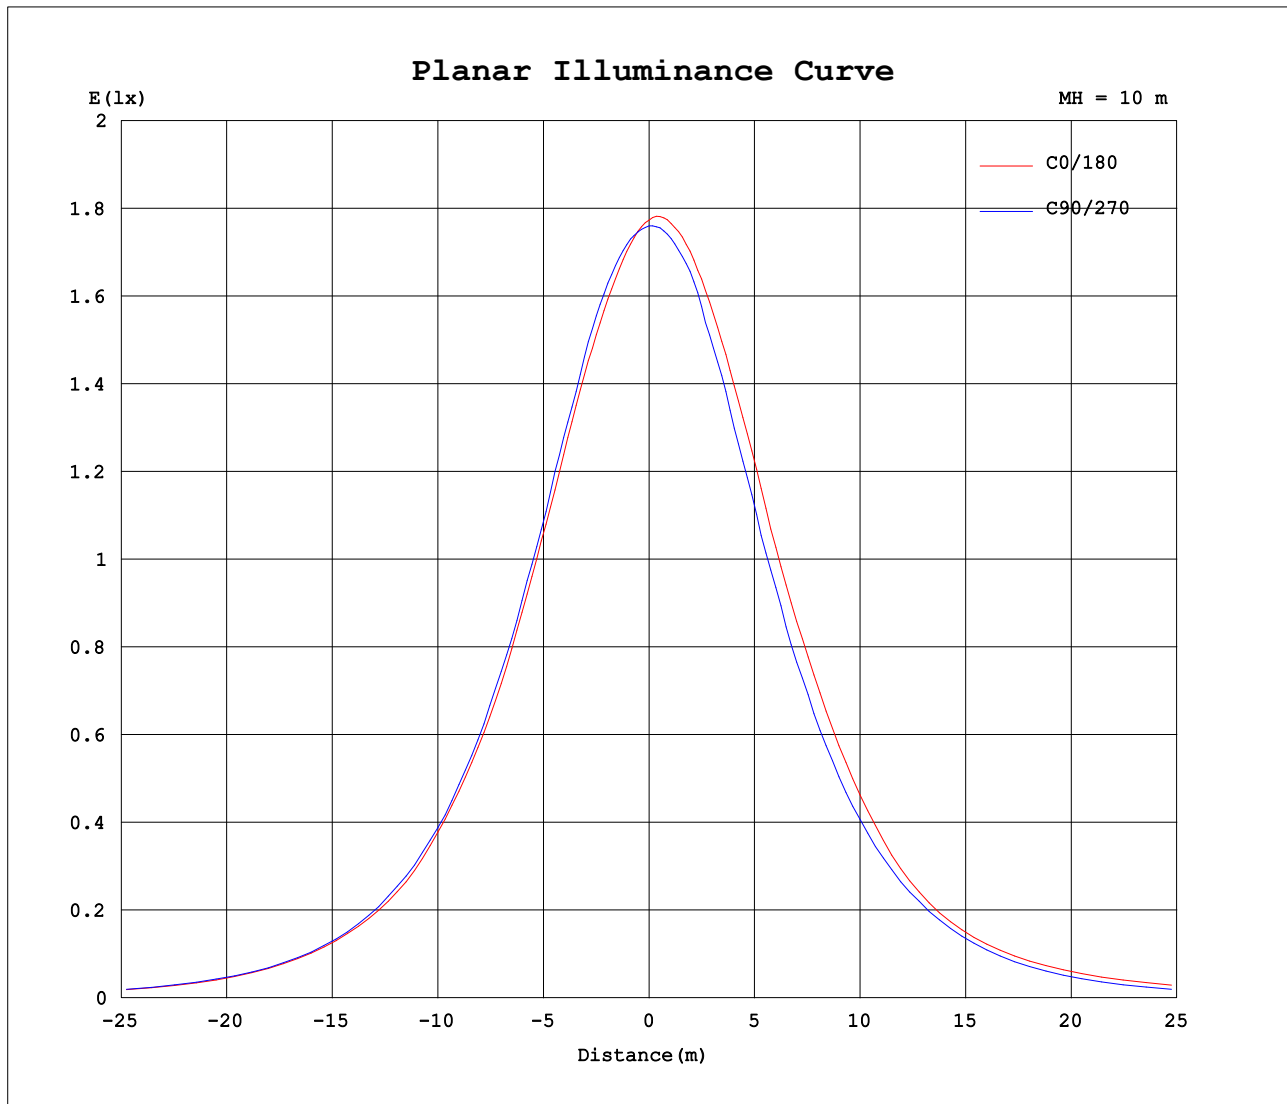

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: LPC  
Test Date: 2021-10-19

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 9.200m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.5775A P:13.86W PF:1.000 Freq:50.00Hz Lamp Flux:7.1304x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	177	177	176	176	176	175	177	177	176	176	176	175						
5	174	174	174	175	176	176	179	179	177	176	175	173						
10	169	169	171	173	174	176	180	179	177	175	172	169						
15	164	164	166	169	172	175	179	178	176	171	168	165						
20	158	159	160	162	169	172	177	176	172	167	161	159						
25	150	151	151	155	163	168	173	173	168	159	153	153						
30	142	143	142	147	156	160	165	165	162	150	145	144						
35	130	133	132	136	148	153	156	158	155	139	137	135						
40	119	121	122	123	138	143	146	149	147	128	127	124						
45	107	109	109	110	126	128	131	134	134	115	116	111						
50	91.3	96.1	96.2	96.0	114	110	111	115	121	99.9	103	99.2						
55	78.0	79.7	82.4	79.8	97.1	88.1	92.3	93.2	105	84.0	89.3	83.9						
60	62.6	64.8	67.9	64.4	74.2	71.6	76.9	73.8	80.0	66.4	74.5	68.1						
65	45.9	49.7	53.1	47.8	51.2	57.9	63.5	60.9	54.2	49.1	59.1	53.7						
70	31.8	34.8	37.9	32.1	36.8	46.4	51.9	48.5	39.1	31.7	43.1	38.5						
75	20.3	21.6	23.9	18.0	26.8	35.8	40.8	37.1	27.8	16.6	27.7	24.1						
80	11.1	11.7	12.2	7.38	18.3	25.7	30.3	26.0	18.7	5.95	14.5	13.3						
85	5.29	5.73	5.44	2.50	10.8	17.0	20.9	17.2	9.95	1.38	5.55	6.16						
90	2.77	3.18	3.23	1.75	5.68	9.86	12.5	9.57	4.98	0.93	2.36	2.80						
95	2.34	2.79	3.00	1.87	3.44	5.34	6.33	4.64	2.57	1.05	2.13	2.06						
100	2.33	2.84	3.04	2.08	3.07	3.37	3.03	2.19	2.15	1.33	2.13	2.00						
105	2.43	2.94	2.83	2.37	2.79	3.02	1.93	2.13	1.98	1.54	1.90	2.06						
110	2.54	3.04	3.11	2.38	3.06	3.07	1.81	2.11	2.33	1.54	2.22	2.13						
115	2.65	3.13	3.28	2.50	3.22	3.13	1.91	2.21	2.48	1.66	2.30	2.25						
120	2.77	3.20	2.86	2.61	3.28	3.18	1.97	2.32	2.54	1.83	2.07	2.38						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks: