


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.2347A P:5.633W PF:1.000 Freq:50.00Hz Lamp Flux:5.02551x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB-G	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 62.45 lm/W
MODEL	5050	I <sub>max</sub> (cd)	124.7	S/MH (C0/180)	1.41	
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.29	
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	351.79	η UP, DN (C0-180)	1.0, 46.3	
NOMINAL FLUX (lm)	5.02551	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 52.0	
LAMPS INSIDE	70	η up (%)	1.8	CIBSE SHR NOM	1.50	
TEST VOLTAGE (V)	24	η down (%)	98.2	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

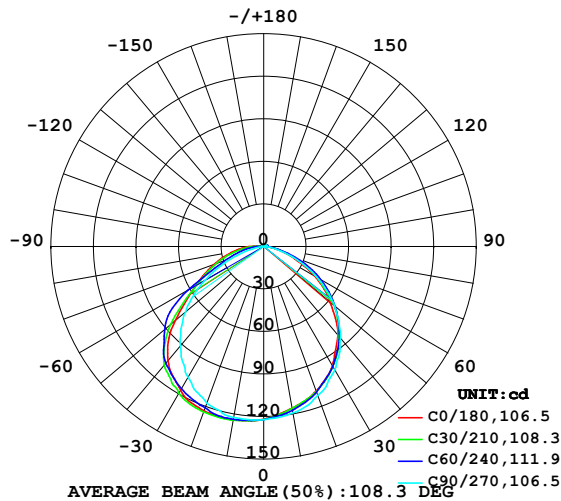

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

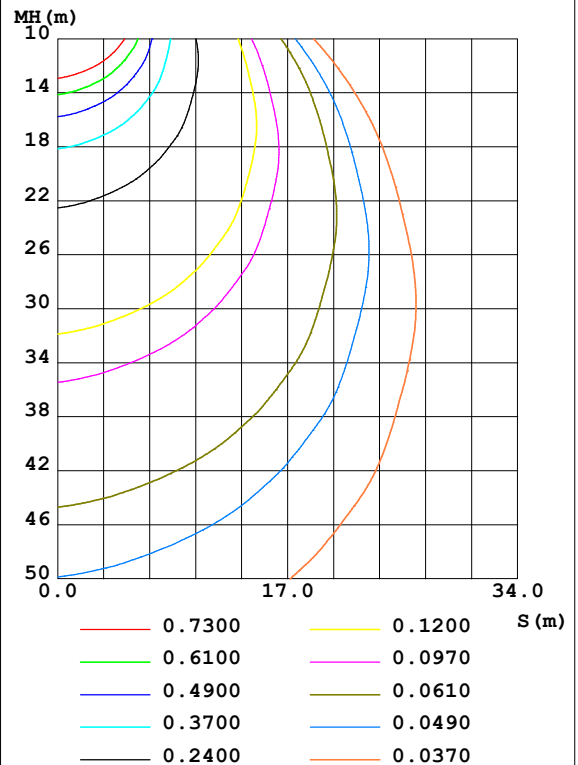

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: LPC  
 Test Date: 2021-10-19

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 9.200m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	115.9	116.7	119.1	121.9	124.2	124.0	122.5	119.0	0- 10	11.56	11.56	3.29,3.29
20	108.4	109.1	111.8	118.9	123.3	122.7	117.5	112.3	10- 20	33.47	45.03	12.8,12.8
30	97.07	97.63	100.6	111.6	117.3	117.8	106.6	102.4	20- 30	51.47	96.50	27.4,27.4
40	81.48	82.53	84.31	100.3	105.1	108.3	91.53	89.12	30- 40	62.89	159.4	45.3,45.3
50	61.20	65.24	65.58	80.29	81.40	88.45	72.01	72.68	40- 50	65.20	224.6	63.8,63.8
60	41.22	44.66	43.33	52.05	55.36	58.04	47.93	51.16	50- 60	55.77	280.4	79.7,79.7
70	20.32	23.87	21.69	29.41	37.44	32.31	22.82	29.27	60- 70	37.80	318.2	90.4,90.4
80	6.835	7.623	5.192	15.64	21.99	16.66	4.228	9.694	70- 80	20.04	338.2	96.1,96.1
90	1.806	2.186	1.257	5.600	9.343	5.472	0.6482	1.692	80- 90	7.370	345.6	98.2,98.2
100	1.623	2.088	1.488	2.284	2.299	1.498	0.8938	1.427	90-100	2.611	348.2	99.99
110	1.754	2.188	1.689	2.171	1.251	1.510	1.045	1.518	100-110	1.761	349.9	99.5,99.5
120	1.935	2.141	1.844	2.287	1.342	1.631	1.256	1.538	110-120	1.759	351.7	100,100
130	0	0	0	0	0	0	0	0	120-130	0.0849	351.8	100,100
140	0	0	0	0	0	0	0	0	130-140	0	351.8	100,100
150	0	0	0	0	0	0	0	0	140-150	0	351.8	100,100
160	0	0	0	0	0	0	0	0	150-160	0	351.8	100,100
170	0	0	0	0	0	0	0	0	160-170	0	351.8	100,100
180	0	0	0	0	0	0	0	0	170-180	0	351.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 192.42 lm

%lum = 54.7%

%lamp = 54.7%

Conical surface Flux(120deg): 280.36 lm

%lum = 79.7%


%lamp = 79.7%

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-10-19

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.2347A P:5.633W PF:1.000 Freq:50.00Hz Lamp Flux:5.02551x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB-G	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

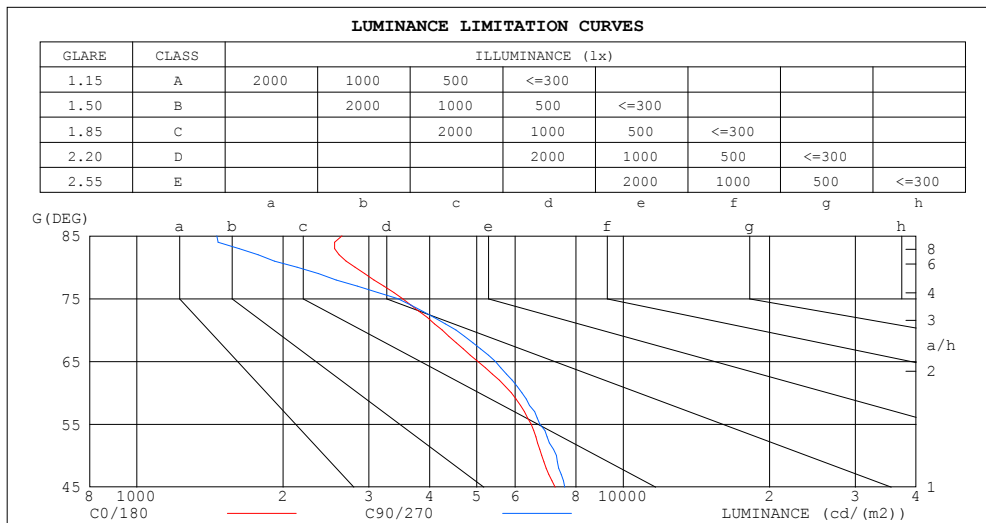

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2641	1460
80	2812	2136
75	3517	3438
70	4244	4530
65	5021	5456
60	5889	6191
55	6466	6735
50	6801	7287
45	7245	7579


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.2347A P:5.633W PF:1.000 Freq:50.00Hz Lamp Flux:5.0255lx70 lm		
NAME: P01-24V-5050-70-SPI3-RGB-G	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.80	.72	.66	.78	.71	.65	.75	.69	.63	.72	.67	.62	.69	.65	.61	.59
4.0	.71	.62	.56	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.55	.48	.62	.54	.48	.60	.53	.47	.58	.51	.46	.56	.50	.46	.43
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.52	.46	.41	.50	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.30	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.36	.30	.26	.24

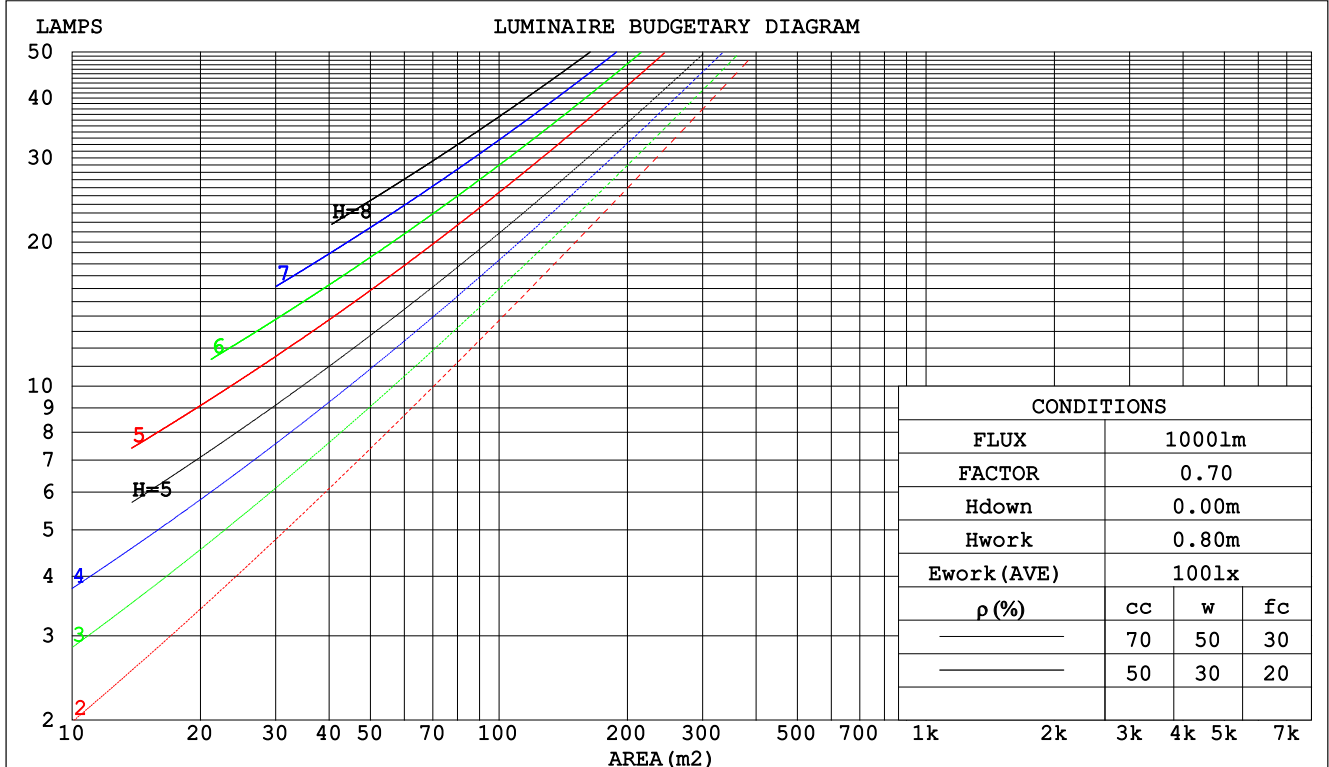

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-10-19

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

### WEC AND CCEC

Test:U:24.00V I:0.2347A P:5.633W PF:1.000 Freq:50.00Hz Lamp Flux:5.02551x70 lm					
NAME: P01-24V-5050-70-SPI3-RGB-G			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:1*0.014		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.302	.172	.054	.295	.168	.053	.280	.161	.051	.267	.154	.049	.255	.148	.048		
2.0	.284	.156	.048	.277	.153	.047	.265	.147	.046	.253	.142	.044	.243	.137	.043		
3.0	.264	.140	.042	.258	.138	.042	.247	.134	.041	.236	.129	.040	.227	.125	.039		
4.0	.244	.127	.037	.239	.125	.037	.229	.121	.036	.220	.118	.036	.211	.115	.035		
5.0	.226	.115	.033	.222	.114	.033	.213	.111	.033	.204	.108	.032	.197	.105	.032		
6.0	.210	.105	.030	.206	.104	.030	.198	.102	.030	.191	.099	.029	.184	.097	.029		
7.0	.196	.097	.027	.192	.096	.027	.185	.094	.027	.179	.092	.027	.172	.090	.026		
8.0	.183	.090	.025	.180	.089	.025	.174	.087	.025	.168	.085	.025	.162	.083	.024		
9.0	.172	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.153	.078	.022		
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.144	.073	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.204	.204	.204	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.193	.170	.149	.165	.146	.128	.113	.100	.088	.065	.058	.051	.021	.019	.017	
2.0	.185	.146	.113	.158	.125	.097	.109	.087	.068	.063	.050	.040	.020	.016	.013	
3.0	.177	.128	.089	.152	.110	.077	.104	.077	.054	.060	.045	.032	.019	.015	.010	
4.0	.169	.115	.073	.145	.099	.063	.100	.069	.045	.058	.040	.026	.019	.013	.009	
5.0	.162	.104	.062	.139	.090	.054	.096	.063	.038	.056	.037	.022	.018	.012	.007	
6.0	.155	.096	.054	.133	.083	.047	.092	.058	.033	.053	.034	.020	.017	.011	.006	
7.0	.148	.089	.047	.128	.077	.041	.088	.054	.029	.051	.032	.017	.017	.010	.006	
8.0	.142	.083	.043	.122	.072	.037	.085	.051	.027	.049	.030	.016	.016	.010	.005	
9.0	.136	.078	.039	.117	.068	.034	.081	.048	.024	.047	.028	.015	.015	.009	.005	
10.0	.130	.074	.037	.112	.064	.032	.078	.045	.023	.045	.027	.014	.015	.009	.004	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.2347A P:5.633W PF:1.000 Freq:50.00Hz Lamp Flux:5.02551x70 lm										
NAME: P01-24V-5050-70-SPI3-RGB-G					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:1*0.014			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.3	23.8	22.6	24.0	24.2	22.6	24.1	22.9	24.3	24.6
3H	23.3	24.6	23.6	24.9	25.2	23.7	25.0	24.0	25.3	25.6
4H	23.6	24.9	23.9	25.1	25.4	24.0	25.3	24.3	25.5	25.8
6H	23.7	24.9	24.1	25.2	25.6	24.1	25.3	24.4	25.6	25.9
8H	23.8	24.9	24.1	25.2	25.6	24.0	25.2	24.4	25.5	25.9
12H	23.8	24.9	24.2	25.2	25.6	24.0	25.1	24.4	25.5	25.8
4H 2H	22.8	24.1	23.2	24.4	24.7	23.1	24.4	23.5	24.7	25.0
3H	24.0	25.1	24.4	25.4	25.8	24.4	25.5	24.8	25.8	26.2
4H	24.4	25.4	24.8	25.7	26.1	24.8	25.8	25.2	26.2	26.5
6H	24.6	25.5	25.0	25.9	26.3	24.9	25.9	25.4	26.2	26.6
8H	24.7	25.5	25.1	25.9	26.3	25.0	25.8	25.4	26.2	26.6
12H	24.7	25.5	25.2	25.9	26.4	25.0	25.7	25.4	26.2	26.6
8H 4H	24.5	25.4	25.0	25.8	26.2	24.9	25.8	25.3	26.2	26.6
6H	24.9	25.6	25.3	26.0	26.5	25.2	25.9	25.7	26.3	26.8
8H	25.0	25.6	25.5	26.1	26.6	25.3	25.9	25.7	26.3	26.8
12H	25.1	25.6	25.6	26.1	26.6	25.3	25.8	25.8	26.3	26.8
12H 4H	24.5	25.3	25.0	25.7	26.2	24.9	25.7	25.3	26.1	26.5
6H	24.9	25.5	25.4	26.0	26.5	25.2	25.8	25.7	26.3	26.8
8H	25.0	25.6	25.5	26.1	26.6	25.3	25.8	25.8	26.3	26.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.5					+ 0.3 / - 0.4				
2.0H	+ 0.4 / - 0.4					+ 0.3 / - 0.5				

CIE Pub.117, 351.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.6)

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.2347A P:5.633W PF:1.000 Freq:50.00Hz Lamp Flux:5.02551x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB-G	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	33
0.80	68	56	49	67	56	49	65	55	48	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	66	79	71	65	57
1.50	88	79	72	87	78	71	83	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:24.00V I:0.2347A P:5.633W PF:1.000 Freq:50.00Hz Lamp Flux:5.02551x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB-G	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

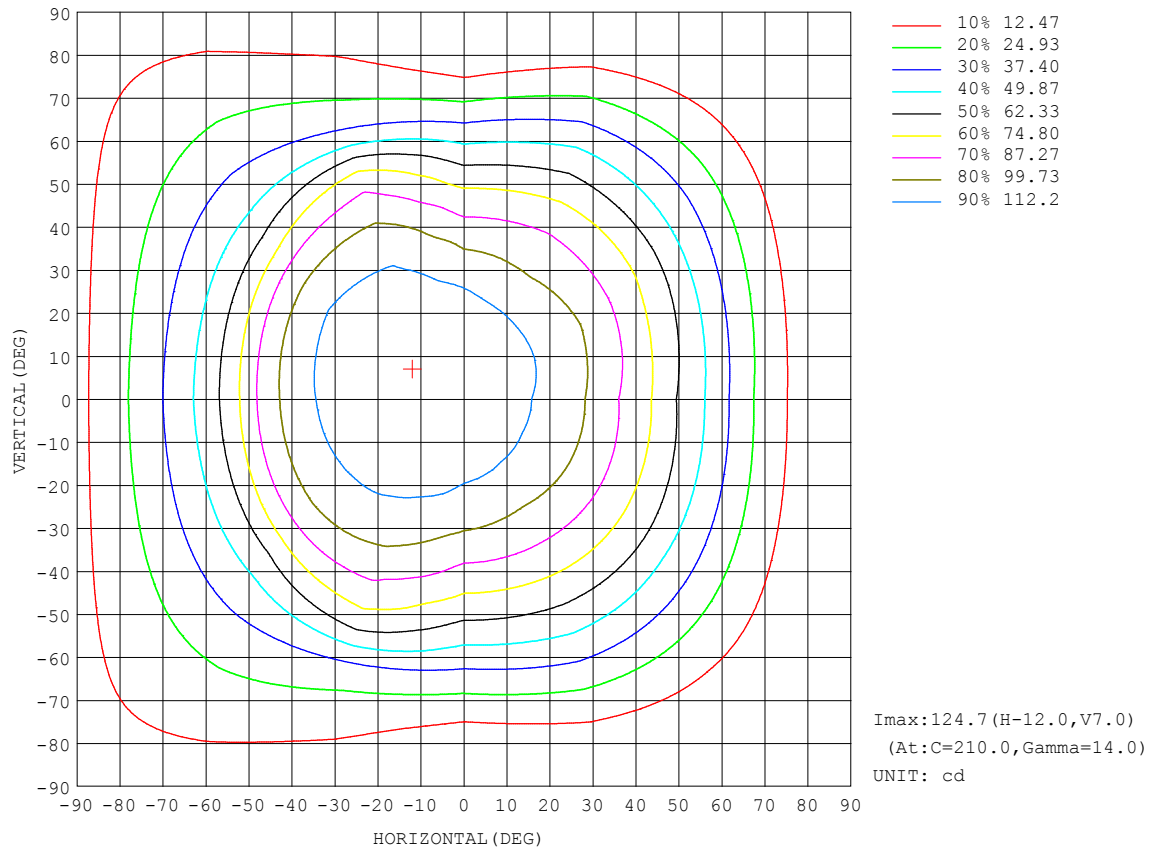


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:



### AAI Figure

Test:U:24.00V I:0.2347A P:5.633W PF:1.000 Freq:50.00Hz Lamp Flux:5.02551x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB-G	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

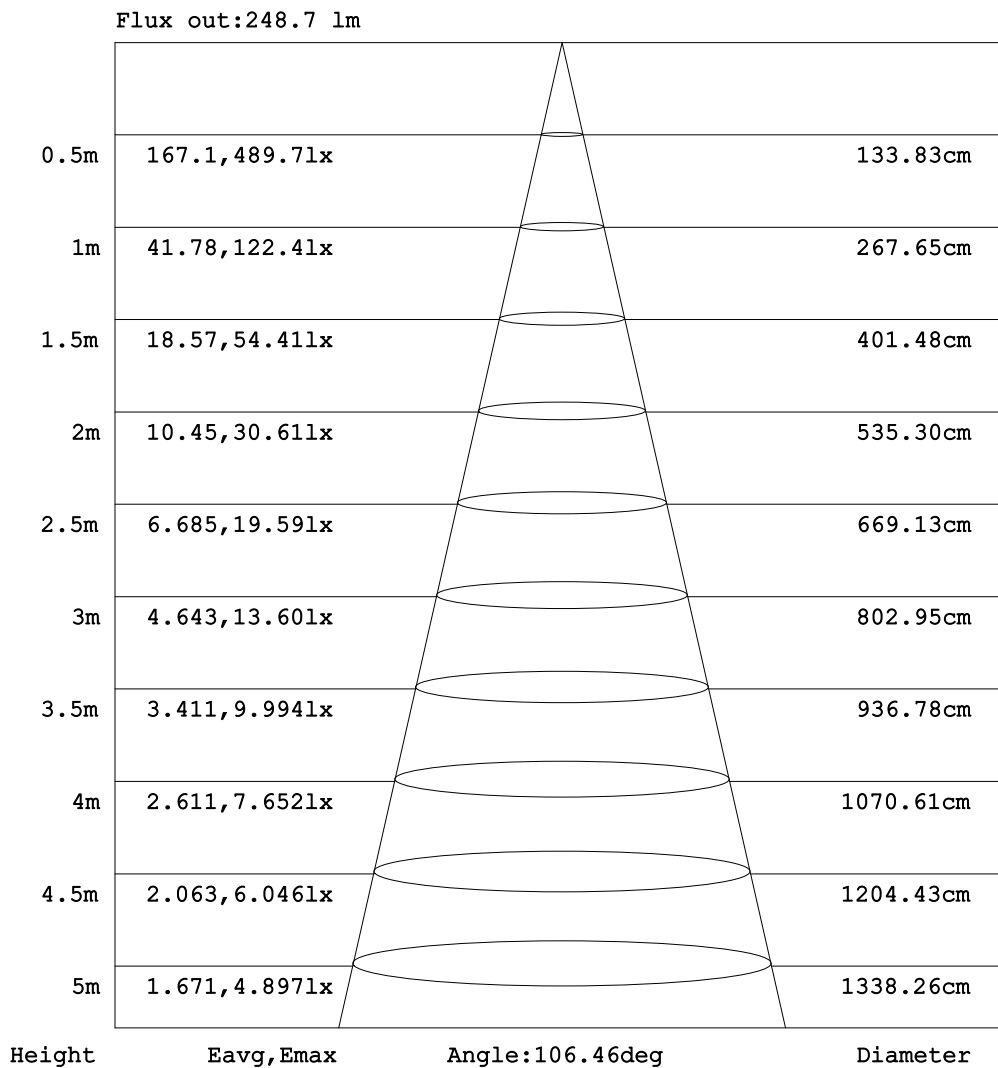


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

### ISOLUX DIAGRAM

Test:U:24.00V I:0.2347A P:5.633W PF:1.000 Freq:50.00Hz Lamp Flux:5.02551x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB-G	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

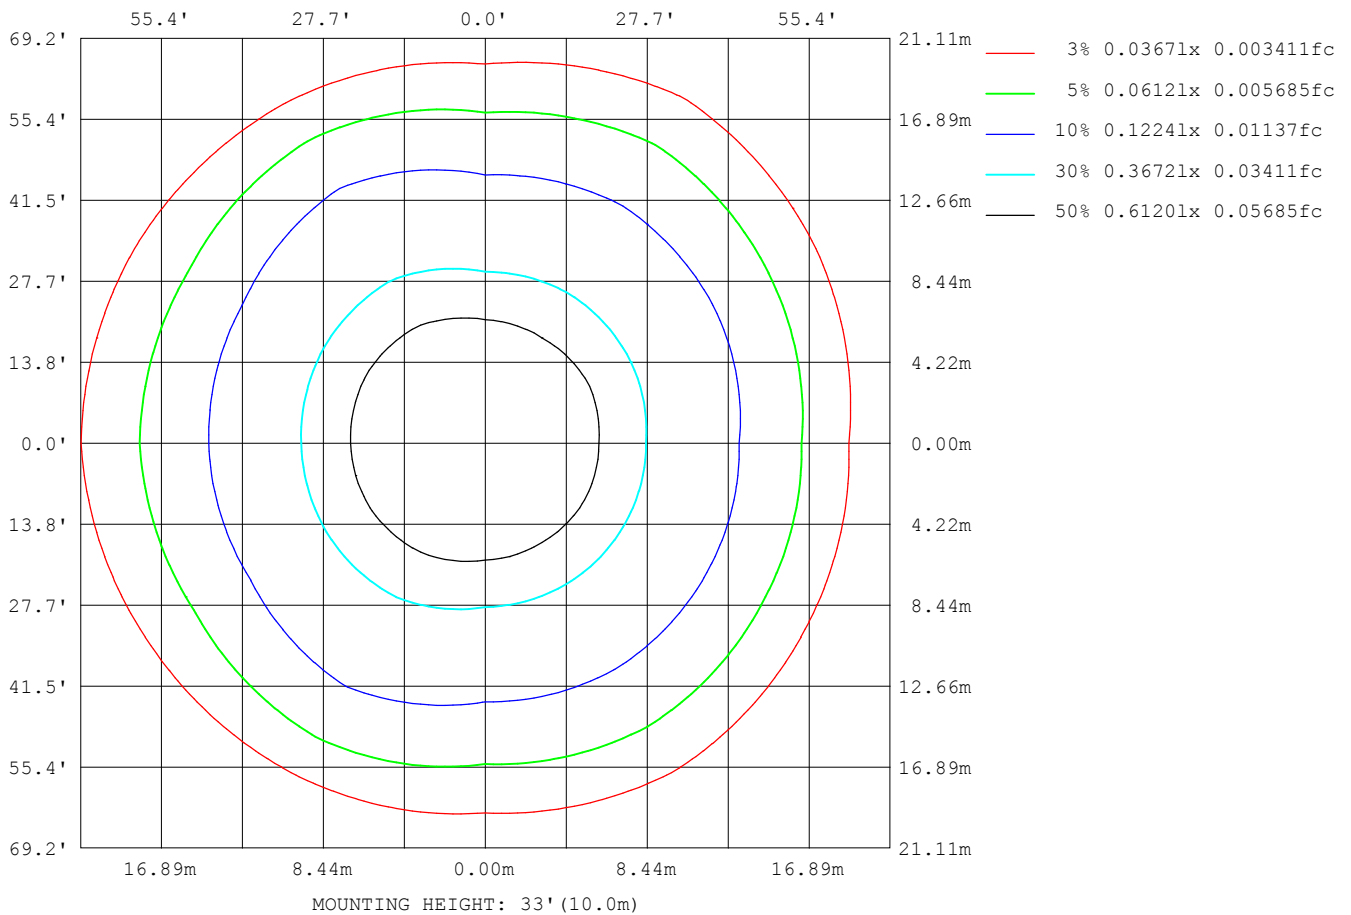

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:24.00V I:0.2347A P:5.633W PF:1.000 Freq:50.00Hz Lamp Flux:5.02551x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB-G	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6389
L_0~180 (75) av	5834
L_0~180 (85) av	7598
L_90~270 (65) av	5722
L_90~270 (75) av	3372
L_90~270 (85) av	1114
L_45 (65) av	6657
L_45 (75) av	5572
L_45 (85) av	5790

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

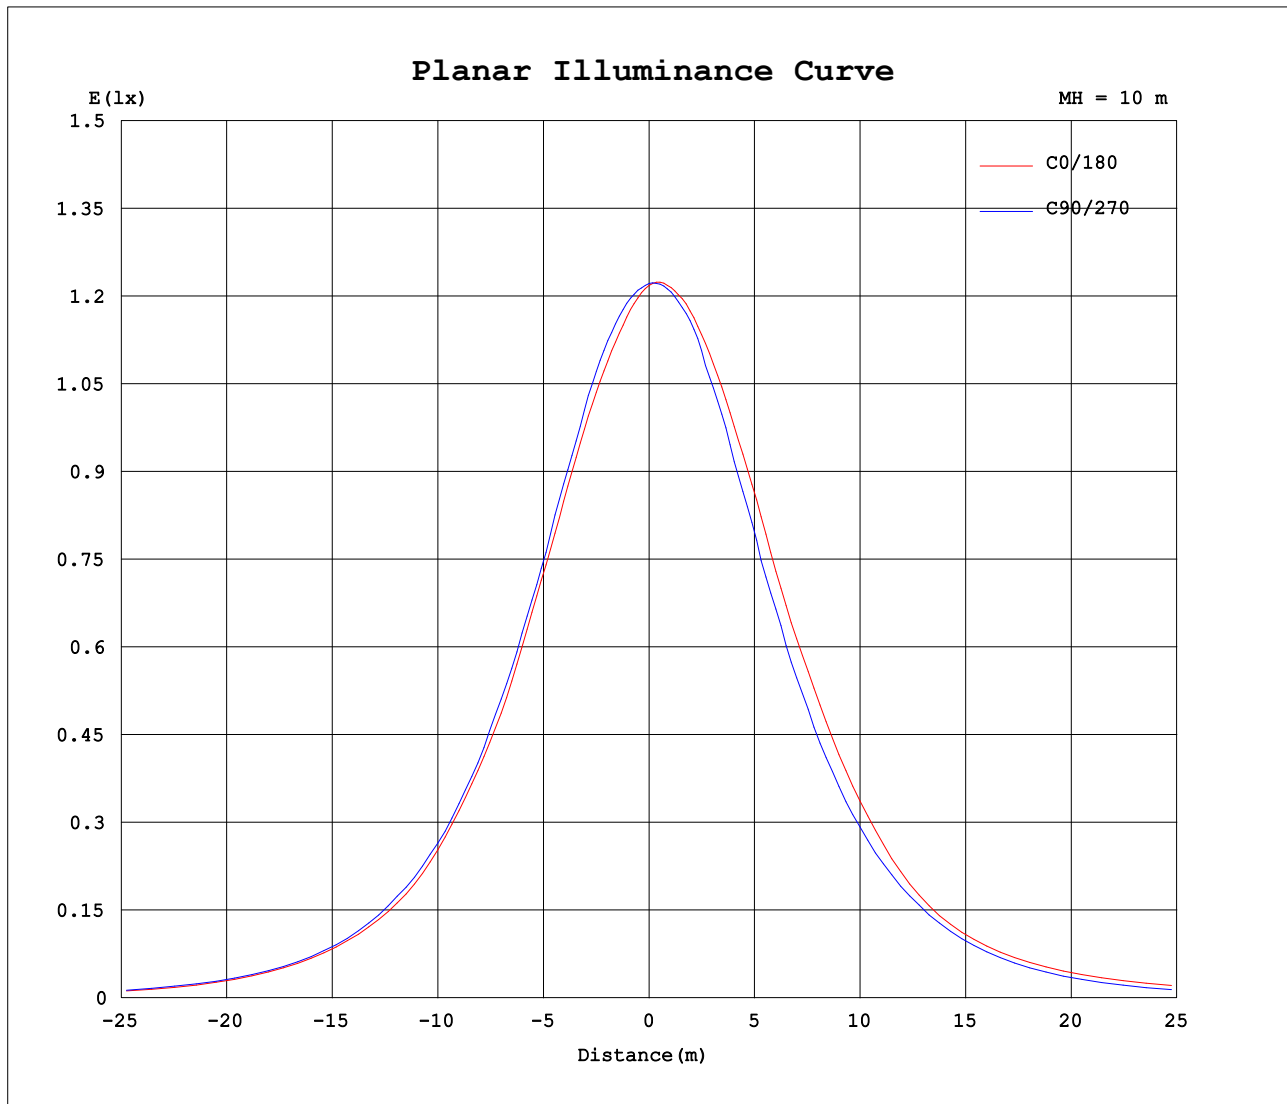

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: LPC  
Test Date: 2021-10-19

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 9.200m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.2347A P:5.633W PF:1.000 Freq:50.00Hz Lamp Flux:5.02551x70 lm		
NAME: P01-24V-5050-70-SPI3-RGB-G	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	122	122	122	122	122	122	122	122	122	122	122	122							
5	119	119	120	121	122	123	123	123	123	123	123	122	120						
10	116	116	117	119	121	123	124	124	124	123	120	118							
15	113	113	114	117	119	122	124	125	124	120	118	115							
20	108	109	109	112	117	121	123	124	121	118	113	111							
25	103	104	103	107	113	119	121	123	119	113	108	107							
30	97.1	97.7	97.5	101	109	114	117	120	116	107	103	102							
35	88.7	90.9	90.6	93.1	104	109	112	114	112	99.6	97.4	95.7							
40	81.5	81.9	83.2	84.3	97.6	103	105	109	107	91.5	90.9	87.4							
45	71.7	73.9	74.7	75.0	89.0	92.8	95.3	98.9	99.7	82.8	83.3	78.8							
50	61.2	64.8	65.7	65.6	81.0	79.6	81.4	85.7	91.2	72.0	74.7	70.7							
55	51.9	52.9	56.2	54.1	69.6	63.1	66.7	69.3	80.9	60.5	65.0	59.0							
60	41.2	43.1	46.3	43.3	53.4	50.7	55.4	54.6	61.5	47.9	54.5	47.8							
65	29.7	32.6	35.9	32.3	36.1	41.1	45.9	44.7	40.6	35.4	43.3	37.7							
70	20.3	22.4	25.3	21.7	25.7	33.2	37.4	35.8	28.8	22.8	31.7	26.9							
75	12.7	13.6	15.9	12.5	18.8	25.5	29.5	27.5	20.4	12.0	20.3	16.5							
80	6.83	7.19	8.06	5.19	13.0	18.3	22.0	19.5	13.8	4.23	10.5	8.92							
85	3.22	3.51	3.58	1.78	7.64	12.2	15.3	13.0	7.33	0.94	3.80	3.98							
90	1.81	2.11	2.26	1.26	4.05	7.15	9.34	7.32	3.62	0.65	1.55	1.84							
95	1.62	1.98	2.15	1.35	2.43	3.85	4.85	3.53	1.75	0.70	1.45	1.43							
100	1.62	2.03	2.15	1.49	2.19	2.38	2.30	1.55	1.44	0.89	1.45	1.40							
105	1.68	2.09	2.00	1.69	1.97	2.14	1.38	1.47	1.36	1.04	1.32	1.42							
110	1.75	2.16	2.22	1.69	2.17	2.18	1.25	1.44	1.58	1.05	1.55	1.49							
115	1.84	2.23	2.33	1.76	2.29	2.22	1.31	1.49	1.68	1.15	1.56	1.57							
120	1.93	2.24	2.05	1.84	2.32	2.25	1.34	1.57	1.69	1.26	1.42	1.66							
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-10-19

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks: