


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.7299A P:17.52W PF:1.000 Freq:50.00Hz Lamp Flux:11.8675x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 47.42 lm/W			
MODEL	5050	I _{max} (cd)	313.2	S/MH(C0/180)	1.26
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	830.72	η UP,DN(C0-180)	0.9,47.7
NOMINAL FLUX(lm)	11.8675	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,50.7
LAMPS INSIDE	70	η up(%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	98.4	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

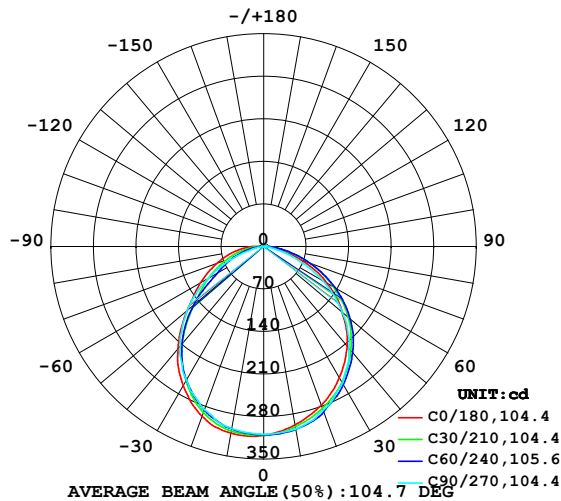

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

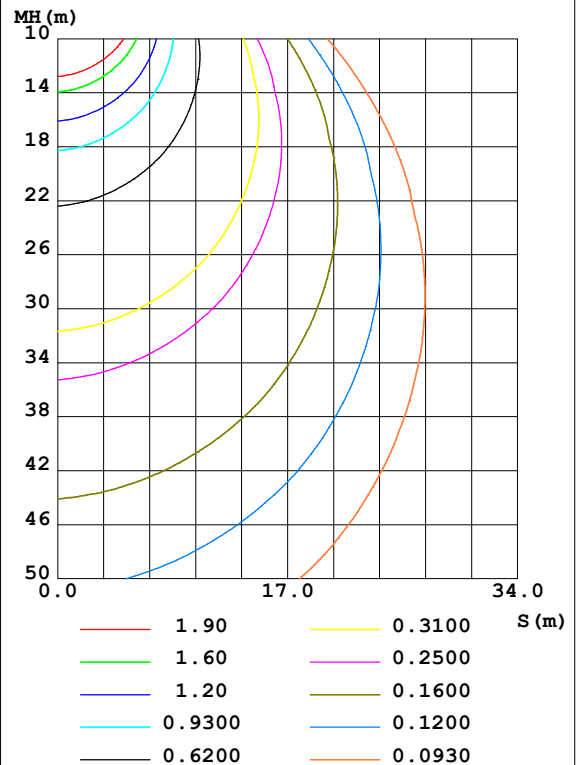

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LPC
 Test Date: 2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 9.200m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	298.2	303.3	304.8	299.3	311.8	306.7	304.4	304.0	0- 10	29.26	29.26	3.52,3.52
20	277.8	286.3	286.9	277.1	297.3	288.6	285.8	287.7	10- 20	83.61	112.9	13.6,13.6
30	249.3	260.2	259.5	240.0	264.7	254.7	254.1	263.4	20- 30	125.1	238.0	28.6,28.6
40	213.8	225.8	218.6	190.4	219.6	209.1	213.4	233.0	30- 40	147.8	385.8	46.4,46.4
50	168.8	184.0	169.5	134.9	164.7	150.4	165.0	193.8	40- 50	147.6	533.4	64.2,64.2
60	120.1	133.9	112.3	86.05	120.5	96.89	106.6	147.2	50- 60	125.7	659.1	79.3,79.3
70	66.46	81.37	51.27	49.90	82.26	59.23	47.44	96.36	60- 70	90.86	750.0	90.3,90.3
80	25.15	33.20	11.66	19.30	47.84	26.38	8.703	47.11	70- 80	50.04	800.0	96.3,96.3
90	5.227	7.111	2.775	4.890	16.58	5.704	1.477	12.22	80- 90	17.54	817.6	98.4,98.4
100	3.653	4.458	3.314	4.800	2.608	3.390	2.164	3.246	90-100	5.012	822.6	99,99
110	4.060	4.711	3.764	5.030	2.941	3.732	2.453	3.343	100-110	3.904	826.5	99.5,99.5
120	4.463	4.749	4.156	5.315	3.352	4.124	2.930	3.259	110-120	4.044	830.5	100,100
130	0	0	0	0	0	0	0	0	120-130	0.1960	830.7	100,100
140	0	0	0	0	0	0	0	0	130-140	0	830.7	100,100
150	0	0	0	0	0	0	0	0	140-150	0	830.7	100,100
160	0	0	0	0	0	0	0	0	150-160	0	830.7	100,100
170	0	0	0	0	0	0	0	0	160-170	0	830.7	100,100
180	0	0	0	0	0	0	0	0	170-180	0	830.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 461.14 lm

%lum = 55.5%

%lamp = 55.5%

Conical surface Flux(120deg): 659.13 lm

%lum = 79.3%


%lamp = 79.3%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.7299A P:17.52W PF:1.000 Freq:50.00Hz Lamp Flux:11.8675x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

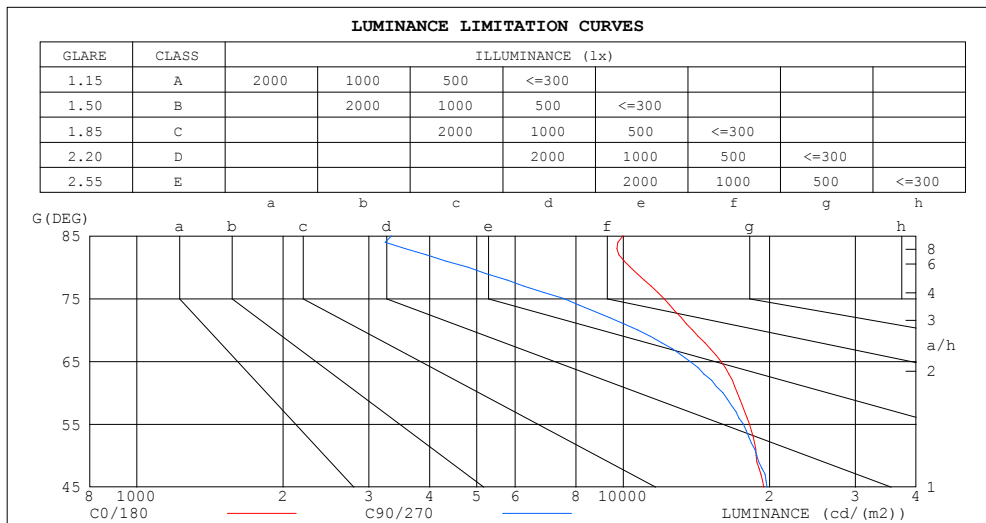

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9999	3340
80	10346	4796
75	12138	7559
70	13879	10707
65	15881	13707
60	17163	16042
55	18173	17664
50	18757	18836
45	19471	19752


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.7299A P:17.52W PF:1.000 Freq:50.00Hz Lamp Flux:11.8675x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.79	.89	.83	.78	.85	.80	.75	.82	.77	.74	.78	.75	.72	.69
3.0	.80	.72	.66	.78	.71	.65	.75	.69	.64	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.63	.56	.70	.62	.55	.67	.60	.55	.65	.58	.54	.62	.57	.53	.51
5.0	.64	.55	.48	.63	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.49	.42	.56	.48	.42	.54	.47	.42	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.44	.37	.51	.43	.37	.50	.42	.37	.48	.41	.37	.47	.41	.36	.34
8.0	.48	.39	.34	.47	.39	.33	.45	.38	.33	.44	.38	.33	.43	.37	.32	.31
9.0	.44	.36	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.28
10.0	.40	.33	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

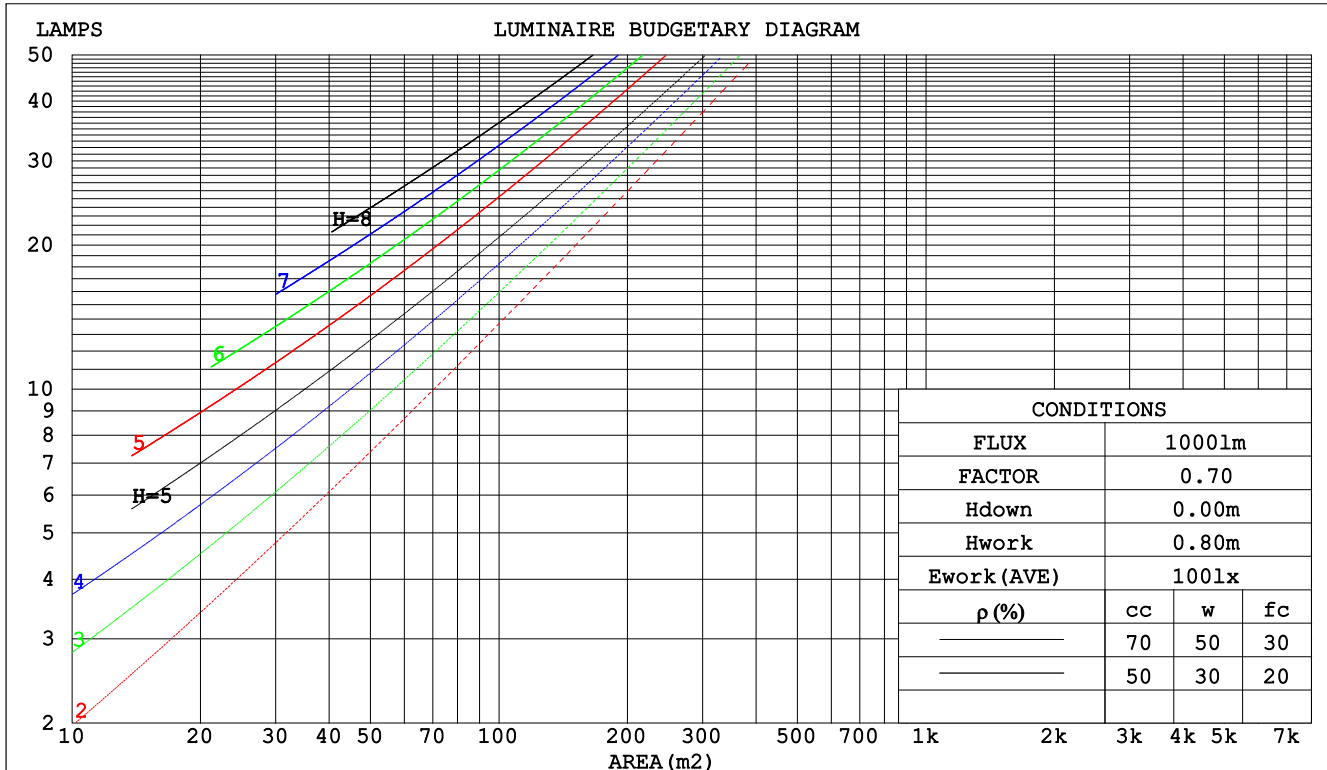

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.7299A P:17.52W PF:1.000 Freq:50.00Hz Lamp Flux:11.8675x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.303	.172	.055	.295	.168	.053	.281	.161	.051	.268	.155	.050	.256	.148	.048		
2.0	.284	.156	.048	.277	.153	.047	.265	.147	.046	.253	.142	.044	.243	.137	.043		
3.0	.263	.140	.042	.257	.138	.041	.246	.133	.041	.236	.129	.040	.226	.125	.039		
4.0	.243	.126	.037	.238	.124	.037	.228	.121	.036	.219	.118	.035	.210	.114	.035		
5.0	.225	.115	.033	.220	.113	.033	.212	.110	.032	.204	.107	.032	.196	.105	.031		
6.0	.209	.105	.030	.205	.104	.030	.197	.101	.029	.190	.099	.029	.183	.096	.029		
7.0	.195	.096	.027	.191	.095	.027	.184	.093	.027	.178	.091	.027	.172	.089	.026		
8.0	.182	.089	.025	.179	.088	.025	.173	.086	.025	.167	.085	.024	.161	.083	.024		
9.0	.171	.083	.023	.168	.082	.023	.162	.080	.023	.157	.079	.023	.152	.077	.022		
10.0	.161	.077	.021	.158	.077	.021	.153	.075	.021	.148	.074	.021	.144	.072	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.203	.203	.203	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.147	.164	.145	.127	.112	.099	.088	.065	.058	.051	.021	.019	.016	
2.0	.183	.144	.111	.157	.124	.096	.108	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.175	.127	.088	.150	.109	.076	.103	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.168	.113	.072	.144	.098	.062	.099	.068	.044	.057	.040	.026	.018	.013	.009	
5.0	.160	.103	.060	.138	.089	.053	.095	.062	.037	.055	.036	.022	.018	.012	.007	
6.0	.153	.094	.052	.132	.082	.045	.091	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.146	.088	.046	.126	.076	.040	.087	.053	.029	.051	.031	.017	.016	.010	.006	
8.0	.140	.082	.042	.121	.071	.036	.083	.050	.026	.049	.029	.015	.016	.010	.005	
9.0	.134	.077	.038	.116	.067	.033	.080	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.129	.073	.035	.111	.063	.031	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.7299A P:17.52W PF:1.000 Freq:50.00Hz Lamp Flux:11.8675x70 lm										
NAME: P01-24V-5050-70-SPI-RGBW(4000K)					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:1*0.014			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.7	25.2	24.0	25.4	25.7	23.7	25.2	24.0	25.4	25.7
3H	25.0	26.4	25.3	26.6	26.9	24.8	26.1	25.1	26.4	26.6
4H	25.5	26.8	25.8	27.0	27.3	25.0	26.3	25.4	26.6	26.9
6H	25.8	27.0	26.1	27.3	27.6	25.1	26.3	25.4	26.6	26.9
8H	25.8	27.0	26.2	27.3	27.6	25.1	26.3	25.4	26.6	26.9
12H	25.9	27.0	26.3	27.3	27.7	25.1	26.2	25.4	26.5	26.8
4H 2H	24.4	25.7	24.7	26.0	26.3	24.4	25.7	24.7	26.0	26.2
3H	25.9	27.0	26.3	27.4	27.7	25.7	26.8	26.1	27.2	27.5
4H	26.5	27.5	26.9	27.9	28.2	26.1	27.2	26.5	27.5	27.9
6H	26.9	27.8	27.3	28.2	28.6	26.3	27.3	26.8	27.6	28.0
8H	27.0	27.9	27.4	28.2	28.7	26.4	27.2	26.8	27.6	28.0
12H	27.1	27.9	27.5	28.3	28.7	26.4	27.2	26.8	27.6	28.0
8H 4H	26.8	27.6	27.2	28.0	28.4	26.5	27.3	26.9	27.7	28.1
6H	27.3	28.0	27.8	28.5	28.9	26.9	27.6	27.3	28.0	28.5
8H	27.5	28.2	28.0	28.6	29.1	27.0	27.6	27.5	28.1	28.6
12H	27.7	28.2	28.2	28.7	29.2	27.1	27.6	27.6	28.1	28.6
12H 4H	26.8	27.5	27.2	28.0	28.4	26.5	27.3	26.9	27.7	28.1
6H	27.4	28.0	27.9	28.5	28.9	27.0	27.6	27.4	28.0	28.5
8H	27.6	28.2	28.1	28.7	29.2	27.2	27.7	27.7	28.2	28.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.4					+ 0.3 / - 0.5				
2.0H	+ 0.2 / - 0.4					+ 0.3 / - 0.6				

CIE Pub.117, 830.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.6)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.7299A P:17.52W PF:1.000 Freq:50.00Hz Lamp Flux:11.8675x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	58	47	40	58	47	40	56	46	40	34
0.80	68	57	50	67	57	50	66	56	49	42
1.00	77	66	59	76	65	58	73	66	58	51
1.25	84	73	66	82	73	66	79	71	65	58
1.50	89	79	72	87	78	72	84	76	70	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	100	96	104	99	94	99	95	92	82
5.00	108	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNO M = 1.25										

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.7299A P:17.52W PF:1.000 Freq:50.00Hz Lamp Flux:11.8675x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

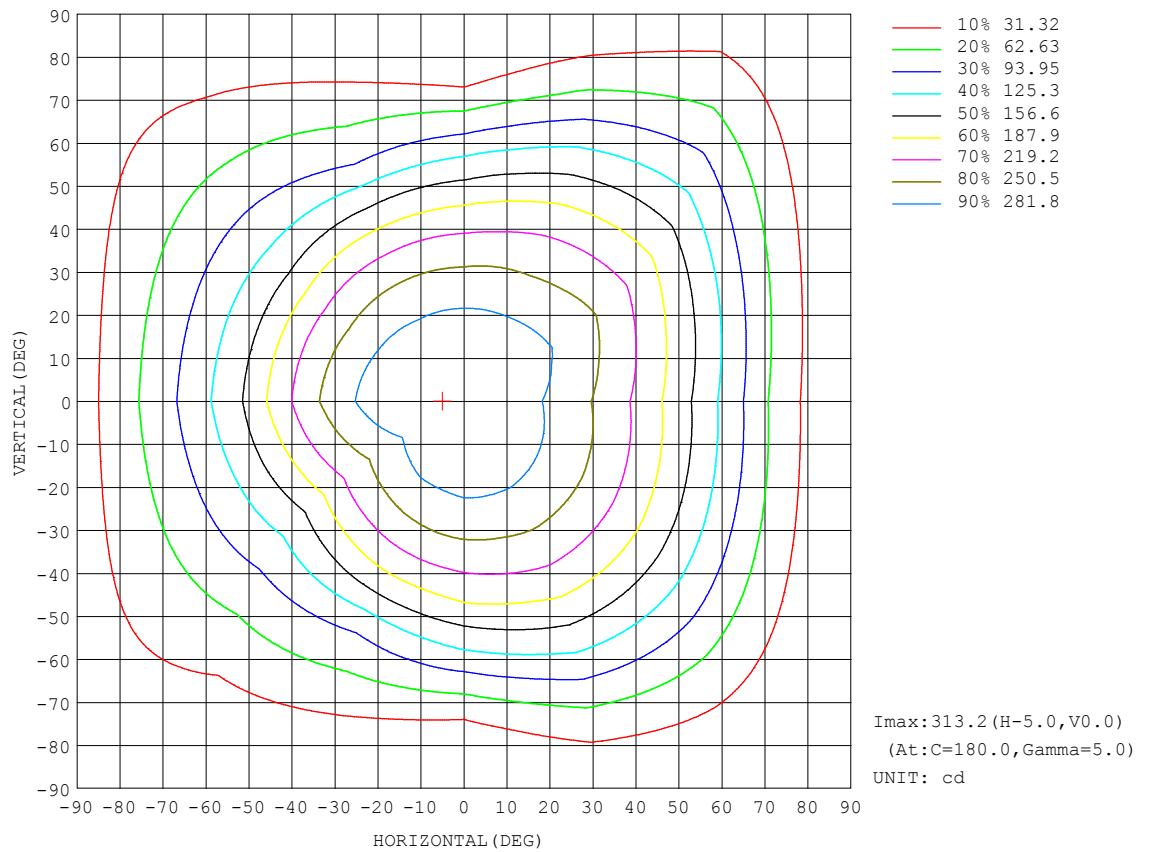


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.7299A P:17.52W PF:1.000 Freq:50.00Hz Lamp Flux:11.8675x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

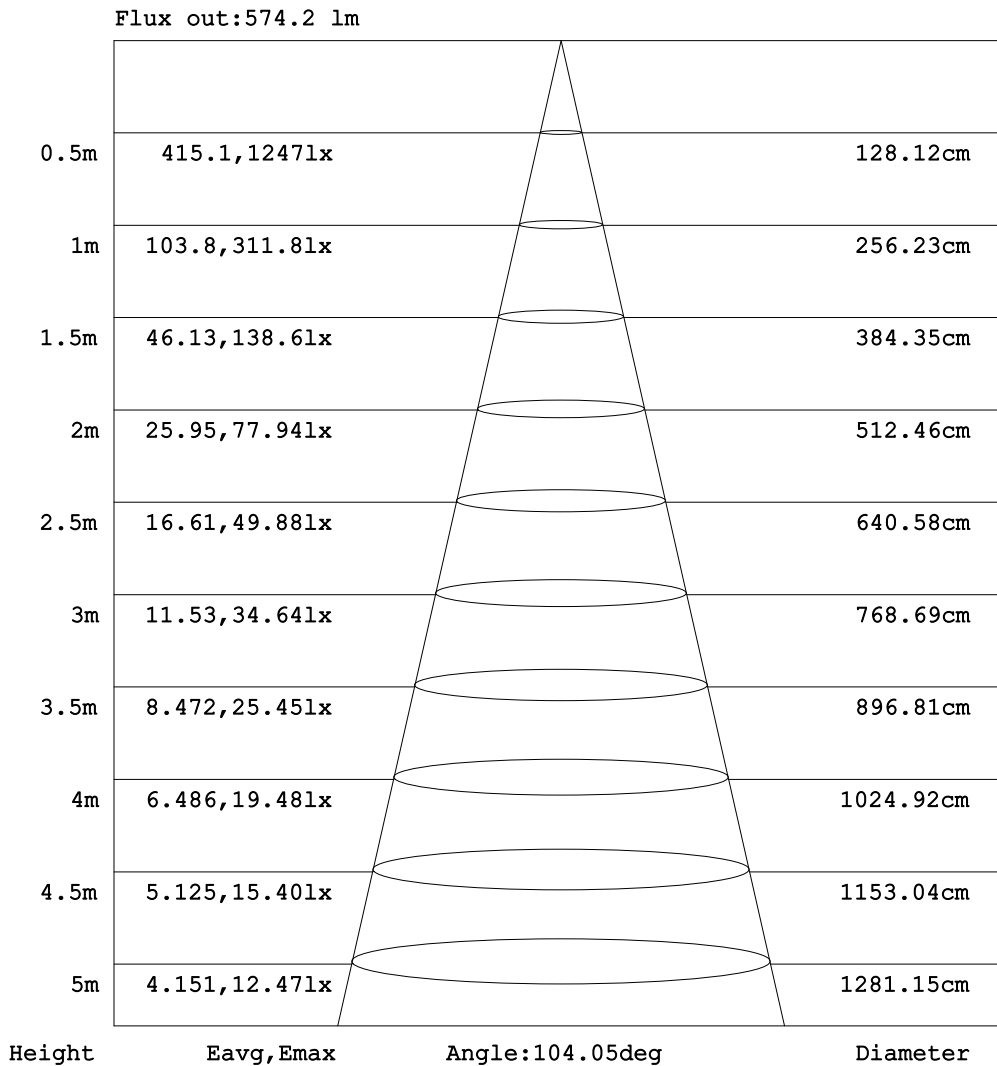


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.7299A P:17.52W PF:1.000 Freq:50.00Hz Lamp Flux:11.8675x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

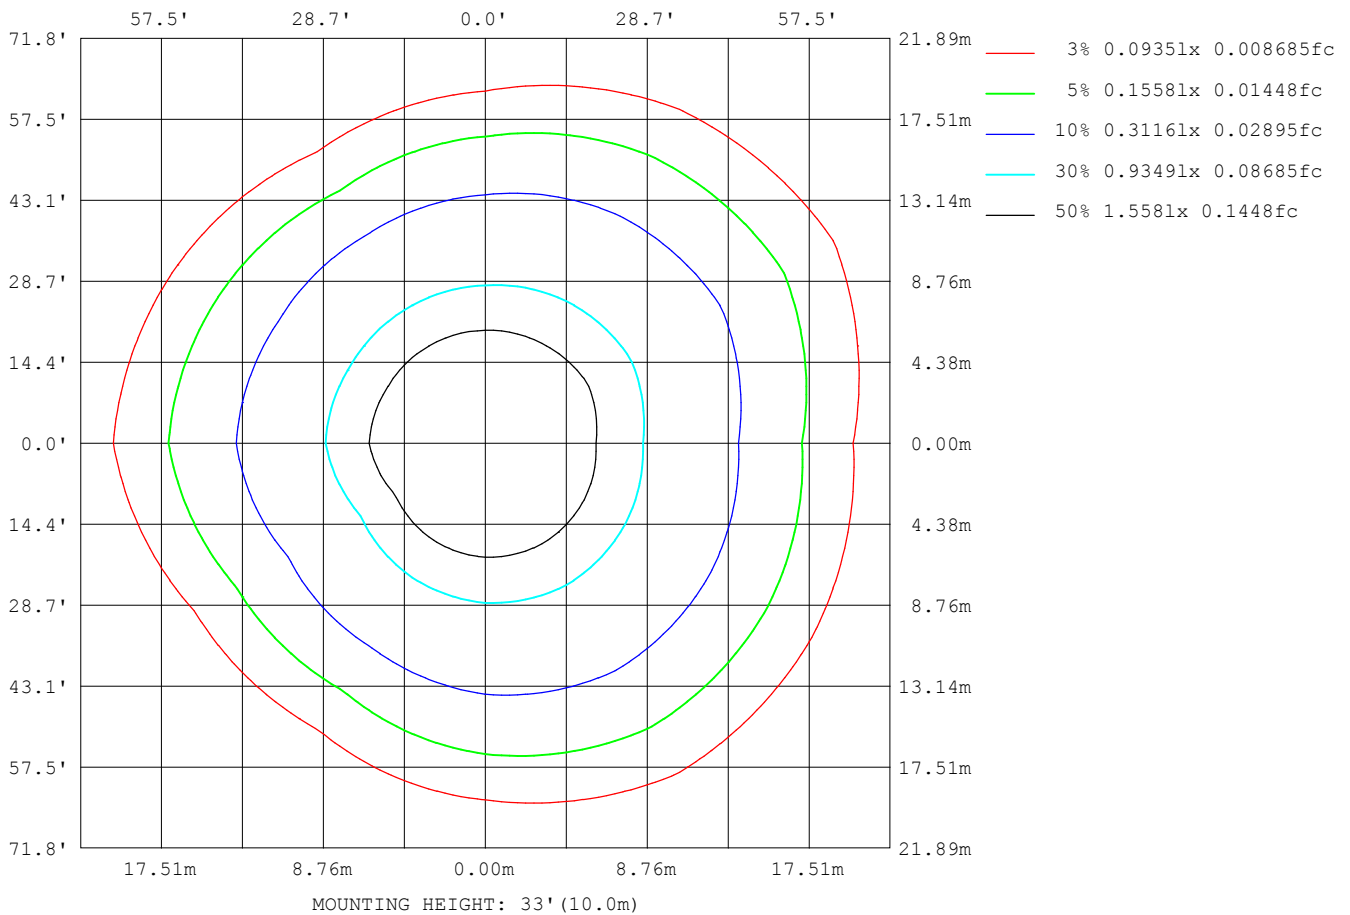

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.7299A P:17.52W PF:1.000 Freq:50.00Hz Lamp Flux:11.8675x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	16436
L_0~180 (75) av	15003
L_0~180 (85) av	17794
L_90~270 (65) av	13314
L_90~270 (75) av	6963
L_90~270 (85) av	2613
L_45 (65) av	15927
L_45 (75) av	14314
L_45 (85) av	13910

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

Planar Illuminance Curve

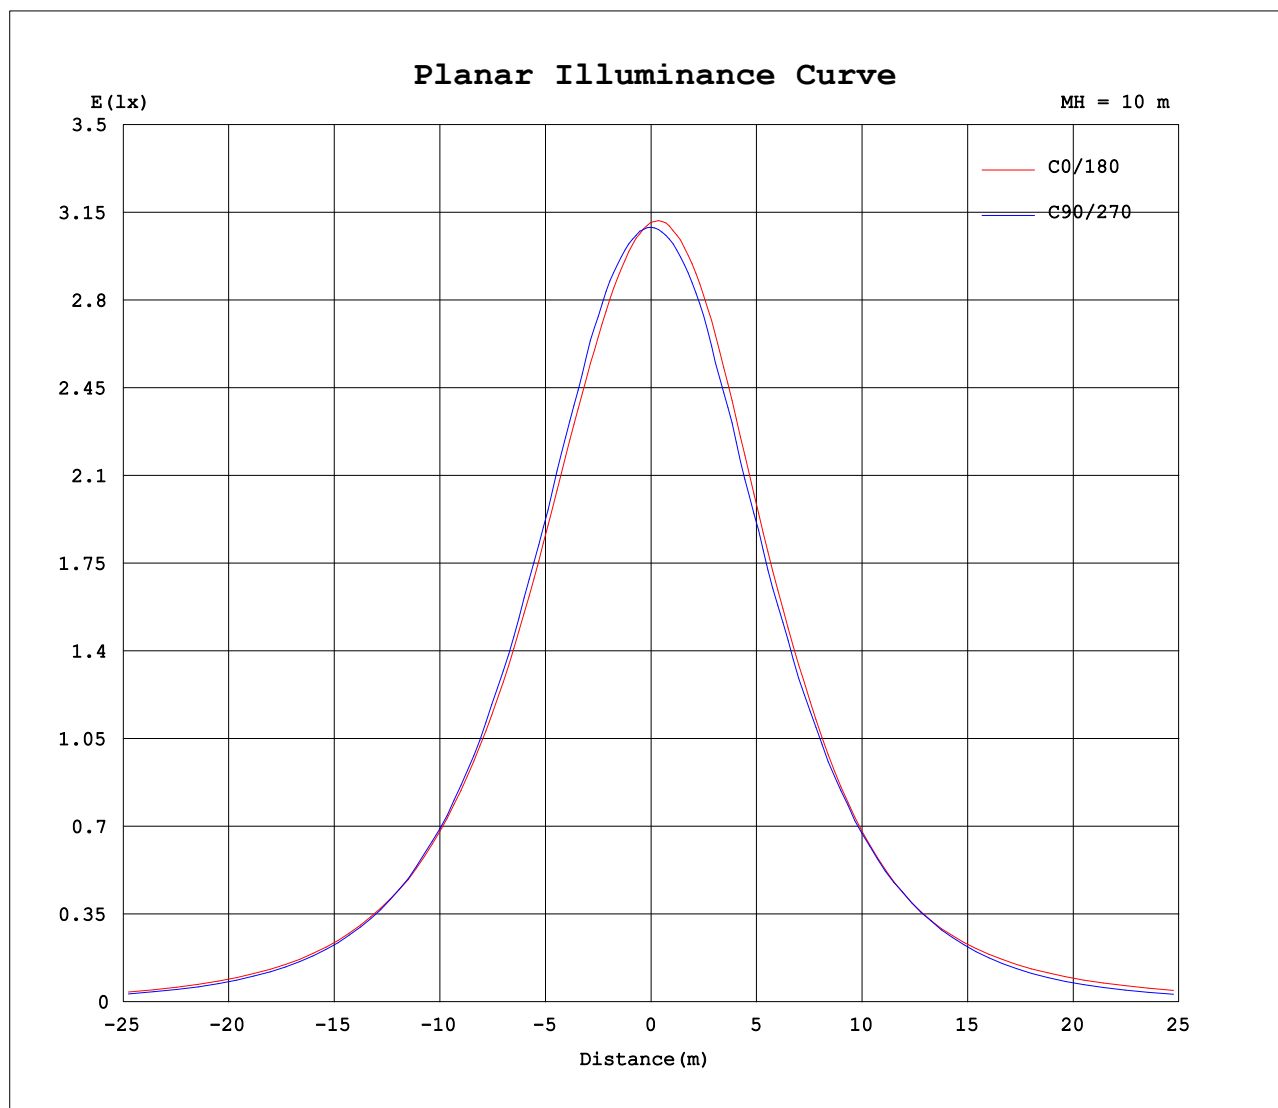

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: LPC
Test Date: 2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.7299A P:17.52W PF:1.000 Freq:50.00Hz Lamp Flux:11.8675x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	311	311	310	309	308	307	311	311	310	309	308	307						
5	306	308	309	308	306	305	313	311	309	308	307	307						
10	298	301	305	305	301	297	312	308	305	304	304	304						
15	289	293	299	299	294	286	307	302	297	298	298	297						
20	278	283	289	287	283	271	297	291	286	286	286	289						
25	265	272	276	274	266	253	283	275	272	271	273	279						
30	249	258	262	260	248	232	265	255	254	254	259	268						
35	232	242	245	240	226	207	245	234	234	235	243	254						
40	214	223	228	219	201	179	220	209	209	213	228	238						
45	193	203	209	196	173	151	193	180	182	190	209	220						
50	169	182	186	170	142	128	165	150	151	165	187	200						
55	146	158	162	142	108	108	140	126	118	136	164	179						
60	120	132	136	112	84.3	87.8	120	105	88.4	107	139	156						
65	94.0	107	109	81.1	66.2	69.3	101	85.1	69.4	76.5	113	130						
70	66.5	81.0	81.8	51.3	48.1	51.7	82.3	66.3	52.1	47.4	86.3	106						
75	44.0	55.2	56.2	27.4	31.9	35.2	64.7	48.7	35.1	23.1	60.8	81.1						
80	25.2	32.3	34.1	11.7	18.2	20.4	47.8	32.2	20.6	8.70	38.0	56.2						
85	12.2	16.5	16.8	4.08	8.62	9.72	31.2	17.4	9.39	2.30	19.5	33.8						
90	5.23	7.41	6.81	2.77	4.91	4.87	16.6	7.38	4.03	1.48	7.47	17.0						
95	3.55	4.26	4.59	2.98	4.75	4.62	6.32	3.39	3.46	1.69	3.57	7.11						
100	3.65	4.32	4.60	3.31	4.88	4.72	2.61	3.20	3.58	2.16	3.41	3.08						
105	3.84	4.49	4.24	3.74	4.52	4.95	2.73	3.41	3.21	2.51	2.90	2.99						
110	4.06	4.67	4.75	3.76	4.97	5.09	2.94	3.61	3.85	2.45	3.59	3.10						
115	4.24	4.85	5.06	3.95	5.23	5.21	3.17	3.82	4.11	2.69	3.67	3.20						
120	4.46	5.04	4.46	4.16	5.31	5.32	3.35	4.02	4.23	2.93	3.12	3.40						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: