


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.7344A P:17.63W PF:1.000 Freq:50.00Hz Lamp Flux:11.6293x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 46.19 lm/W			
MODEL	5050	I _{max} (cd)	310.6	S/MH(C0/180)	1.13
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.22
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	814.05	η UP,DN(C0-180)	0.9,50.5
NOMINAL FLUX(lm)	11.6293	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,47.9
LAMPS INSIDE	70	η up(%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	98.4	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

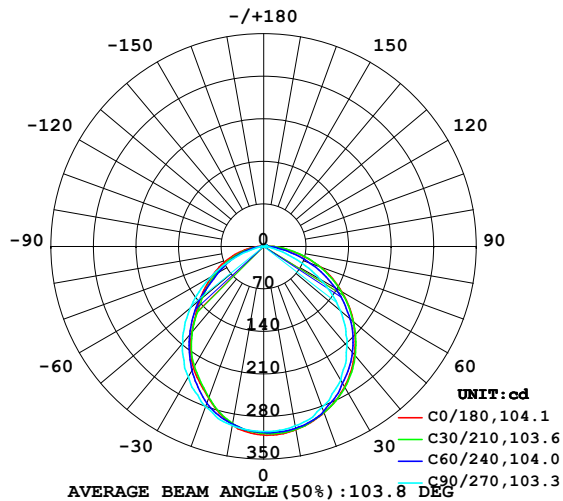

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

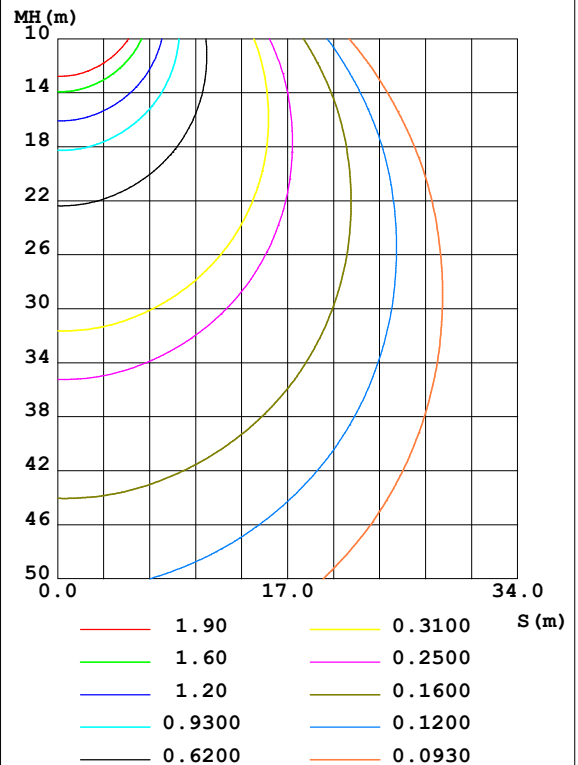

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LPC
 Test Date: 2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 9.200m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	306.2	304.6	299.6	292.1	297.5	296.3	299.0	300.7	0- 10	28.89	28.89	3.55,3.55
20	291.1	289.7	281.7	266.0	265.4	269.5	280.1	285.5	10- 20	81.88	110.8	13.6,13.6
30	266.6	264.0	254.0	230.4	231.4	232.1	248.3	261.0	20- 30	121.6	232.4	28.5,28.5
40	232.6	230.9	213.7	184.6	184.4	186.3	207.4	229.4	30- 40	143.3	375.7	46.2,46.2
50	192.9	189.1	165.3	135.1	137.4	135.4	158.0	188.1	40- 50	143.1	518.8	63.7,63.7
60	148.2	141.3	106.9	88.72	98.53	88.29	99.88	141.2	50- 60	123.6	642.5	78.9,78.9
70	99.81	90.12	47.77	52.08	63.47	51.66	43.41	90.90	60- 70	90.42	732.9	90,90
80	48.64	42.55	10.87	20.64	28.93	19.99	7.854	44.17	70- 80	50.61	783.5	96.2,96.2
90	14.76	10.78	2.679	4.996	5.051	3.796	1.442	11.38	80- 90	17.71	801.2	98.4,98.4
100	3.540	4.166	3.203	4.573	2.709	3.352	2.089	3.240	90-100	4.960	806.2	99,99
110	3.713	4.362	3.639	4.802	3.167	3.704	2.402	3.282	100-110	3.765	810.0	99.5,99.5
120	4.091	4.400	4.021	5.106	3.598	4.091	2.885	3.189	110-120	3.905	813.9	100,100
130	0	0	0	0	0	0	0	0	120-130	0.1896	814.1	100,100
140	0	0	0	0	0	0	0	0	130-140	0	814.1	100,100
150	0	0	0	0	0	0	0	0	140-150	0	814.1	100,100
160	0	0	0	0	0	0	0	0	150-160	0	814.1	100,100
170	0	0	0	0	0	0	0	0	160-170	0	814.1	100,100
180	0	0	0	0	0	0	0	0	170-180	0	814.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 448.59 lm

%lum = 55.1%

%lamp = 55.1%

Conical surface Flux(120deg): 642.49 lm

%lum = 78.9%


%lamp = 78.9%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.7344A P:17.63W PF:1.000 Freq:50.00Hz Lamp Flux:11.6293x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

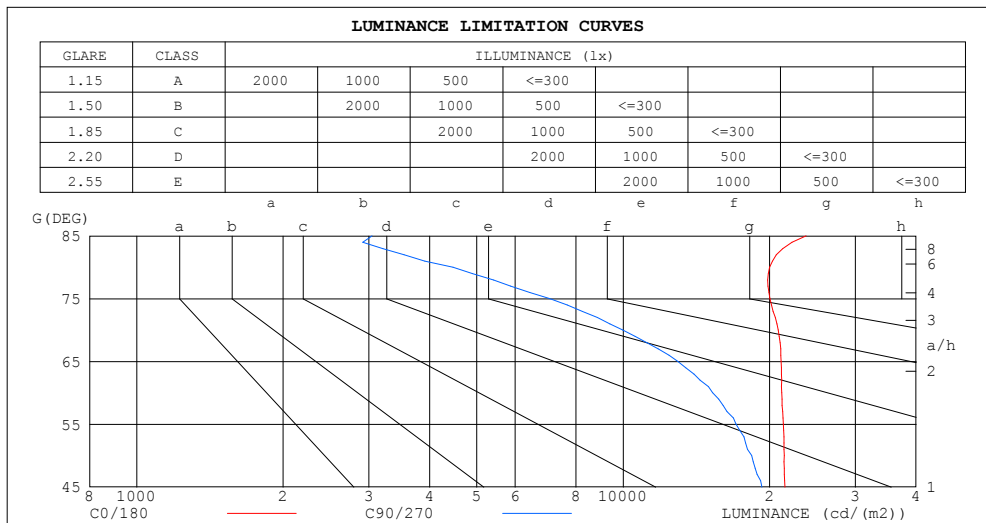

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	23774	3048
80	20007	4471
75	20025	7058
70	20844	9977
65	21105	12940
60	21178	15276
55	21344	17046
50	21437	18367
45	21511	19286


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.7344A P:17.63W PF:1.000 Freq:50.00Hz Lamp Flux:11.6293x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.00	.96	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.63	.72	.67	.62	.69	.65	.61	.59
4.0	.71	.62	.56	.70	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.53	.50
5.0	.64	.55	.48	.62	.54	.48	.60	.53	.47	.58	.52	.46	.56	.50	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.46	.41	.36	.34
8.0	.48	.39	.33	.47	.39	.33	.45	.38	.33	.44	.37	.33	.43	.37	.32	.30
9.0	.44	.36	.30	.43	.35	.30	.42	.35	.30	.41	.34	.29	.39	.34	.29	.27
10.0	.40	.33	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

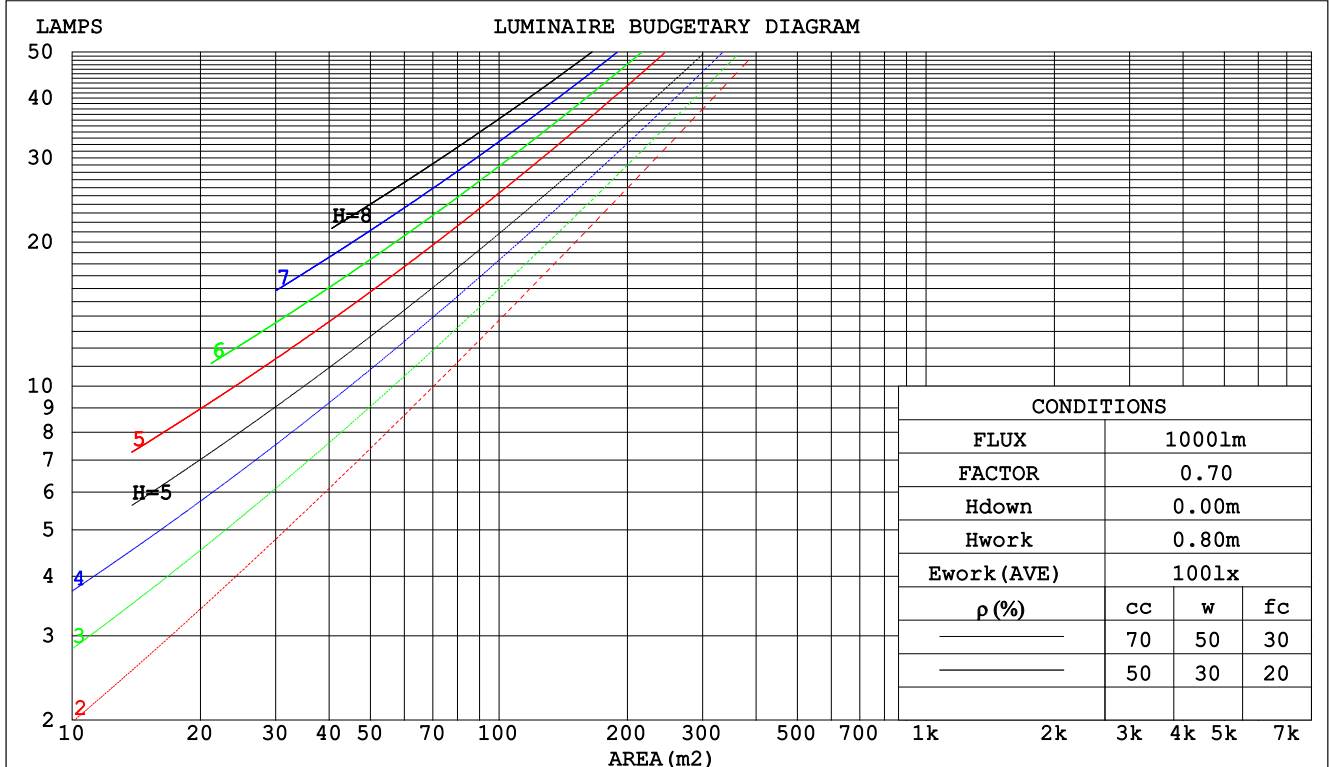

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.7344A P:17.63W PF:1.000 Freq:50.00Hz Lamp Flux:11.6293x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.305	.173	.055	.297	.169	.054	.283	.162	.052	.270	.156	.050	.258	.150	.048		
2.0	.285	.156	.048	.279	.153	.047	.266	.148	.046	.255	.143	.045	.244	.138	.044		
3.0	.264	.140	.042	.258	.138	.042	.247	.134	.041	.237	.130	.040	.227	.126	.039		
4.0	.244	.127	.037	.239	.125	.037	.229	.121	.036	.220	.118	.036	.211	.115	.035		
5.0	.226	.115	.033	.221	.114	.033	.212	.111	.033	.204	.108	.032	.197	.105	.032		
6.0	.210	.105	.030	.206	.104	.030	.198	.101	.029	.190	.099	.029	.184	.097	.029		
7.0	.195	.097	.027	.192	.095	.027	.185	.093	.027	.178	.091	.027	.172	.089	.026		
8.0	.183	.089	.025	.179	.088	.025	.173	.086	.025	.167	.085	.024	.162	.083	.024		
9.0	.171	.083	.023	.168	.082	.023	.163	.080	.023	.157	.079	.023	.152	.077	.022		
10.0	.161	.077	.021	.159	.077	.021	.153	.075	.021	.149	.074	.021	.144	.072	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.147	.164	.144	.126	.112	.099	.087	.065	.057	.051	.021	.019	.016	
2.0	.184	.144	.111	.157	.124	.096	.108	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.176	.126	.087	.151	.109	.076	.103	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.168	.113	.071	.144	.098	.062	.099	.068	.044	.057	.040	.026	.018	.013	.008	
5.0	.160	.103	.060	.138	.089	.052	.095	.062	.037	.055	.036	.022	.018	.012	.007	
6.0	.153	.094	.052	.132	.082	.045	.091	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.147	.087	.046	.126	.076	.040	.087	.053	.028	.051	.031	.017	.016	.010	.006	
8.0	.140	.082	.042	.121	.071	.036	.083	.050	.026	.049	.029	.015	.016	.010	.005	
9.0	.134	.077	.038	.116	.067	.033	.080	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.129	.072	.035	.111	.063	.031	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.7344A P:17.63W PF:1.000 Freq:50.00Hz Lamp Flux:11.6293x70 lm										
NAME: P01-24V-5050-70-SPI-RGBW(3000K)					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:1*0.014			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.7	26.2	25.0	26.4	26.7	23.8	25.3	24.1	25.5	25.7
3H	26.5	27.8	26.8	28.1	28.3	24.8	26.1	25.1	26.4	26.7
4H	27.2	28.5	27.5	28.8	29.1	25.0	26.3	25.4	26.6	26.9
6H	27.8	29.0	28.2	29.3	29.6	25.1	26.3	25.4	26.6	26.9
8H	28.1	29.2	28.4	29.5	29.9	25.1	26.3	25.4	26.6	26.9
12H	28.3	29.4	28.7	29.7	30.1	25.0	26.2	25.4	26.5	26.8
4H 2H	25.3	26.6	25.6	26.9	27.2	24.6	25.9	24.9	26.2	26.4
3H	27.3	28.4	27.6	28.7	29.0	25.9	27.0	26.2	27.3	27.6
4H	28.2	29.2	28.6	29.5	29.9	26.3	27.3	26.7	27.6	28.0
6H	28.9	29.8	29.3	30.2	30.6	26.5	27.4	26.9	27.8	28.2
8H	29.2	30.1	29.7	30.5	30.9	26.5	27.3	26.9	27.7	28.2
12H	29.6	30.3	30.0	30.7	31.2	26.5	27.3	26.9	27.7	28.1
8H 4H	28.4	29.3	28.8	29.7	30.1	26.8	27.6	27.2	28.0	28.4
6H	29.4	30.1	29.9	30.5	31.0	27.2	27.9	27.6	28.3	28.8
8H	29.8	30.5	30.3	30.9	31.4	27.3	27.9	27.8	28.4	28.9
12H	30.3	30.8	30.8	31.3	31.8	27.4	27.9	27.9	28.4	28.9
12H 4H	28.4	29.2	28.9	29.6	30.0	26.8	27.6	27.3	28.0	28.5
6H	29.4	30.1	29.9	30.5	31.0	27.3	28.0	27.8	28.4	28.9
8H	30.0	30.5	30.5	31.0	31.5	27.5	28.1	28.0	28.6	29.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.5				
2.0H	+ 0.1 / - 0.3					+ 0.3 / - 0.6				

CIE Pub.117, 814.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.7)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.7344A P:17.63W PF:1.000 Freq:50.00Hz Lamp Flux:11.6293x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) × RCR = 5									
k = 0.60	58	47	40	58	47	40	56	46	40	33
0.80	68	57	50	67	56	49	65	56	49	42
1.00	77	66	58	75	65	58	73	66	58	51
1.25	84	73	66	82	72	66	79	71	65	58
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	98	94	99	95	91	82
5.00	108	104	99	106	101	98	101	98	95	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNM = 1.25										

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.7344A P:17.63W PF:1.000 Freq:50.00Hz Lamp Flux:11.6293x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

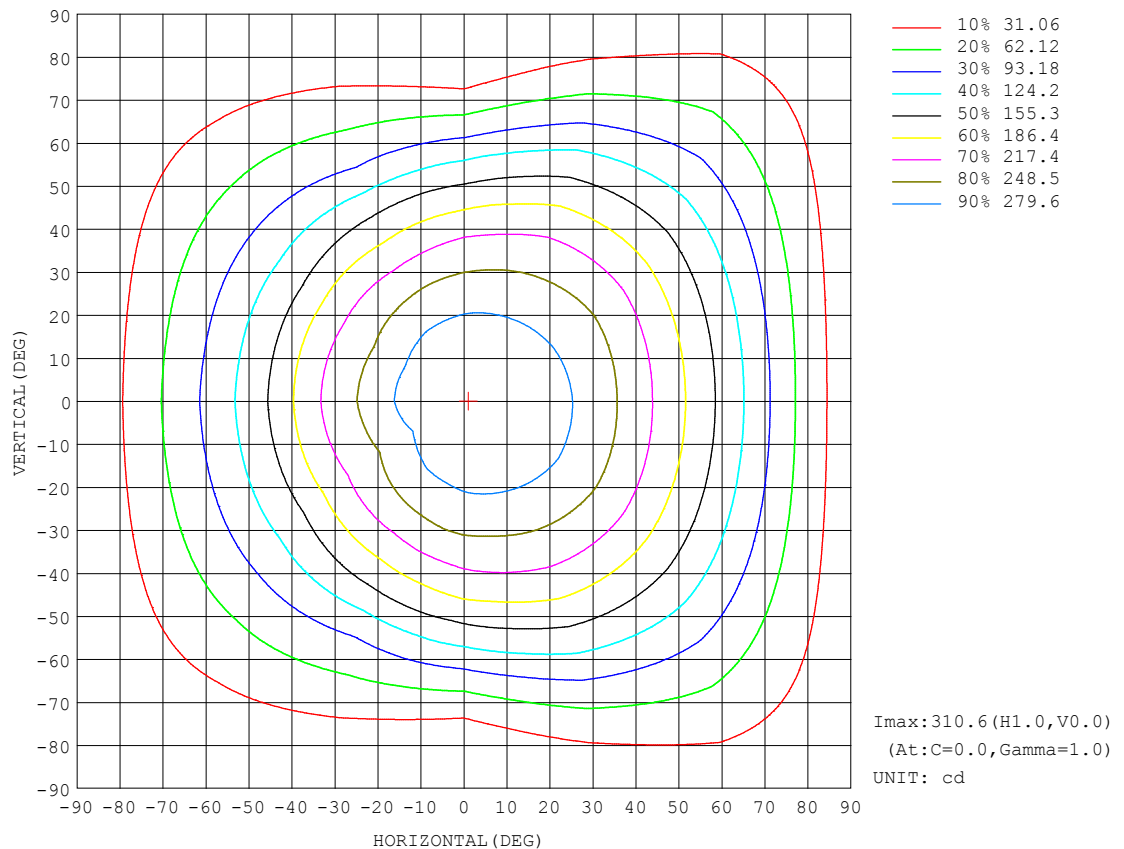


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.7344A P:17.63W PF:1.000 Freq:50.00Hz Lamp Flux:11.6293x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

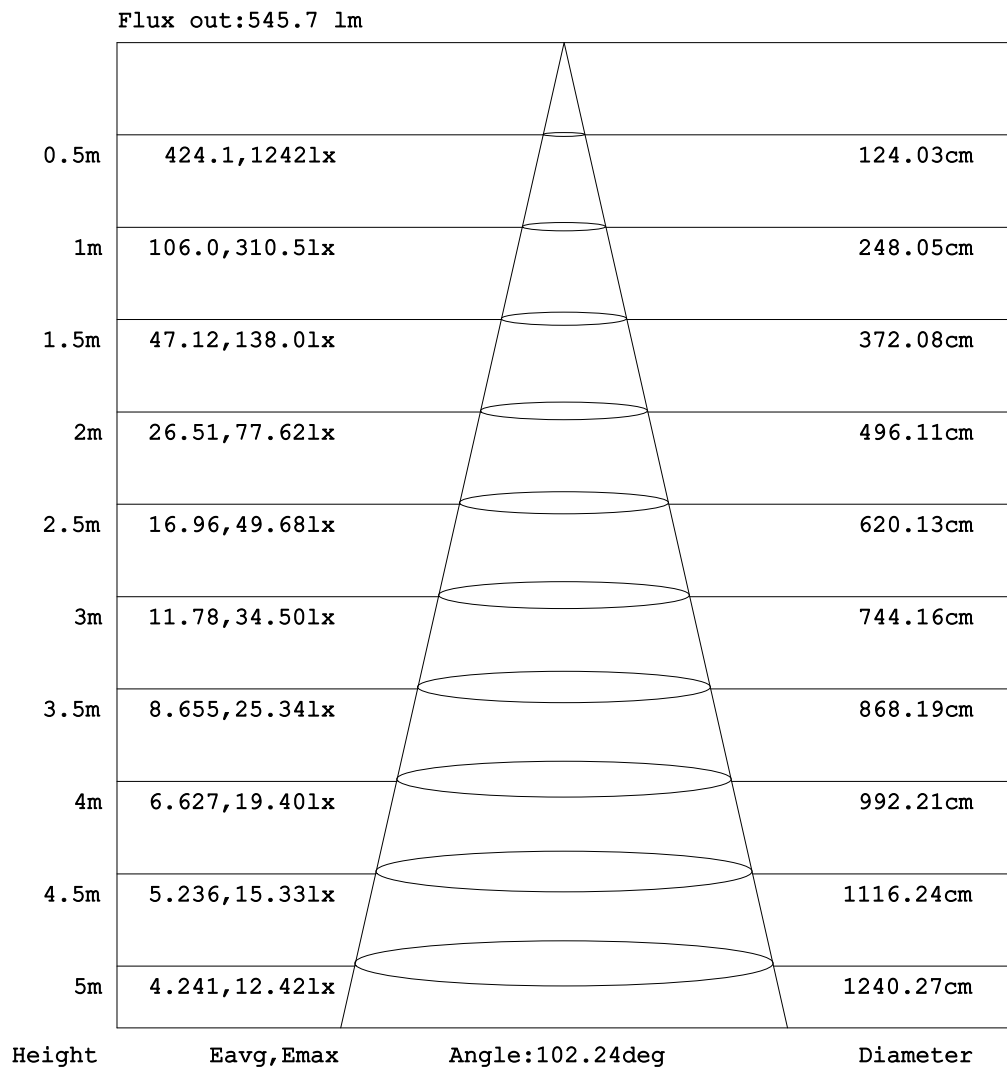


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.7344A P:17.63W PF:1.000 Freq:50.00Hz Lamp Flux:11.6293x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

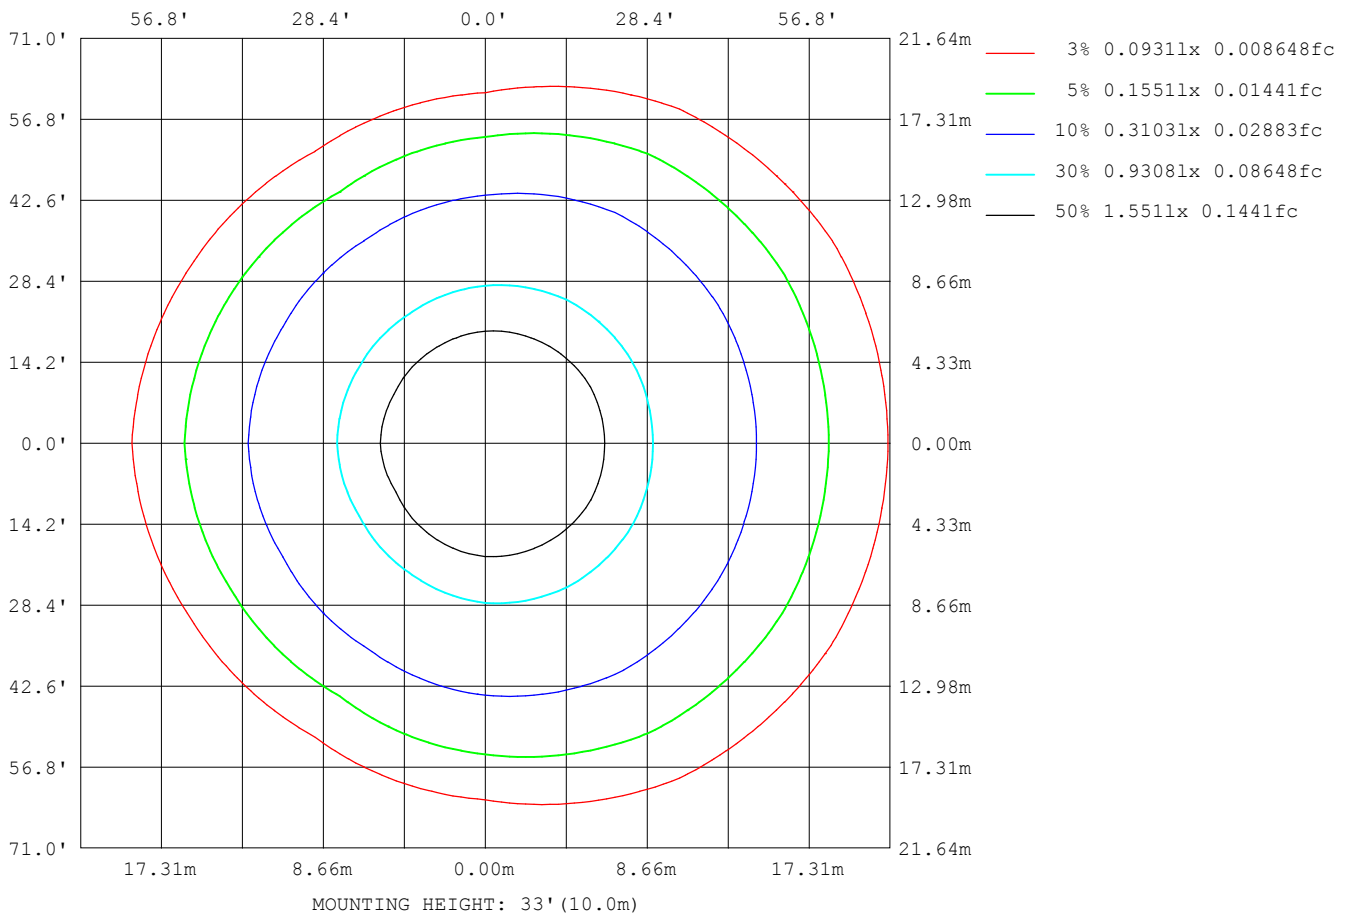

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.7344A P:17.63W PF:1.000 Freq:50.00Hz Lamp Flux:11.6293x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	17381
L_0~180 (75) av	16370
L_0~180 (85) av	17739
L_90~270 (65) av	12446
L_90~270 (75) av	6442
L_90~270 (85) av	2401
L_45 (65) av	15783
L_45 (75) av	14281
L_45 (85) av	14186

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

Planar Illuminance Curve

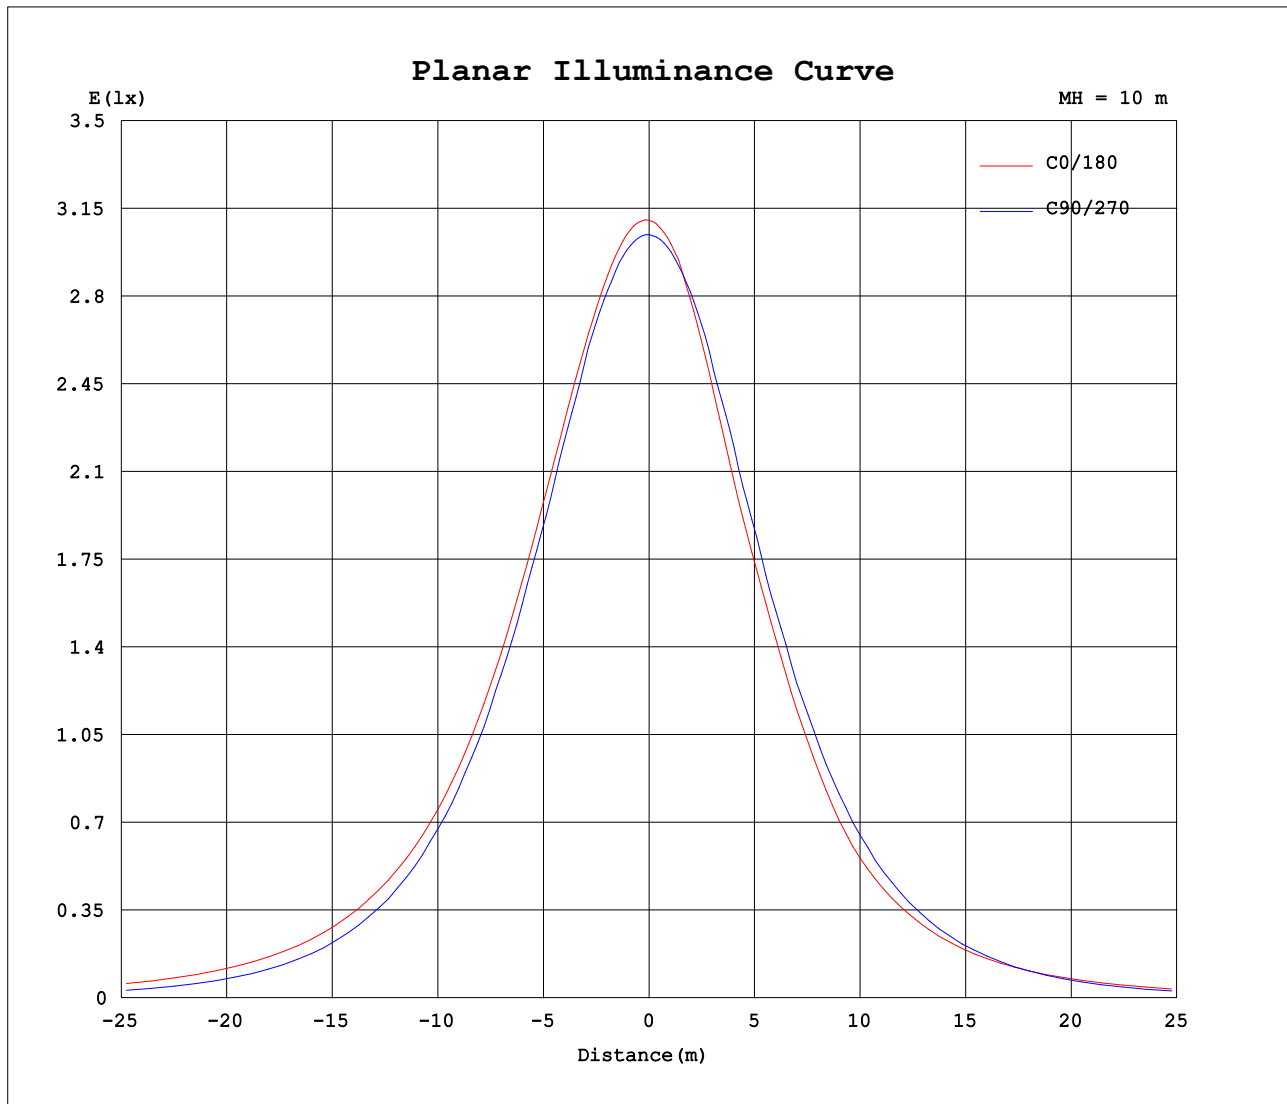

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: LPC
Test Date: 2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.7344A P:17.63W PF:1.000 Freq:50.00Hz Lamp Flux:11.6293x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	310	308	306	305	303	303	310	308	306	305	303	303							
5	310	308	306	304	301	298	307	304	304	303	303	304							
10	306	306	304	300	295	289	297	296	297	299	300	301							
15	300	299	298	294	286	276	284	282	288	293	295	295							
20	291	291	289	282	273	259	265	265	274	280	284	287							
25	280	281	276	268	257	241	248	246	256	265	271	278							
30	267	268	260	254	237	224	231	228	236	248	257	265							
35	251	252	245	235	214	203	210	208	213	229	242	251							
40	233	234	227	214	191	178	184	183	190	207	225	233							
45	213	214	208	191	167	152	158	155	165	184	206	214							
50	193	192	186	165	140	130	137	132	139	158	184	192							
55	171	170	162	137	111	110	117	112	109	130	160	170							
60	148	147	136	107	87.4	90.1	98.5	90.9	85.7	99.9	135	148							
65	125	123	109	76.6	68.4	71.7	80.8	72.3	66.8	70.7	108	124							
70	99.8	98.5	81.8	47.8	50.1	54.1	63.5	54.5	48.8	43.4	81.5	100							
75	72.6	74.7	56.3	25.6	33.1	37.5	46.1	37.5	32.1	21.1	56.3	77.1							
80	48.6	50.8	34.3	10.9	19.0	22.2	28.9	22.0	18.0	7.85	34.5	53.8							
85	29.0	29.5	17.2	3.72	9.06	10.7	14.3	9.95	7.87	2.14	17.4	32.4							
90	14.8	14.5	7.02	2.68	4.88	5.11	5.05	3.95	3.64	1.44	6.63	16.1							
95	6.51	6.48	4.41	2.89	4.51	4.41	2.55	3.08	3.41	1.64	3.45	6.71							
100	3.54	4.01	4.32	3.20	4.62	4.52	2.71	3.21	3.49	2.09	3.33	3.15							
105	3.52	4.09	4.03	3.58	4.33	4.72	2.93	3.41	3.24	2.39	2.96	2.94							
110	3.71	4.26	4.47	3.64	4.73	4.87	3.17	3.62	3.79	2.40	3.52	3.05							
115	3.89	4.43	4.76	3.82	4.98	5.00	3.41	3.82	4.02	2.63	3.57	3.18							
120	4.09	4.55	4.25	4.02	5.10	5.12	3.60	4.03	4.15	2.88	3.04	3.34							
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: