


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.2339A P:5.614W PF:1.000 Freq:50.00Hz Lamp Flux:5.55047x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 69.21 lm/W			
MODEL	5050	I _{max} (cd)	148.8	S/MH(C0/180)	1.11
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	388.53	η UP,DN(C0-180)	0.9,51.6
NOMINAL FLUX(lm)	5.55047	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,46.9
LAMPS INSIDE	70	η up(%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	98.4	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

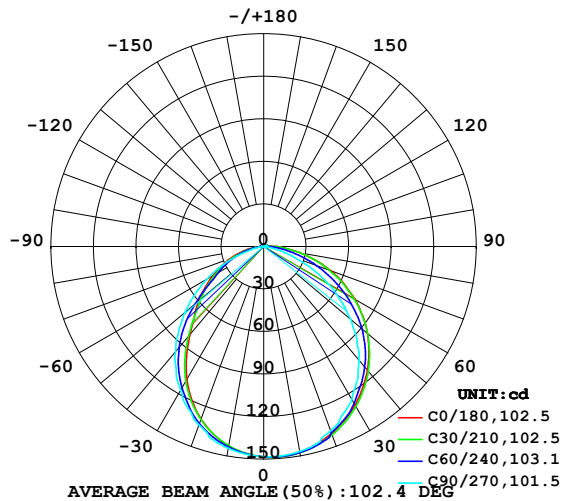

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

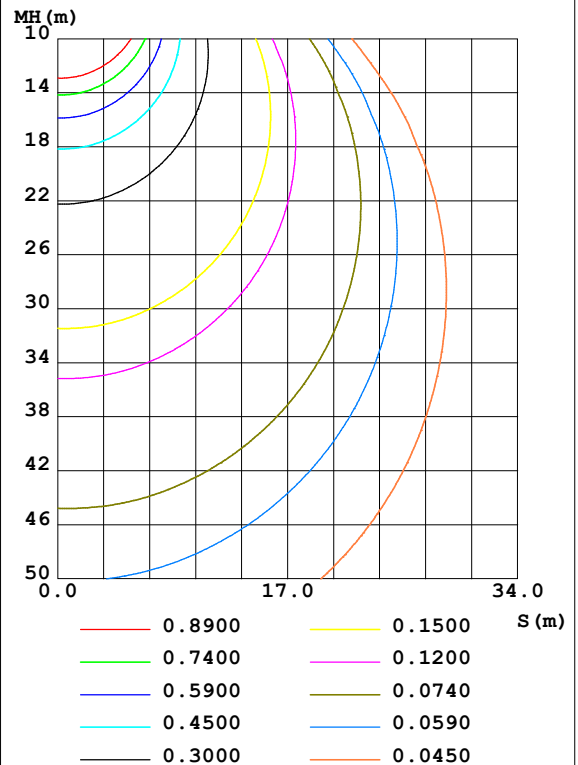

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LPC
 Test Date: 2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 9.200m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	147.2	147.7	146.8	144.2	142.8	143.1	144.5	146.4	0- 10	14.02	14.02	3.61,3.61
20	140.2	140.6	138.3	133.3	129.5	131.3	133.9	138.1	10- 20	39.87	53.89	13.9,13.9
30	129.0	129.0	124.7	115.0	108.4	112.5	117.2	125.2	20- 30	59.20	113.1	29.1,29.1
40	113.9	112.9	104.7	89.87	80.92	87.68	96.68	109.1	30- 40	69.00	182.1	46.9,46.9
50	95.62	93.06	80.13	62.53	59.96	60.70	72.92	89.24	40- 50	67.99	250.1	64.4,64.4
60	74.28	69.64	52.22	39.76	41.48	38.25	46.51	66.70	50- 60	58.04	308.1	79.3,79.3
70	50.55	44.54	23.86	22.78	25.40	22.04	20.22	43.17	60- 70	42.31	350.4	90.2,90.2
80	25.91	21.35	5.353	8.644	10.35	8.202	3.798	21.17	70- 80	23.64	374.1	96.3,96.3
90	8.315	5.535	1.287	2.146	1.536	1.622	0.6584	5.574	80- 90	8.342	382.4	98.4,98.4
100	1.751	1.952	1.523	2.151	1.312	1.586	0.9790	1.493	90-100	2.426	384.8	99.99
110	1.668	2.030	1.719	2.264	1.533	1.777	1.126	1.546	100-110	1.778	386.6	99.5,99.5
120	1.865	2.081	1.895	2.407	1.724	1.958	1.342	1.498	110-120	1.841	388.4	100,100
130	0	0	0	0	0	0	0	0	120-130	0.0894	388.5	100,100
140	0	0	0	0	0	0	0	0	130-140	0	388.5	100,100
150	0	0	0	0	0	0	0	0	140-150	0	388.5	100,100
160	0	0	0	0	0	0	0	0	150-160	0	388.5	100,100
170	0	0	0	0	0	0	0	0	160-170	0	388.5	100,100
180	0	0	0	0	0	0	0	0	170-180	0	388.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 216.82 lm

%lum = 55.8%

%lamp = 55.8%

Conical surface Flux(120deg): 308.11 lm

%lum = 79.3%


%lamp = 79.3%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.2339A P:5.614W PF:1.000 Freq:50.00Hz Lamp Flux:5.55047x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

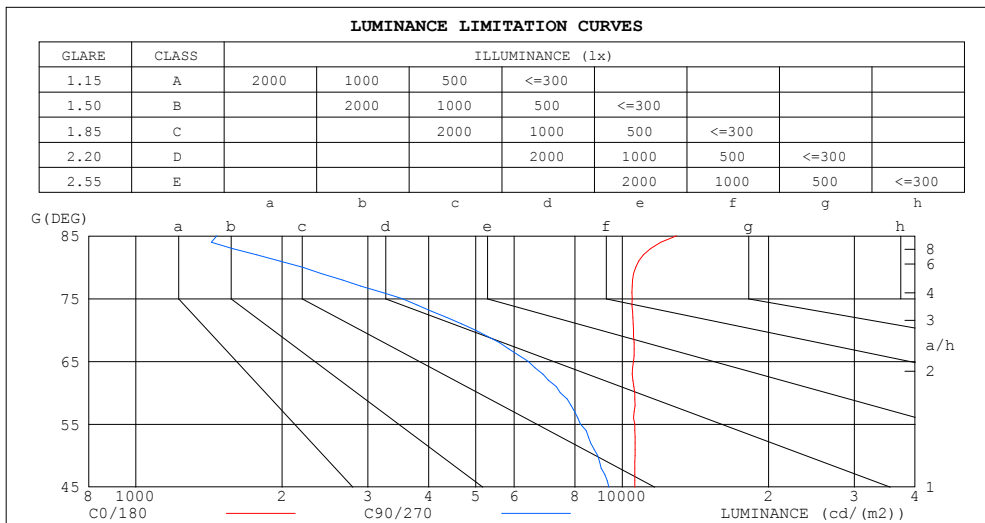

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	12933	1468
80	10660	2202
75	10486	3527
70	10556	4982
65	10548	6414
60	10612	7460
55	10609	8203
50	10626	8905
45	10619	9385


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.2339A P:5.614W PF:1.000 Freq:50.00Hz Lamp Flux:5.55047x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.79	.89	.83	.78	.85	.80	.76	.82	.77	.74	.78	.75	.72	.69
3.0	.80	.72	.66	.78	.71	.65	.75	.69	.64	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.63	.56	.70	.62	.56	.67	.60	.55	.65	.59	.54	.62	.57	.53	.51
5.0	.64	.55	.49	.63	.54	.48	.60	.53	.48	.58	.52	.47	.56	.51	.46	.44
6.0	.58	.49	.43	.57	.48	.42	.55	.47	.42	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.44	.38	.51	.43	.38	.50	.42	.37	.48	.42	.37	.47	.41	.36	.34
8.0	.48	.39	.34	.47	.39	.34	.46	.38	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.34	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

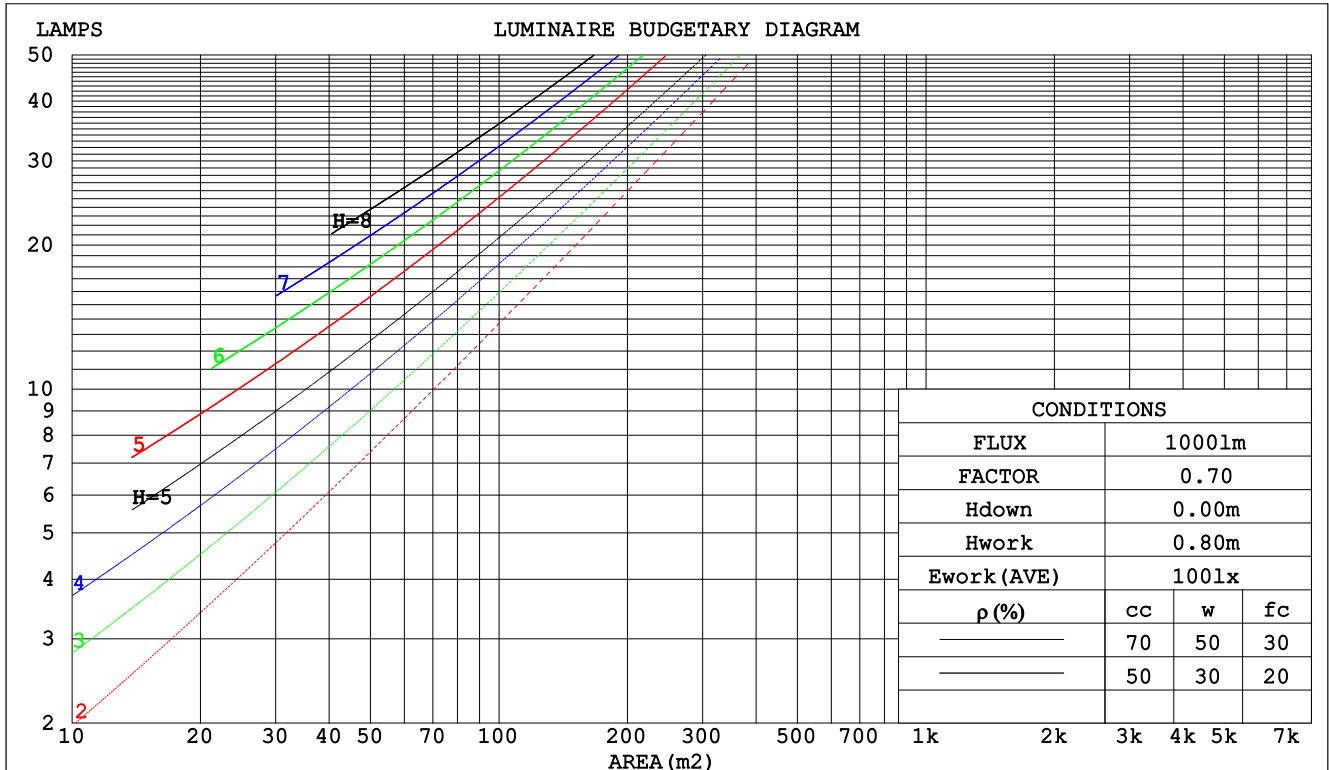

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.2339A P:5.614W PF:1.000 Freq:50.00Hz Lamp Flux:5.55047x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.302	.172	.054	.295	.168	.053	.281	.161	.051	.268	.154	.050	.256	.148	.048		
2.0	.283	.155	.048	.277	.152	.047	.264	.147	.046	.253	.142	.044	.242	.137	.043		
3.0	.262	.140	.042	.256	.137	.041	.245	.133	.040	.235	.129	.040	.226	.125	.039		
4.0	.242	.126	.037	.237	.124	.037	.227	.121	.036	.218	.117	.035	.210	.114	.035		
5.0	.225	.114	.033	.220	.113	.033	.211	.110	.032	.203	.107	.032	.195	.104	.031		
6.0	.209	.105	.030	.204	.103	.030	.197	.101	.029	.189	.098	.029	.183	.096	.029		
7.0	.194	.096	.027	.191	.095	.027	.184	.093	.027	.177	.091	.026	.171	.089	.026		
8.0	.182	.089	.025	.179	.088	.025	.172	.086	.025	.166	.084	.024	.161	.083	.024		
9.0	.171	.083	.023	.168	.082	.023	.162	.080	.023	.157	.079	.022	.152	.077	.022		
10.0	.161	.077	.021	.158	.076	.021	.153	.075	.021	.148	.073	.021	.143	.072	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.147	.164	.144	.127	.112	.099	.088	.065	.058	.051	.021	.019	.016	
2.0	.183	.144	.111	.157	.124	.096	.108	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.175	.127	.088	.150	.109	.076	.103	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.168	.113	.072	.144	.098	.062	.099	.068	.044	.057	.040	.026	.018	.013	.009	
5.0	.160	.103	.060	.137	.089	.053	.095	.062	.037	.055	.036	.022	.018	.012	.007	
6.0	.153	.094	.052	.131	.082	.046	.091	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.146	.087	.046	.126	.076	.040	.087	.053	.029	.050	.031	.017	.016	.010	.006	
8.0	.140	.082	.042	.120	.071	.036	.083	.050	.026	.048	.029	.015	.016	.010	.005	
9.0	.134	.077	.038	.115	.067	.033	.080	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.128	.072	.035	.111	.063	.031	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.2339A P:5.614W PF:1.000 Freq:50.00Hz Lamp Flux:5.55047x70 lm											
NAME: P01-24V-5050-70-SPI-RGBW(4000K)-W					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: EVERFINE					SUR.:1*0.014			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	25.0	26.5	25.3	26.7	26.9	23.9	25.4	24.2	25.6	25.9	
	3H	26.8	28.1	27.1	28.4	28.7	24.9	26.3	25.3	26.5	26.8
	4H	27.6	28.9	27.9	29.1	29.4	25.2	26.5	25.5	26.7	27.0
	6H	28.2	29.4	28.6	29.7	30.0	25.3	26.5	25.6	26.8	27.1
	8H	28.5	29.7	28.9	30.0	30.3	25.3	26.4	25.6	26.7	27.0
	12H	28.8	29.9	29.1	30.2	30.5	25.2	26.3	25.6	26.7	27.0
4H	2H	25.6	26.9	25.9	27.1	27.4	24.8	26.0	25.1	26.3	26.6
	3H	27.6	28.7	28.0	29.0	29.4	26.0	27.2	26.4	27.5	27.8
	4H	28.5	29.5	28.9	29.9	30.3	26.4	27.5	26.8	27.8	28.2
	6H	29.3	30.2	29.8	30.6	31.0	26.6	27.6	27.1	27.9	28.3
	8H	29.7	30.5	30.1	30.9	31.4	26.7	27.5	27.1	27.9	28.3
	12H	30.0	30.8	30.5	31.2	31.7	26.7	27.5	27.1	27.9	28.3
8H	4H	28.8	29.6	29.2	30.0	30.4	27.0	27.8	27.4	28.2	28.6
	6H	29.8	30.5	30.3	30.9	31.4	27.4	28.1	27.8	28.5	29.0
	8H	30.3	30.9	30.8	31.4	31.8	27.5	28.1	28.0	28.6	29.1
	12H	30.8	31.3	31.3	31.8	32.3	27.6	28.1	28.1	28.6	29.1
12H	4H	28.8	29.5	29.2	29.9	30.4	27.1	27.8	27.5	28.2	28.7
	6H	29.8	30.5	30.3	30.9	31.4	27.6	28.2	28.1	28.6	29.1
	8H	30.4	30.9	30.9	31.4	31.9	27.8	28.3	28.3	28.8	29.3
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.5					
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.6					

CIE Pub.117, 388.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.3)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.2339A P:5.614W PF:1.000 Freq:50.00Hz Lamp Flux:5.55047x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) × RCR = 5									
k = 0.60	59	47	41	58	47	40	57	47	40	34
0.80	69	57	50	68	57	50	66	56	50	43
1.00	77	66	59	76	65	59	73	67	58	51
1.25	84	74	67	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	71	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	91	85	97	90	85	93	87	83	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	94	99	95	92	82
5.00	108	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNM = 1.25										

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.2339A P:5.614W PF:1.000 Freq:50.00Hz Lamp Flux:5.55047x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

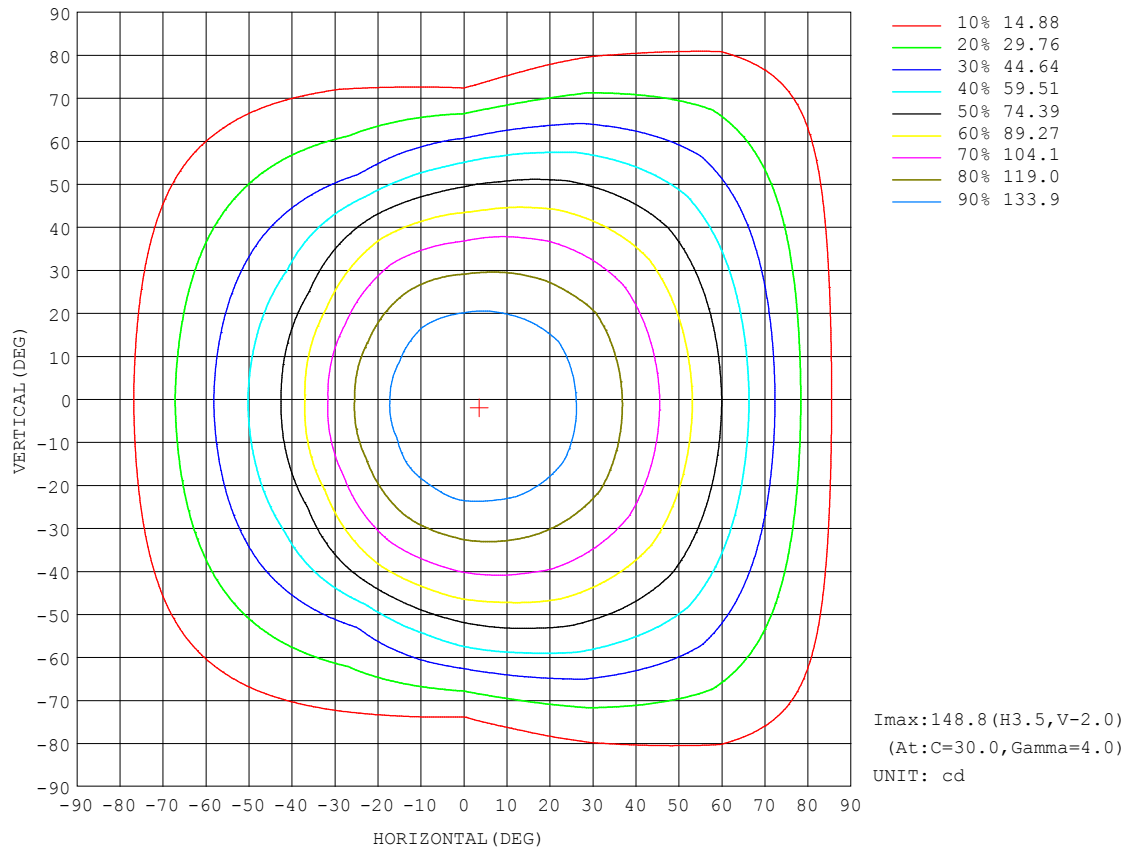


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.2339A P:5.614W PF:1.000 Freq:50.00Hz Lamp Flux:5.55047x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

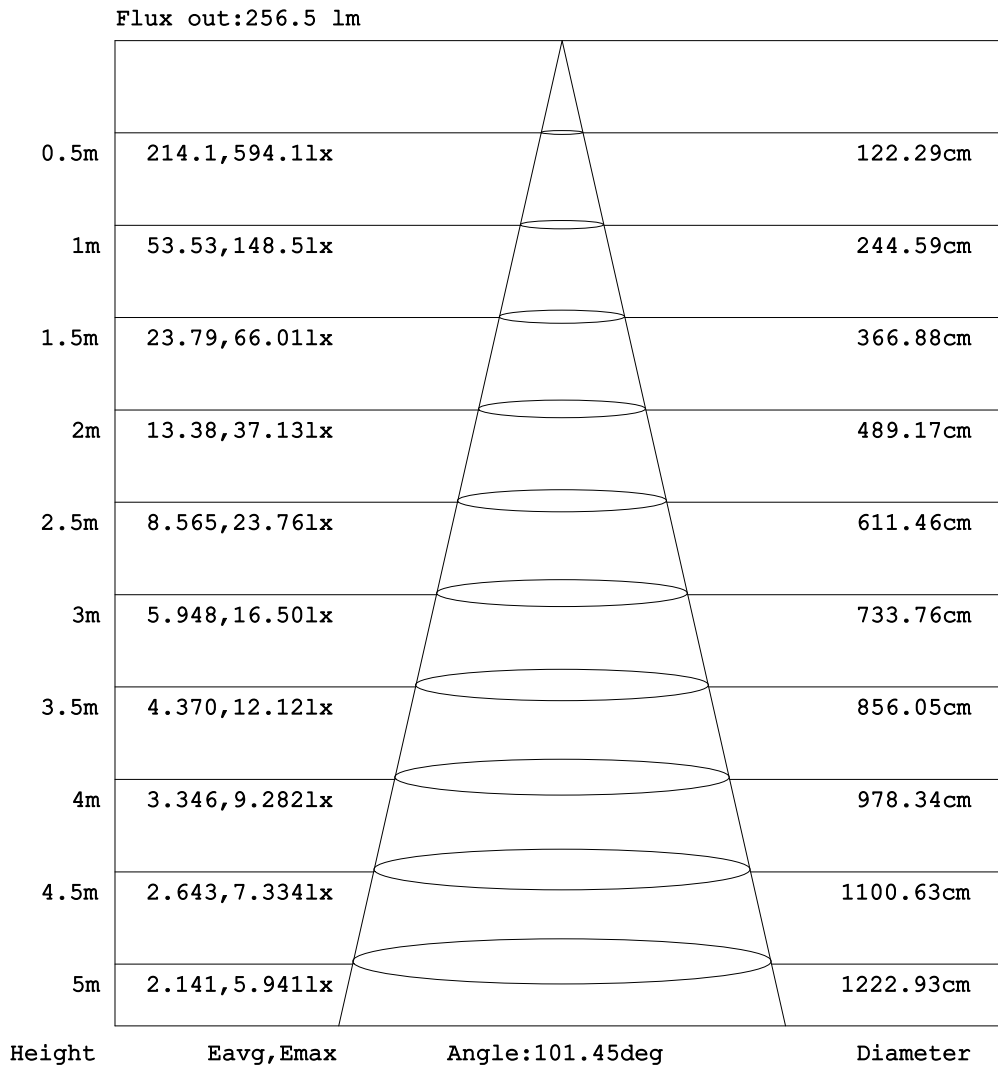


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.2339A P:5.614W PF:1.000 Freq:50.00Hz Lamp Flux:5.55047x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

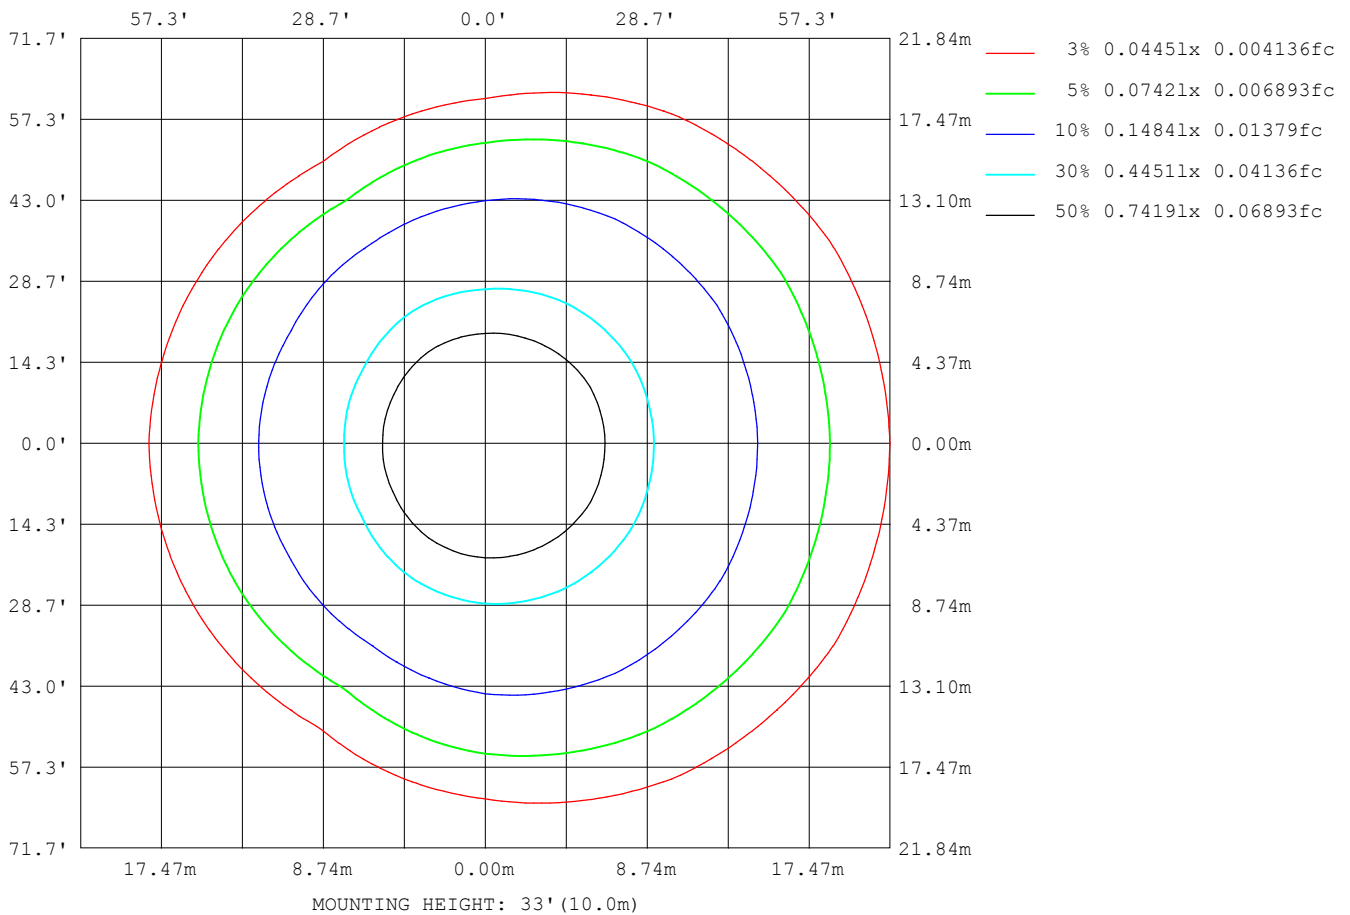

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:24.00V I:0.2339A P:5.614W PF:1.000 Freq:50.00Hz Lamp Flux:5.55047x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8083
L_0~180 (75) av	7673
L_0~180 (85) av	8357
L_90~270 (65) av	6002
L_90~270 (75) av	3117
L_90~270 (85) av	1166
L_45 (65) av	7353
L_45 (75) av	6623
L_45 (85) av	6655

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

Planar Illuminance Curve

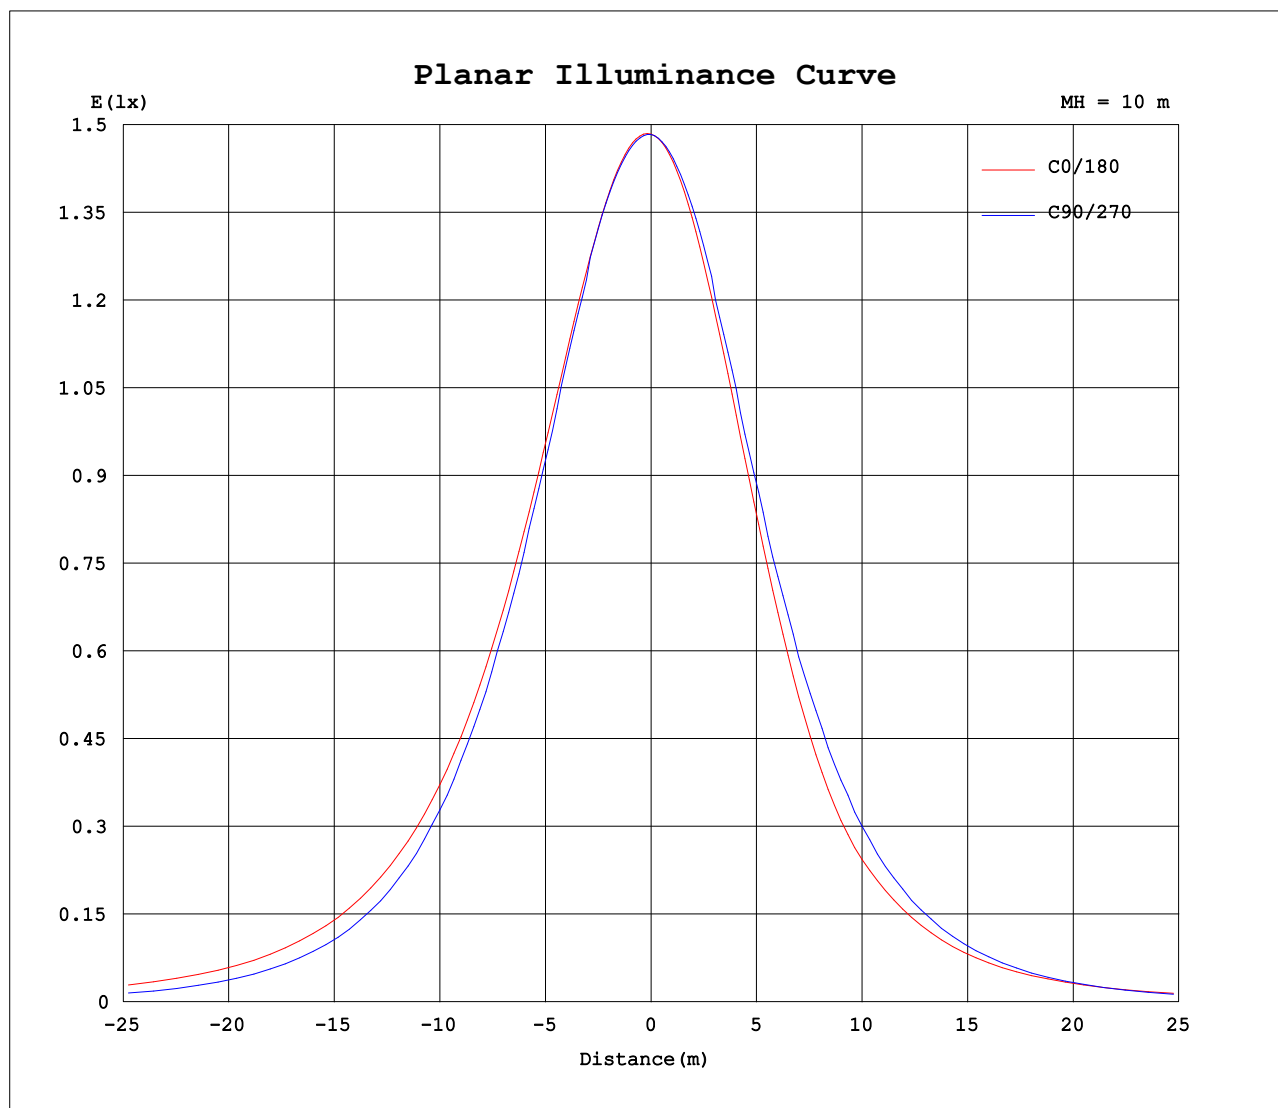

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: LPC
Test Date: 2021-10-20

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.2339A P:5.614W PF:1.000 Freq:50.00Hz Lamp Flux:5.55047x70 lm		
NAME: P01-24V-5050-70-SPI-RGBW(4000K)-W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	148	148	148	148	148	148	148	148	148	148	148	148						
5	149	149	149	148	147	147	147	146	147	147	148	148						
10	147	148	148	147	145	143	143	143	144	144	146	147						
15	144	145	145	144	141	138	137	137	139	141	143	144						
20	140	141	140	138	136	131	129	130	133	134	136	140						
25	135	136	135	131	127	122	120	121	124	126	130	135						
30	129	130	128	125	119	111	108	110	115	117	122	128						
35	122	123	119	115	108	98.2	94.9	97.0	105	107	114	121						
40	114	115	111	105	96.3	83.5	80.9	82.6	92.8	96.7	106	112						
45	105	106	101	92.9	81.9	69.7	69.0	68.5	78.9	85.0	95.9	103						
50	95.6	95.7	90.4	80.1	65.3	59.7	60.0	58.2	63.2	72.9	85.2	93.3						
55	85.2	85.0	78.4	65.9	49.3	50.2	50.4	48.9	47.7	59.6	73.7	82.8						
60	74.3	73.6	65.6	52.2	38.9	40.6	41.5	39.5	37.0	46.5	61.8	71.6						
65	62.4	61.7	52.6	37.9	30.4	31.9	33.2	30.9	29.0	33.1	49.9	60.0						
70	50.5	49.2	39.8	23.9	22.0	23.6	25.4	22.9	21.2	20.2	38.0	48.3						
75	38.0	37.4	27.5	12.8	14.5	15.8	17.6	15.4	13.9	9.81	26.7	36.8						
80	25.9	25.7	17.0	5.35	8.29	8.99	10.3	8.63	7.77	3.80	16.7	25.7						
85	15.8	15.1	8.66	1.79	3.82	4.17	4.61	3.78	3.34	1.05	8.52	15.6						
90	8.31	7.65	3.42	1.29	2.18	2.12	1.54	1.64	1.61	0.66	3.25	7.90						
95	3.78	3.38	2.06	1.38	2.12	2.09	1.21	1.48	1.62	0.75	1.59	3.23						
100	1.75	1.88	2.03	1.52	2.16	2.14	1.31	1.52	1.65	0.98	1.56	1.43						
105	1.60	1.92	1.85	1.70	2.02	2.25	1.42	1.63	1.54	1.13	1.37	1.39						
110	1.67	1.99	2.07	1.72	2.21	2.32	1.53	1.73	1.82	1.13	1.67	1.42						
115	1.75	2.08	2.22	1.80	2.35	2.38	1.63	1.83	1.95	1.23	1.68	1.48						
120	1.86	2.14	2.02	1.89	2.39	2.43	1.72	1.93	1.99	1.34	1.42	1.57						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-10-20

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: