


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.3317A P:7.961W PF:1.000 Freq:50.00Hz Lamp Flux:5.24562x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 79.07 lm/W			
MODEL	2835	I _{max} (cd)	256.2	S/MH (C0/180)	1.23
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH (C90/270)	1.20
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	629.47	η UP,DN(C0-180)	0.9,49.2
NOMINAL FLUX(lm)	5.24562	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.8,49.0
LAMPS INSIDE	120	η up (%)	1.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down (%)	98.3	CIBSE SHR MAX	1.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

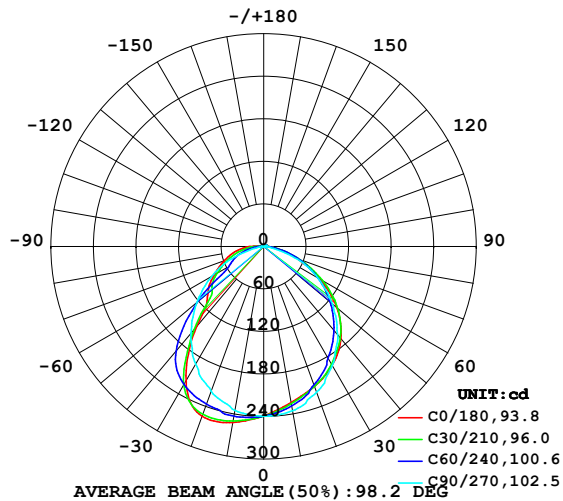

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

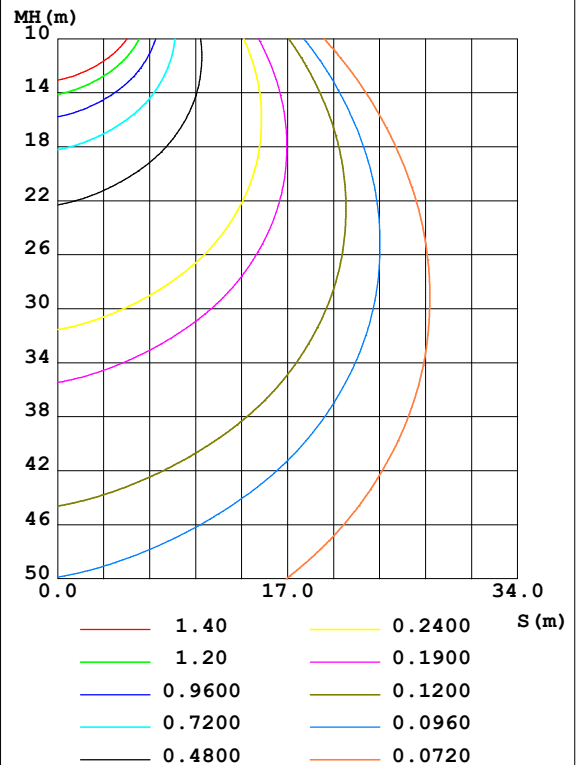

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LPC
 Test Date: 2021-09-10

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 9.200m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	223.5	226.8	235.3	246.3	252.2	246.5	234.8	226.4	0- 10	22.70	22.70	3.61,3.61
20	210.0	208.8	218.7	245.0	254.7	244.1	217.2	206.8	10- 20	65.57	88.27	14,14
30	193.4	186.7	193.9	225.3	219.1	225.3	191.9	185.7	20- 30	99.75	188.0	29.9,29.9
40	169.6	161.3	162.4	176.7	146.7	172.4	159.7	161.0	30- 40	116.1	304.1	48.3,48.3
50	135.0	129.6	127.0	110.2	102.9	109.1	122.7	128.4	40- 50	109.0	413.1	65.6,65.6
60	91.49	91.97	87.87	66.54	80.84	66.41	85.11	91.23	50- 60	89.60	502.7	79.9,79.9
70	49.95	53.92	46.26	46.28	59.38	46.62	43.76	52.89	60- 70	64.87	567.6	90.2,90.2
80	20.08	21.20	9.843	25.14	40.22	25.46	6.848	20.44	70- 80	36.85	604.4	96,96
90	3.572	4.507	2.171	9.363	18.61	8.613	1.131	3.337	80- 90	14.08	618.5	98.3,98.3
100	2.774	3.674	2.519	3.983	3.493	2.730	1.547	2.442	90-100	4.548	623.0	99,99
110	3.000	3.797	2.935	3.930	2.478	2.742	1.895	2.694	100-110	3.095	626.1	99.5,99.5
120	3.367	3.754	3.232	4.119	2.689	3.091	2.292	2.855	110-120	3.181	629.3	100,100
130	0	0	0	0	0	0	0	0	120-130	0.1544	629.5	100,100
140	0	0	0	0	0	0	0	0	130-140	0	629.5	100,100
150	0	0	0	0	0	0	0	0	140-150	0	629.5	100,100
160	0	0	0	0	0	0	0	0	150-160	0	629.5	100,100
170	0	0	0	0	0	0	0	0	160-170	0	629.5	100,100
180	0	0	0	0	0	0	0	0	170-180	0	629.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 360.6 lm

%lum = 57.3%

%lamp = 57.3%

Conical surface Flux(120deg): 502.68 lm

%lum = 79.9%


%lamp = 79.9%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-09-10

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.3317A P:7.961W PF:1.000 Freq:50.00Hz Lamp Flux:5.24562x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

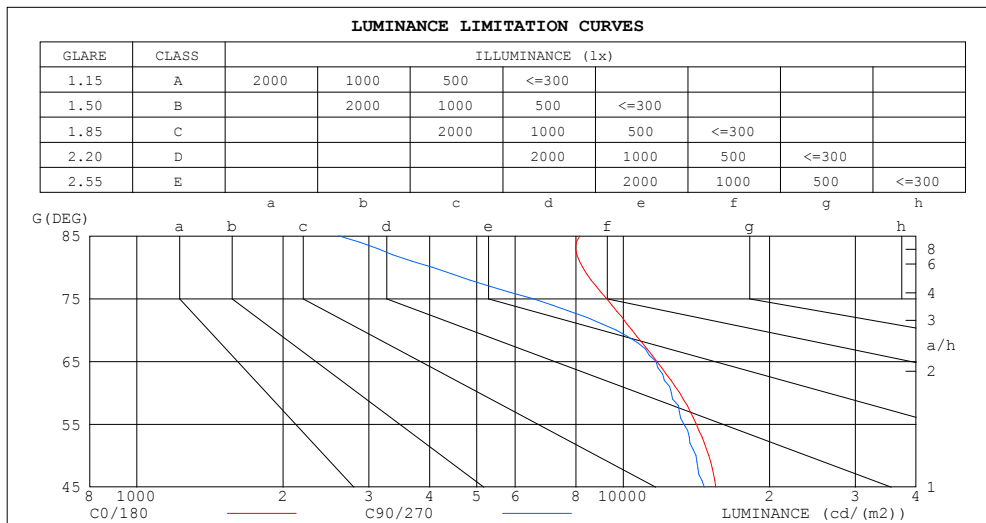

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8147	2603
80	8260	4049
75	9255	6520
70	10432	9661
65	11720	11674
60	13070	12553
55	14146	13323
50	14999	14113
45	15515	14683


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.3317A P:7.961W PF:1.000 Freq:50.00Hz Lamp Flux:5.24562x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.85	.79	.89	.83	.78	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.81	.73	.66	.79	.72	.66	.76	.69	.64	.73	.67	.63	.70	.65	.62	.59
4.0	.72	.63	.57	.70	.62	.56	.68	.61	.55	.65	.59	.54	.63	.58	.53	.51
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.52	.47	.57	.51	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.53	.47	.42	.52	.46	.41	.39
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.38	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.48	.40	.34	.46	.39	.34	.45	.38	.34	.44	.38	.33	.31
9.0	.44	.36	.31	.44	.36	.31	.43	.36	.31	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.37	.32	.27	.26

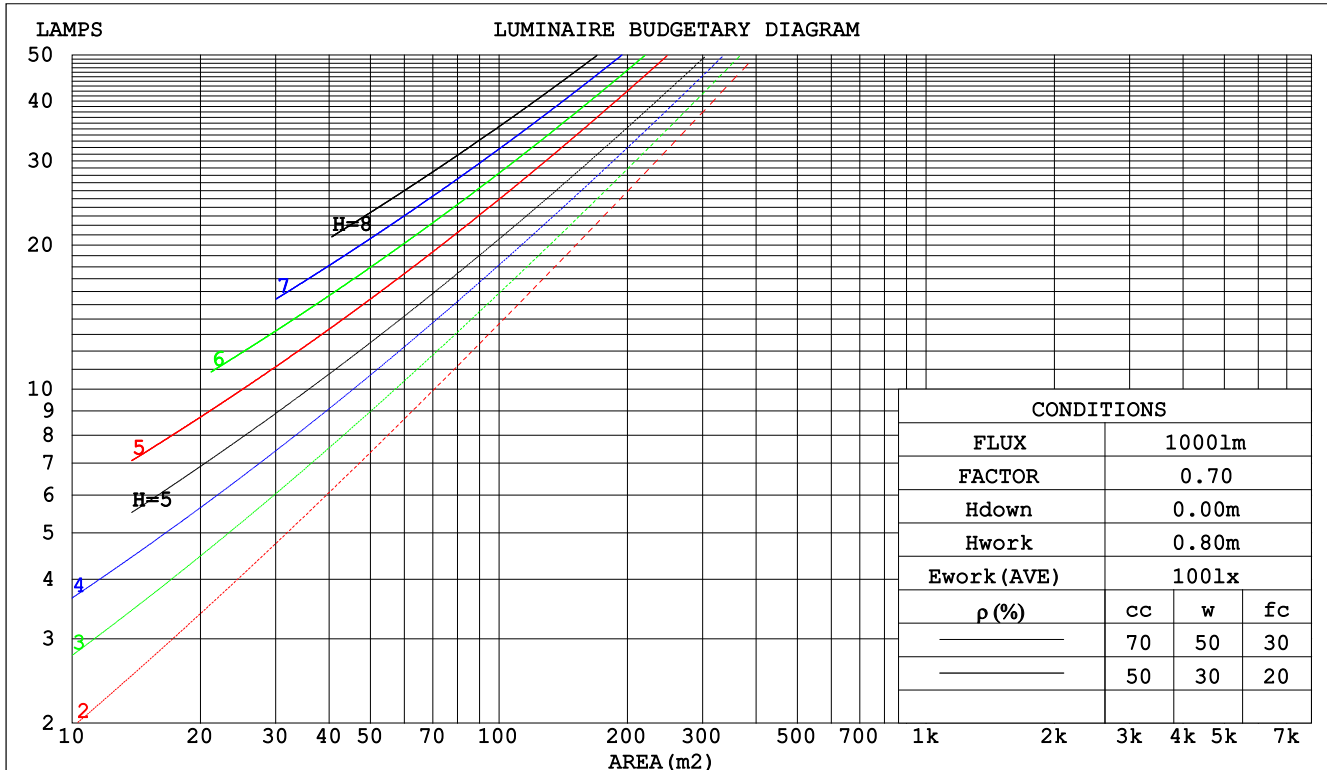

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-09-10

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.3317A P:7.961W PF:1.000 Freq:50.00Hz Lamp Flux:5.24562x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.300	.170	.054	.292	.167	.053	.278	.160	.051	.265	.153	.049	.253	.147	.047		
2.0	.280	.154	.047	.274	.151	.046	.261	.145	.045	.250	.140	.044	.239	.135	.043		
3.0	.260	.138	.041	.254	.136	.041	.243	.131	.040	.232	.127	.039	.223	.123	.038		
4.0	.240	.125	.037	.235	.123	.036	.225	.119	.036	.216	.116	.035	.207	.113	.034		
5.0	.222	.113	.033	.218	.112	.033	.209	.109	.032	.201	.106	.032	.193	.103	.031		
6.0	.207	.104	.030	.203	.102	.029	.195	.100	.029	.187	.097	.029	.181	.095	.028		
7.0	.193	.095	.027	.189	.094	.027	.182	.092	.027	.176	.090	.026	.169	.088	.026		
8.0	.181	.088	.025	.177	.087	.025	.171	.085	.024	.165	.084	.024	.159	.082	.024		
9.0	.170	.082	.023	.167	.081	.023	.161	.080	.023	.155	.078	.022	.150	.076	.022		
10.0	.160	.077	.021	.157	.076	.021	.152	.074	.021	.147	.073	.021	.142	.072	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.204	.204	.204	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.193	.170	.149	.165	.146	.128	.113	.100	.088	.065	.058	.051	.021	.019	.017	
2.0	.184	.145	.113	.158	.125	.098	.108	.087	.068	.062	.050	.040	.020	.016	.013	
3.0	.176	.128	.089	.151	.110	.077	.104	.077	.054	.060	.045	.032	.019	.015	.010	
4.0	.168	.114	.073	.144	.099	.064	.099	.069	.045	.057	.040	.027	.018	.013	.009	
5.0	.161	.104	.062	.138	.090	.054	.095	.063	.038	.055	.037	.023	.018	.012	.007	
6.0	.154	.096	.054	.132	.083	.047	.091	.058	.033	.053	.034	.020	.017	.011	.007	
7.0	.147	.089	.048	.126	.077	.042	.087	.054	.029	.051	.032	.018	.016	.010	.006	
8.0	.141	.083	.043	.121	.072	.038	.084	.050	.027	.049	.030	.016	.016	.010	.005	
9.0	.135	.078	.040	.116	.068	.034	.080	.048	.024	.047	.028	.015	.015	.009	.005	
10.0	.129	.074	.037	.111	.064	.032	.077	.045	.023	.045	.027	.014	.015	.009	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.3317A P:7.961W PF:1.000 Freq:50.00Hz Lamp Flux:5.24562x120 lm											
NAME: P01-24V-2835-120-DW-2700K-5700K(2700K)						TYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.: EVERFINE						SUR.:1*0.014		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.6	25.1	23.9	25.3	25.5	23.2	24.7	23.5	24.9	25.1	
	3H	24.8	26.2	25.2	26.4	26.7	24.5	25.8	24.8	26.0	26.3
	4H	25.3	26.5	25.6	26.8	27.1	24.8	26.0	25.1	26.3	26.6
	6H	25.6	26.8	25.9	27.1	27.4	24.9	26.0	25.2	26.3	26.7
	8H	25.7	26.8	26.0	27.1	27.4	24.8	26.0	25.2	26.3	26.6
	12H	25.7	26.8	26.1	27.2	27.5	24.8	25.9	25.2	26.2	26.6
4H	2H	24.1	25.4	24.5	25.7	26.0	23.8	25.1	24.2	25.4	25.7
	3H	25.5	26.7	25.9	27.0	27.3	25.3	26.4	25.6	26.7	27.0
	4H	26.1	27.1	26.5	27.5	27.8	25.7	26.7	26.1	27.1	27.4
	6H	26.5	27.4	26.9	27.8	28.2	25.9	26.8	26.3	27.2	27.6
	8H	26.7	27.5	27.1	27.9	28.3	25.9	26.8	26.4	27.2	27.6
	12H	26.8	27.6	27.2	28.0	28.4	25.9	26.7	26.4	27.1	27.6
8H	4H	26.3	27.2	26.8	27.5	28.0	26.0	26.8	26.4	27.2	27.6
	6H	26.9	27.6	27.3	28.0	28.5	26.3	27.0	26.8	27.5	27.9
	8H	27.1	27.7	27.6	28.2	28.7	26.4	27.0	26.9	27.5	28.0
	12H	27.3	27.8	27.8	28.3	28.8	26.5	27.0	27.0	27.5	28.0
12H	4H	26.3	27.1	26.8	27.5	27.9	26.0	26.7	26.4	27.1	27.6
	6H	26.9	27.5	27.4	28.0	28.5	26.4	27.0	26.9	27.5	27.9
	8H	27.2	27.7	27.7	28.2	28.7	26.5	27.1	27.0	27.5	28.1
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3					
1.5H	+ 0.3 / - 0.4					+ 0.2 / - 0.3					
2.0H	+ 0.3 / - 0.4					+ 0.2 / - 0.3					

CIE Pub.117, 629.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.6)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:


```

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.3317A P:7.961W PF:1.000 Freq:50.00Hz Lamp Flux:5.24562x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

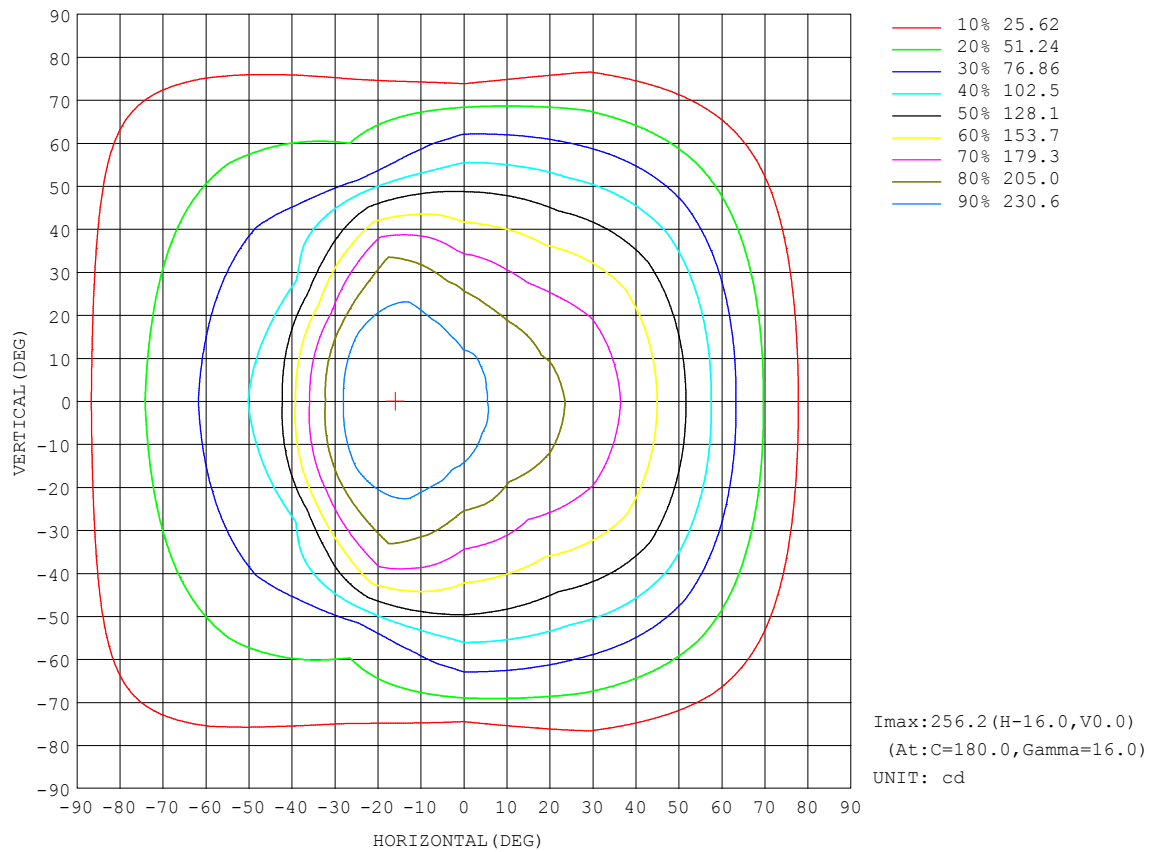


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.3317A P:7.961W PF:1.000 Freq:50.00Hz Lamp Flux:5.24562x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

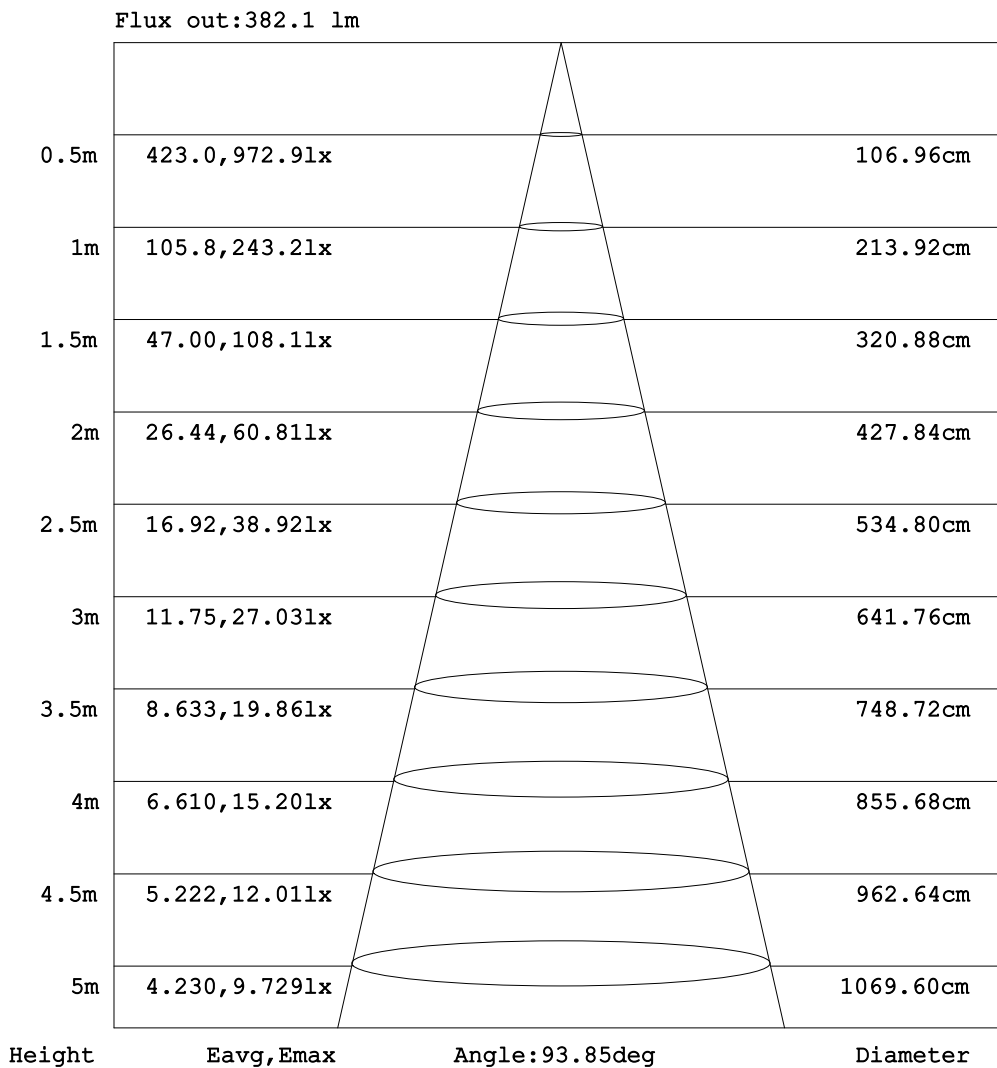


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.3317A P:7.961W PF:1.000 Freq:50.00Hz Lamp Flux:5.24562x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

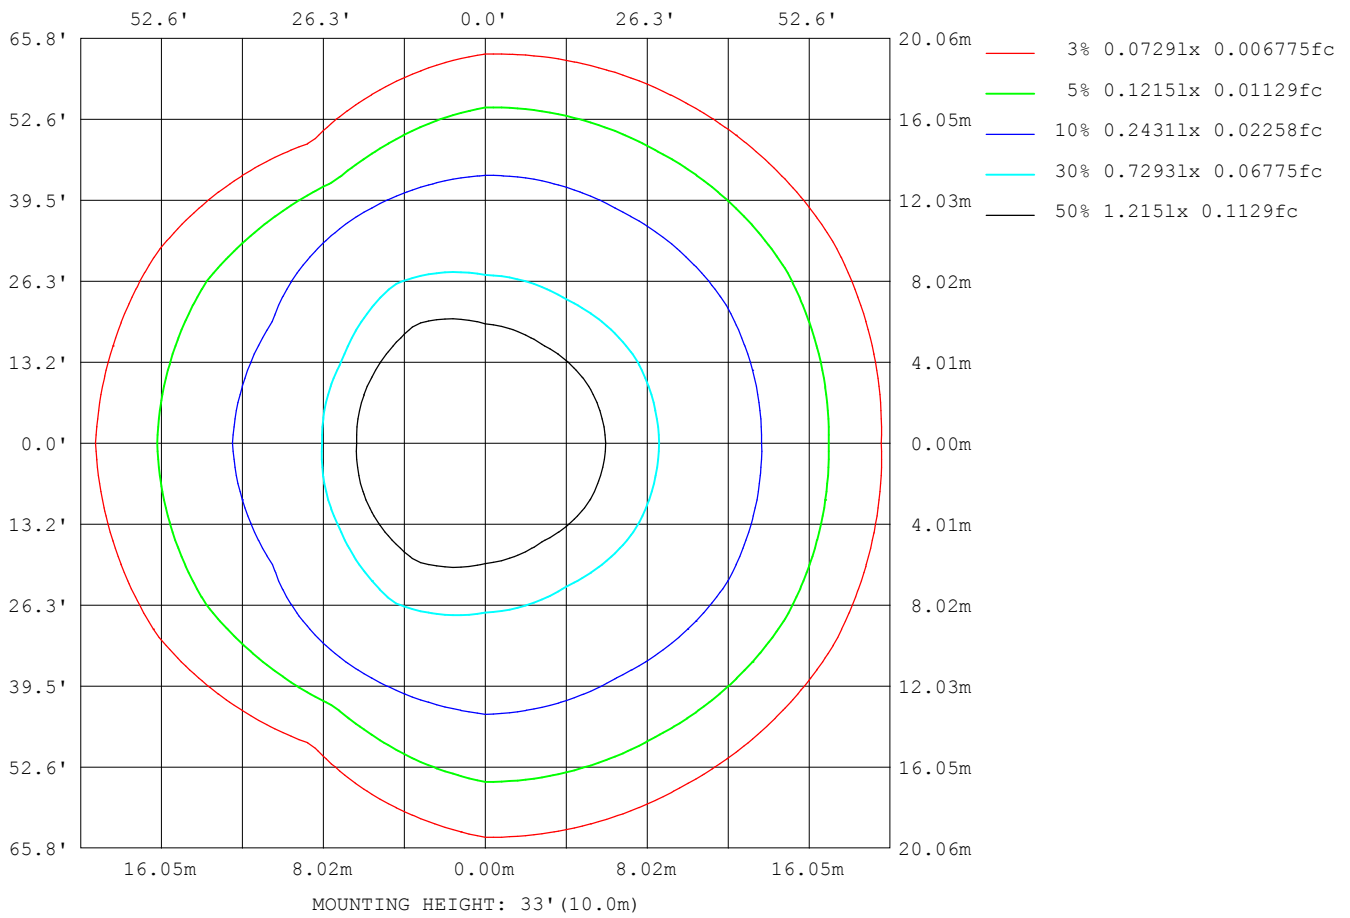

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.3317A P:7.961W PF:1.000 Freq:50.00Hz Lamp Flux:5.24562x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11754
L_0~180 (75) av	11475
L_0~180 (85) av	16074
L_90~270 (65) av	11322
L_90~270 (75) av	6043
L_90~270 (85) av	2020
L_45 (65) av	10755
L_45 (75) av	10032
L_45 (85) av	10784

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

Planar Illuminance Curve

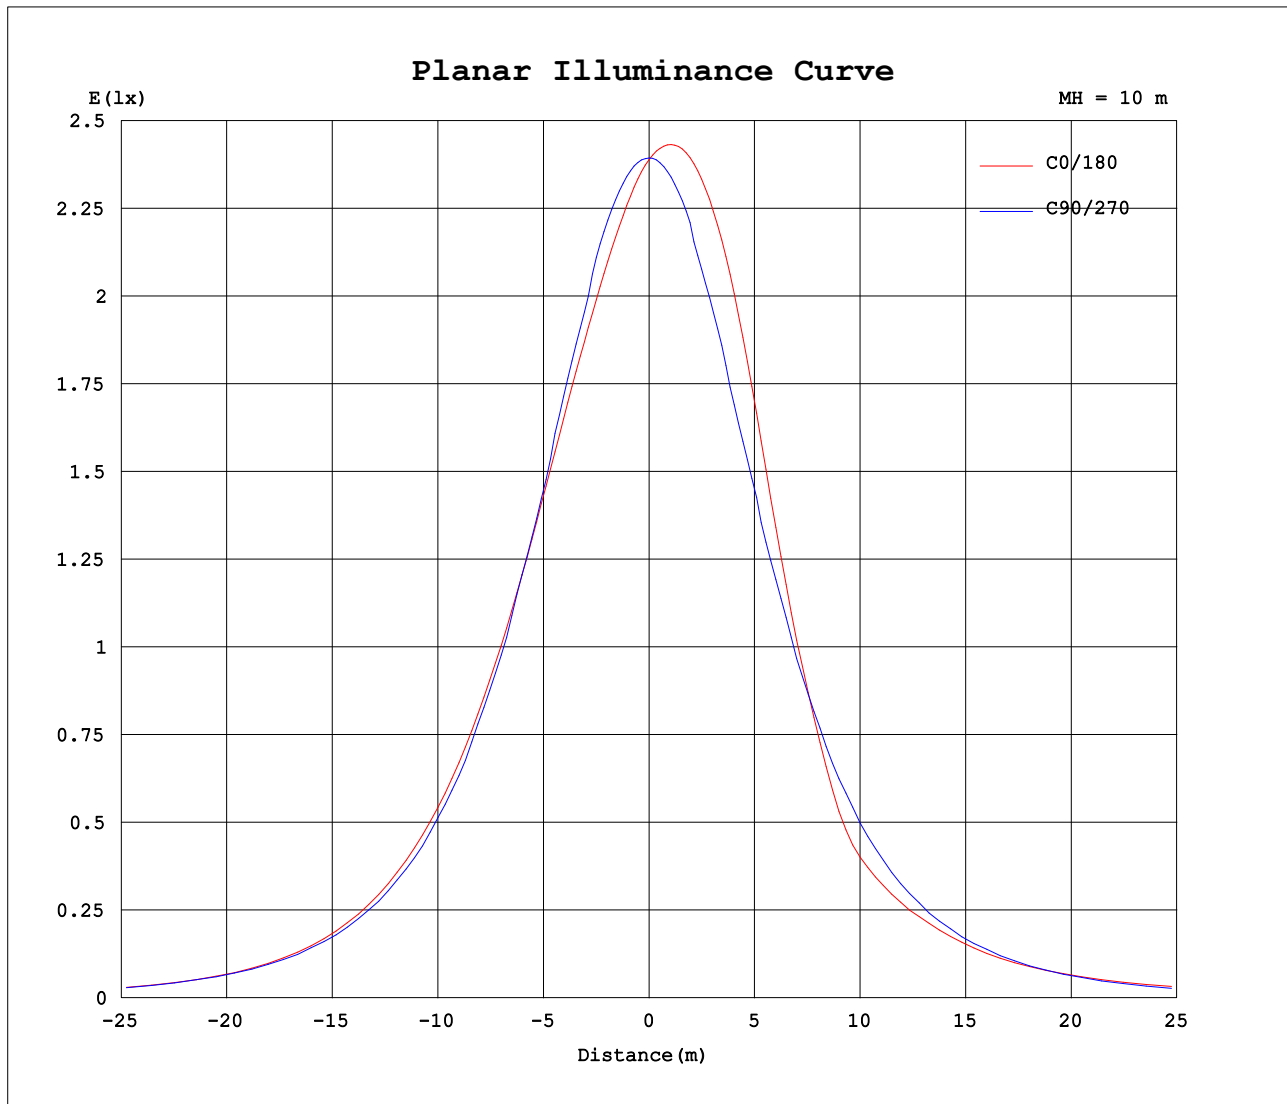

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: LPC
Test Date: 2021-09-10

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3317A P:7.961W PF:1.000 Freq:50.00Hz Lamp Flux:5.24562x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(2700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	239	239	239	239	239	239	239	239	239	239	239	239						
5	231	233	235	238	242	245	246	245	242	238	235	232						
10	223	225	229	235	243	249	252	250	243	235	228	224						
15	216	218	220	229	243	252	256	253	239	226	217	217						
20	210	210	208	219	238	252	255	252	236	217	208	206						
25	203	202	197	206	231	245	244	244	232	206	194	198						
30	193	191	182	194	224	227	219	226	225	192	182	189						
35	183	180	169	178	212	197	185	191	213	176	167	179						
40	170	168	154	162	193	161	147	153	192	160	155	167						
45	154	154	139	145	165	113	114	112	160	141	139	152						
50	135	136	123	127	125	95.2	103	95.3	123	123	122	134						
55	114	117	106	107	81.0	87.5	93.1	87.4	80.7	105	105	115						
60	91.5	95.5	88.4	87.9	57.1	75.9	80.8	75.7	57.1	85.1	87.7	94.8						
65	69.3	74.4	70.6	69.1	48.2	64.1	69.7	63.8	48.8	64.9	69.9	73.5						
70	49.9	54.7	53.2	46.3	39.7	52.8	59.4	52.9	40.4	43.8	52.7	53.1						
75	33.5	36.4	36.3	23.6	29.7	41.4	49.6	42.2	30.0	20.2	35.8	34.9						
80	20.1	21.6	20.8	9.84	19.6	30.7	40.2	31.1	19.8	6.85	20.6	20.3						
85	9.94	11.1	9.49	3.18	11.5	21.2	29.3	20.4	11.0	1.75	8.98	9.77						
90	3.57	4.66	4.35	2.17	6.13	12.6	18.6	12.0	5.22	1.13	3.24	3.44						
95	2.76	3.48	3.84	2.31	4.16	6.50	9.29	5.57	2.88	1.29	2.57	2.38						
100	2.77	3.52	3.83	2.52	4.00	3.96	3.49	2.79	2.67	1.55	2.61	2.27						
105	2.85	3.58	3.49	2.90	3.58	3.88	2.44	2.63	2.37	1.88	2.31	2.47						
110	3.00	3.71	3.88	2.94	3.91	3.95	2.48	2.67	2.81	1.89	2.75	2.64						
115	3.18	3.85	4.10	3.08	4.10	4.02	2.59	2.80	3.10	2.08	3.01	2.82						
120	3.37	3.93	3.58	3.23	4.15	4.09	2.69	2.97	3.22	2.29	2.68	3.03						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: