


SP01 Tunable White Silicone LED Strip Light

SP01-24V-2835-120-DW

Specification

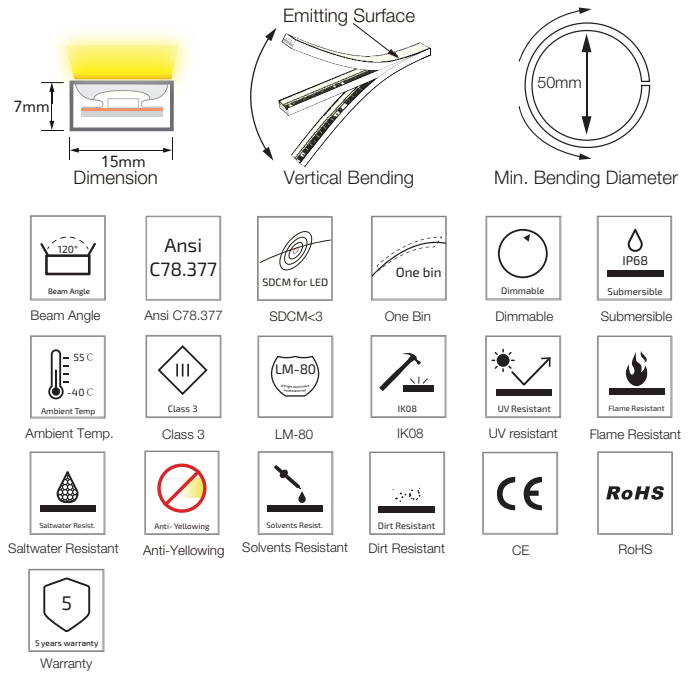


Technical Parameters




Electrical	
Input Voltage	24V DC
Power Consumption	12W/m
Physical	
LED Count	120 LEDs/m
Cutting Unit	12 LEDs
Cutting Unit Length	100mm
Minimum Bend Diameter	50mm
Output	
LED Light	Epistar SMD LED 2835
CRI	>80, >90
Max Run Length*	
Single Feed	10M
Double Feed	20M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68

Optional Color	Lumen/m
2200K+5700K	2200K:600lm 5700K:700lm
2700K+5700K	2200K:629lm 5700K:700lm
3000K+5700K	2200K:650lm 5700K:700lm

White Color Charts

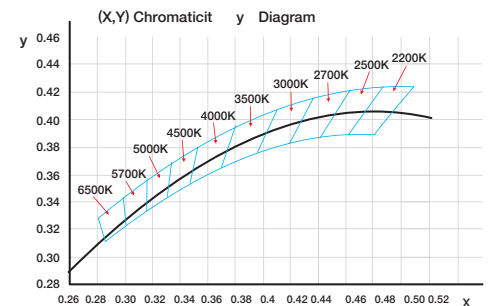

Illuminance Distribution

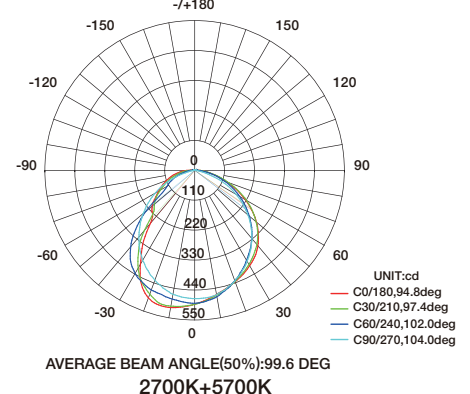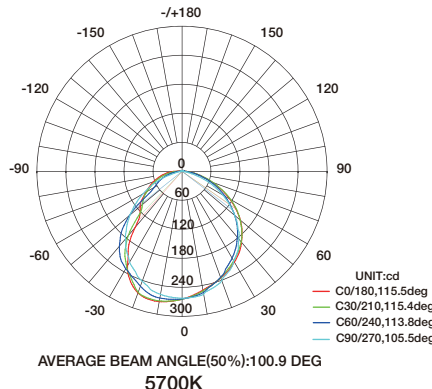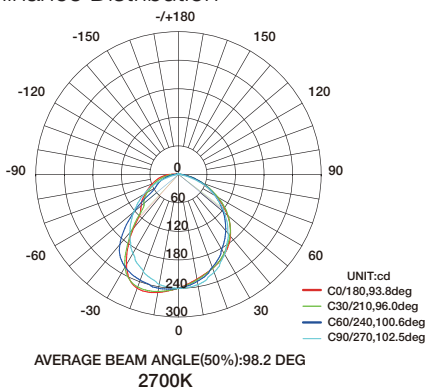

SP01 Tunable White Silicone LED Strip Light

Connection

