


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.3372A P:8.093W PF:1.000 Freq:50.00Hz Lamp Flux:5.84248x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(5700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 86.63 lm/W			
MODEL	2835	I _{max} (cd)	274.1	S/MH(C0/180)	1.20
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	701.10	η UP,DN(C0-180)	0.9,49.5
NOMINAL FLUX(lm)	5.84248	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.8,48.8
LAMPS INSIDE	120	η up(%)	1.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	98.3	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

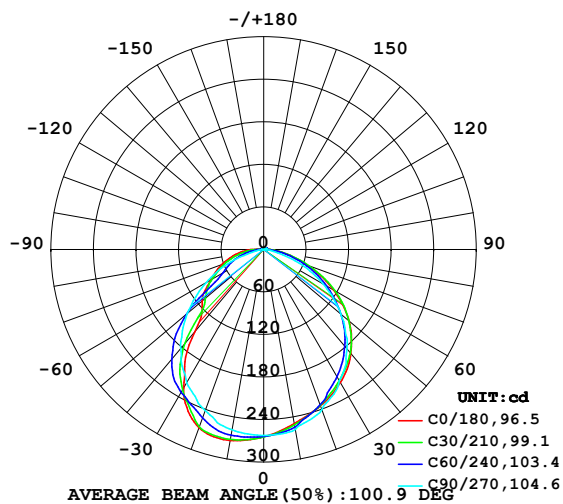

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

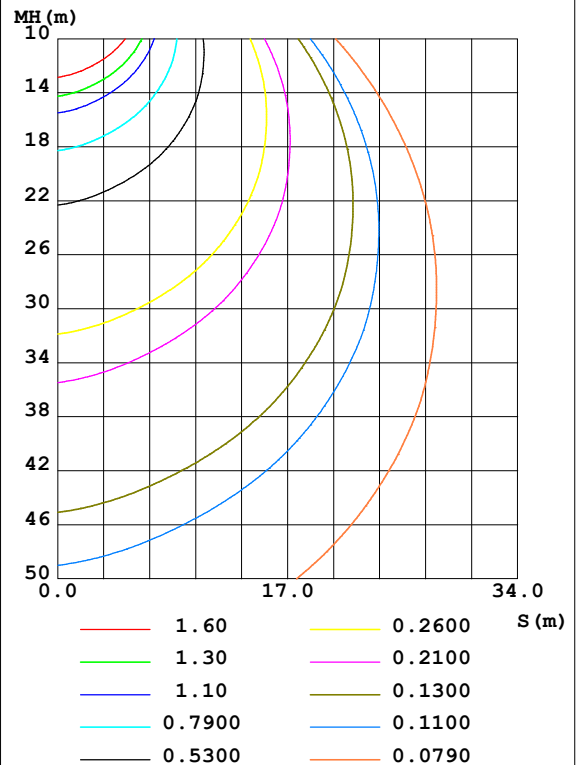

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-09-10

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	249.3	252.7	257.6	264.9	273.5	268.9	258.3	251.9	0- 10	24.97	24.97	3.56,3.56
20	234.7	233.6	240.4	254.0	267.4	259.5	241.8	233.6	10- 20	71.59	96.56	13.8,13.8
30	216.6	210.3	213.8	233.1	226.2	231.0	217.3	210.6	20- 30	107.8	204.4	29.2,29.2
40	191.3	184.1	182.9	188.6	151.4	187.5	182.2	183.7	30- 40	127.1	331.5	47.3,47.3
50	157.3	149.6	142.2	122.7	113.3	124.7	140.9	149.2	40- 50	122.7	454.2	64.8,64.8
60	113.4	109.1	96.68	73.82	86.74	75.45	93.52	108.6	50- 60	102.6	556.8	79.4,79.4
70	66.43	65.10	47.95	50.02	63.20	51.51	44.72	65.00	60- 70	74.54	631.3	90,90
80	28.14	27.02	9.831	26.69	39.86	27.07	7.089	26.64	70- 80	42.23	673.5	96.1,96.1
90	6.202	5.658	2.397	9.151	15.89	8.244	1.246	4.994	80- 90	15.89	689.4	98.3,98.3
100	3.131	3.810	2.771	4.149	2.827	3.026	1.733	2.847	90-100	4.590	694.0	99,99
110	3.332	3.983	3.242	4.266	2.744	3.177	2.121	3.091	100-110	3.392	697.4	99.5,99.5
120	3.689	4.061	3.573	4.523	3.081	3.533	2.543	3.144	110-120	3.517	700.9	100,100
130	0	0	0	0	0	0	0	0	120-130	0.1709	701.1	100,100
140	0	0	0	0	0	0	0	0	130-140	0	701.1	100,100
150	0	0	0	0	0	0	0	0	140-150	0	701.1	100,100
160	0	0	0	0	0	0	0	0	150-160	0	701.1	100,100
170	0	0	0	0	0	0	0	0	160-170	0	701.1	100,100
180	0	0	0	0	0	0	0	0	170-180	0	701.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 394.61 lm

%lum = 56.3%

%lamp = 56.3%

Conical surface Flux(120deg): 556.77 lm

%lum = 79.4%


%lamp = 79.4%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-09-10

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.3372A P:8.093W PF:1.000 Freq:50.00Hz Lamp Flux:5.84248x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(5700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

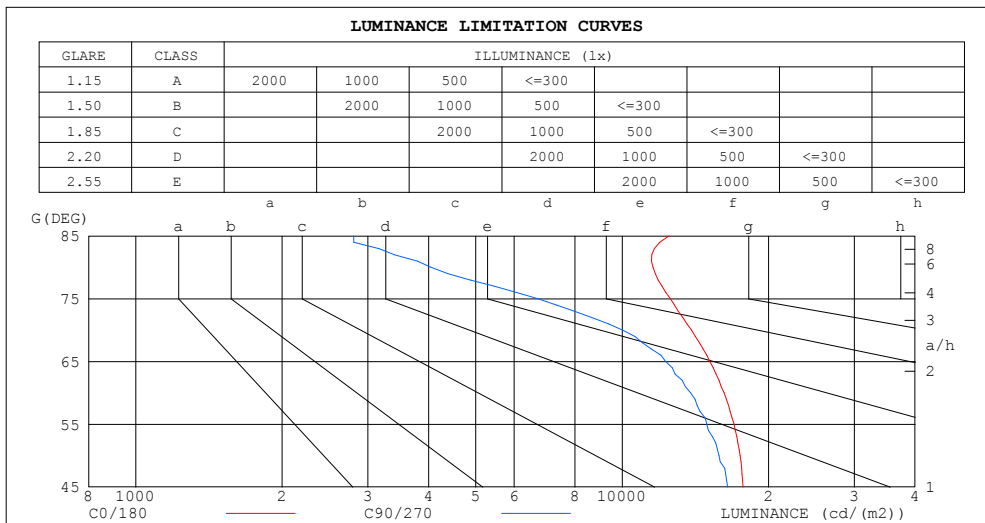

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	12476	2805
80	11575	4044
75	12552	6696
70	13874	10014
65	15140	12271
60	16203	13812
55	16977	14925
50	17480	15803
45	17708	16470


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.3372A P:8.093W PF:1.000 Freq:50.00Hz Lamp Flux:5.84248x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(5700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.79	.89	.83	.78	.85	.80	.76	.82	.77	.74	.78	.75	.72	.69
3.0	.80	.72	.66	.79	.71	.65	.75	.69	.64	.72	.67	.63	.70	.65	.61	.59
4.0	.71	.63	.56	.70	.62	.56	.67	.60	.55	.65	.59	.54	.62	.57	.53	.51
5.0	.64	.55	.49	.63	.55	.48	.60	.53	.48	.58	.52	.47	.56	.51	.46	.44
6.0	.58	.49	.43	.57	.48	.42	.55	.47	.42	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.44	.38	.52	.43	.38	.50	.43	.37	.48	.42	.37	.47	.41	.36	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.31	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

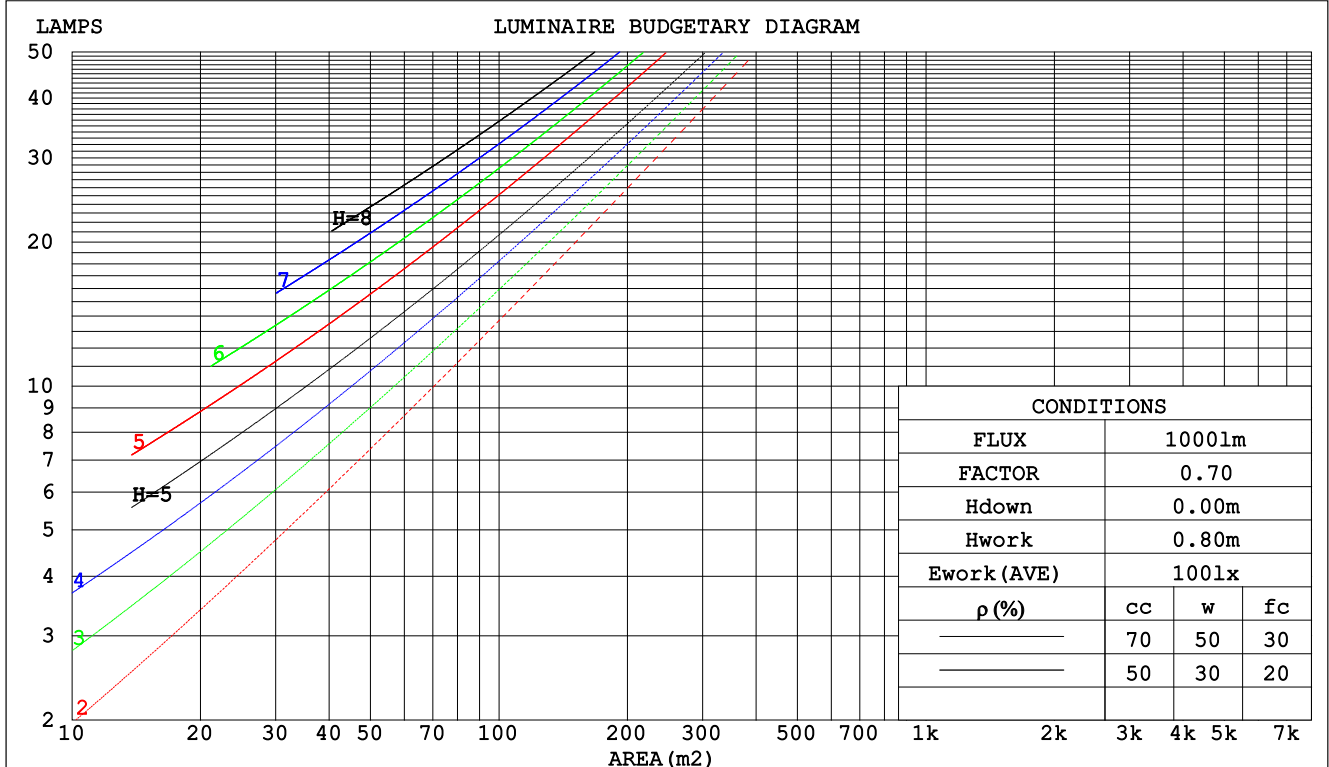

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-09-10

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.3372A P:8.093W PF:1.000 Freq:50.00Hz Lamp Flux:5.84248x120 lm					
NAME: P01-24V-2835-120-DW-2700K-5700K(5700K)			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:1*0.014		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.303	.172	.055	.295	.168	.053	.281	.161	.051	.268	.154	.050	.256	.148	.048	
2.0	.283	.155	.048	.276	.152	.047	.264	.147	.046	.252	.141	.044	.242	.137	.043	
3.0	.262	.139	.042	.256	.137	.041	.245	.133	.040	.235	.129	.039	.225	.125	.039	
4.0	.242	.126	.037	.237	.124	.037	.227	.120	.036	.218	.117	.035	.209	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.211	.110	.032	.202	.107	.032	.195	.104	.031	
6.0	.208	.104	.030	.204	.103	.030	.196	.101	.029	.189	.098	.029	.182	.096	.028	
7.0	.194	.096	.027	.190	.095	.027	.183	.093	.027	.177	.091	.026	.171	.089	.026	
8.0	.182	.089	.025	.178	.088	.025	.172	.086	.025	.166	.084	.024	.160	.082	.024	
9.0	.170	.082	.023	.167	.082	.023	.162	.080	.023	.156	.078	.022	.151	.077	.022	
10.0	.160	.077	.021	.158	.076	.021	.153	.075	.021	.148	.073	.021	.143	.072	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.193	.169	.148	.165	.145	.127	.113	.100	.088	.065	.058	.051	.021	.019	.017	
2.0	.184	.145	.112	.158	.125	.097	.108	.086	.068	.062	.050	.040	.020	.016	.013	
3.0	.176	.127	.088	.151	.110	.077	.103	.076	.054	.060	.045	.032	.019	.014	.010	
4.0	.168	.114	.072	.144	.098	.063	.099	.069	.044	.057	.040	.026	.018	.013	.009	
5.0	.161	.103	.061	.138	.089	.053	.095	.062	.038	.055	.037	.022	.018	.012	.007	
6.0	.153	.095	.053	.132	.082	.046	.091	.058	.033	.053	.034	.019	.017	.011	.006	
7.0	.147	.088	.047	.126	.076	.041	.087	.054	.029	.051	.032	.017	.016	.010	.006	
8.0	.140	.082	.042	.121	.071	.037	.084	.050	.026	.049	.030	.016	.016	.010	.005	
9.0	.134	.077	.039	.116	.067	.034	.080	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.129	.073	.036	.111	.063	.031	.077	.045	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.3372A P:8.093W PF:1.000 Freq:50.00Hz Lamp Flux:5.84248x120 lm										
NAME: P01-24V-2835-120-DW-2700K-5700K(5700K)					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:1*0.014			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.1	25.6	24.4	25.8	26.0	23.3	24.8	23.6	25.0	25.3
3H	25.5	26.8	25.8	27.1	27.4	24.5	25.8	24.8	26.1	26.4
4H	26.0	27.3	26.4	27.6	27.9	24.8	26.0	25.1	26.3	26.6
6H	26.4	27.6	26.8	27.9	28.2	24.8	26.0	25.2	26.3	26.7
8H	26.5	27.7	26.9	28.0	28.3	24.8	26.0	25.2	26.3	26.6
12H	26.7	27.8	27.0	28.1	28.4	24.8	25.9	25.2	26.2	26.6
4H 2H	24.6	25.9	25.0	26.2	26.5	24.0	25.3	24.4	25.6	25.9
3H	26.2	27.3	26.6	27.7	28.0	25.4	26.5	25.8	26.8	27.2
4H	26.9	27.9	27.3	28.2	28.6	25.8	26.8	26.2	27.2	27.5
6H	27.4	28.3	27.8	28.7	29.1	26.0	26.9	26.4	27.3	27.7
8H	27.6	28.4	28.0	28.8	29.2	26.0	26.9	26.5	27.3	27.7
12H	27.8	28.5	28.2	28.9	29.4	26.0	26.8	26.5	27.2	27.7
8H 4H	27.1	27.9	27.5	28.3	28.7	26.1	27.0	26.6	27.4	27.8
6H	27.7	28.5	28.2	28.9	29.3	26.5	27.2	27.0	27.6	28.1
8H	28.0	28.7	28.5	29.1	29.6	26.6	27.2	27.1	27.7	28.2
12H	28.3	28.9	28.8	29.3	29.8	26.7	27.2	27.2	27.7	28.2
12H 4H	27.1	27.8	27.5	28.3	28.7	26.2	26.9	26.6	27.3	27.8
6H	27.8	28.4	28.3	28.9	29.4	26.6	27.2	27.1	27.7	28.2
8H	28.1	28.7	28.6	29.1	29.7	26.8	27.3	27.3	27.8	28.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 701.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.2)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:


```

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.3372A P:8.093W PF:1.000 Freq:50.00Hz Lamp Flux:5.84248x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(5700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

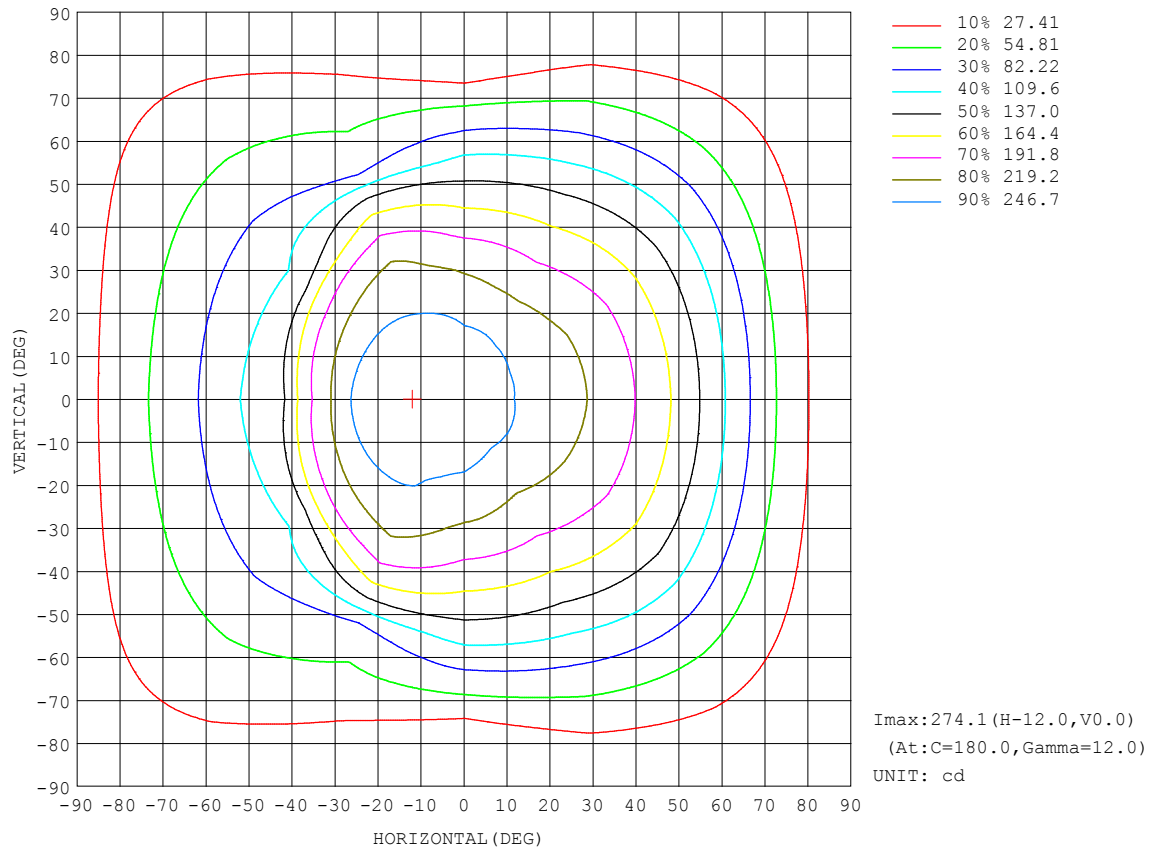


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.3372A P:8.093W PF:1.000 Freq:50.00Hz Lamp Flux:5.84248x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(5700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

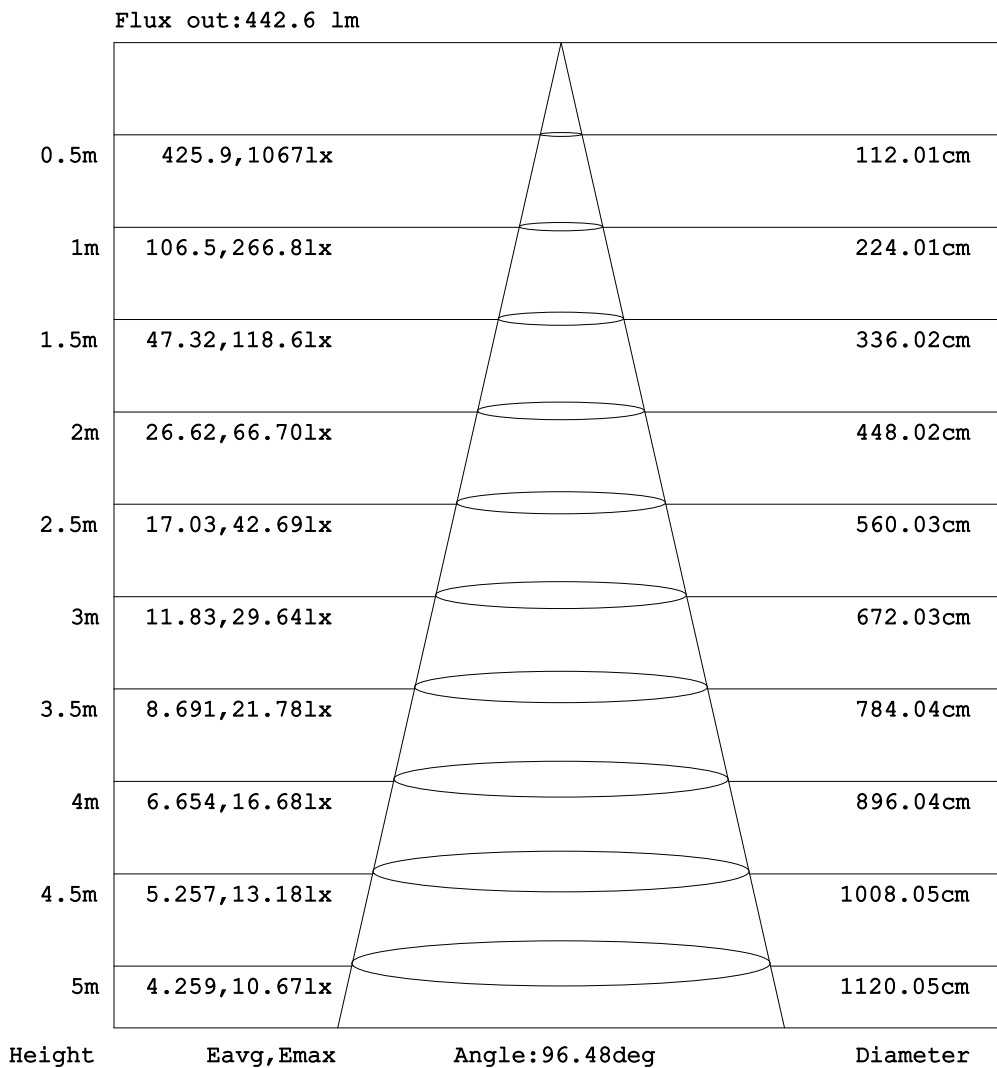


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.3372A P:8.093W PF:1.000 Freq:50.00Hz Lamp Flux:5.84248x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(5700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

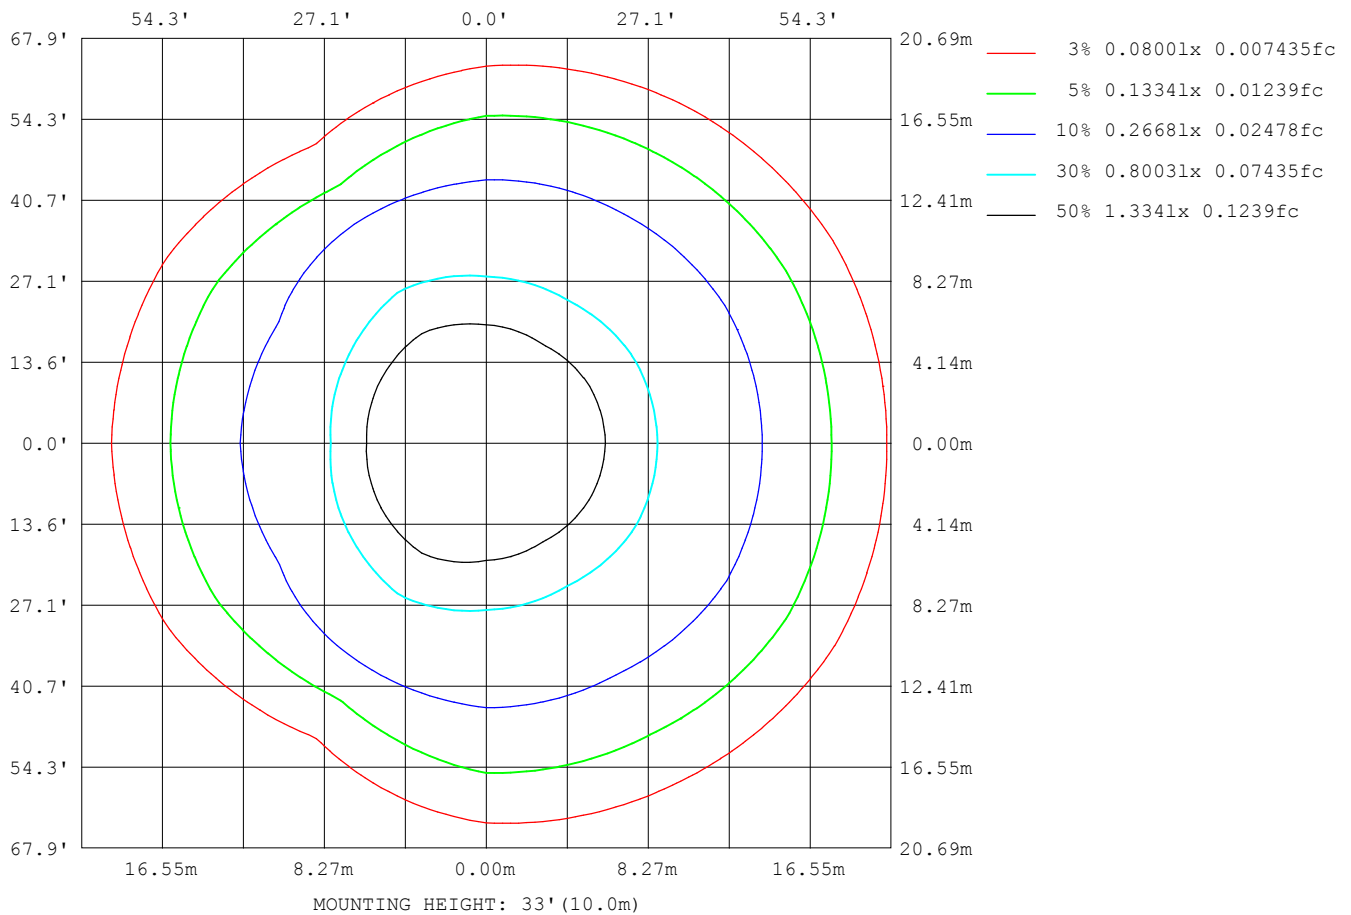

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.3372A P:8.093W PF:1.000 Freq:50.00Hz Lamp Flux:5.84248x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(5700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13892
L_0~180 (75) av	13338
L_0~180 (85) av	17545
L_90~270 (65) av	12080
L_90~270 (75) av	6182
L_90~270 (85) av	2200
L_45 (65) av	12557
L_45 (75) av	11691
L_45 (85) av	12446

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LPC
 Test Date:2021-09-10

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

Planar Illuminance Curve

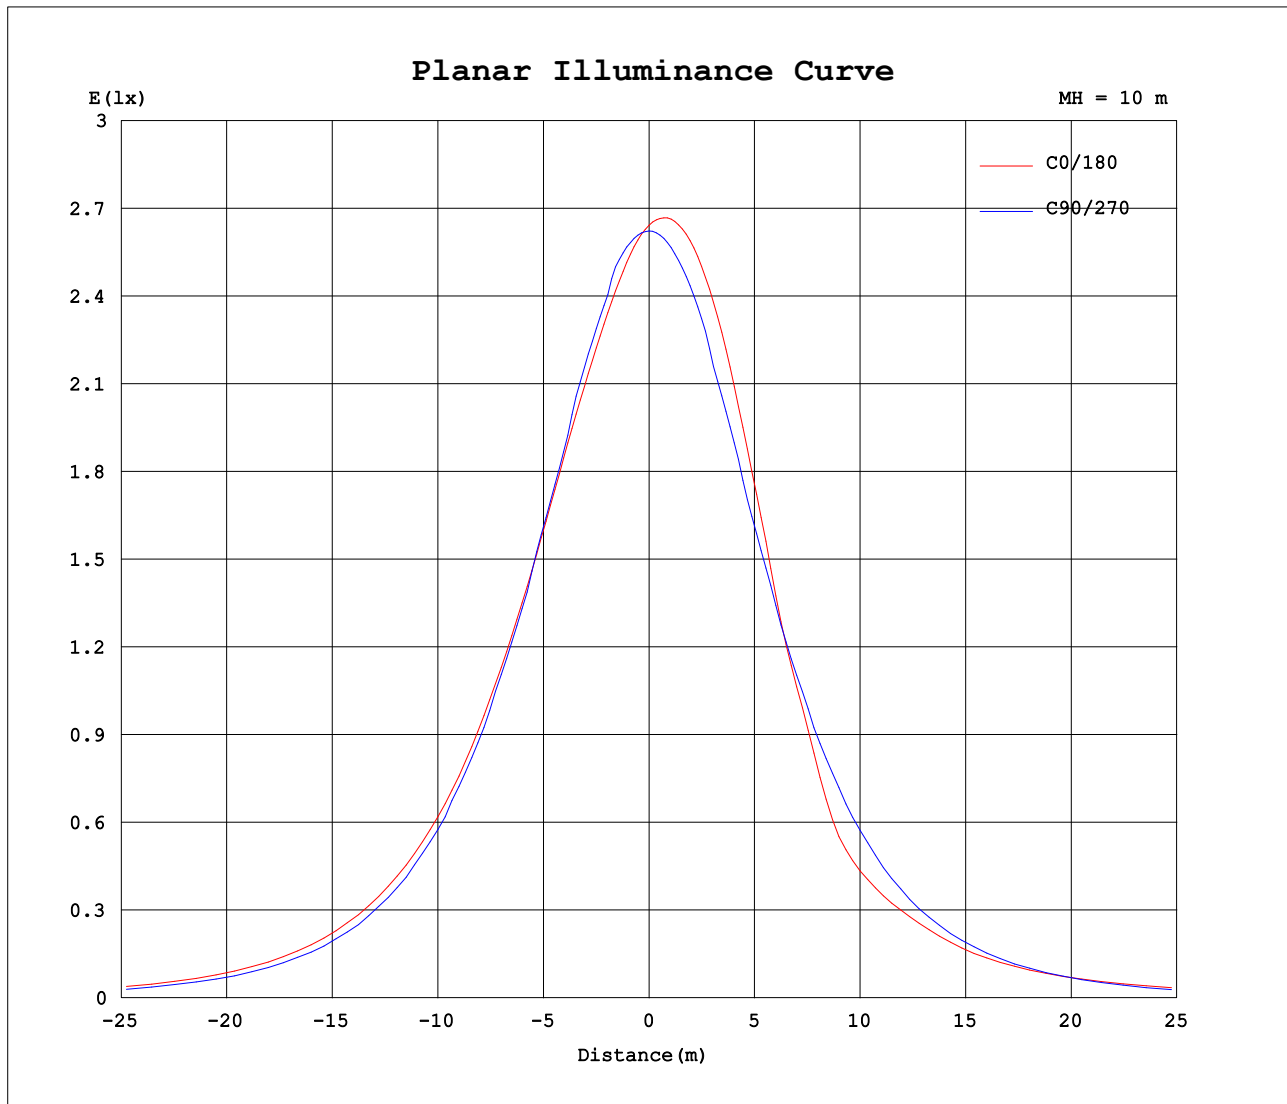

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: LPC
Test Date: 2021-09-10

γ Range: 0 - 120DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3372A P:8.093W PF:1.000 Freq:50.00Hz Lamp Flux:5.84248x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K(5700K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	264	265	264	262	263	264	264	265	264	262	263	264						
5	257	259	260	261	261	269	270	269	266	261	259	258						
10	249	251	254	258	258	272	273	272	266	258	253	250						
15	242	243	243	249	250	270	273	271	262	253	246	242						
20	235	234	233	240	249	259	267	266	253	242	233	234						
25	226	224	219	228	245	248	252	247	242	229	222	225						
30	217	214	207	214	236	231	226	229	233	217	207	215						
35	206	203	194	201	222	207	194	207	222	201	194	202						
40	191	190	178	183	202	175	151	173	202	182	178	189						
45	175	175	162	163	176	128	123	124	177	162	162	173						
50	157	157	142	142	139	107	113	107	142	141	144	155						
55	136	138	122	120	89.7	96.3	101	97.3	90.9	117	124	135						
60	113	116	102	96.7	64.8	82.9	86.7	83.9	67.0	93.5	104	114						
65	89.6	91.8	81.9	72.6	53.5	69.8	74.8	70.7	55.6	70.3	82.9	90.5						
70	66.4	68.7	61.5	47.9	42.5	57.5	63.2	58.0	45.0	44.7	62.5	67.5						
75	45.5	47.3	42.3	24.3	31.2	44.8	51.2	45.1	33.0	20.5	42.9	46.0						
80	28.1	29.0	25.0	9.83	20.7	32.7	39.9	32.6	21.5	7.09	25.2	28.0						
85	15.2	15.3	11.7	3.42	11.7	21.4	27.6	20.8	11.6	1.94	11.5	14.6						
90	6.20	6.49	4.82	2.40	6.05	12.3	15.9	11.1	5.38	1.25	4.27	5.72						
95	3.18	3.62	3.96	2.55	4.26	6.09	6.95	4.76	3.21	1.42	3.06	2.86						
100	3.13	3.65	3.97	2.77	4.22	4.08	2.83	2.93	3.12	1.73	3.06	2.63						
105	3.20	3.74	3.65	3.21	3.86	4.16	2.59	2.92	2.74	2.12	2.60	2.81						
110	3.33	3.88	4.08	3.24	4.26	4.28	2.74	3.09	3.27	2.12	3.16	3.02						
115	3.49	4.03	4.38	3.40	4.49	4.40	2.93	3.25	3.54	2.29	3.39	3.18						
120	3.69	4.14	3.98	3.57	4.56	4.49	3.08	3.43	3.63	2.54	2.93	3.35						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LPC
Test Date:2021-09-10

γ Range: 0 - 120DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: