


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.6667A P:16.00W PF:1.000 Freq:50.00Hz Lamp Flux:10.6422x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 79.81 lm/W			
MODEL	2835	I <sub>max</sub> (cd)	513.0	S/MH (C0/180)	1.16
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	1.21
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	1277.1	η UP, DN (C0-180)	0.9, 49.9
NOMINAL FLUX (lm)	10.6422	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 48.5
LAMPS INSIDE	120	η up (%)	1.7	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	98.3	CIBSE SHR MAX	1.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

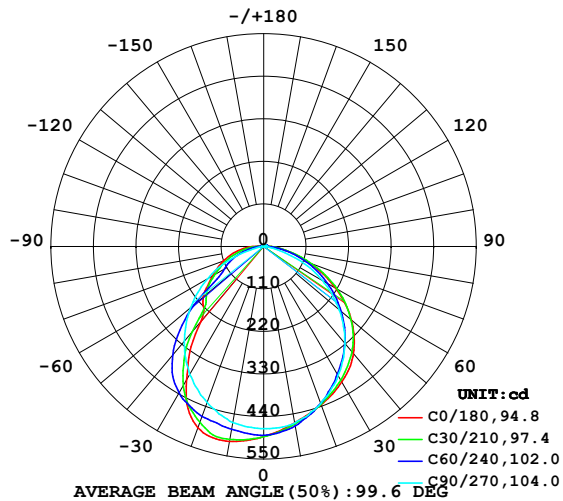

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

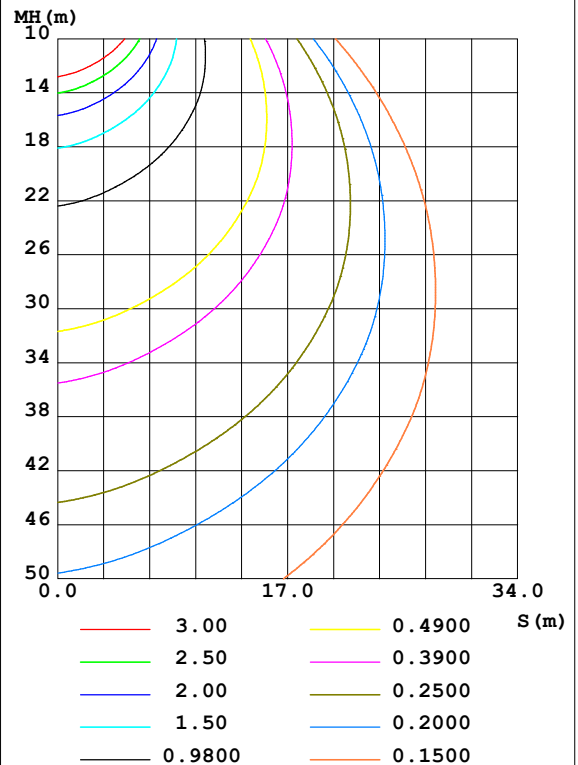

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: LPC  
 Test Date: 2021-09-10

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 9.200m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	463.1	468.9	463.8	494.7	511.6	493.2	462.1	462.3	0- 10	45.95	45.95	3.6,3.6
20	435.3	432.9	432.5	476.0	498.6	475.6	429.2	430.7	10- 20	132.0	177.9	13.9,13.9
30	404.3	389.9	384.9	426.6	398.9	426.8	382.2	388.5	20- 30	198.3	376.2	29.5,29.5
40	361.2	340.8	327.9	324.6	253.1	326.8	319.8	340.5	30- 40	230.1	606.3	47.5,47.5
50	296.7	278.0	254.8	209.3	204.2	214.2	247.3	278.0	40- 50	220.3	826.6	64.7,64.7
60	214.3	205.0	176.2	130.2	153.6	131.7	167.6	203.9	50- 60	185.2	1012	79.2,79.2
70	127.4	125.4	85.98	87.27	111.2	89.25	80.01	124.6	60- 70	136.6	1148	89.9,89.9
80	56.36	54.91	19.32	45.00	69.46	45.72	12.12	53.78	70- 80	77.68	1226	96,96
90	13.79	12.65	4.403	15.06	26.41	13.40	2.316	11.20	80- 90	29.52	1256	98.3,98.3
100	5.759	7.262	5.088	7.838	5.009	5.526	3.240	5.169	90-100	8.325	1264	99,99
110	6.066	7.475	5.931	8.023	5.207	5.886	3.930	5.572	100-110	6.294	1270	99.5,99.5
120	6.719	7.491	6.523	8.451	5.835	6.571	4.659	5.722	110-120	6.507	1277	100,100
130	0	0	0	0	0	0	0	0	120-130	0.3158	1277	100,100
140	0	0	0	0	0	0	0	0	130-140	0	1277	100,100
150	0	0	0	0	0	0	0	0	140-150	0	1277	100,100
160	0	0	0	0	0	0	0	0	150-160	0	1277	100,100
170	0	0	0	0	0	0	0	0	160-170	0	1277	100,100
180	0	0	0	0	0	0	0	0	170-180	0	1277	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 719.16 lm

%lum = 56.3%

%lamp = 56.3%

Conical surface Flux(120deg): 1011.8 lm

%lum = 79.2%


%lamp = 79.2%

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-09-10

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.6667A P:16.00W PF:1.000 Freq:50.00Hz Lamp Flux:10.6422x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

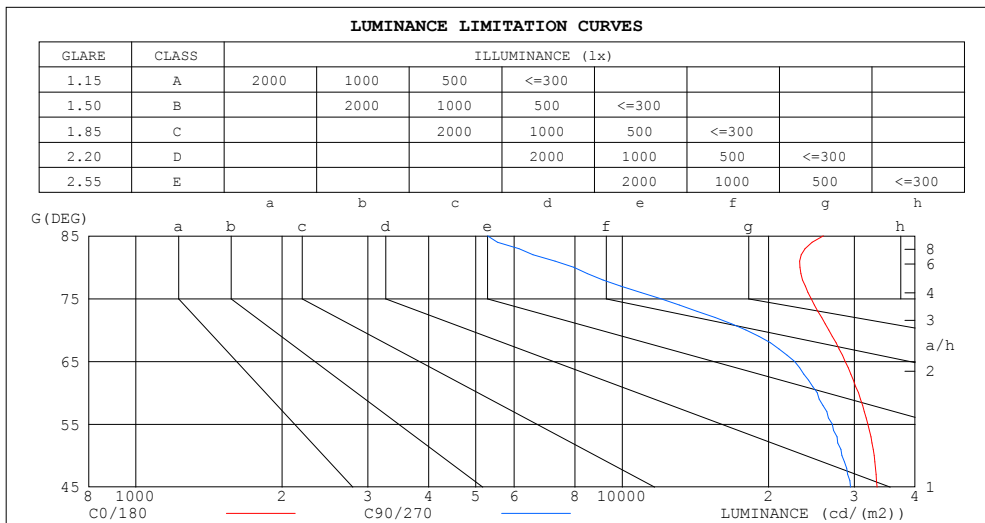

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	25923	5289
80	23184	7946
75	24481	11977
70	26611	17956
65	28724	22598
60	30608	25173
55	32010	27028
50	32974	28309
45	33424	29484


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-09-10

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.6667A P:16.00W PF:1.000 Freq:50.00Hz Lamp Flux:10.6422x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.79	.89	.83	.78	.85	.80	.76	.82	.77	.74	.78	.75	.72	.69
3.0	.80	.72	.66	.79	.71	.65	.75	.69	.64	.72	.67	.63	.70	.65	.61	.59
4.0	.71	.63	.56	.70	.62	.56	.67	.60	.55	.65	.59	.54	.62	.57	.53	.51
5.0	.64	.55	.49	.63	.55	.48	.60	.53	.48	.58	.52	.47	.56	.51	.46	.44
6.0	.58	.49	.43	.57	.49	.42	.55	.47	.42	.53	.46	.41	.51	.46	.41	.39
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.48	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.31	.44	.36	.31	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.37	.31	.27	.25

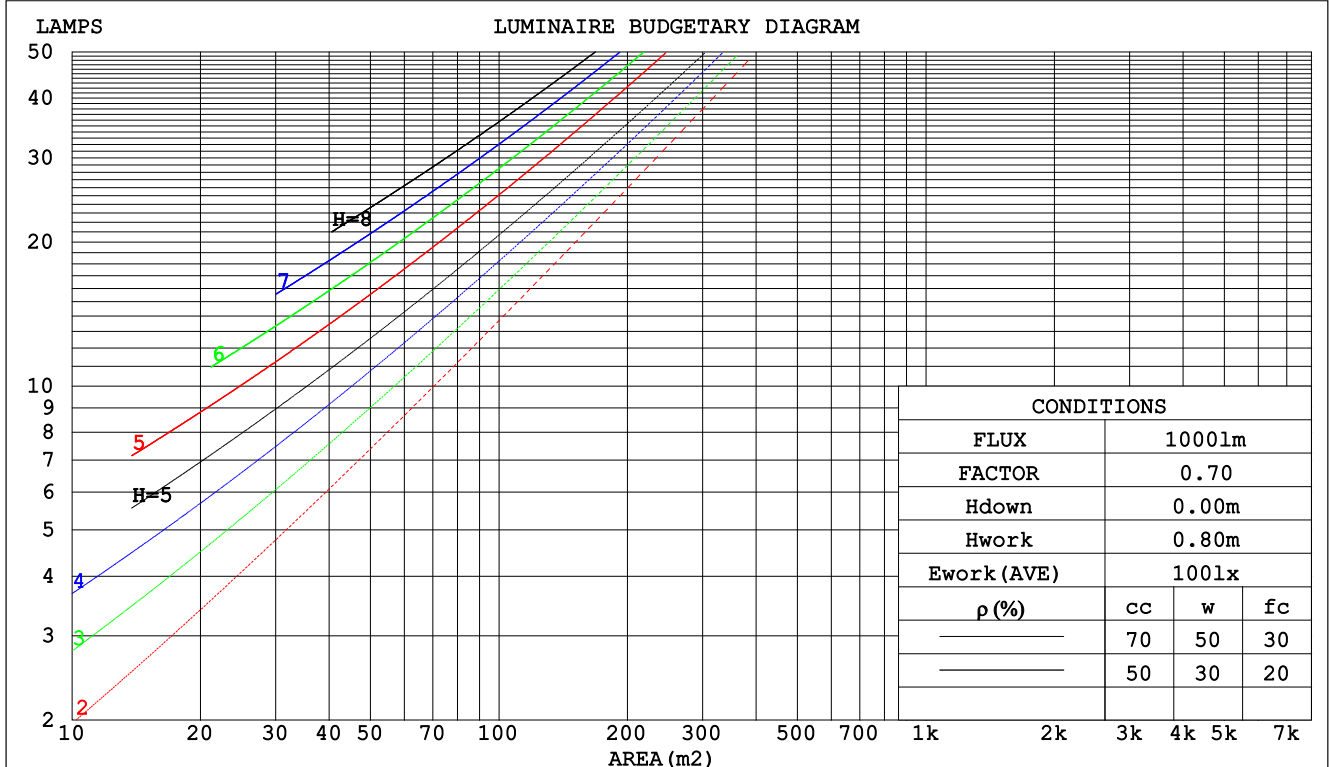

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-09-10

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

### WEC AND CCEC

Test:U:24.00V I:0.6667A P:16.00W PF:1.000 Freq:50.00Hz Lamp Flux:10.6422x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.303	.172	.055	.295	.169	.054	.281	.161	.052	.268	.155	.050	.256	.149	.048	
2.0	.283	.155	.048	.276	.152	.047	.264	.147	.046	.252	.142	.044	.242	.137	.043	
3.0	.262	.139	.042	.256	.137	.041	.245	.133	.040	.235	.129	.039	.225	.125	.039	
4.0	.242	.126	.037	.237	.124	.037	.227	.120	.036	.218	.117	.035	.209	.114	.035	
5.0	.224	.114	.033	.219	.113	.033	.210	.110	.032	.202	.107	.032	.195	.104	.031	
6.0	.208	.104	.030	.204	.103	.030	.196	.100	.029	.189	.098	.029	.182	.096	.028	
7.0	.194	.096	.027	.190	.095	.027	.183	.093	.027	.177	.091	.026	.170	.089	.026	
8.0	.181	.089	.025	.178	.088	.025	.172	.086	.025	.166	.084	.024	.160	.082	.024	
9.0	.170	.082	.023	.167	.082	.023	.162	.080	.023	.156	.078	.022	.151	.077	.022	
10.0	.160	.077	.021	.158	.076	.021	.152	.075	.021	.148	.073	.021	.143	.072	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.193	.169	.148	.165	.145	.127	.113	.100	.088	.065	.058	.051	.021	.019	.017	
2.0	.184	.145	.112	.158	.125	.097	.108	.086	.068	.062	.050	.040	.020	.016	.013	
3.0	.176	.127	.089	.151	.110	.077	.104	.076	.054	.060	.045	.032	.019	.014	.010	
4.0	.168	.114	.073	.144	.098	.063	.099	.069	.044	.057	.040	.026	.018	.013	.009	
5.0	.161	.103	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
6.0	.154	.095	.053	.132	.082	.046	.091	.058	.033	.053	.034	.019	.017	.011	.006	
7.0	.147	.088	.047	.126	.076	.041	.087	.054	.029	.051	.032	.017	.016	.010	.006	
8.0	.140	.082	.042	.121	.071	.037	.084	.050	.026	.049	.030	.016	.016	.010	.005	
9.0	.134	.077	.039	.116	.067	.034	.080	.047	.024	.047	.028	.014	.015	.009	.005	
10.0	.129	.073	.036	.111	.064	.031	.077	.045	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-09-10

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.6667A P:16.00W PF:1.000 Freq:50.00Hz Lamp Flux:10.6422x120 lm										
NAME: P01-24V-2835-120-DW-2700K-5700K					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:1*0.014			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.3	25.8	24.6	26.0	26.3	23.4	24.9	23.7	25.1	25.3
3H	25.8	27.1	26.1	27.4	27.7	24.6	25.9	24.9	26.2	26.4
4H	26.3	27.6	26.7	27.9	28.2	24.8	26.1	25.2	26.4	26.7
6H	26.8	28.0	27.1	28.3	28.6	24.9	26.1	25.3	26.4	26.8
8H	26.9	28.1	27.3	28.4	28.7	24.9	26.1	25.3	26.4	26.7
12H	27.1	28.2	27.4	28.5	28.8	24.9	26.0	25.3	26.4	26.7
4H 2H	24.9	26.1	25.2	26.4	26.7	24.1	25.4	24.5	25.7	26.0
3H	26.5	27.6	26.9	28.0	28.3	25.5	26.6	25.9	27.0	27.3
4H	27.2	28.2	27.6	28.6	29.0	26.0	27.0	26.4	27.3	27.7
6H	27.8	28.7	28.2	29.1	29.5	26.2	27.1	26.6	27.5	27.9
8H	28.0	28.8	28.4	29.2	29.7	26.2	27.1	26.7	27.5	27.9
12H	28.2	29.0	28.7	29.4	29.8	26.2	27.0	26.7	27.4	27.9
8H 4H	27.4	28.3	27.9	28.7	29.1	26.3	27.2	26.8	27.6	28.0
6H	28.2	28.9	28.6	29.3	29.8	26.8	27.5	27.2	27.9	28.4
8H	28.5	29.1	29.0	29.6	30.1	26.9	27.5	27.4	28.0	28.5
12H	28.8	29.4	29.3	29.8	30.4	27.0	27.5	27.5	28.0	28.5
12H 4H	27.4	28.2	27.9	28.6	29.1	26.4	27.2	26.8	27.6	28.0
6H	28.2	28.8	28.7	29.3	29.8	26.9	27.5	27.4	28.0	28.4
8H	28.6	29.1	29.1	29.6	30.1	27.1	27.6	27.6	28.1	28.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 1277 lm Total Lamp Luminous Flux Correct ( $8\log(F/F_0) = 0.8$ )

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-09-10

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.6667A P:16.00W PF:1.000 Freq:50.00Hz Lamp Flux:10.6422x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	59	48	41	58	48	41	57	47	41	35
0.80	69	58	51	68	57	50	66	56	50	43
1.00	77	66	59	76	66	59	74	67	58	51
1.25	84	74	67	83	73	66	80	72	66	58
1.50	89	79	72	87	78	72	84	76	71	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	91	86	97	90	85	93	87	83	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	100	96	104	99	94	99	95	92	82
5.00	108	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-09-10

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:24.00V I:0.6667A P:16.00W PF:1.000 Freq:50.00Hz Lamp Flux:10.6422x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

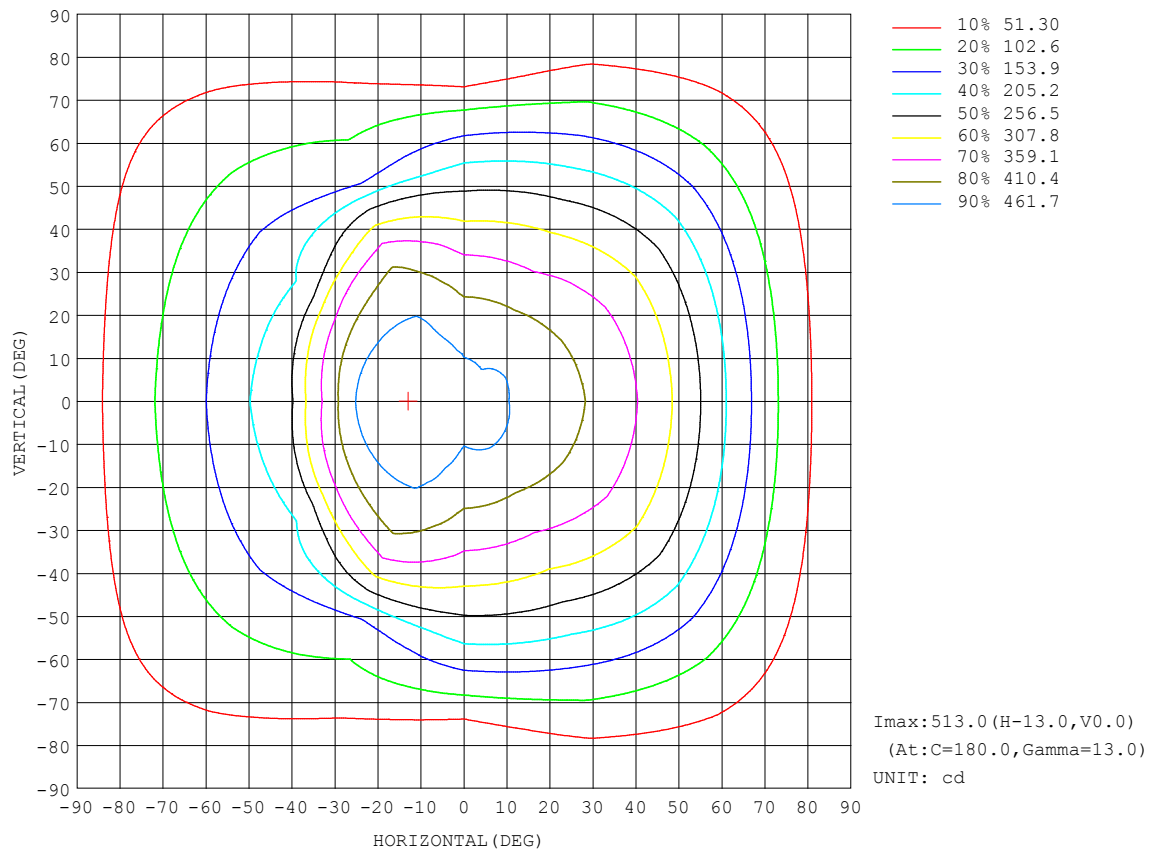


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-09-10

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:



### AAI Figure

Test:U:24.00V I:0.6667A P:16.00W PF:1.000 Freq:50.00Hz Lamp Flux:10.6422x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

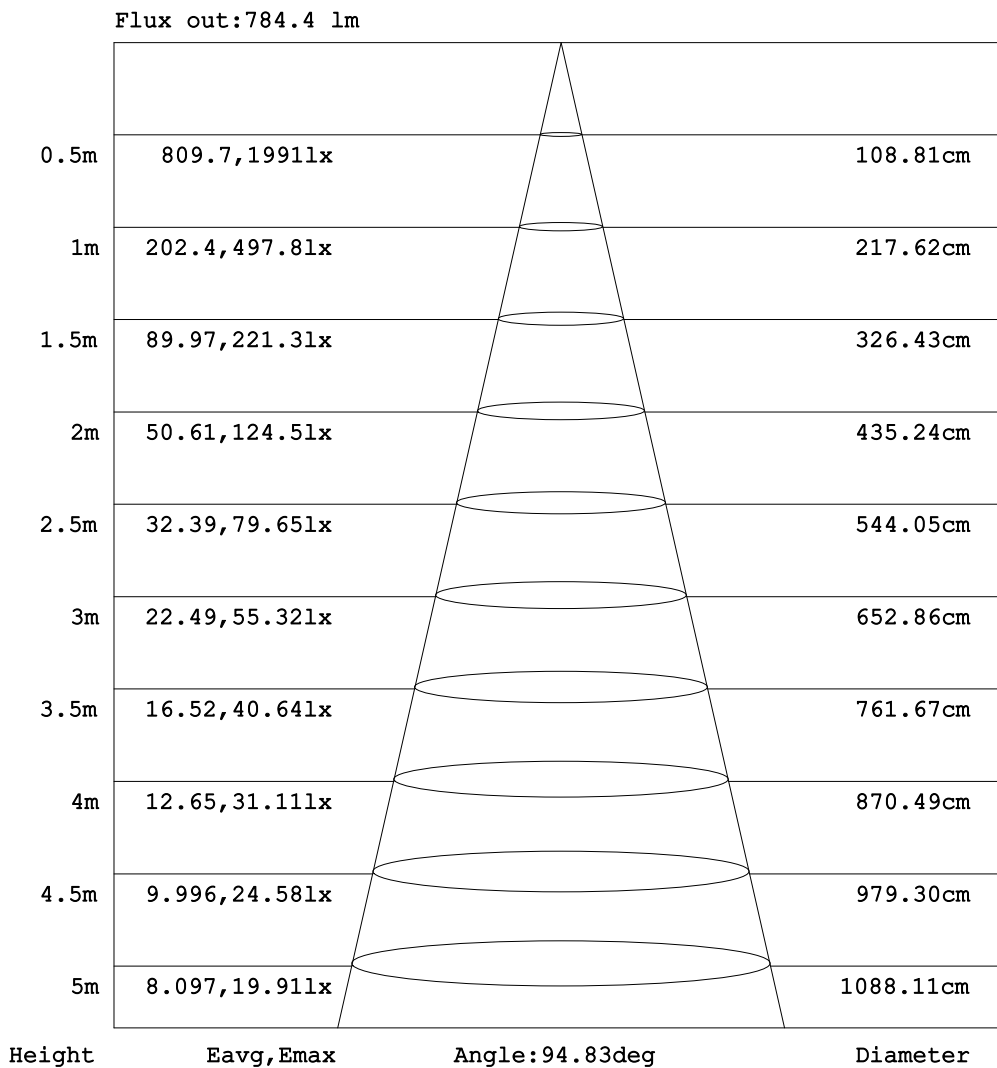


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-09-10

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

### ISOLUX DIAGRAM

Test:U:24.00V I:0.6667A P:16.00W PF:1.000 Freq:50.00Hz Lamp Flux:10.6422x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

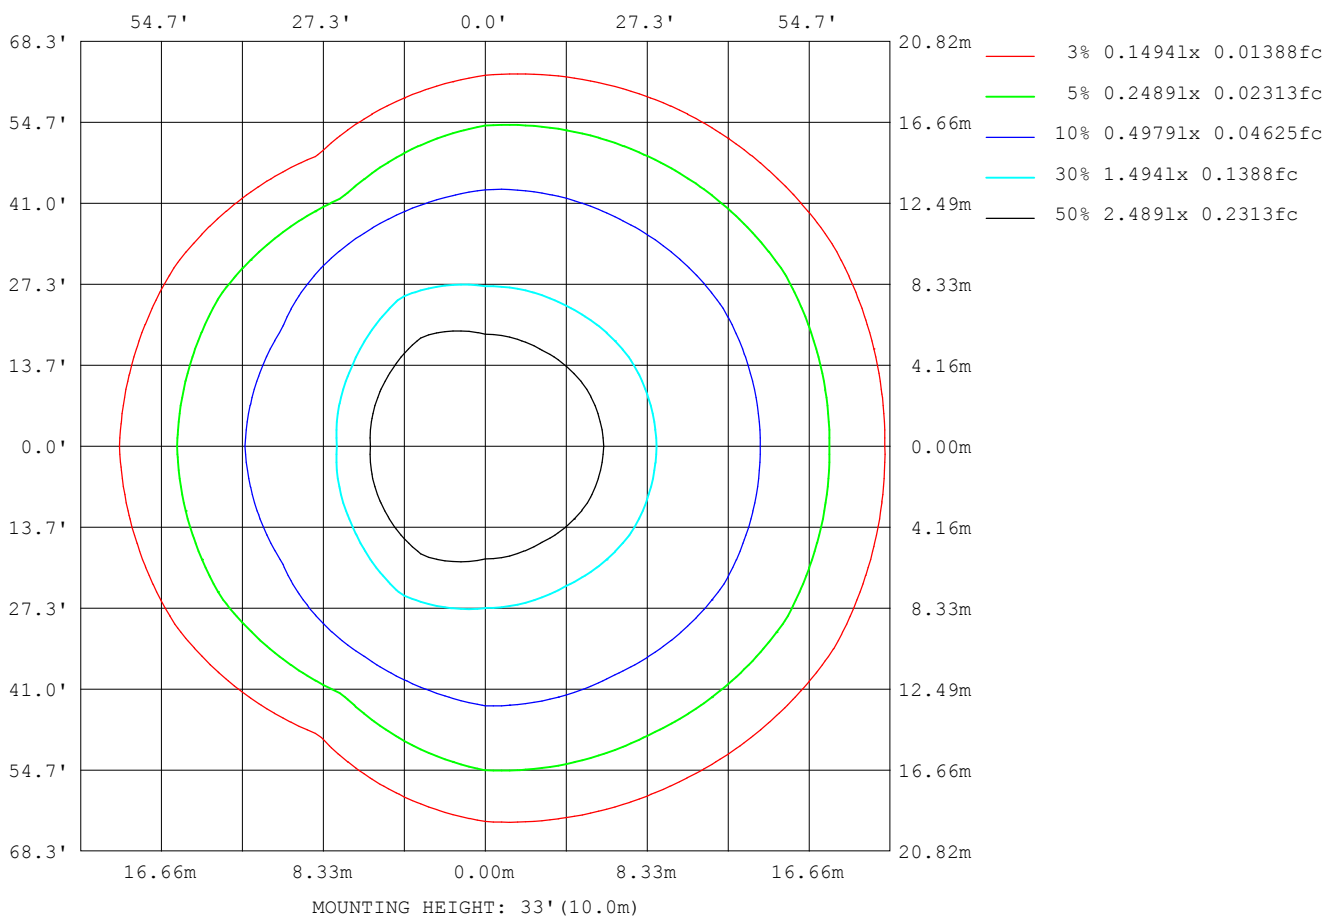

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-09-10

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:24.00V I:0.6667A P:16.00W PF:1.000 Freq:50.00Hz Lamp Flux:10.6422x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	25503
L_0~180 (75) av	24704
L_0~180 (85) av	32299
L_90~270 (65) av	22014
L_90~270 (75) av	10905
L_90~270 (85) av	4139
L_45 (65) av	23099
L_45 (75) av	21585
L_45 (85) av	23242

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LPC  
 Test Date:2021-09-10

γ Range: 0 - 120DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:9.200m [K=1.0000]  
 Remarks:

## Planar Illuminance Curve

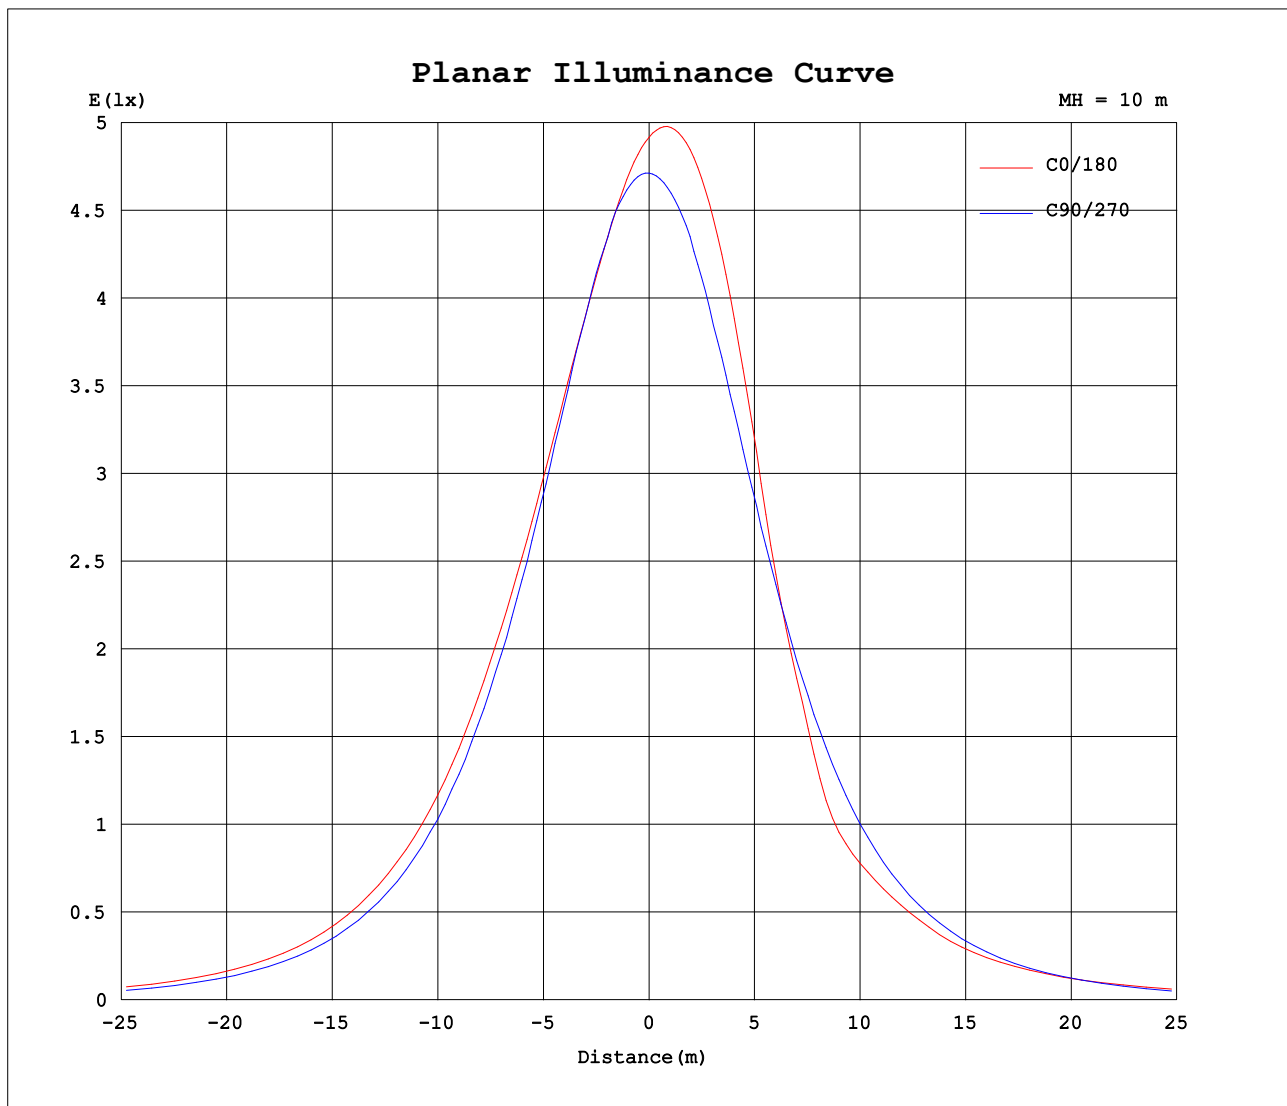

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: LPC  
Test Date: 2021-09-10

$\gamma$  Range: 0 - 120DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 9.200m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.6667A P:16.00W PF:1.000 Freq:50.00Hz Lamp Flux:10.6422x120 lm		
NAME: P01-24V-2835-120-DW-2700K-5700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:1*0.014	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	492	492	488	471	471	491	492	492	488	471	471	491						
5	478	480	483	470	479	500	504	501	485	468	465	479						
10	463	466	471	464	483	506	512	507	480	462	459	465						
15	449	451	453	451	477	501	512	505	472	448	449	449						
20	435	434	431	432	471	481	499	483	468	429	430	431						
25	421	417	407	410	456	459	464	457	454	407	406	416						
30	404	399	381	385	437	416	399	417	437	382	380	397						
35	386	379	355	358	407	362	334	360	410	352	354	376						
40	361	355	326	328	364	285	253	288	366	320	328	353						
45	331	328	296	292	305	215	221	212	308	284	296	326						
50	297	294	262	255	227	192	204	193	235	247	263	293						
55	257	259	226	217	148	172	178	173	148	208	228	257						
60	214	219	191	176	115	145	154	145	118	168	191	217						
65	170	176	154	134	96.6	121	132	122	99.4	127	154	174						
70	127	133	118	86.0	76.3	98.3	111	99.6	78.8	80.0	118	131						
75	88.7	93.4	82.7	43.4	54.3	75.8	90.3	76.7	56.6	35.6	83.0	91.1						
80	56.4	59.0	50.8	19.3	35.2	54.8	69.5	55.1	36.3	12.1	50.7	56.9						
85	31.6	32.6	25.1	6.45	19.7	35.0	47.2	34.4	19.4	3.65	24.6	30.8						
90	13.8	14.8	10.5	4.40	10.7	19.4	26.4	17.8	9.03	2.32	9.29	13.1						
95	6.01	7.13	7.63	4.67	8.10	9.72	10.9	7.66	5.82	2.65	5.59	5.37						
100	5.76	6.93	7.59	5.09	8.01	7.66	5.01	5.31	5.74	3.24	5.57	4.76						
105	5.85	7.01	6.91	5.89	7.28	7.86	4.93	5.47	4.99	3.93	4.74	5.11						
110	6.07	7.24	7.71	5.93	7.98	8.07	5.21	5.78	5.99	3.93	5.72	5.42						
115	6.38	7.49	8.22	6.20	8.40	8.24	5.53	6.10	6.48	4.24	6.18	5.73						
120	6.72	7.74	7.24	6.52	8.51	8.39	5.83	6.43	6.71	4.66	5.36	6.09						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LPC  
Test Date:2021-09-10

γ Range: 0 - 120DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:9.200m [K=1.0000]  
Remarks: