


室内灯具光度数据

实测参数: U:24.00V I:2.052A P:49.26W PF:1.000 Freq:0Hz 实检光通: 906.665x1 lm					
灯具名称: AW01-24V-3030-18-DMX4-RGBW(4000K)-80-40-B-1000			灯具类型:		灯具重量:
灯具规格:			外型尺寸: Length=1m		测试编号:
制造厂商: OLympia lighting			发光口面:		遮光角:

光源数据		光度数据				光效: 18.41 lm/W
型号	3030	峰值光强(cd)	3235	S/MH(C0/180)	0.39	
标称功率(W)	45	灯具效率(%)	100.0	S/MH(C90/270)	0.43	
额定电源电压(V)	24	总光通量(lm)	906.66	η UP,DN(C0-180)	2.0,49.2	
额定光通量(lm)	906.665	CIE分类	直接	η UP,DN(C180-360)	1.8,47.0	
灯具内光源数(只)	1	上射光通比(%)	3.8	CIBSE SHR NOM	0.00	
实测电源电压(V)		下射光通比(%)	96.2	CIBSE SHR MAX	1.00	

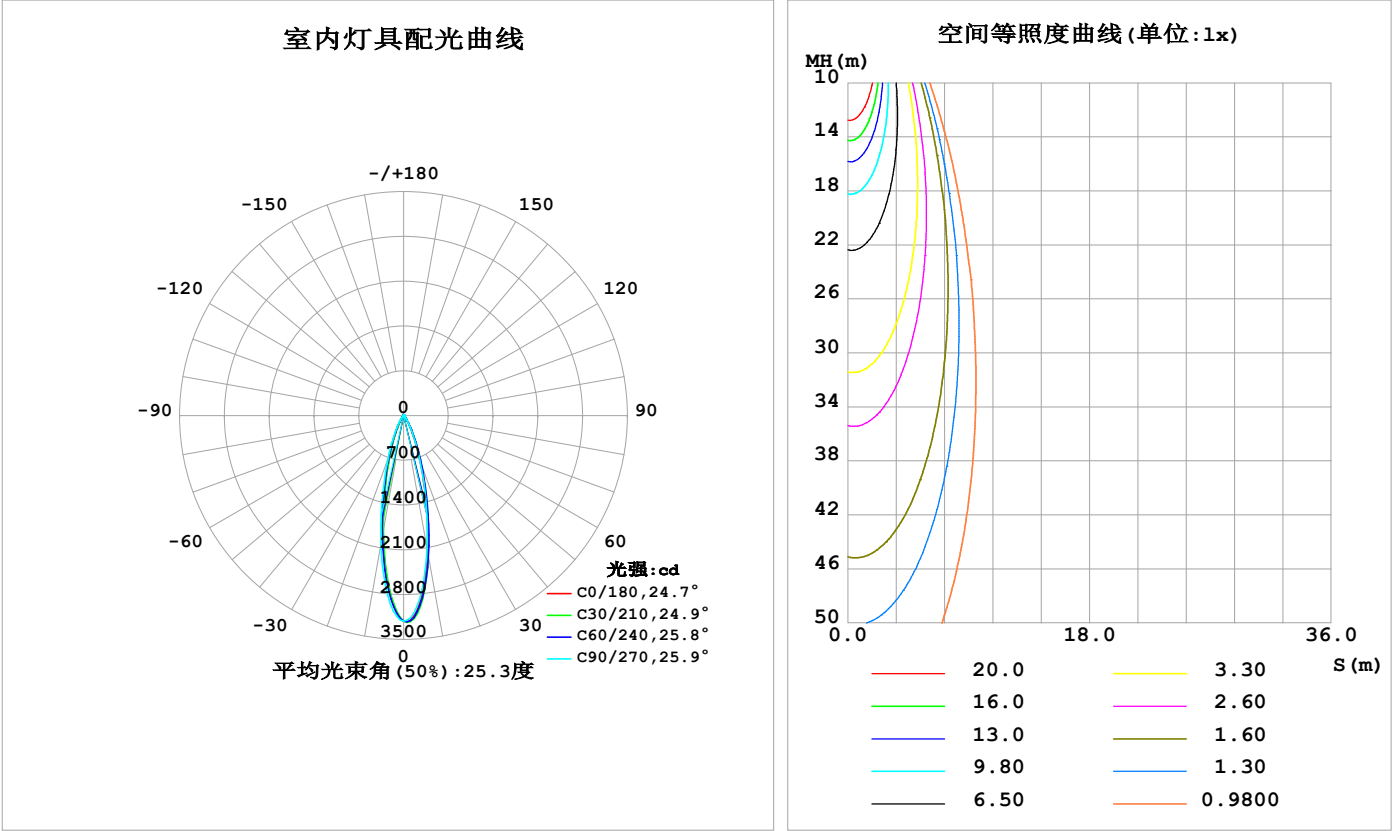

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	2147	2237	2112	1896	1858	1872	2049	2219	0- 10	245.1	245.1	27,27
20	756.0	821.0	759.4	637.6	599.9	612.4	715.0	814.5	10- 20	352.1	597.3	65.9,65.9
30	191.2	222.5	206.3	166.1	150.1	158.4	193.6	221.7	20- 30	178.4	775.7	85.6,85.6
40	40.55	50.59	52.41	38.23	32.76	35.30	49.31	51.04	30- 40	61.67	837.4	92.4,92.4
50	8.650	10.82	13.19	8.579	7.229	8.296	12.41	10.07	40- 50	16.79	854.2	94.2,94.2
60	4.541	5.446	7.020	5.144	4.139	4.990	6.902	5.157	50- 60	6.106	860.3	94.9,94.9
70	3.746	4.214	5.588	4.232	3.272	3.926	5.584	3.965	60- 70	4.671	864.9	95.4,95.4
80	3.196	3.400	4.333	3.580	2.751	3.159	4.424	3.258	70- 80	4.078	869.0	95.8,95.8
90	2.479	2.510	2.485	2.493	2.284	2.380	2.519	2.537	80- 90	3.222	872.2	96.2,96.2
100	2.261	2.304	2.353	2.347	2.364	2.498	2.532	2.430	90-100	2.579	874.8	96.5,96.5
110	2.651	2.786	3.019	3.026	2.986	3.230	3.259	2.994	100-110	2.775	877.6	96.8,96.8
120	4.110	4.322	4.741	4.843	4.645	4.851	4.776	4.421	110-120	3.671	881.3	97.2,97.2
130	6.829	6.907	7.190	7.539	6.920	6.907	6.648	6.491	120-130	5.133	886.4	97.8,97.8
140	9.635	9.452	9.327	9.911	8.434	8.376	8.097	8.142	130-140	6.181	892.6	98.4,98.4
150	11.19	10.79	10.33	11.00	9.048	9.029	8.697	8.873	140-150	5.959	898.5	99.1,99.1
160	11.07	10.57	10.12	10.74	9.145	9.112	8.598	8.841	150-160	4.590	903.1	99.6,99.6
170	9.688	9.305	9.488	9.691	8.743	8.891	8.621	8.372	160-170	2.690	905.8	99.9,99.9
180	8.652	8.943	9.299	8.873	8.655	8.945	9.273	8.861	170-180	0.8536	906.7	100,100
单位:°	光强:cd									单位:lm		

锥面光通量(90度)：848.54 lm


%lum = 93.6%
%lamp = 93.6%

锥面光通量(130度)：862.68 lm

%lum = 95.1%
%lamp = 95.1%

灯具亮度限制曲线

实测参数: U:24.00V I:2.052A P:49.26W PF:1.000 Freq:0Hz 实检光通: 906.665x1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(4000K)-80-40-B-1000	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

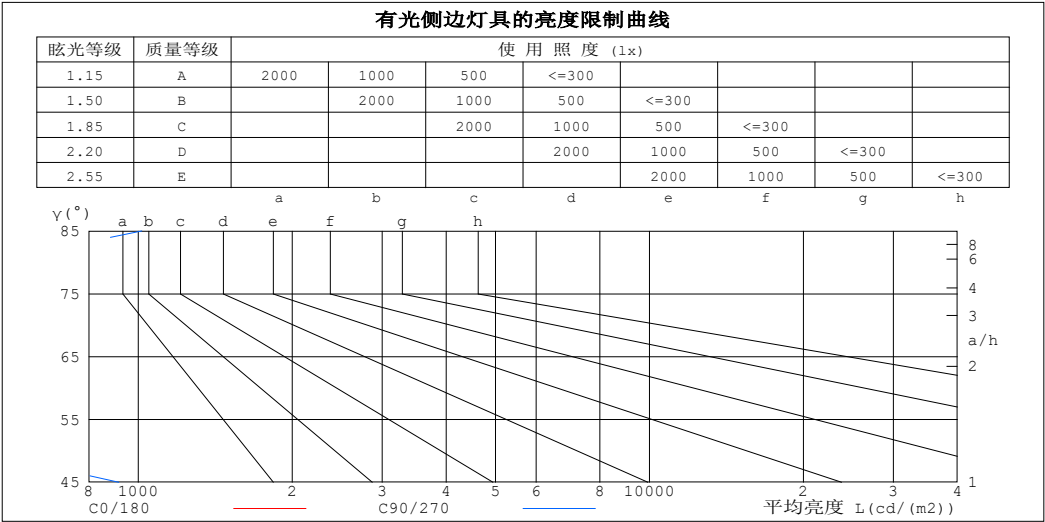

平均亮度值 cd/(m2)		
γ (°)	C0/180	C90/270
85	842	1015
80	476	632
75	349	493
70	283	414
65	246	372
60	235	356
55	253	373
50	348	520
45	664	916


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:24.00V I:2.052A P:49.26W PF:1.000 Freq:0Hz 实检光通: 906.665x1 lm			灯具名称: AW01-24V-3030-18-DMX4-RGBW(4000K)-80-40-B-1000-L-0.00m			灯具重量:		
灯具规格:			外型尺寸: Length=1m			测试编号:		
制造厂商: OLympia lighting			发光口面:			遮光角:		

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.96
1.0	1.11	1.09	1.07	1.08	1.06	1.05	1.04	1.02	1.01	.99	.98	.97	.95	.94	.94	.92
2.0	1.05	1.01	.98	1.03	.90	.97	.99	.96	.94	.95	.93	.92	.92	.91	.89	.88
3.0	.99	.95	.92	.98	.94	.91	.95	.91	.89	.92	.89	.87	.89	.87	.85	.84
4.0	.94	.90	.86	.93	.89	.86	.91	.87	.84	.88	.85	.83	.86	.84	.82	.80
5.0	.90	.85	.82	.89	.85	.81	.87	.83	.80	.85	.82	.79	.83	.81	.78	.77
6.0	.86	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.80	.78	.75	.74
7.0	.83	.78	.75	.82	.78	.74	.81	.77	.74	.79	.76	.73	.78	.75	.73	.71
8.0	.80	.75	.72	.79	.75	.71	.78	.74	.71	.77	.73	.71	.75	.72	.70	.69
9.0	.77	.72	.69	.76	.72	.69	.75	.71	.68	.74	.71	.68	.73	.70	.68	.67
10.0	.74	.70	.67	.74	.69	.66	.73	.69	.66	.72	.68	.66	.71	.68	.65	.64

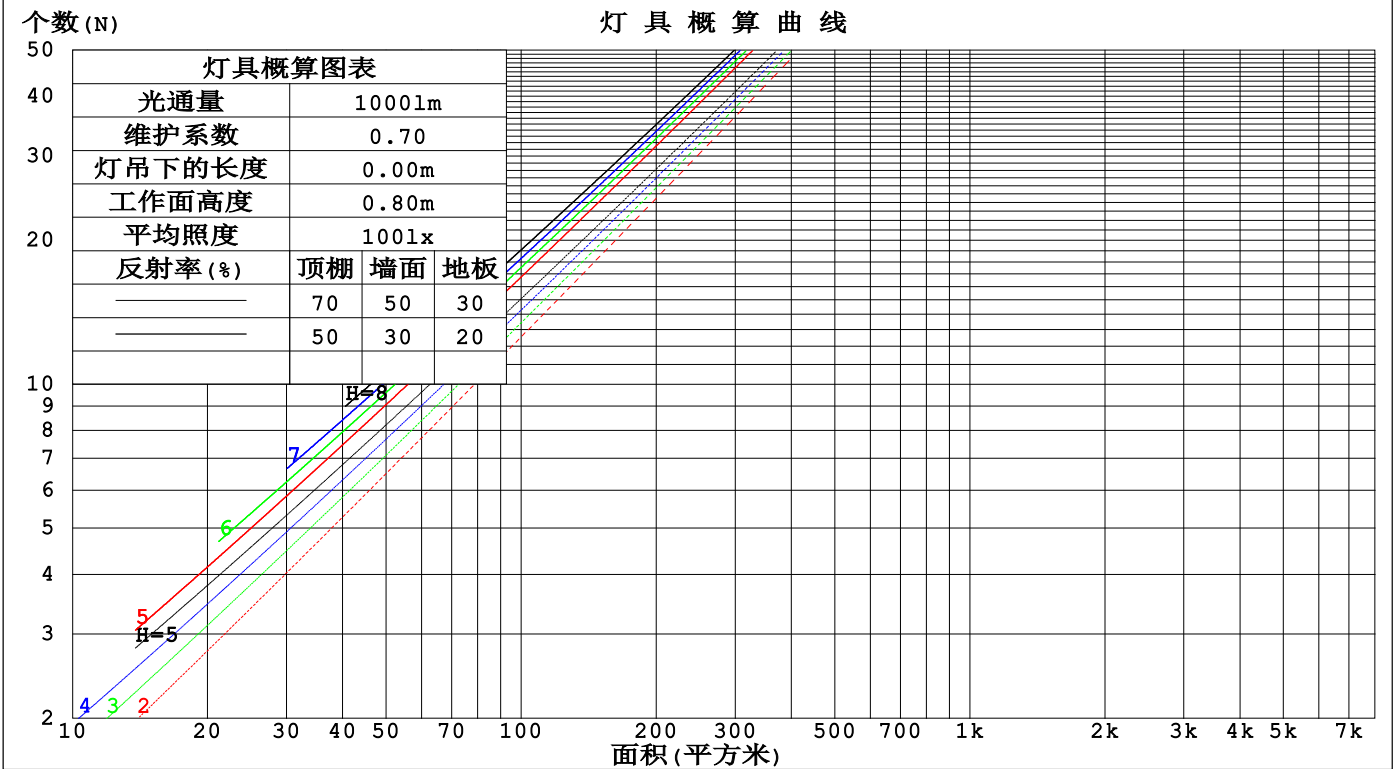

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:24.00V I:2.052A P:49.26W PF:1.000 Freq:0Hz 实检光通: 906.665x1 lm											
灯具名称: AW01-24V-3030-18-DMX4-RGBW(4000K)-80-40-B-1000mm						灯具类型:			灯具重量:		
灯具规格:						外型尺寸: Length=1m			测试编号:		
制造厂商: OLympia lighting						发光口面:			遮光角:		

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.159	.090	.029	.151	.086	.027	.136	.078	.025	.123	.071	.023	.110	.064	.021	
2.0	.147	.080	.025	.140	.077	.024	.128	.071	.022	.116	.065	.020	.106	.060	.019	
3.0	.137	.073	.022	.131	.070	.021	.121	.065	.020	.111	.061	.019	.102	.056	.017	
4.0	.128	.067	.020	.123	.065	.019	.114	.061	.018	.106	.057	.017	.098	.053	.016	
5.0	.121	.062	.018	.117	.060	.017	.109	.057	.017	.101	.053	.016	.094	.050	.015	
6.0	.114	.057	.016	.111	.056	.016	.103	.053	.015	.097	.050	.015	.091	.048	.014	
7.0	.108	.054	.015	.105	.052	.015	.099	.050	.014	.093	.048	.014	.088	.045	.013	
8.0	.103	.050	.014	.100	.049	.014	.095	.047	.014	.089	.045	.013	.084	.043	.013	
9.0	.099	.048	.013	.096	.047	.013	.091	.045	.013	.086	.043	.012	.082	.041	.012	
10.0	.094	.045	.013	.092	.044	.012	.087	.043	.012	.083	.041	.012	.079	.040	.011	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.219	.219	.219	.188	.188	.188	.128	.128	.128	.074	.074	.074	.024	.024	.024	
1.0	.199	.187	.176	.170	.160	.151	.116	.110	.104	.067	.064	.061	.021	.021	.020	
2.0	.182	.162	.145	.156	.139	.125	.107	.096	.087	.062	.056	.051	.020	.018	.017	
3.0	.168	.143	.123	.144	.123	.106	.099	.086	.075	.057	.050	.044	.018	.016	.014	
4.0	.157	.128	.106	.134	.111	.092	.092	.077	.065	.053	.045	.038	.017	.015	.013	
5.0	.147	.116	.093	.126	.100	.081	.087	.070	.057	.050	.041	.034	.016	.013	.011	
6.0	.138	.106	.083	.119	.092	.073	.082	.064	.051	.048	.038	.031	.015	.012	.010	
7.0	.131	.098	.075	.113	.085	.066	.078	.060	.047	.045	.035	.028	.015	.012	.009	
8.0	.125	.092	.069	.108	.080	.060	.074	.056	.043	.043	.033	.026	.014	.011	.008	
9.0	.119	.086	.064	.103	.075	.056	.071	.053	.040	.042	.031	.024	.013	.010	.008	
10.0	.115	.082	.060	.099	.071	.052	.069	.050	.037	.040	.030	.022	.013	.010	.007	

C角度范围: 0度 - 360度 C角度间隔: 30.0度 测试速度: 快速 环境温度: 25.3℃ 测试人员: 测试日期: 2025-04-23	γ角度范围: 0度 - 180度 γ角度间隔: 1.0度 测试系统: 远方(EVERFINE) GO-2000B_V1 系统 V2.00.488 环境湿度: 65.0% 测试距离: 6.360米 [K=1.0000] 备注:
------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------

UGR(Unified Glare Rating)数据表

实测参数: U:24.00V I:2.052A P:49.26W PF:1.000 Freq:0Hz 实检光通: 906.665x1 lm											
灯具名称: AW01-24V-3030-18-DMX4-RGBW(4000K)-80-40-B-1000-1000						灯具类型:		灯具重量:			
灯具规格:						外型尺寸: Length=1m		测试编号:			
制造厂商: OLympia lighting						发光口面:		遮光角:			
反射比: 天花板		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸		横向(Viewed crosswise)					纵向(Viewed endwise)				
x = 2H y = 2H		4.5	5.2	4.7	5.4	5.6	5.4	6.2	5.7	6.4	6.6
	3H	4.6	5.3	4.9	5.6	5.8	5.7	6.4	6.0	6.7	6.9
	4H	4.9	5.5	5.2	5.8	6.1	6.1	6.7	6.4	7.0	7.3
	6H	5.3	5.9	5.6	6.2	6.5	6.6	7.2	6.9	7.5	7.8
	8H	5.6	6.1	5.9	6.5	6.8	6.9	7.5	7.2	7.8	8.1
	12H	6.0	6.5	6.3	6.9	7.2	7.3	7.8	7.6	8.2	8.5
4H	2H	4.4	5.0	4.7	5.3	5.6	5.3	6.0	5.6	6.2	6.5
	3H	4.7	5.3	5.1	5.6	5.9	5.8	6.3	6.1	6.7	7.0
	4H	5.1	5.6	5.5	6.0	6.3	6.2	6.8	6.6	7.1	7.5
	6H	5.7	6.2	6.2	6.6	7.0	7.0	7.4	7.4	7.8	8.2
	8H	6.2	6.6	6.6	7.0	7.5	7.4	7.8	7.9	8.3	8.7
	12H	6.8	7.2	7.2	7.6	8.1	8.0	8.4	8.5	8.8	9.3
8H	4H	5.3	5.7	5.7	6.1	6.5	6.3	6.7	6.8	7.2	7.6
	6H	6.1	6.5	6.6	6.9	7.4	7.3	7.6	7.7	8.1	8.6
	8H	6.8	7.1	7.3	7.6	8.1	7.9	8.2	8.4	8.7	9.2
	12H	7.6	7.9	8.1	8.4	8.9	8.7	9.0	9.2	9.5	10.0
12H	4H	5.3	5.7	5.8	6.1	6.6	6.3	6.7	6.8	7.2	7.6
	6H	6.3	6.6	6.8	7.1	7.6	7.3	7.7	7.8	8.1	8.6
	8H	7.0	7.3	7.5	7.8	8.3	8.0	8.3	8.6	8.8	9.4
不同间隔布灯时,观察者位置引起的UGR变化(CIE Pub.117):											
S = 1.0H		+ 1.1 / - 1.1					+ 1.1 / - 1.1				
1.5H		+ 2.3 / - 1.1					+ 2.4 / - 1.0				
2.0H		+ 0.8 / - 0.3					+ 1.2 / - 0.4				

依据CIE Pub.117计算, 906.7lm光源光通表格中的数据需要进行修正(8log(F/F0) = -0.3)。
出光口面积: 0.0392 m2

C角度范围: 0度 - 360度	γ角度范围: 0度 - 180度
C角度间隔: 30.0度	γ角度间隔: 1.0度
测试速度: 快速	测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.00.488
环境温度:25.3℃	环境湿度:65.0%
测试人员:	测试距离:6.360米 [K=1.0000]
测试日期:2025-04-23	备注:

UF利用系数表

实测参数: U:24.00V I:2.052A P:49.26W PF:1.000 Freq:0Hz 实检光通: 906.665x1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(4000K)-80-40-B-1000Lx300mm	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	87	81	77	86	80	77	85	80	77	73
0.80	94	88	85	93	88	84	92	87	84	80
1.00	98	93	89	97	92	89	95	91	88	84
1.25	102	97	93	101	96	93	98	95	92	87
1.50	105	100	96	103	99	96	101	97	94	89
2.00	107	103	100	106	102	99	102	99	97	91
2.50	109	105	102	107	104	101	103	101	99	92
3.00	111	107	104	108	105	103	104	102	100	93
4.00	113	110	107	110	108	106	106	104	103	94
5.00	114	112	110	111	109	108	107	105	104	95
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHR _{NOM} = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:

灯 具 等 光 强 曲 线

实测参数: U:24.00V I:2.052A P:49.26W PF:1.000 Freq:0Hz 实检光通: 906.665x1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(4000K)-80-40-B-100V-L-2	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

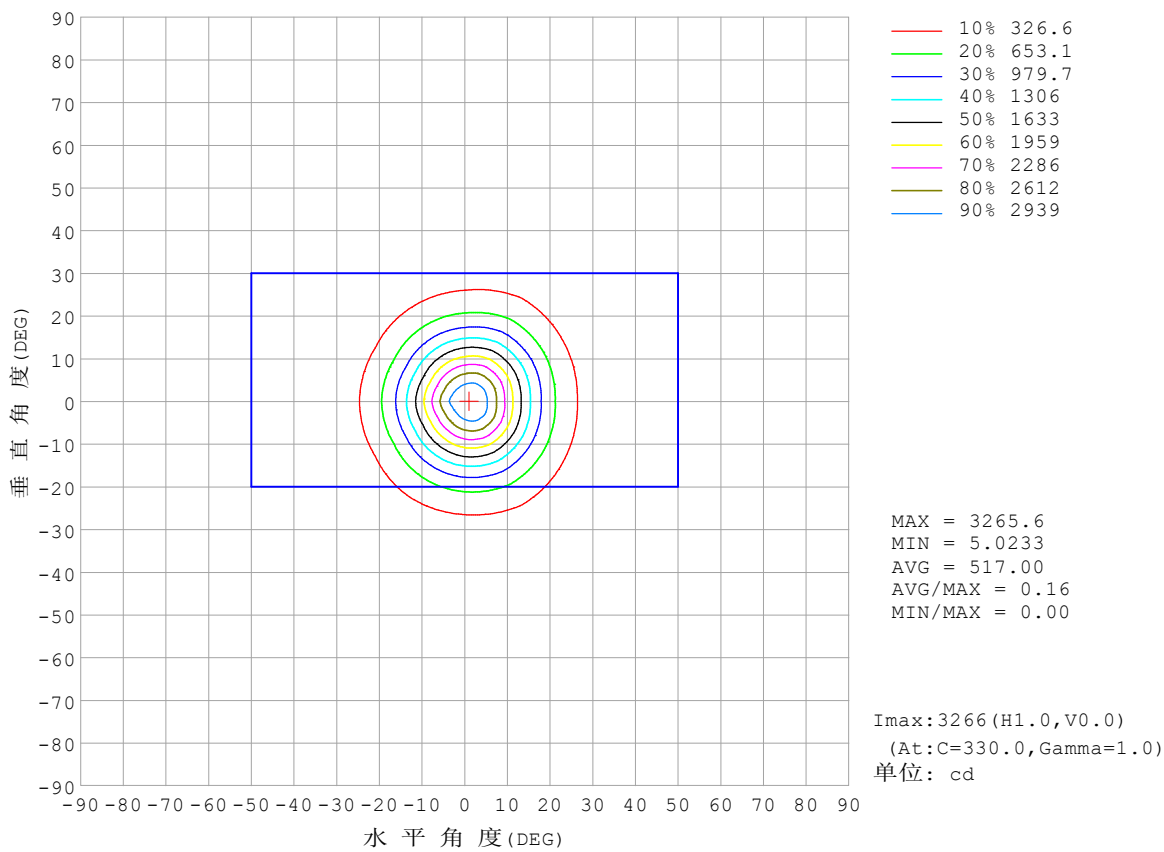


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:24.00V I:2.052A P:49.26W PF:1.000 Freq:0Hz 实检光通: 906.665x1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(4000K)-80-40-B-1000-1000	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

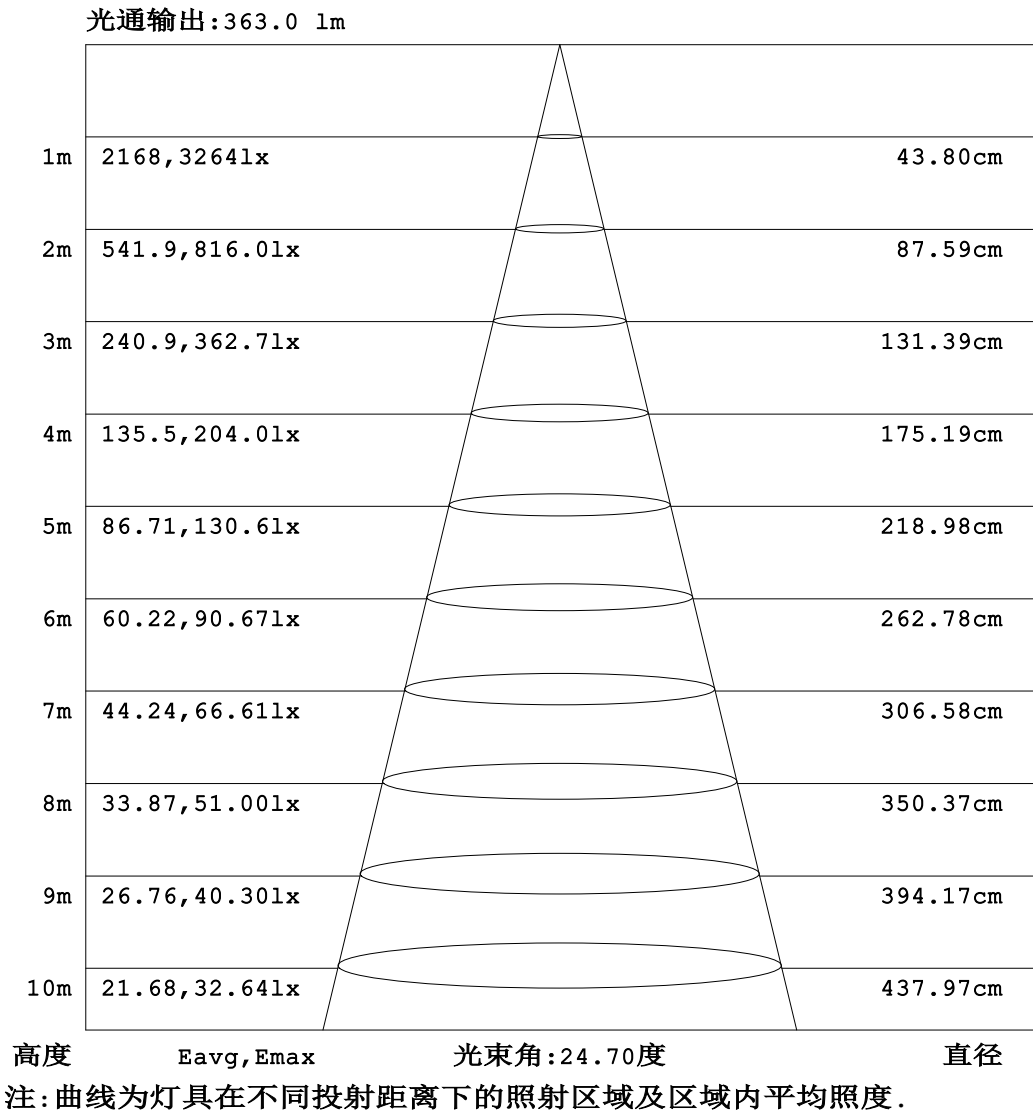


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:24.00V I:2.052A P:49.26W PF:1.000 Freq:0Hz 实检光通: 906.665x1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(4000K)-80-40-B-1000	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

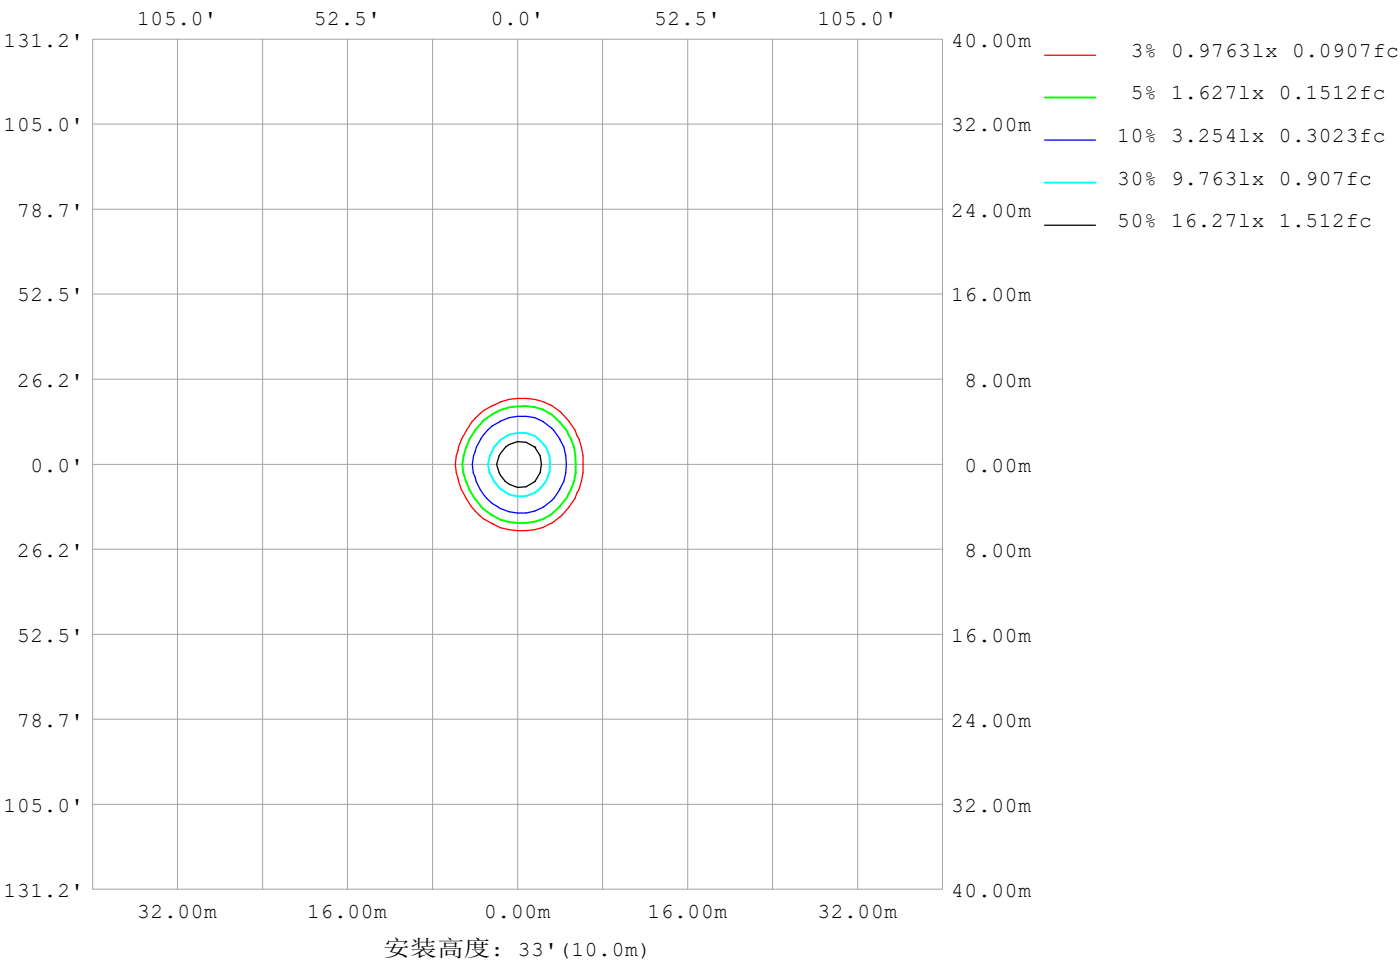

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:

LED筒灯平均亮度报告


实测参数: U:24.00V I:2.052A P:49.26W PF:1.000 Freq:0Hz 实检光通: 906.665x1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(4000K)-80-40-B-1000L	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

平均亮度	数值 (cd/m2)
L横 (65) av	230
L横 (75) av	320
L横 (85) av	784
L纵 (65) av	375
L纵 (75) av	500
L纵 (85) av	1020
L45 (65) av	269
L45 (75) av	361
L45 (85) av	844

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度 C角度间隔: 30.0度 测试速度: 快速 环境温度:25.3℃ 测试人员: 测试日期:2025-04-23	γ角度范围: 0度 - 180度 γ角度间隔: 1.0度 测试系统: 远方(EVERFINE) GO-2000B_V1 系统 V2.00.488 环境湿度:65.0% 测试距离:6.360米 [K=1.0000] 备注:
----------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------

平面照度曲线

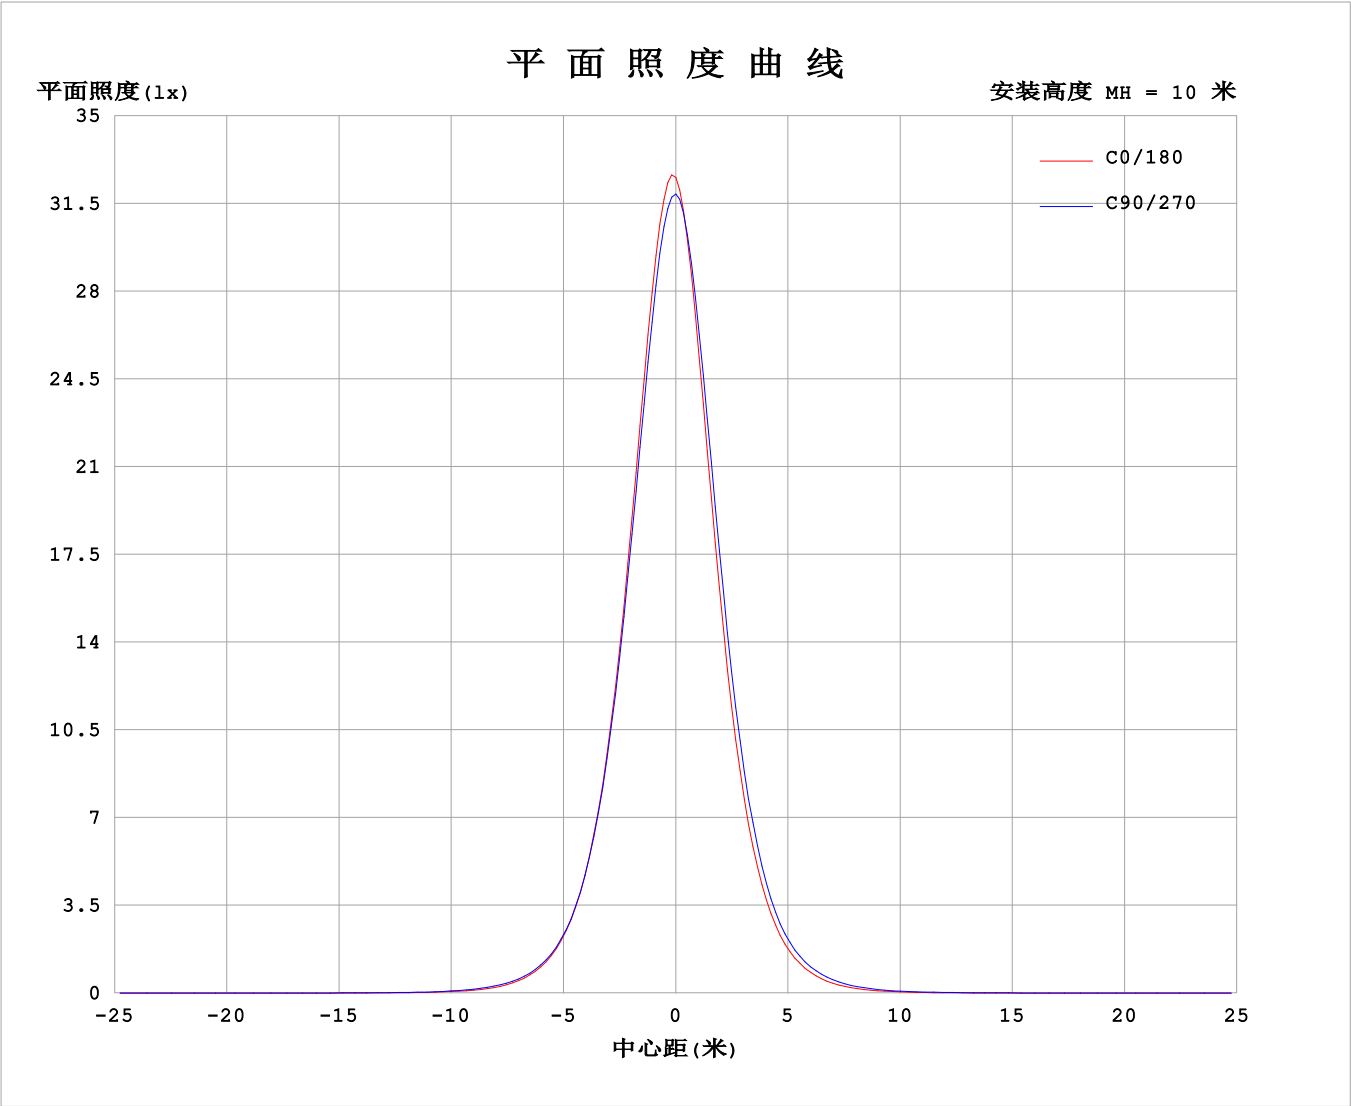

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2025-04-23

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:24.00V I:2.052A P:49.26W PF:1.000 Freq:0Hz 实检光通: 906.665x1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(4000K)-80-40-B-1000L-0.25	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:


表--1单位: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	3211	3211	3211	3211	3211	3211	3211	3211	3211	3211	3211	3211						
5	2936	3005	2976	2877	2756	2680	2702	2669	2734	2831	2947	2984						
10	2147	2237	2237	2112	1954	1839	1858	1817	1928	2049	2206	2231						
15	1343	1413	1441	1338	1216	1104	1107	1082	1177	1275	1422	1417						
20	756	801	841	759	681	594	600	581	644	715	821	808						
25	390	419	453	402	363	301	306	292	333	375	447	421						
30	191	210	235	206	184	148	150	145	172	194	233	211						
35	89.6	101	116	105	90.8	73.7	71.8	70.3	83.4	99.3	115	103						
40	40.6	47.0	54.2	52.4	41.9	34.6	32.8	32.5	38.2	49.3	53.2	48.9						
45	18.2	21.2	24.4	25.6	18.8	15.2	14.4	14.5	17.5	23.8	23.2	21.2						
50	8.65	9.64	12.0	13.2	9.75	7.42	7.23	7.17	9.43	12.4	11.0	9.12						
55	5.62	6.16	7.47	8.44	6.77	5.58	5.09	5.31	6.76	8.11	6.93	6.05						
60	4.54	4.95	5.94	7.02	5.64	4.66	4.14	4.38	5.60	6.90	5.52	4.79						
65	4.02	4.31	5.08	6.21	5.04	4.13	3.62	3.83	4.94	6.20	4.79	4.06						
70	3.75	3.92	4.51	5.59	4.68	3.78	3.27	3.43	4.42	5.58	4.32	3.61						
75	3.50	3.59	4.02	5.04	4.42	3.48	3.00	3.13	3.92	5.12	3.94	3.28						
80	3.20	3.24	3.56	4.33	4.04	3.12	2.75	2.85	3.47	4.42	3.53	2.99						
85	2.84	2.88	3.02	3.49	3.28	2.75	2.51	2.59	2.86	3.48	3.14	2.71						
90	2.48	2.48	2.54	2.48	2.60	2.39	2.28	2.35	2.41	2.52	2.63	2.45						
95	2.29	2.28	2.32	2.29	2.36	2.30	2.29	2.33	2.44	2.41	2.42	2.33						
100	2.26	2.29	2.32	2.35	2.36	2.33	2.36	2.43	2.57	2.53	2.50	2.36						
105	2.35	2.41	2.49	2.57	2.59	2.53	2.57	2.68	2.86	2.79	2.72	2.52						
110	2.65	2.72	2.85	3.02	3.08	2.97	2.99	3.13	3.33	3.26	3.13	2.86						
115	3.21	3.29	3.51	3.75	3.86	3.70	3.68	3.84	4.03	3.93	3.74	3.44						
120	4.11	4.18	4.47	4.74	4.91	4.77	4.64	4.80	4.91	4.78	4.57	4.28						
125	5.36	5.40	5.66	5.93	6.16	6.12	5.80	5.89	5.88	5.72	5.53	5.34						
130	6.83	6.83	6.98	7.19	7.50	7.58	6.92	6.96	6.86	6.65	6.53	6.45						
135	8.32	8.27	8.26	8.37	8.73	8.96	7.82	7.81	7.69	7.47	7.43	7.42						
140	9.63	9.55	9.35	9.33	9.73	10.1	8.43	8.43	8.33	8.10	8.14	8.14						
145	10.6	10.5	10.1	9.99	10.4	10.9	8.82	8.83	8.75	8.50	8.61	8.62						
150	11.2	11.0	10.5	10.3	10.8	11.2	9.05	9.07	8.99	8.70	8.85	8.89						
155	11.3	11.1	10.6	10.3	10.8	11.2	9.17	9.19	9.05	8.72	8.85	9.02						
160	11.1	10.9	10.3	10.1	10.6	10.9	9.14	9.21	9.02	8.60	8.68	9.00						
165	10.5	10.2	9.73	9.79	10.1	10.4	8.99	9.10	8.94	8.53	8.42	8.77						
170	9.69	9.38	9.23	9.49	9.67	9.71	8.74	8.86	8.92	8.62	8.33	8.41						
175	8.94	8.73	9.06	9.35	9.31	9.10	8.49	8.67	8.99	8.89	8.52	8.26						
180	8.65	8.73	9.16	9.30	9.03	8.72	8.66	8.71	9.18	9.27	9.03	8.69						

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2025-04-23


γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:

I (cd)

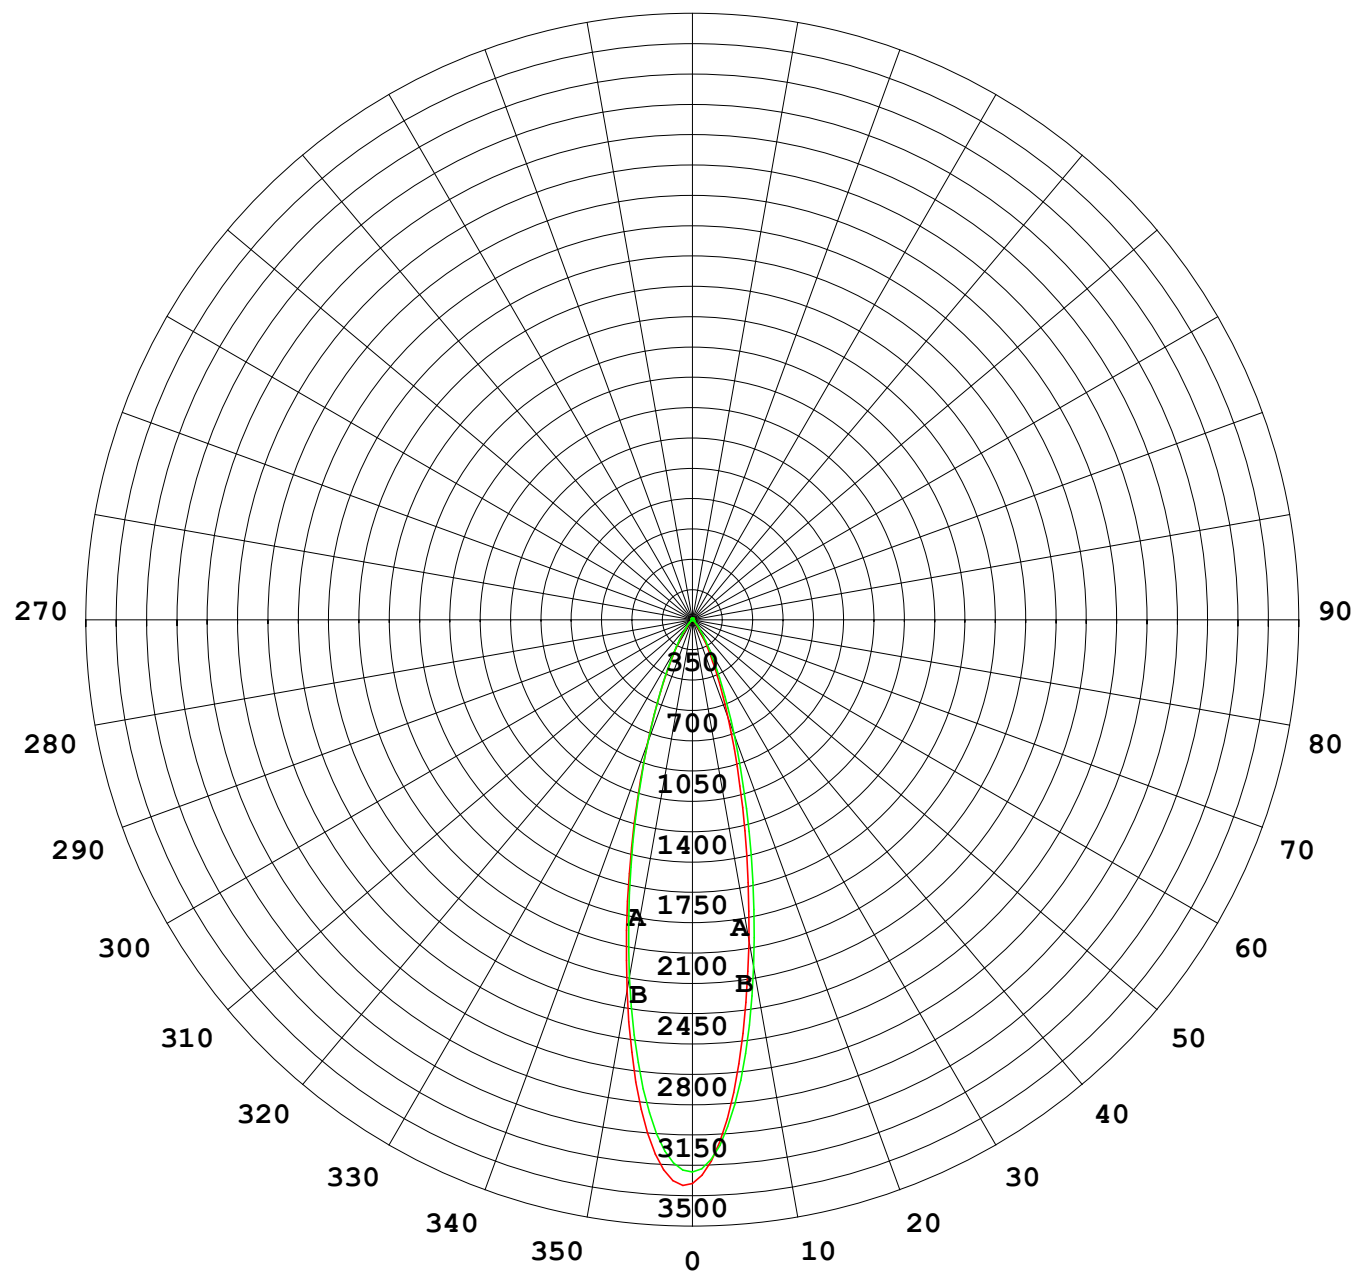

1000 lm

$\kappa = 1$

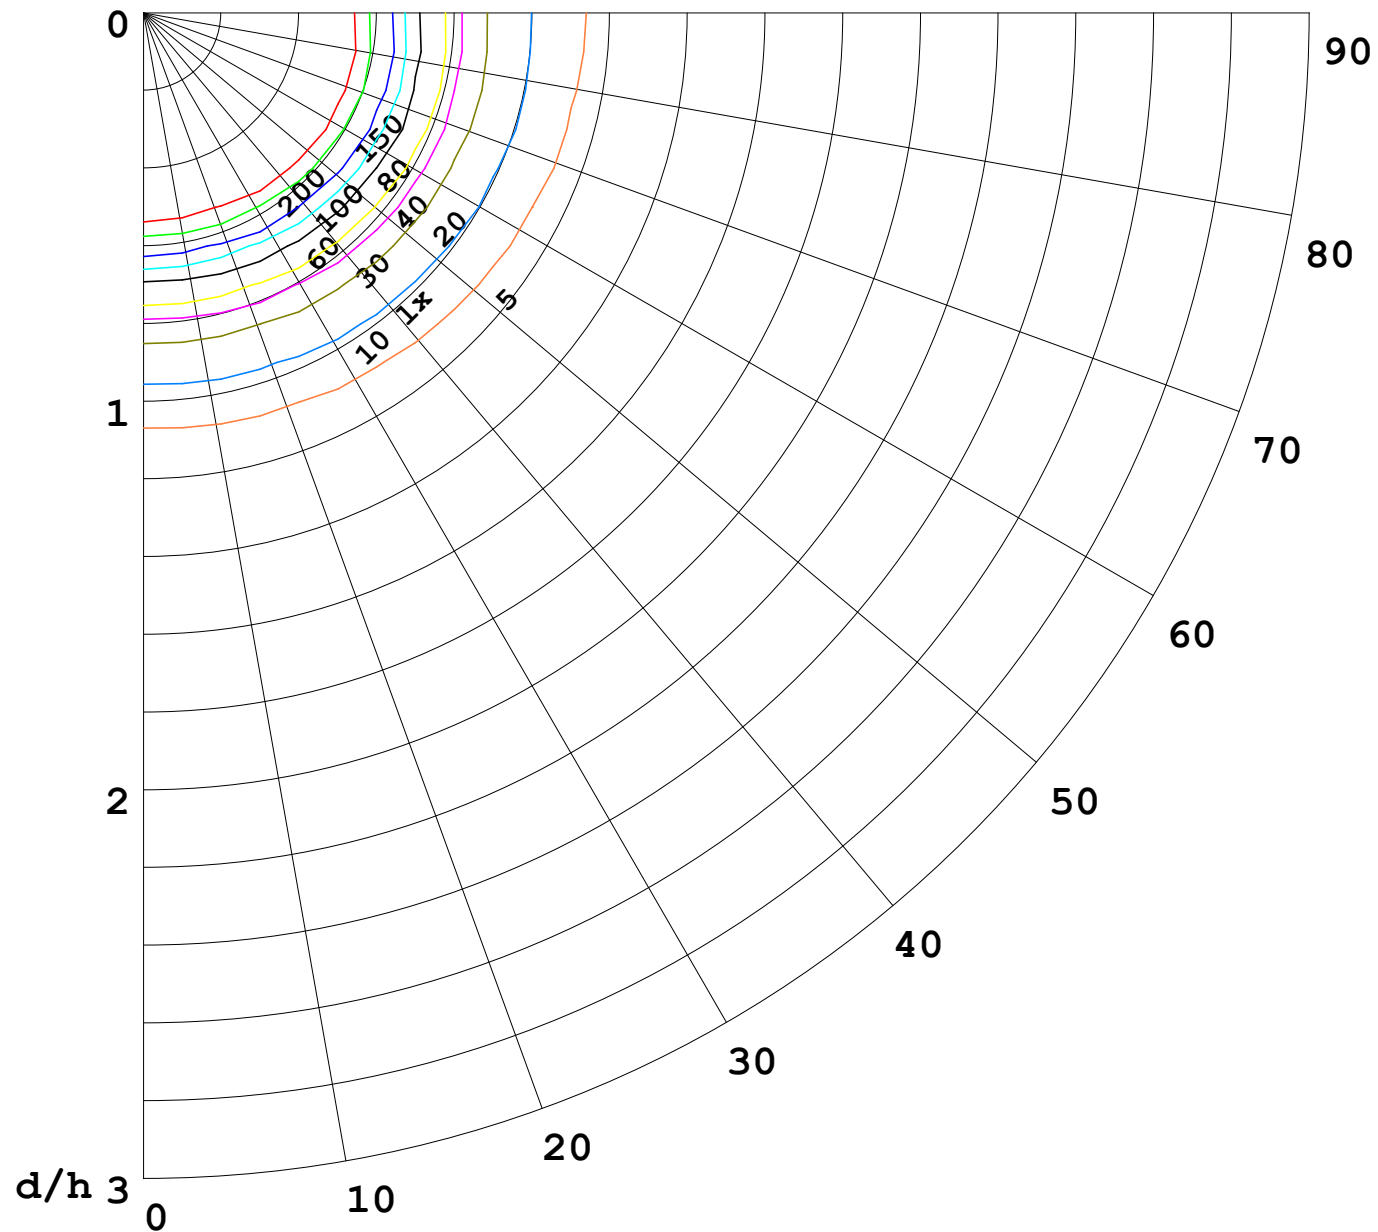

F = 1000 lm
 K = 0.7
 Hcc = 0.8 m
 Hfc = 0.0 m
 Eave = 100 lx

	Pcc	Pw	Pfc
—————	70	50	30
—————	50	30	20

