
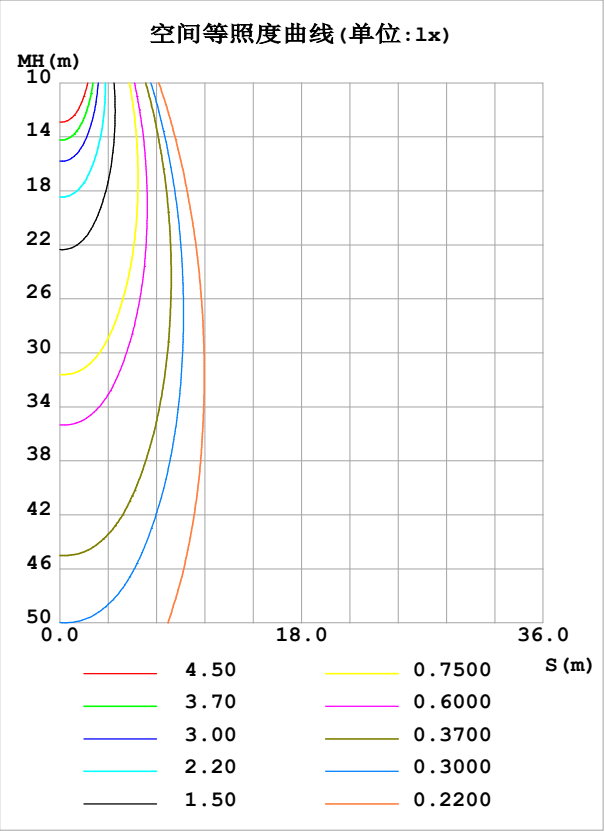


室内灯具光度数据

实测参数: U:24.00V I:0.7197A P:17.27W PF:1.000 Freq:0Hz 实检光通: 279.19lx1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(3000K)-80-40-A-100	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

光源数据		光度数据				光效: 16.16 lm/W
型号	3030	峰值光强(cd)	743.2	S/MH(C0/180)		0.47
标称功率(W)		灯具效率(%)	100.0	S/MH(C90/270)		0.49
额定电源电压(V)	24	总光通量(lm)	279.19	η UP,DN(C0-180)		2.0,48.0
额定光通量(lm)	279.191	CIE分类	直接	η UP,DN(C180-360)		1.8,48.2
灯具内光源数(只)	1	上射光通比(%)	3.8	CIBSE SHR NOM		0.50
实测电源电压(V)		下射光通比(%)	96.2	CIBSE SHR MAX		0.50

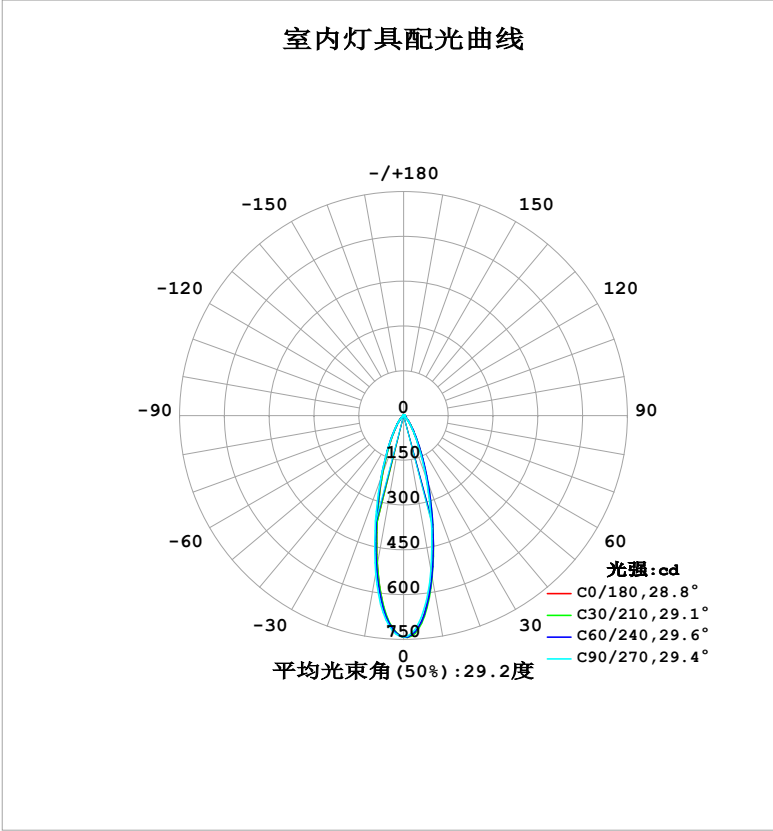

C角度范围: 0度 - 360度	γ角度范围: 0度 - 180度
C角度间隔: 30.0度	γ角度间隔: 1.0度
测试速度: 快速	测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.00.488
环境温度: 25.3℃	环境湿度: 65.0%
测试人员:	测试距离: 6.360米 [K=1.0000]
测试日期: 2025-04-23	备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	535.9	549.8	528.4	496.9	509.6	514.8	537.5	555.1	0- 10	60.15	60.15	21.5,21.5
20	228.3	238.3	220.2	197.7	209.3	213.2	225.3	236.0	10- 20	98.18	158.3	56.7,56.7
30	80.57	83.03	73.94	67.60	73.72	73.13	76.04	80.89	20- 30	61.26	219.6	78.7,78.7
40	28.15	29.32	26.92	24.05	26.19	25.49	26.10	27.94	30- 40	29.07	248.7	89.1,89.1
50	7.796	9.092	8.809	7.228	7.548	7.256	7.668	7.900	40- 50	12.04	260.7	93.4,93.4
60	2.102	2.423	2.746	2.097	2.070	2.163	2.342	2.141	50- 60	3.839	264.5	94.8,94.8
70	1.278	1.403	1.784	1.315	1.263	1.420	1.466	1.217	60- 70	1.668	266.2	95.4,95.4
80	1.049	1.084	1.392	1.064	1.020	1.112	1.164	0.9785	70- 80	1.291	267.5	95.8,95.8
90	0.8233	0.8132	0.8080	0.7957	0.8229	0.8204	0.7709	0.7695	80- 90	1.037	268.5	96.2,96.2
100	0.7744	0.7973	0.8371	0.8014	0.7774	0.8088	0.7934	0.7783	90-100	0.8529	269.4	96.5,96.5
110	0.9341	0.9901	1.066	1.028	0.9776	1.036	1.019	0.9699	100-110	0.9335	270.3	96.8,96.8
120	1.399	1.459	1.559	1.549	1.435	1.479	1.451	1.388	110-120	1.202	271.5	97.3,97.3
130	2.145	2.159	2.234	2.281	2.044	2.032	1.972	1.960	120-130	1.592	273.1	97.8,97.8
140	2.874	2.835	2.818	2.940	2.481	2.454	2.380	2.416	130-140	1.850	275.0	98.5,98.5
150	3.289	3.196	3.125	3.270	2.686	2.673	2.586	2.638	140-150	1.767	276.7	99.1,99.1
160	3.298	3.169	3.093	3.235	2.726	2.733	2.604	2.655	150-160	1.367	278.1	99.6,99.6
170	2.984	2.888	2.945	2.988	2.697	2.740	2.659	2.615	160-170	0.8180	278.9	99.9,99.9
180	2.757	2.809	2.882	2.792	2.752	2.809	2.873	2.782	170-180	0.2665	279.2	100,100
单位:°	光强:cd									单位:lm		

锥面光通量(90度)：256.21 lm

%lum = 91.8%
%lamp = 91.8%


锥面光通量(130度)：265.46 lm

%lum = 95.1%
%lamp = 95.1%

C角度范围： 0度 - 360度 C角度间隔：30.0度 测试速度：快速 环境温度:25.3℃ 测试人员： 测试日期:2025-04-23	γ角度范围： 0度 - 180度 γ角度间隔： 1.0度 测试系统：远方(EVERFINE) GO-2000B_V1 系统 V2.00.488 环境湿度:65.0% 测试距离:6.360米 [K=1.0000] 备注：
--	--

灯具亮度限制曲线

实测参数: U:24.00V I:0.7197A P:17.27W PF:1.000 Freq:0Hz 实检光通: 279.19lx1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(3000K)-80-40-A-1000	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

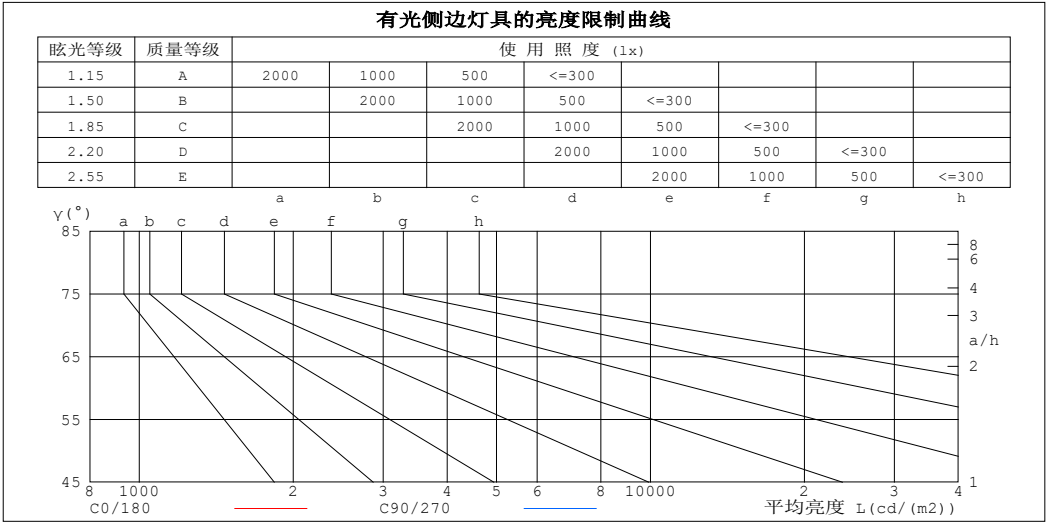

平均亮度值 cd/(m2)		
γ (°)	C0/180	C90/270
85	279	317
80	156	204
75	114	156
70	96	133
65	93	122
60	108	140
55	167	207
50	312	348
45	563	567


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:24.00V I:0.7197A P:17.27W PF:1.000 Freq:0Hz 实检光通: 279.19lx1 lm			灯具名称: AW01-24V-3030-18-DMX4-RGBW(3000K)-80-40-A-100灯具类型:			灯具重量:		
灯具规格:			外型尺寸: Length=1m			测试编号:		
制造厂商: Olymبيا lighting			发光口面:			遮光角:		

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.96
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.03	1.01	.00	.99	.97	.96	.95	.94	.93	.91
2.0	1.03	.00	.97	1.01	.98	.95	.98	.95	.93	.94	.92	.90	.91	.89	.88	.86
3.0	.97	.93	.89	.96	.92	.88	.93	.89	.86	.90	.87	.85	.87	.85	.83	.81
4.0	.92	.87	.83	.91	.86	.83	.88	.84	.81	.86	.82	.80	.83	.81	.79	.77
5.0	.87	.82	.78	.86	.81	.78	.84	.80	.77	.82	.78	.76	.80	.77	.75	.73
6.0	.83	.78	.74	.82	.77	.73	.80	.76	.73	.78	.75	.72	.77	.74	.71	.70
7.0	.79	.74	.70	.78	.73	.70	.77	.72	.69	.75	.71	.69	.74	.71	.68	.67
8.0	.76	.70	.67	.75	.70	.66	.74	.69	.66	.72	.68	.66	.71	.68	.65	.64
9.0	.72	.67	.64	.72	.67	.64	.71	.66	.63	.70	.66	.63	.68	.65	.62	.61
10.0	.69	.64	.61	.69	.64	.61	.68	.64	.61	.67	.63	.60	.66	.62	.60	.59

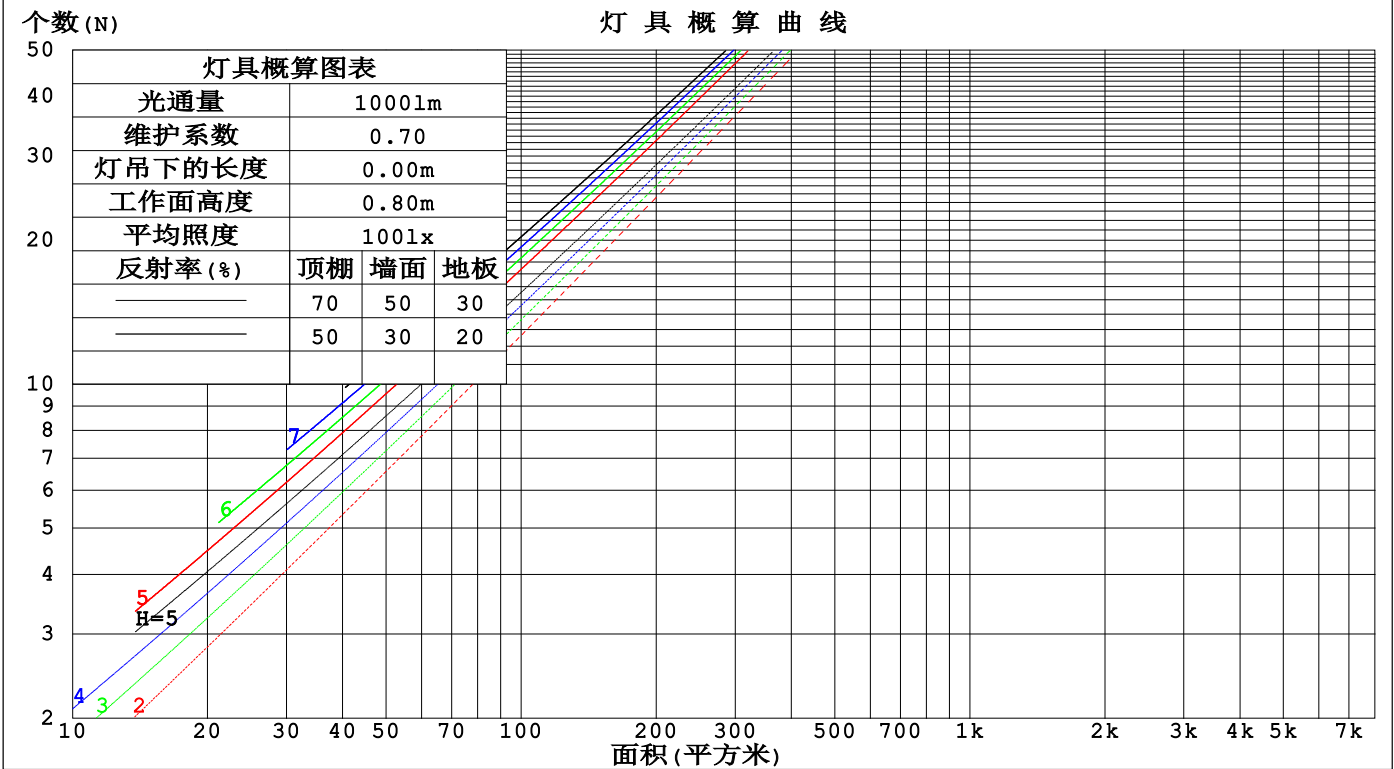

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:24.00V I:0.7197A P:17.27W PF:1.000 Freq:0Hz 实检光通: 279.19lx1 lm											
灯具名称: AW01-24V-3030-18-DMX4-RGBW(3000K)-80-40-A-100灯具类型:						灯具重量:					
灯具规格:						外型尺寸: Length=1m			测试编号:		
制造厂商: OLympia lighting						发光口面:			遮光角:		

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.170	.096	.031	.162	.092	.029	.147	.084	.027	.133	.077	.025	.121	.070	.023	
2.0	.159	.087	.027	.152	.084	.026	.139	.078	.024	.128	.072	.022	.117	.066	.021	
3.0	.149	.079	.024	.143	.077	.023	.132	.072	.022	.122	.067	.021	.113	.063	.019	
4.0	.140	.073	.021	.135	.071	.021	.126	.067	.020	.117	.063	.019	.109	.059	.018	
5.0	.132	.067	.020	.128	.066	.019	.120	.062	.018	.112	.059	.018	.105	.056	.017	
6.0	.125	.063	.018	.122	.061	.018	.114	.059	.017	.107	.056	.016	.101	.053	.016	
7.0	.119	.059	.017	.116	.058	.016	.109	.055	.016	.103	.053	.015	.097	.051	.015	
8.0	.113	.055	.016	.110	.054	.015	.105	.052	.015	.099	.050	.014	.094	.048	.014	
9.0	.108	.052	.015	.106	.051	.014	.100	.050	.014	.095	.048	.014	.091	.046	.013	
10.0	.104	.050	.014	.101	.049	.014	.096	.047	.013	.092	.046	.013	.088	.044	.013	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.220	.220	.220	.188	.188	.188	.128	.128	.128	.074	.074	.074	.024	.024	.024	
1.0	.200	.187	.175	.171	.160	.150	.117	.110	.104	.067	.064	.060	.022	.021	.020	
2.0	.184	.162	.144	.158	.139	.124	.108	.097	.087	.062	.056	.051	.020	.018	.017	
3.0	.171	.143	.121	.146	.123	.105	.101	.086	.074	.058	.050	.043	.019	.016	.014	
4.0	.160	.128	.104	.137	.111	.091	.094	.077	.064	.055	.045	.038	.018	.015	.012	
5.0	.150	.117	.092	.129	.101	.080	.089	.070	.056	.052	.041	.033	.017	.014	.011	
6.0	.142	.107	.082	.122	.093	.071	.084	.065	.050	.049	.038	.030	.016	.012	.010	
7.0	.135	.099	.074	.116	.086	.065	.080	.060	.046	.047	.036	.027	.015	.012	.009	
8.0	.129	.093	.068	.111	.081	.059	.077	.057	.042	.045	.033	.025	.014	.011	.008	
9.0	.124	.088	.063	.107	.076	.055	.074	.053	.039	.043	.032	.023	.014	.010	.008	
10.0	.119	.083	.059	.103	.072	.052	.071	.051	.037	.042	.030	.022	.013	.010	.007	

C角度范围: 0度 - 360度 C角度间隔: 30.0度 测试速度: 快速 环境温度: 25.3℃ 测试人员: 测试日期: 2025-04-23	γ角度范围: 0度 - 180度 γ角度间隔: 1.0度 测试系统: 远方(EVERFINE) GO-2000B_V1 系统 V2.00.488 环境湿度: 65.0% 测试距离: 6.360米 [K=1.0000] 备注:
--	---

UGR(Unified Glare Rating)数据表

实测参数: U:24.00V I:0.7197A P:17.27W PF:1.000 Freq:0Hz 实检光通: 279.19lx1 lm										
灯具名称: AW01-24V-3030-18-DMX4-RGBW(3000K)-80-40-A-1000					灯具类型:			灯具重量:		
灯具规格:					外型尺寸: Length=1m			测试编号:		
制造厂商: OLympia lighting					发光口面:			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	横向(Viewed crosswise)					纵向(Viewed endwise)				
x = 2H y = 2H	13.2	14.0	13.5	14.2	14.5	13.3	14.1	13.6	14.3	14.5
3H	13.2	13.9	13.5	14.2	14.4	13.3	14.1	13.6	14.3	14.6
4H	13.2	13.9	13.5	14.2	14.5	13.4	14.1	13.8	14.4	14.7
6H	13.3	14.0	13.7	14.3	14.6	13.6	14.3	14.0	14.6	14.9
8H	13.4	14.1	13.8	14.4	14.7	13.8	14.4	14.2	14.8	15.1
12H	13.6	14.2	14.0	14.5	14.9	14.0	14.6	14.4	15.0	15.3
4H 2H	13.0	13.8	13.4	14.0	14.3	13.1	13.8	13.4	14.1	14.4
3H	13.1	13.7	13.4	14.0	14.4	13.2	13.8	13.6	14.2	14.5
4H	13.2	13.7	13.6	14.1	14.5	13.4	14.0	13.8	14.3	14.7
6H	13.4	13.9	13.8	14.3	14.7	13.8	14.3	14.2	14.7	15.1
8H	13.6	14.1	14.0	14.5	14.9	14.0	14.5	14.5	14.9	15.4
12H	13.9	14.3	14.4	14.8	15.2	14.4	14.8	14.9	15.2	15.7
8H 4H	13.1	13.6	13.6	14.0	14.5	13.4	13.8	13.8	14.3	14.7
6H	13.5	13.9	14.0	14.3	14.8	13.9	14.3	14.4	14.7	15.2
8H	13.8	14.2	14.3	14.6	15.2	14.3	14.6	14.8	15.1	15.6
12H	14.3	14.6	14.8	15.1	15.7	14.8	15.1	15.3	15.6	16.1
12H 4H	13.1	13.6	13.6	14.0	14.5	13.4	13.8	13.8	14.2	14.7
6H	13.6	13.9	14.1	14.4	14.9	13.9	14.2	14.4	14.7	15.2
8H	13.9	14.2	14.5	14.7	15.3	14.4	14.6	14.9	15.1	15.7
不同间隔布灯时,观察者位置引起的UGR变化(CIE Pub.117):										
S = 1.0H	+ 1.7 / - 2.7					+ 1.4 / - 2.1				
1.5H	+ 3.0 / - 2.5					+ 2.4 / - 2.1				
2.0H	+ 3.1 / - 1.5					+ 2.7 / - 1.3				

依据CIE Pub.117计算, 279.2lm光源光通表格中的数据需要进行修正(8log(F/F0) = -4.4)。
出光口面积: 0.0392 m2

C角度范围: 0度 - 360度	γ角度范围: 0度 - 180度
C角度间隔: 30.0度	γ角度间隔: 1.0度
测试速度: 快速	测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.00.488
环境温度:25.3℃	环境湿度:65.0%
测试人员:	测试距离:6.360米 [K=1.0000]
测试日期:2025-04-23	备注:

UF利用系数表


实测参数: U:24.00V I:0.7197A P:17.27W PF:1.000 Freq:0Hz 实检光通: 279.19lx1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(3000K)-80-40-A-1000	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	85	78	74	84	78	74	83	77	74	70
0.80	92	86	82	91	86	82	90	85	81	77
1.00	97	91	87	96	90	87	94	90	86	82
1.25	101	95	92	100	95	91	97	93	90	85
1.50	104	99	95	102	98	94	100	96	93	88
2.00	107	102	99	105	101	98	102	98	96	90
2.50	108	104	101	107	103	100	103	100	98	91
3.00	110	106	103	108	105	102	104	101	99	92
4.00	112	109	107	110	107	105	106	104	102	94
5.00	114	111	109	111	109	107	106	105	103	95
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHR _{NOM} = 1.25			

C角度范围: 0度 - 360度 C角度间隔: 30.0度 测试速度: 快速 环境温度: 25.3℃ 测试人员: 测试日期: 2025-04-23	γ角度范围: 0度 - 180度 γ角度间隔: 1.0度 测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488 环境湿度: 65.0% 测试距离: 6.360米 [K=1.0000] 备注:
--	--

灯 具 等 光 强 曲 线

实测参数: U:24.00V I:0.7197A P:17.27W PF:1.000 Freq:0Hz 实检光通: 279.19lx1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(3000K)-80-40-A-100	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

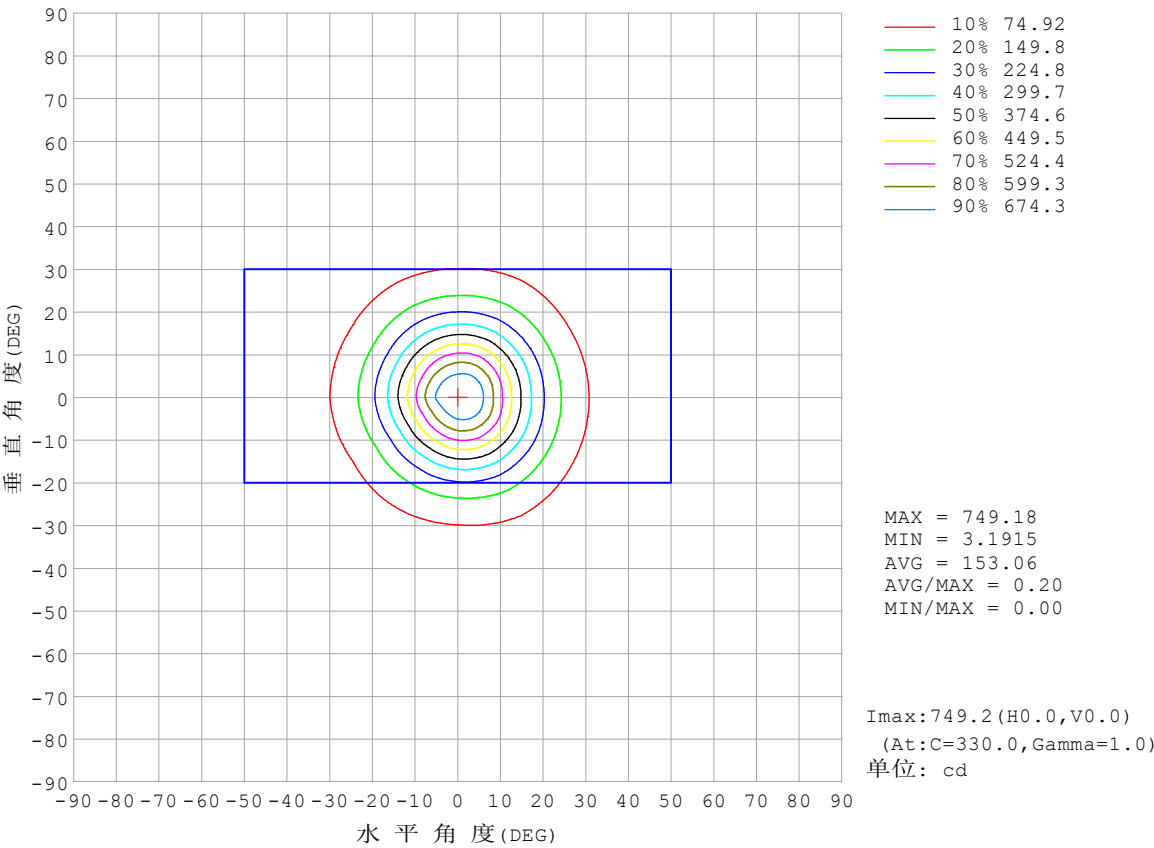


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:24.00V I:0.7197A P:17.27W PF:1.000 Freq:0Hz 实检光通: 279.19lx1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(3000K)-80-40-A-1000	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

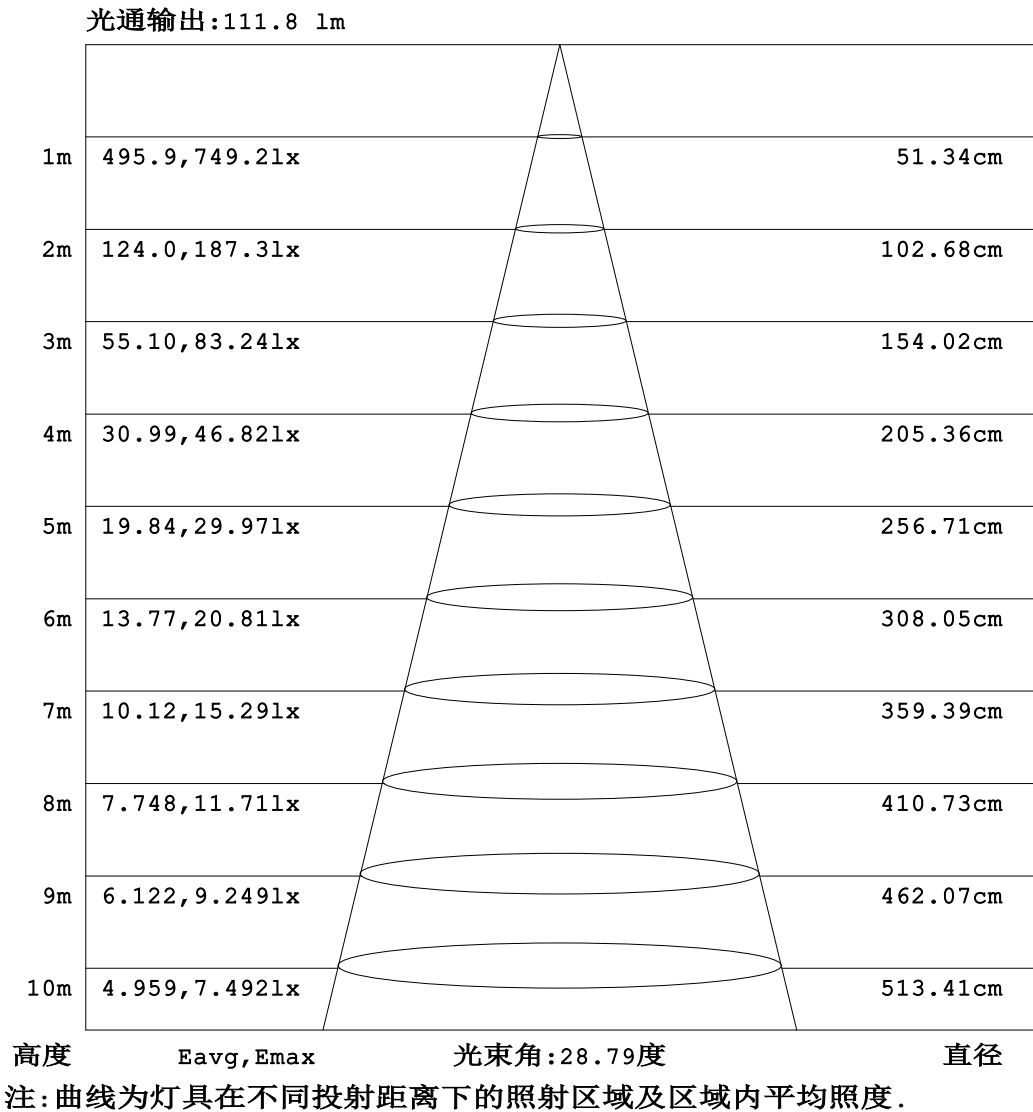


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.00.488
环境湿度:65.0%
测试距离:6.360米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:24.00V I:0.7197A P:17.27W PF:1.000 Freq:0Hz 实检光通: 279.19lx1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(3000K)-80-40-A-100	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

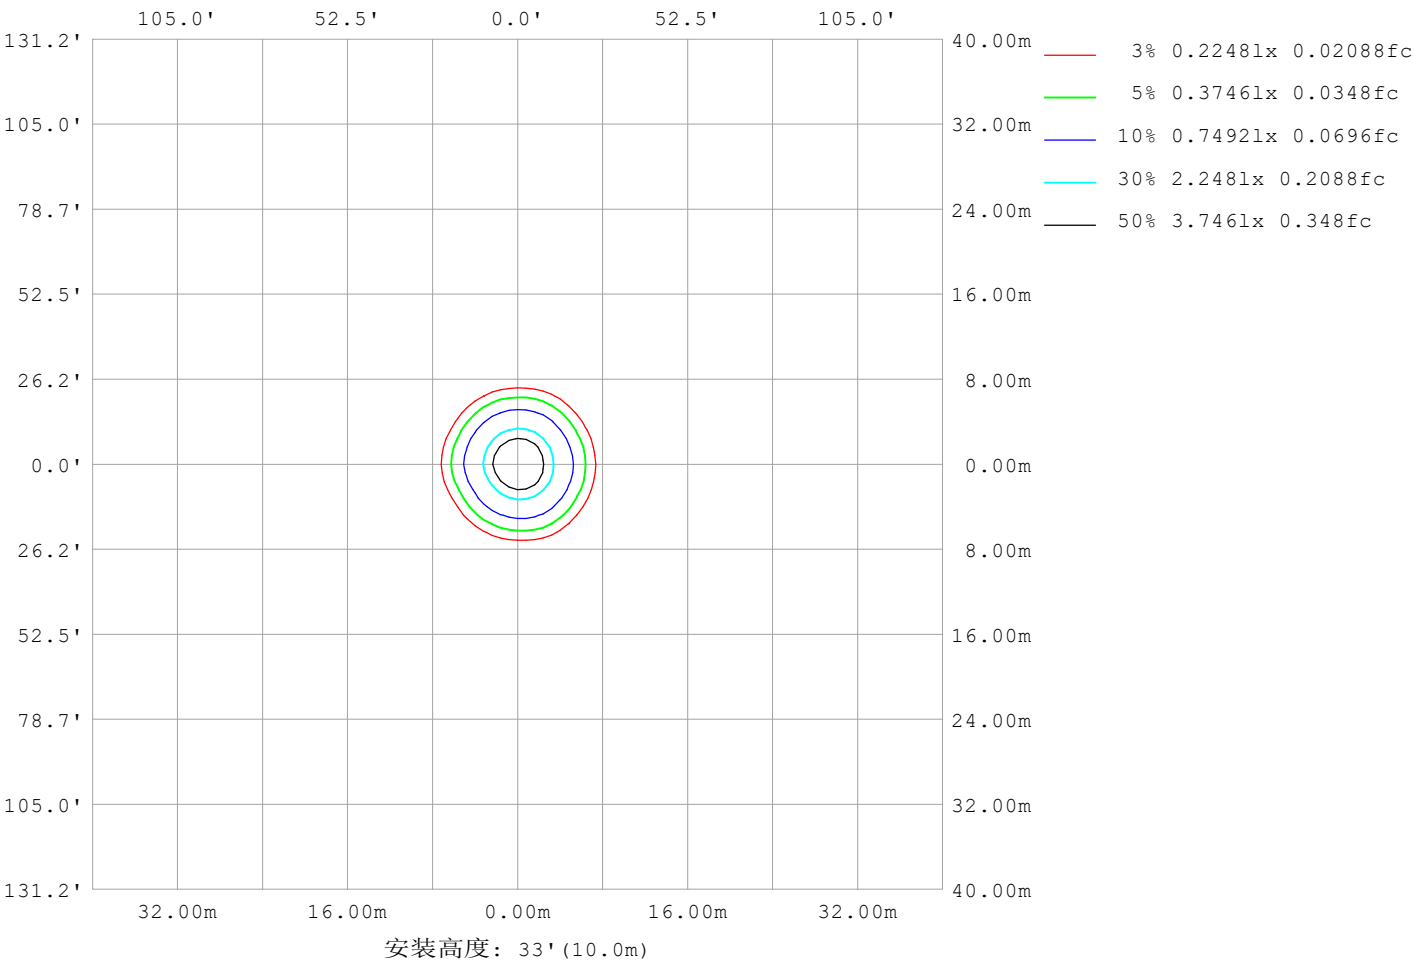

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:

LED筒灯平均亮度报告


实测参数: U:24.00V I:0.7197A P:17.27W PF:1.000 Freq:0Hz 实检光通: 279.19lx1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(3000K)-80-40-A-100	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

平均亮度	数值 (cd/m2)
L横 (65) av	91
L横 (75) av	112
L横 (85) av	273
L纵 (65) av	114
L纵 (75) av	142
L纵 (85) av	309
L45 (65) av	95
L45 (75) av	115
L45 (85) av	270

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度 C角度间隔: 30.0度 测试速度: 快速 环境温度:25.3℃ 测试人员: 测试日期:2025-04-23	γ角度范围: 0度 - 180度 γ角度间隔: 1.0度 测试系统: 远方(EVERFINE) GO-2000B_V1 系统 V2.00.488 环境湿度:65.0% 测试距离:6.360米 [K=1.0000] 备注:
--	---

平面照度曲线

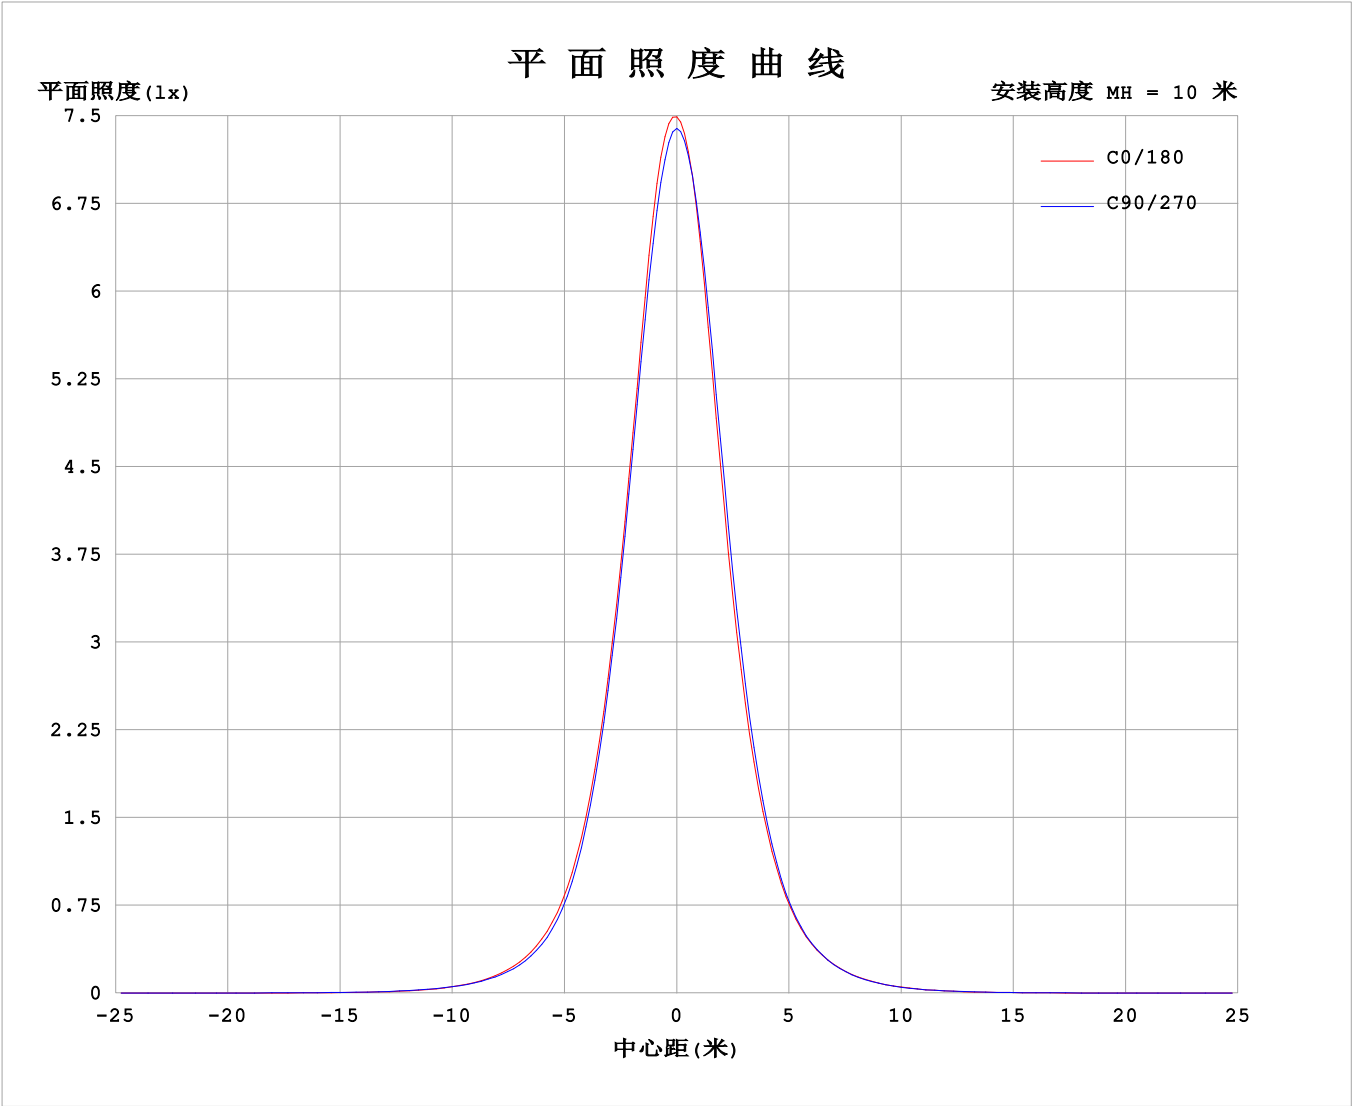

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.00.488
环境湿度: 65.0%
测试距离: 6.360米 [K=1.0000]
备注:


光 强 分 布 数 据 表 格

实测参数: U:24.00V I:0.7197A P:17.27W PF:1.000 Freq:0Hz 实检光通: 279.19lx1 lm		
灯具名称: AW01-24V-3030-18-DMX4-RGBW(3000K)-80-40-A-1000mm	灯具类型:	灯具重量:
灯具规格:	外型尺寸: Length=1m	测试编号:
制造厂商: OLympia lighting	发光口面:	遮光角:

表--1												单位: cd					
γ (DEG)	C (DEG)	0	30	60	90	120	150	180	210	240	270	300	330				
	0	742	742	742	742	742	742	742	742	742	742	742	742				
	5	693	699	692	679	664	661	674	670	676	686	700	705				
	10	536	551	548	528	502	492	510	507	522	538	556	554				
	15	365	378	379	357	330	319	339	338	352	365	381	377				
	20	228	238	239	220	202	193	209	207	219	225	237	235				
	25	137	140	144	128	120	111	125	121	130	132	141	138				
	30	80.6	80.8	85.3	73.9	70.4	64.8	73.7	70.4	75.9	76.0	82.9	78.9				
	35	48.2	48.0	50.3	44.2	41.9	38.8	44.4	41.9	44.6	44.9	48.7	47.0				
	40	28.2	28.7	29.9	26.9	24.8	23.3	26.2	25.1	25.9	26.1	28.3	27.6				
	45	15.5	16.5	17.2	15.8	14.1	13.3	14.6	14.0	14.2	14.6	15.6	15.3				
	50	7.80	8.78	9.40	8.81	7.48	6.98	7.55	7.26	7.25	7.67	7.96	7.84				
	55	3.72	4.33	4.66	4.68	3.82	3.48	3.66	3.66	3.64	3.97	3.95	3.82				
	60	2.10	2.35	2.49	2.75	2.23	1.97	2.07	2.20	2.12	2.34	2.20	2.08				
	65	1.53	1.66	1.74	2.03	1.64	1.45	1.50	1.71	1.57	1.73	1.53	1.44				
	70	1.28	1.37	1.44	1.78	1.41	1.23	1.26	1.50	1.34	1.47	1.26	1.18				
	75	1.14	1.19	1.26	1.59	1.25	1.09	1.12	1.33	1.18	1.29	1.11	1.05				
	80	1.05	1.05	1.11	1.39	1.12	1.01	1.02	1.18	1.05	1.16	1.00	0.96				
	85	0.94	0.93	0.96	1.09	0.95	0.90	0.92	1.03	0.90	1.03	0.90	0.87				
	90	0.82	0.81	0.82	0.81	0.80	0.80	0.82	0.87	0.77	0.77	0.79	0.75				
	95	0.78	0.78	0.78	0.80	0.78	0.77	0.77	0.78	0.78	0.76	0.77	0.73				
	100	0.77	0.80	0.79	0.84	0.80	0.80	0.78	0.78	0.84	0.79	0.80	0.76				
	105	0.83	0.86	0.87	0.92	0.89	0.89	0.86	0.87	0.93	0.89	0.89	0.82				
	110	0.93	0.98	1.00	1.07	1.03	1.02	0.98	1.00	1.07	1.02	1.01	0.93				
	115	1.13	1.17	1.20	1.28	1.27	1.24	1.18	1.19	1.26	1.22	1.19	1.11				
	120	1.40	1.44	1.47	1.56	1.56	1.54	1.44	1.45	1.51	1.45	1.42	1.35				
	125	1.75	1.78	1.81	1.89	1.90	1.90	1.74	1.75	1.77	1.71	1.70	1.64				
	130	2.14	2.16	2.16	2.23	2.27	2.30	2.04	2.02	2.04	1.97	1.98	1.94				
	135	2.53	2.54	2.51	2.55	2.60	2.67	2.30	2.27	2.27	2.20	2.22	2.21				
	140	2.87	2.87	2.79	2.82	2.89	2.99	2.48	2.45	2.45	2.38	2.42	2.41				
	145	3.13	3.12	3.01	3.01	3.09	3.22	2.61	2.59	2.59	2.51	2.56	2.55				
	150	3.29	3.27	3.13	3.13	3.20	3.34	2.69	2.67	2.67	2.59	2.64	2.63				
	155	3.33	3.28	3.16	3.13	3.23	3.33	2.73	2.72	2.71	2.60	2.64	2.68				
	160	3.30	3.22	3.12	3.09	3.21	3.26	2.73	2.74	2.72	2.60	2.62	2.69				
	165	3.16	3.07	3.00	3.02	3.11	3.14	2.71	2.74	2.73	2.61	2.59	2.68				
	170	2.98	2.88	2.90	2.95	3.00	2.98	2.70	2.73	2.75	2.66	2.61	2.62				
	175	2.81	2.77	2.86	2.90	2.91	2.84	2.70	2.72	2.80	2.75	2.68	2.61				
	180	2.76	2.76	2.86	2.88	2.82	2.76	2.75	2.75	2.86	2.87	2.83	2.74				


C角度范围: 0度 - 360度	γ角度范围: 0度 - 180度
C角度间隔: 30.0度	γ角度间隔: 1.0度
测试速度: 快速	测试系统: 远方(EVERFINE) GO-2000B_V1 系统 V2.00.488
环境温度: 25.3℃	环境湿度: 65.0%
测试人员:	测试距离: 6.360米 [K=1.0000]
测试日期: 2025-04-23	备注:

I (cd)

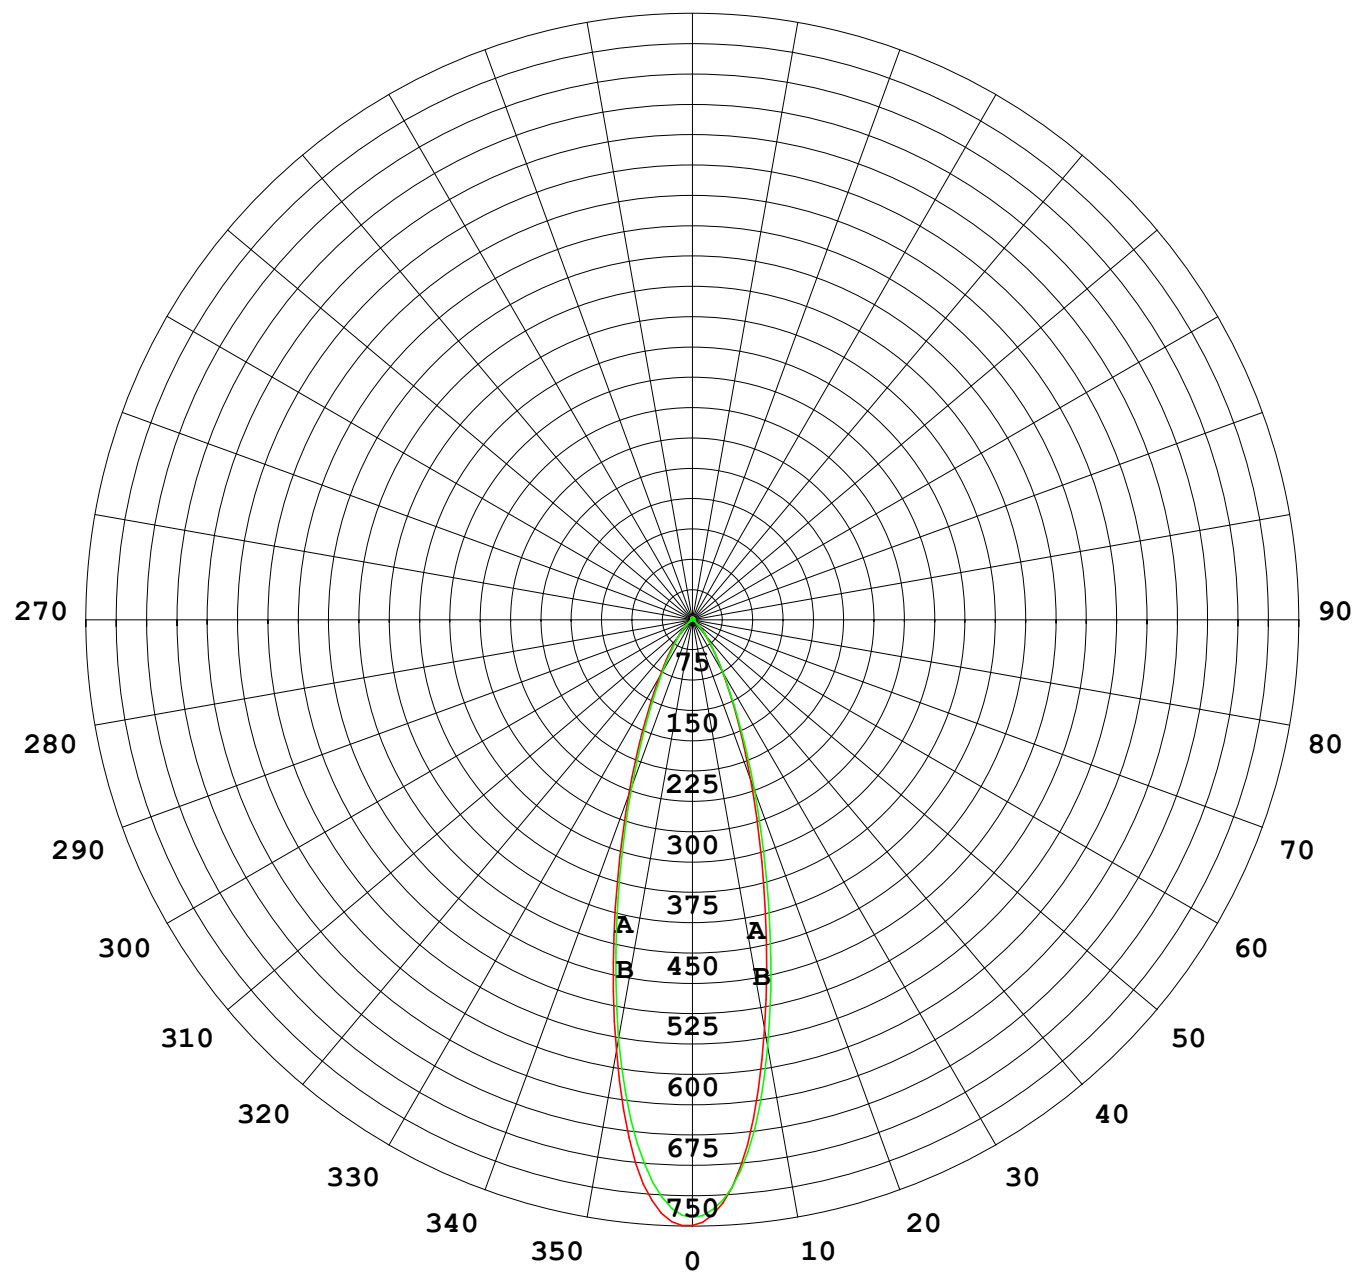

1000 lm

$\kappa = 1$

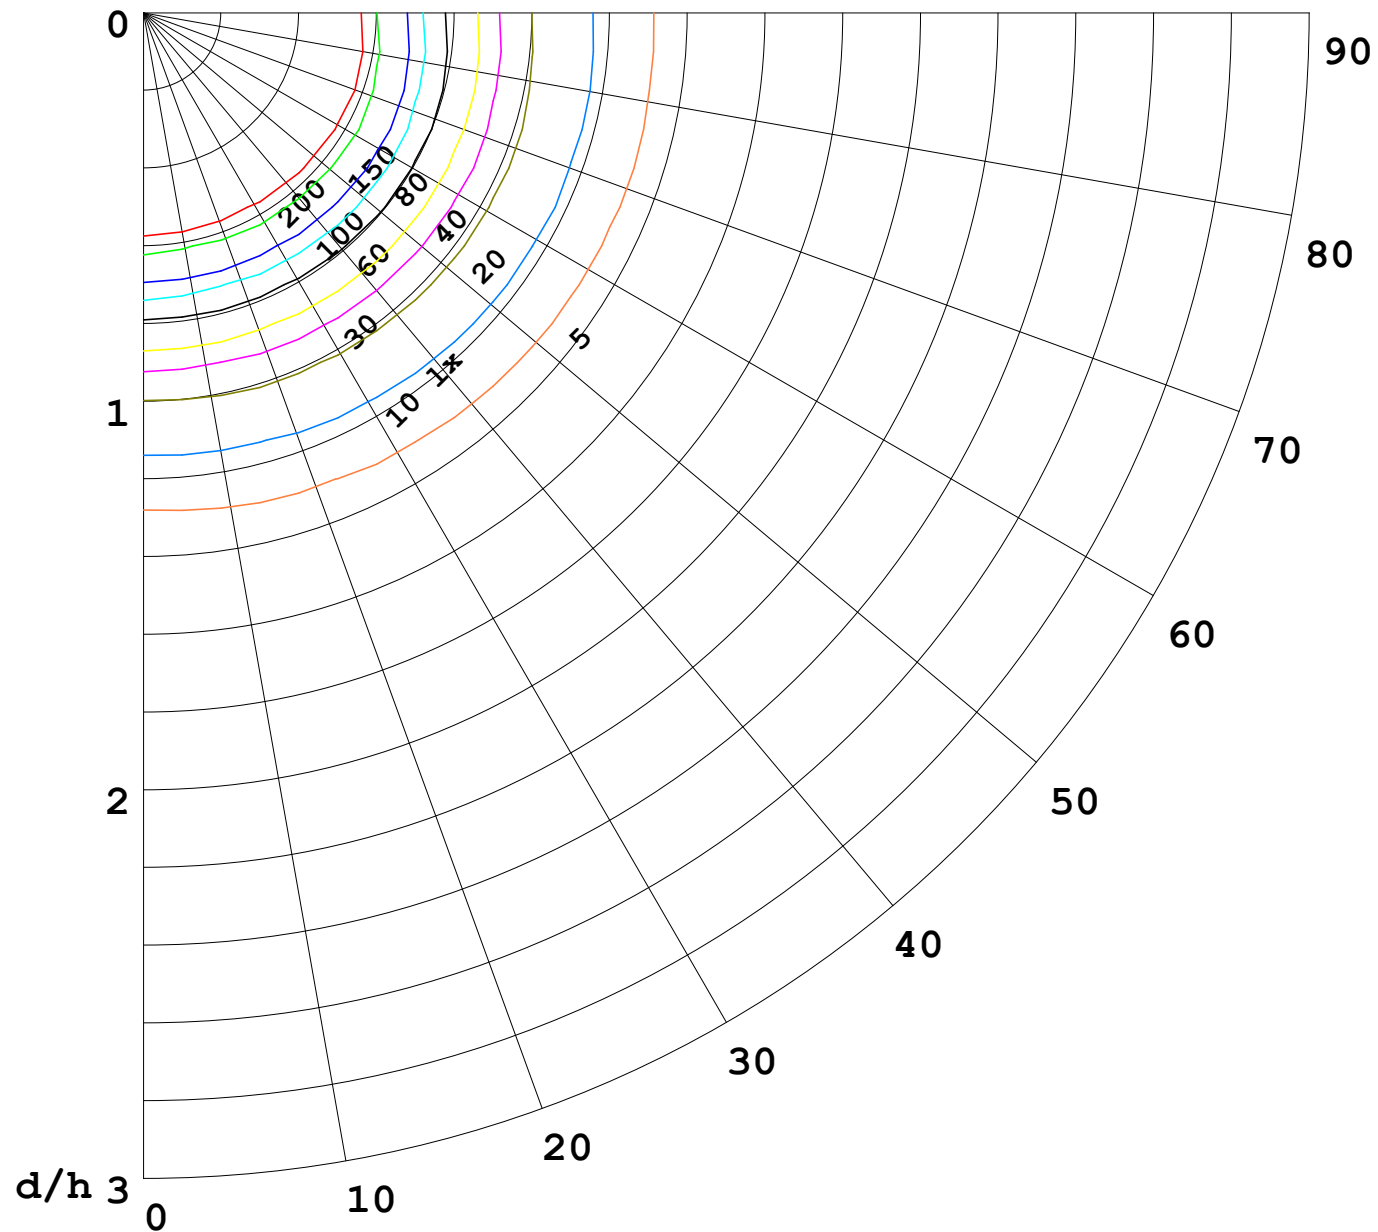

F = 1000 lm
 K = 0.7
 Hcc = 0.8 m
 Hfc = 0.0 m
 Eave = 100 lx

	Pcc	Pw	Pfc
—————	70	50	30
—————	50	30	20

