


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.000V I:0.9197A P:22.073W PF:1.0000 Freq:0Hz Lamp Flux:594.487x1 lm		
NAME: AW06-24V-3535-18-3000-80-3060-B-1000	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 26.93 lm/W
MODEL		I _{max} (cd)	1846	S/MH (C0/180)		0.40
NOMINAL POWER (W)		LOR (%)	100.0	S/MH (C90/270)		0.61
RATED VOLTAGE (V)		TOTAL FLUX (lm)	594.49	η UP, DN (C0-180)		0.0, 48.6
NOMINAL FLUX (lm)	594.487	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 51.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.00
TEST VOLTAGE (V)		η down (%)	100.0	CIBSE SHR MAX		1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

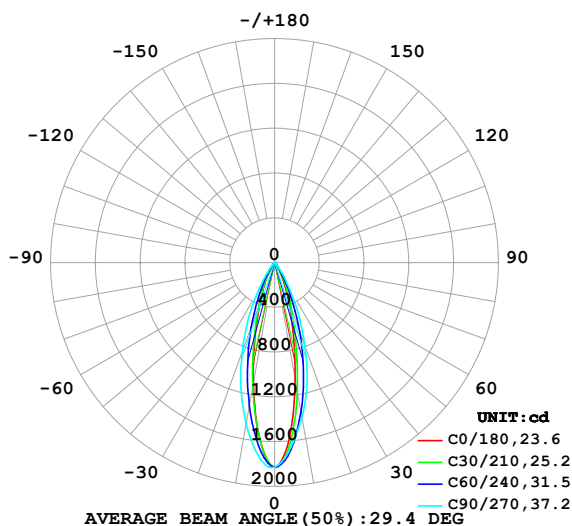

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

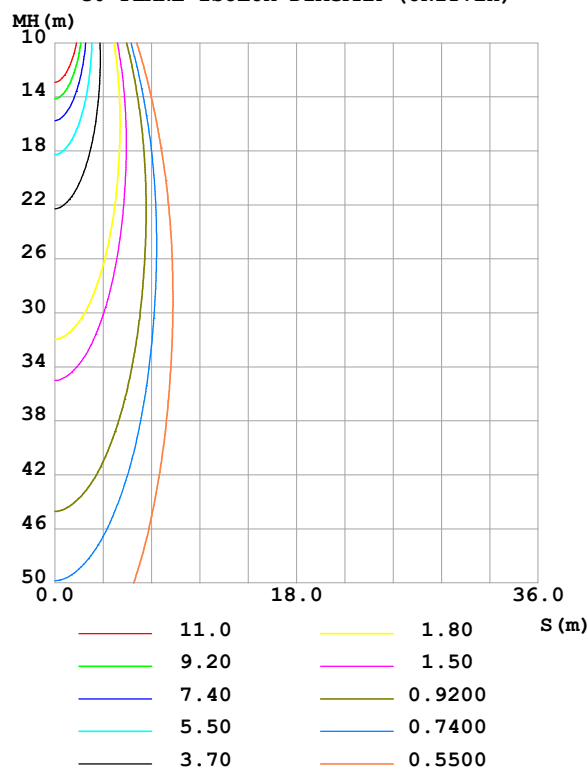

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: Cloud
Test Date: 2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity: 65.0%
Test Distance: 6.350m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1063	1263	1405	1164	1099	1216	1465	1331	0- 10	143.0	143.0	24.1,24.1
20	369.4	546.7	789.9	475.2	389.7	512.8	851.2	561.9	10- 20	237.7	380.7	64,64
30	105.8	152.8	261.6	125.2	112.3	143.5	299.9	167.2	20- 30	147.7	528.4	88.9,88.9
40	24.63	23.73	32.49	17.79	23.25	21.11	44.84	27.22	30- 40	47.42	575.8	96.9,96.9
50	6.336	5.929	6.152	4.983	5.733	5.226	6.299	6.311	40- 50	9.128	585.0	98.4,98.4
60	2.770	2.804	2.963	2.609	2.515	2.523	2.957	2.779	50- 60	3.473	588.4	99,99
70	2.168	2.120	2.085	2.120	1.864	1.891	2.028	1.939	60- 70	2.272	590.7	99.4,99.4
80	1.888	1.814	1.764	1.862	1.601	1.644	1.738	1.668	70- 80	1.986	592.7	99.7,99.7
90	1.570	1.570	1.591	1.625	1.476	1.527	1.622	1.532	80- 90	1.787	594.5	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 581.87 lm

%lum = 97.9%

%lamp = 97.9%

Conical surface Flux(130deg): 589.64 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Cloud
 Test Date:2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
 Humidity:65.0%
 Test Distance:6.350m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.000V I:0.9197A P:22.073W PF:1.0000 Freq:0Hz Lamp Flux:594.487x1 lm		
NAME: AW06-24V-3535-18-3000-80-3060-B-1000	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

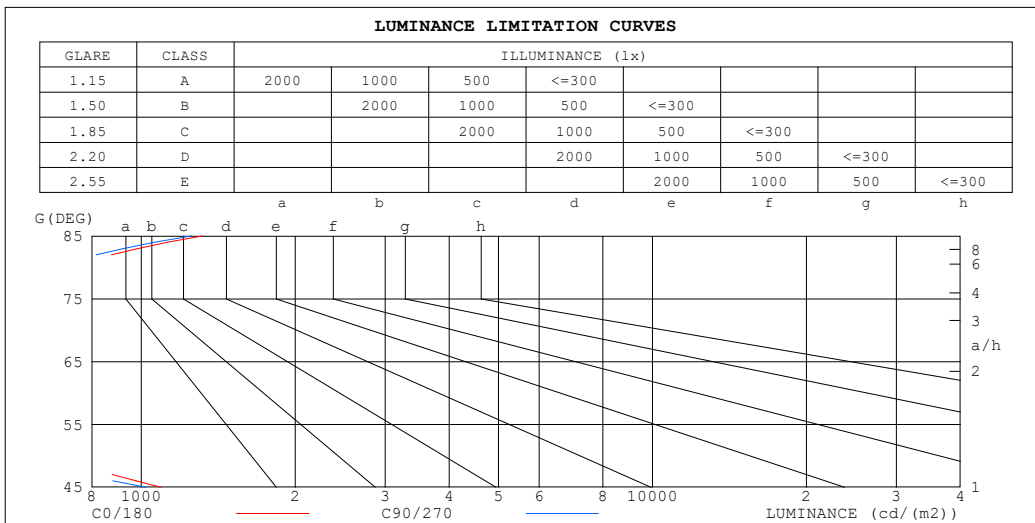

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1316	1252
80	729	674
75	528	488
70	425	404
65	372	374
60	372	393
55	450	471
50	661	635
45	1091	1021


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.000V I:0.9197A P:22.073W PF:1.0000 Freq:0Hz Lamp Flux:594.487x1 lm		
NAME: AW06-24V-3535-18-3000-80-3060-B-1000	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.91	.89	.92	.90	.88	.86
4.0	.95	.91	.87	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83
5.0	.91	.86	.83	.90	.86	.82	.88	.85	.82	.87	.84	.81	.85	.83	.80	.79
6.0	.87	.82	.79	.86	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.77	.76
7.0	.83	.79	.75	.83	.78	.75	.82	.78	.75	.81	.77	.74	.79	.76	.74	.73
8.0	.80	.75	.72	.80	.75	.72	.79	.74	.72	.78	.74	.71	.77	.73	.71	.70
9.0	.77	.72	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.74	.71	.68	.67
10.0	.74	.70	.66	.74	.69	.66	.73	.69	.66	.72	.69	.66	.72	.68	.66	.65

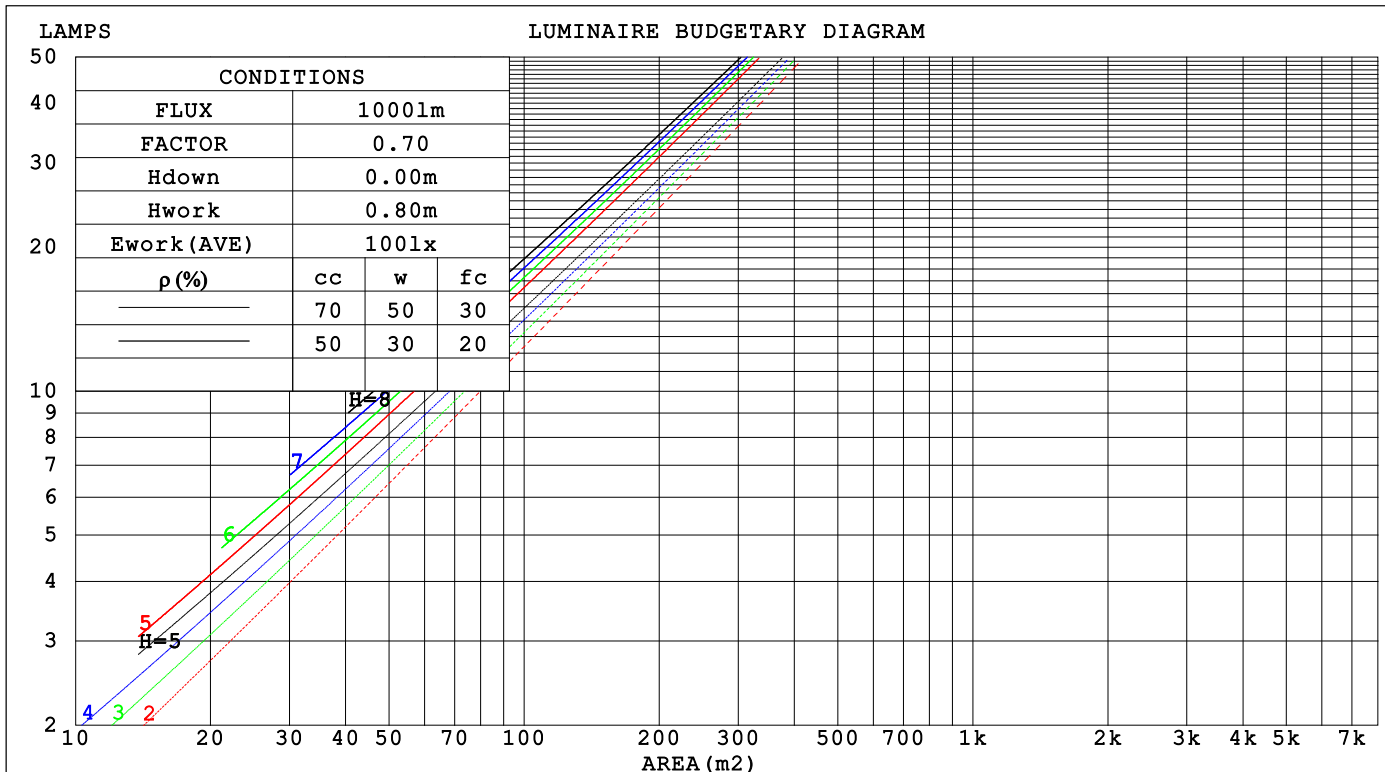

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:24.000V I:0.9197A P:22.073W PF:1.0000 Freq:0Hz Lamp Flux:594.487x1 lm		
NAME: AW06-24V-3535-18-3000-80-3060-B-1000	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.156	.089	.028	.150	.085	.027	.137	.079	.025	.126	.073	.023	.115	.067	.022		
2.0	.146	.080	.024	.140	.077	.024	.130	.072	.022	.120	.067	.021	.111	.063	.020		
3.0	.136	.073	.022	.132	.071	.021	.123	.067	.020	.115	.063	.019	.107	.059	.018		
4.0	.128	.067	.020	.124	.065	.019	.117	.062	.019	.110	.059	.018	.104	.056	.017		
5.0	.121	.062	.018	.118	.061	.018	.112	.058	.017	.106	.056	.017	.100	.054	.016		
6.0	.115	.058	.017	.112	.057	.016	.107	.055	.016	.102	.053	.016	.097	.051	.015		
7.0	.110	.054	.015	.107	.053	.015	.102	.052	.015	.098	.050	.015	.094	.049	.014		
8.0	.105	.051	.014	.103	.051	.014	.098	.049	.014	.094	.048	.014	.090	.046	.014		
9.0	.100	.049	.014	.098	.048	.013	.095	.047	.013	.091	.046	.013	.088	.044	.013		
10.0	.096	.046	.013	.094	.046	.013	.091	.045	.013	.088	.044	.012	.085	.043	.012		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.157	.146	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013		
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011		
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009		
5.0	.117	.086	.063	.101	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008		
6.0	.109	.077	.053	.094	.066	.046	.065	.046	.033	.037	.027	.020	.012	.009	.006		
7.0	.102	.069	.045	.088	.059	.040	.060	.042	.028	.035	.025	.017	.011	.008	.006		
8.0	.096	.062	.039	.082	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005		
9.0	.090	.057	.034	.078	.049	.030	.054	.035	.021	.031	.020	.013	.010	.007	.004		
10.0	.085	.052	.030	.074	.045	.026	.051	.032	.018	.030	.019	.011	.010	.006	.004		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.000V I:0.9197A P:22.073W PF:1.0000 Freq:0Hz Lamp Flux:594.487x1 lm											
NAME: AW06-24V-3535-18-3000-80-3060-B-1000					TYPE:			WEIGHT:			
SPEC.:					DIM.: Length=1m			SERIAL No.:			
MFR.:					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.7	7.5	7.0	7.7	7.8	9.9	10.7	10.1	10.8	11.0	
	3H	6.9	7.7	7.2	7.8	8.0	9.9	10.6	10.1	10.8	11.0
	4H	7.2	7.9	7.5	8.1	8.3	9.9	10.6	10.2	10.8	11.1
	6H	7.6	8.3	7.9	8.5	8.7	10.1	10.7	10.4	10.9	11.2
	8H	8.0	8.6	8.3	8.8	9.1	10.2	10.8	10.5	11.1	11.3
	12H	8.4	9.0	8.7	9.3	9.5	10.4	11.0	10.7	11.3	11.5
4H 2H	6.7	7.3	6.9	7.5	7.8	9.7	10.4	10.0	10.6	10.8	
	3H	7.0	7.6	7.3	7.8	8.1	9.8	10.4	10.1	10.6	10.9
	4H	7.4	7.9	7.7	8.2	8.5	9.9	10.4	10.2	10.7	11.0
	6H	8.1	8.6	8.5	8.9	9.2	10.2	10.6	10.5	11.0	11.3
	8H	8.6	9.0	9.0	9.4	9.7	10.4	10.8	10.8	11.2	11.5
	12H	9.3	9.7	9.7	10.0	10.4	10.7	11.1	11.1	11.5	11.9
8H 4H	7.6	8.0	7.9	8.3	8.7	9.9	10.3	10.3	10.7	11.0	
	6H	8.5	8.9	8.9	9.2	9.7	10.3	10.7	10.7	11.1	11.5
	8H	9.2	9.5	9.6	9.9	10.4	10.7	11.0	11.1	11.4	11.9
	12H	10.1	10.4	10.6	10.8	11.3	11.2	11.5	11.7	12.0	12.4
12H 4H	7.6	8.0	8.0	8.4	8.7	9.9	10.3	10.3	10.7	11.0	
	6H	8.6	8.9	9.1	9.4	9.8	10.4	10.7	10.8	11.1	11.5
	8H	9.4	9.7	9.9	10.1	10.6	10.8	11.1	11.3	11.5	12.0
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 1.4 / - 1.0					+ 3.0 / - 2.0					
1.5H	+ 2.7 / - 0.9					+ 5.1 / - 1.8					
2.0H	+ 1.0 / - 0.3					+ 0.8 / - 0.3					

CIE Pub.117, 594.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.8)
Area: 0.015 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.000V I:0.9197A P:22.073W PF:1.0000 Freq:0Hz Lamp Flux:594.487x1 lm		
NAME: AW06-24V-3535-18-3000-80-3060-B-1000	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	84	80	88	83	80	77
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	95	92	100	95	92	98	95	91	87
1.25	104	99	96	103	99	96	101	98	95	91
1.50	107	102	99	106	102	99	103	100	98	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	104	101	96
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	109	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: Cloud
Test Date: 2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity: 65.0%
Test Distance: 6.350m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.000V I:0.9197A P:22.073W PF:1.0000 Freq:0Hz Lamp Flux:594.487x1 lm		
NAME: AW06-24V-3535-18-3000-80-3060-B-1000	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

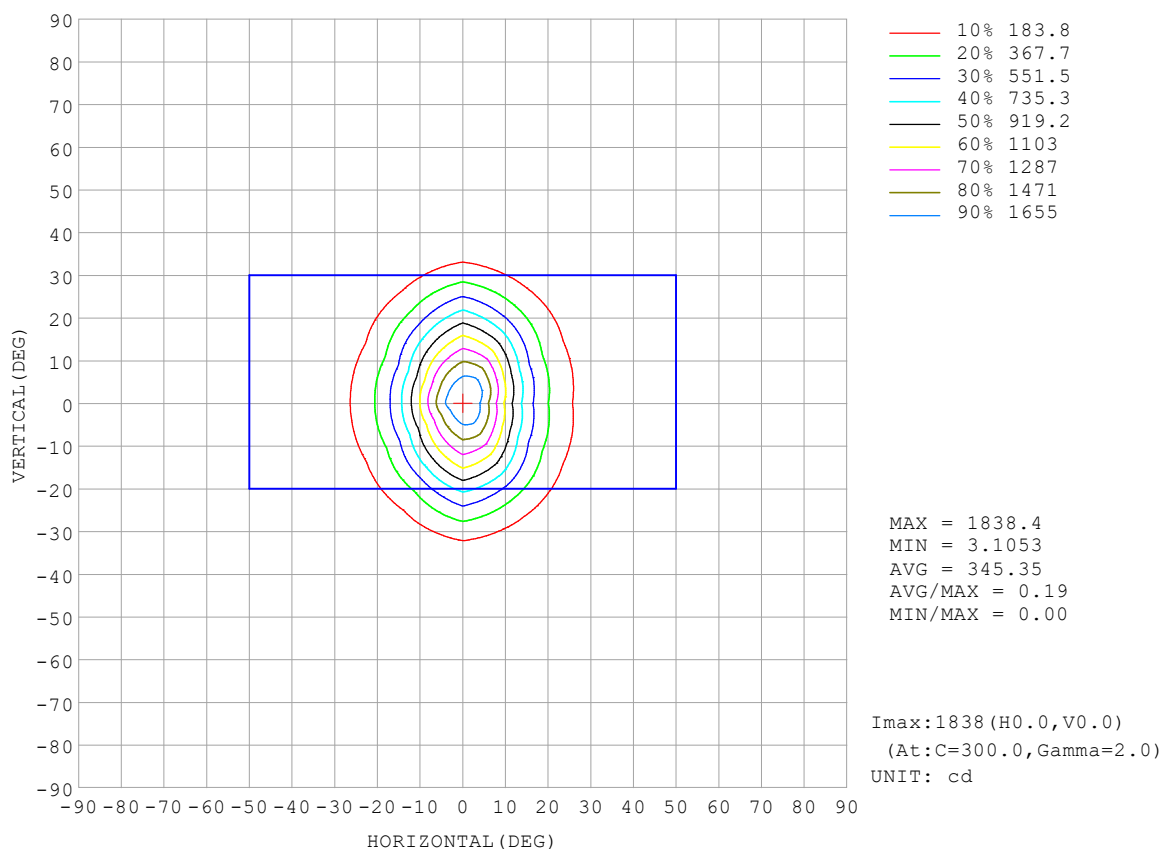


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.000V I:0.9197A P:22.073W PF:1.0000 Freq:0Hz Lamp Flux:594.487x1 lm		
NAME: AW06-24V-3535-18-3000-80-3060-B-1000	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

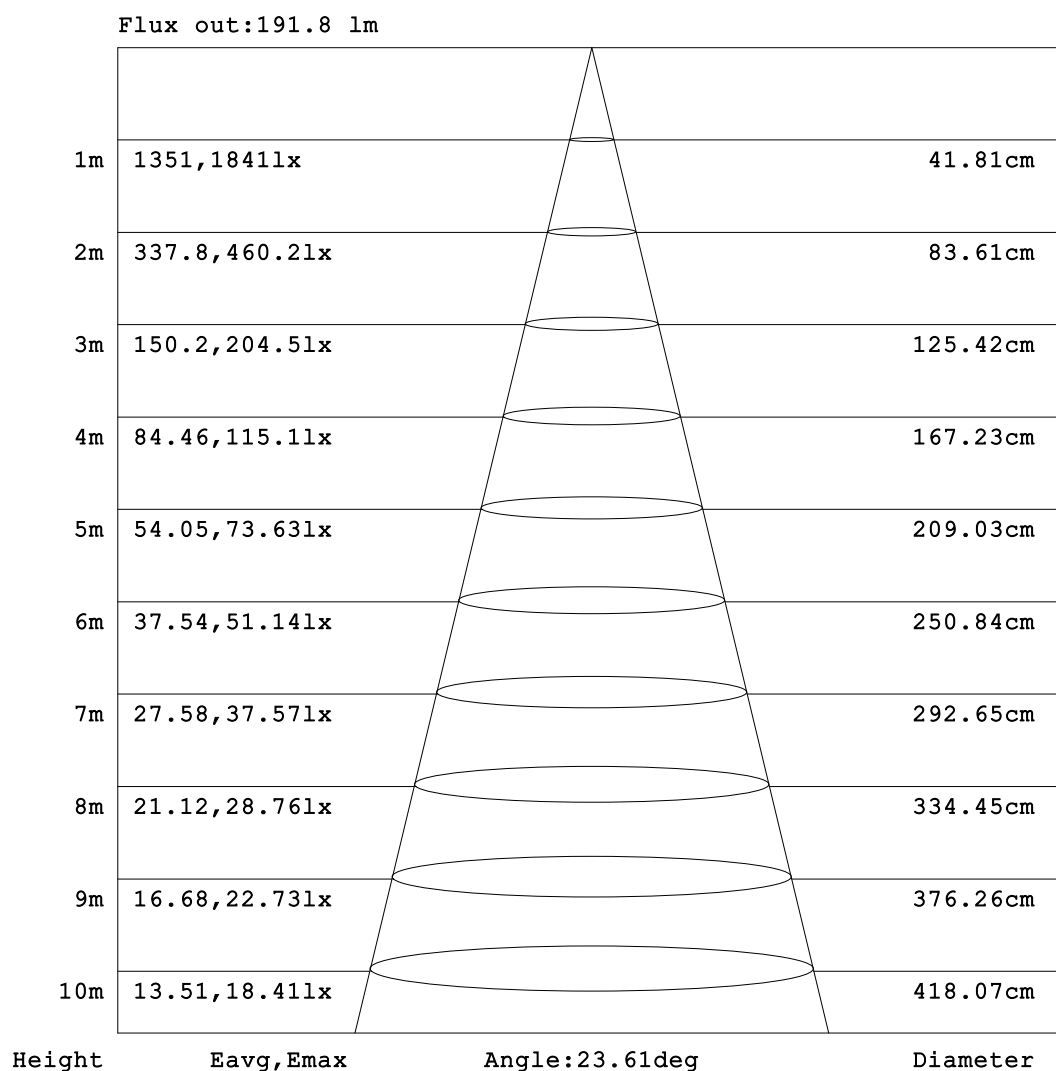


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.000V I:0.9197A P:22.073W PF:1.0000 Freq:0Hz Lamp Flux:594.487x1 lm		
NAME: AW06-24V-3535-18-3000-80-3060-B-1000	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

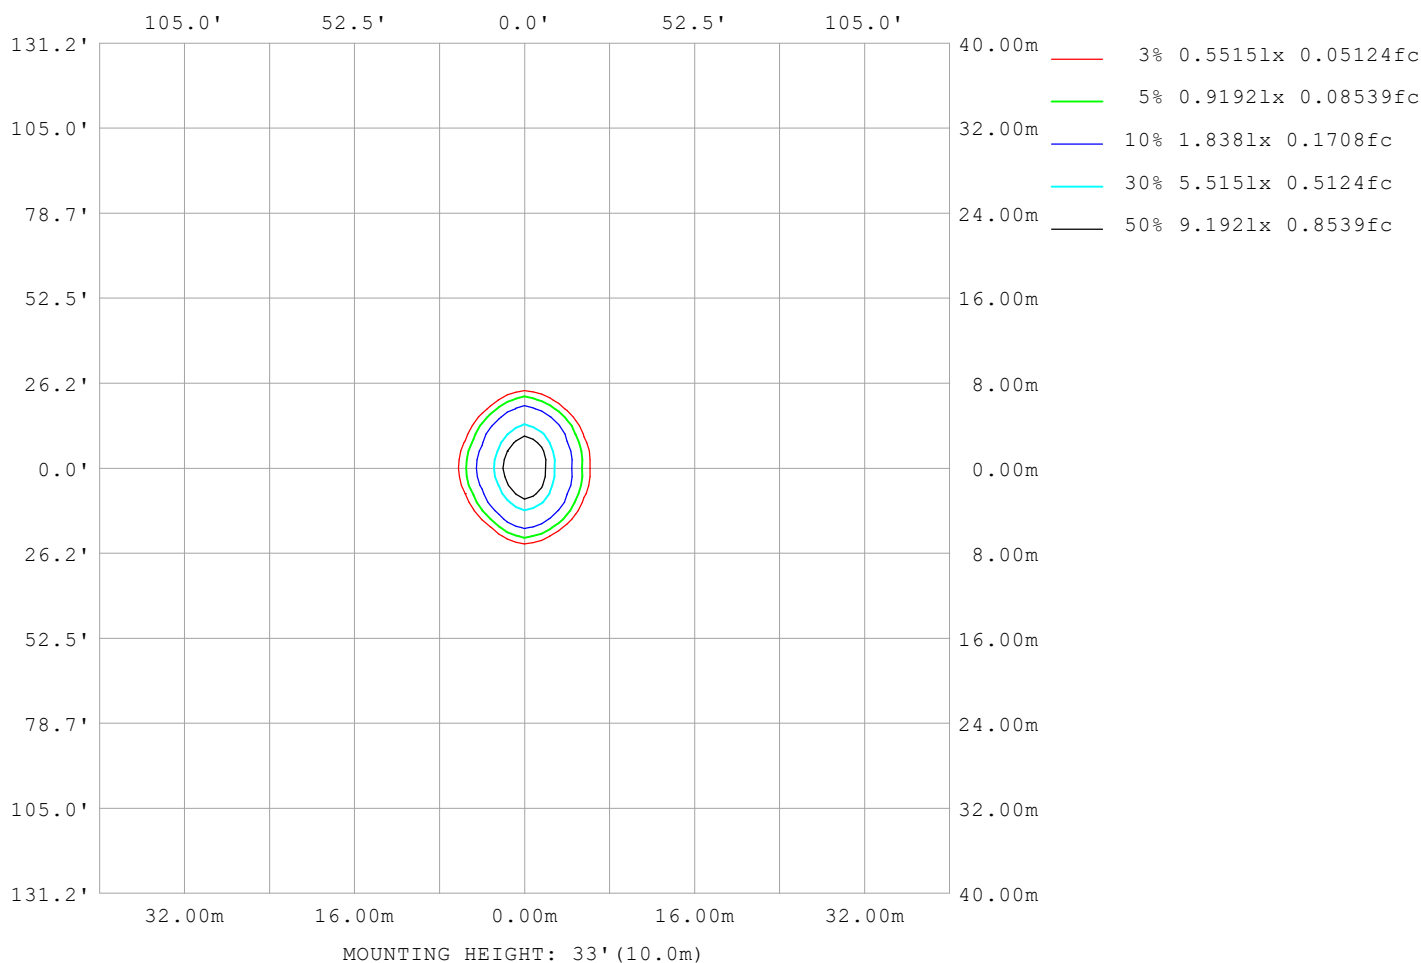

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.000V I:0.9197A P:22.073W PF:1.0000 Freq:0Hz Lamp Flux:594.487x1 lm		
NAME: AW06-24V-3535-18-3000-80-3060-B-1000	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	350
L_0~180 (75) av	484
L_0~180 (85) av	1230
L_90~270 (65) av	373
L_90~270 (75) av	484
L_90~270 (85) av	1264
L_45 (65) av	351
L_45 (75) av	482
L_45 (85) av	1247

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Cloud
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

Planar Illuminance Curve

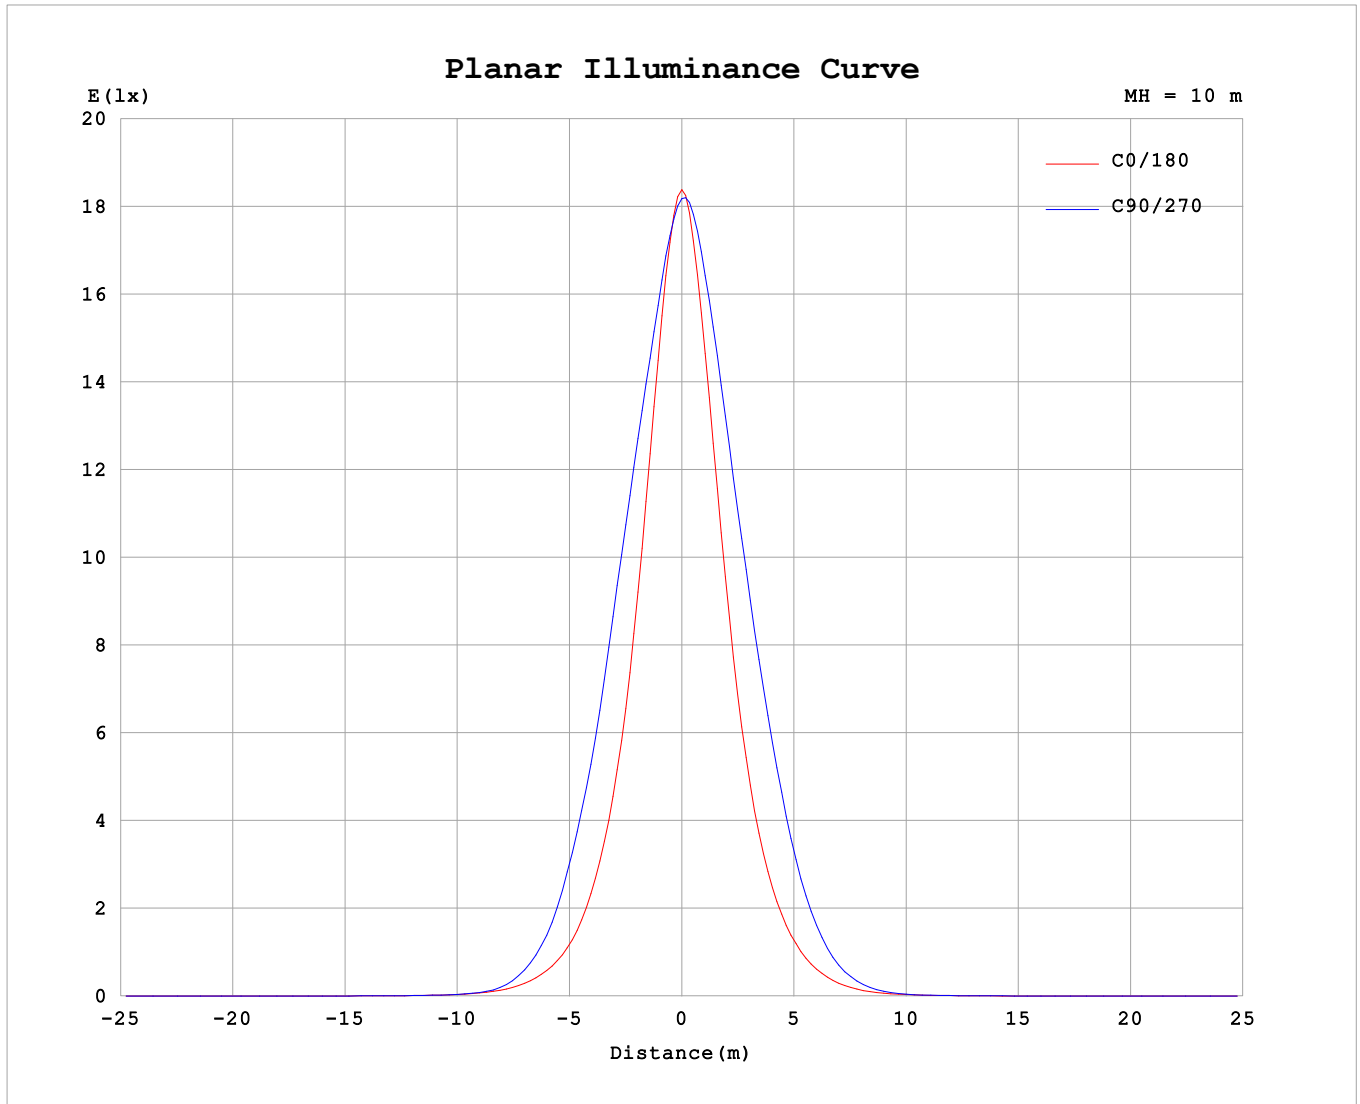

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: Cloud
 Test Date: 2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.488
 Humidity: 65.0%
 Test Distance: 6.350m [K=1.0000]
 Remarks:

Test:U:24.000V I:0.9197A P:22.073W PF:1.0000 Freq:0Hz Lamp Flux:594.487x1 lm		
NAME: AW06-24V-3535-18-3000-80-3060-B-1000	TYPE:	WEIGHT:
SPEC.:	DIM.: Length=1m	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

UNIT: cd

[illegible]

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.488
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

```