


室内灯具光度数据

| | | |
|---|-------|-------|
| 实测参数: U:24.00V I:0.9429A P:22.63W PF:1.000 实检光通:1260.9×1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-3060 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |

| 光源数据 | | 光度数据 | | | | 光效: 55.72 lm/W |
|-----------|--------|----------|--------|-------------------|----------|----------------|
| 型号 | 3535 | 峰值光强(cd) | 2265 | S/MH(C0/180) | 0.45 | |
| 标称功率(W) | | 灯具效率(%) | 100.0 | S/MH(C90/270) | 0.84 | |
| 额定电源电压(V) | | 总光通量(lm) | 1260.9 | η UP,DN(C0-180) | 1.8,48.6 | |
| 额定光通量(lm) | 1260.9 | CIE分类 | 直接 | η UP,DN(C180-360) | 1.3,48.3 | |
| 灯具内光源数(只) | 1 | 上射光通比(%) | 3.1 | CIBSE SHR NOM | 0.50 | |
| 实测电源电压(V) | | 下射光通比(%) | 96.9 | CIBSE SHR MAX | 0.55 | |

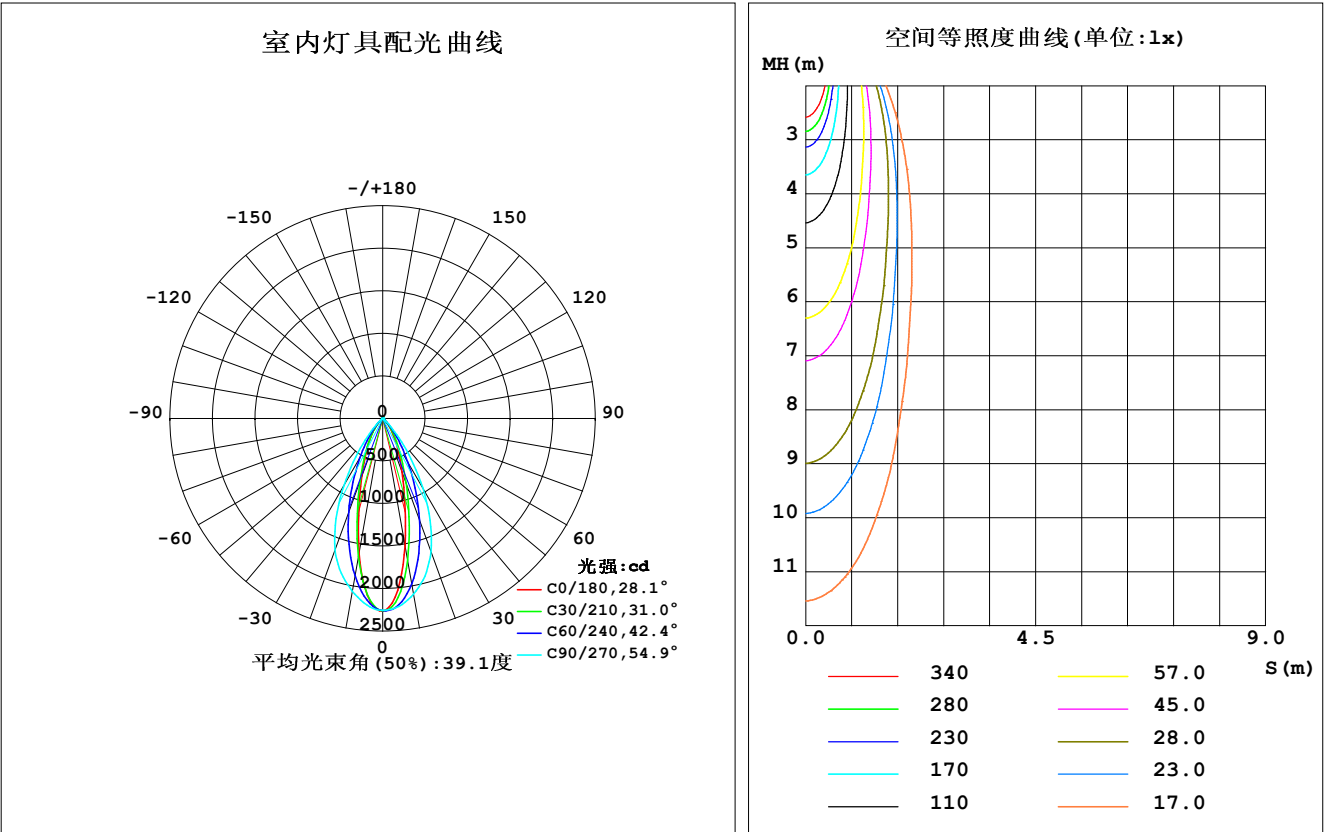


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

灯具环带光通量和亮度限制曲线

环带光通量：

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | $\gamma(^{\circ})$ | Φ 环 | Φ 总 | %lum, lamp |
|----------|-------|-------|-------|-------|--------|--------|-------|--------|--------------------|----------|----------|------------|
| 10 | 1516 | 1832 | 2098 | 1737 | 1602 | 1761 | 2063 | 1821 | 0- 10 | 192.5 | 192.5 | 15.3,15.3 |
| 20 | 665.1 | 1039 | 1663 | 938.1 | 716.9 | 975.1 | 1642 | 1033 | 10- 20 | 389.4 | 581.9 | 46.1,46.1 |
| 30 | 300.7 | 468.0 | 947.9 | 423.2 | 332.1 | 443.0 | 913.7 | 469.2 | 20- 30 | 345.5 | 927.4 | 73.5,73.5 |
| 40 | 112.7 | 166.8 | 302.7 | 152.6 | 130.0 | 154.7 | 285.2 | 164.0 | 30- 40 | 200.0 | 1127 | 89.4,89.4 |
| 50 | 24.62 | 37.66 | 43.85 | 32.30 | 25.48 | 29.20 | 35.71 | 32.49 | 40- 50 | 67.98 | 1195 | 94.8,94.8 |
| 60 | 9.057 | 9.964 | 11.18 | 8.963 | 5.948 | 5.575 | 7.130 | 6.339 | 50- 60 | 14.29 | 1210 | 95.9,95.9 |
| 70 | 5.650 | 5.921 | 6.190 | 5.710 | 1.581 | 1.631 | 2.153 | 1.875 | 60- 70 | 5.409 | 1215 | 96.4,96.4 |
| 80 | 5.117 | 5.084 | 5.171 | 5.202 | 0.8458 | 0.9787 | 1.172 | 0.9878 | 70- 80 | 3.438 | 1218 | 96.6,96.6 |
| 90 | 4.803 | 4.860 | 5.039 | 4.957 | 1.003 | 1.181 | 1.335 | 1.148 | 80- 90 | 3.321 | 1222 | 96.9,96.9 |
| 100 | 4.555 | 4.782 | 5.087 | 4.761 | 1.650 | 1.921 | 2.174 | 1.852 | 90-100 | 3.458 | 1225 | 97.2,97.2 |
| 110 | 4.501 | 4.942 | 5.432 | 4.890 | 2.557 | 3.096 | 3.466 | 2.982 | 100-110 | 3.830 | 1229 | 97.5,97.5 |
| 120 | 5.019 | 5.724 | 6.375 | 5.745 | 4.062 | 4.770 | 5.073 | 4.613 | 110-120 | 4.490 | 1234 | 97.8,97.8 |
| 130 | 6.685 | 7.271 | 7.849 | 7.434 | 6.401 | 6.745 | 6.825 | 6.582 | 120-130 | 5.407 | 1239 | 98.3,98.3 |
| 140 | 9.306 | 9.298 | 9.474 | 9.582 | 8.659 | 8.609 | 8.420 | 8.446 | 130-140 | 6.169 | 1245 | 98.7,98.7 |
| 150 | 11.68 | 11.13 | 10.84 | 11.53 | 9.969 | 10.08 | 9.641 | 9.745 | 140-150 | 6.160 | 1251 | 99.2,99.2 |
| 160 | 12.92 | 12.10 | 11.78 | 12.68 | 10.73 | 11.08 | 10.60 | 10.41 | 150-160 | 5.137 | 1256 | 99.6,99.6 |
| 170 | 12.69 | 12.22 | 12.40 | 12.72 | 11.19 | 11.73 | 11.59 | 10.93 | 160-170 | 3.329 | 1260 | 99.9,99.9 |
| 180 | 11.73 | 12.32 | 12.59 | 12.17 | 11.67 | 12.32 | 12.52 | 12.15 | 170-180 | 1.146 | 1261 | 100,100 |
| 单位:° | | 光强:cd | | | | | | | | 单位:lm | | |

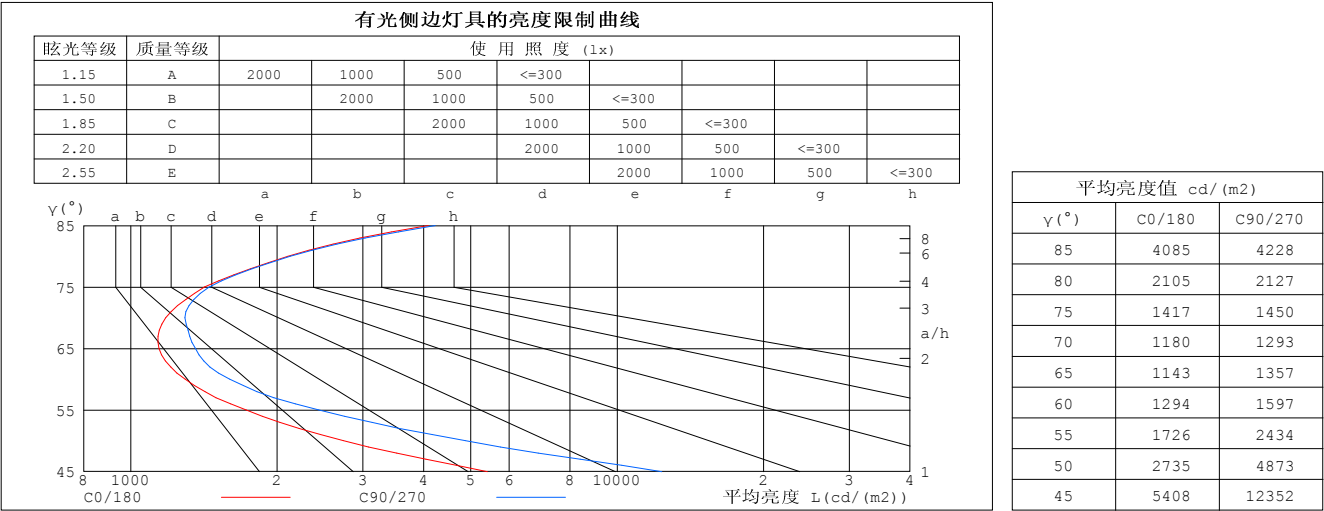


C角度范围： 0度 - 360度
C角度间隔： 30.0度
测试速度：快速
环境温度:25.3℃
测试人员:LYH
测试日期:2024-07-22

γ 角度范围： 0度 - 180度
 γ 角度间隔： 1.0度
测试系统：远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度:65.0%
测试距离:10.000米 [K=1.0000]
备注：

工作面利用系数和灯具概算曲线

| | | |
|---|-------|-------|
| 实测参数: U:24.00V I:0.9429A P:22.63W PF:1.000 实检光通:1260.9x1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-3060 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 工 作 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | 1.18 | 1.18 | 1.18 | 1.15 | 1.15 | 1.15 | 1.09 | 1.09 | 1.09 | 1.04 | 1.04 | 1.04 | .99 | .99 | .99 | .97 |
| 1.0 | 1.10 | 1.08 | 1.05 | 1.08 | 1.05 | 1.03 | 1.03 | 1.01 | .00 | .99 | .97 | .96 | .95 | .94 | .93 | .91 |
| 2.0 | 1.03 | .99 | .96 | 1.01 | .97 | .94 | .97 | .94 | .92 | .94 | .91 | .89 | .90 | .89 | .87 | .85 |
| 3.0 | .96 | .91 | .88 | .95 | .90 | .87 | .92 | .88 | .85 | .89 | .86 | .83 | .86 | .84 | .82 | .80 |
| 4.0 | .90 | .85 | .81 | .89 | .84 | .80 | .86 | .82 | .79 | .84 | .81 | .78 | .82 | .79 | .77 | .75 |
| 5.0 | .85 | .79 | .75 | .84 | .79 | .75 | .82 | .77 | .74 | .80 | .76 | .73 | .78 | .75 | .72 | .71 |
| 6.0 | .80 | .74 | .70 | .79 | .74 | .70 | .77 | .73 | .69 | .76 | .72 | .69 | .74 | .71 | .68 | .66 |
| 7.0 | .76 | .70 | .66 | .75 | .70 | .66 | .73 | .69 | .65 | .72 | .68 | .65 | .71 | .67 | .64 | .63 |
| 8.0 | .72 | .66 | .62 | .71 | .66 | .62 | .70 | .65 | .62 | .69 | .64 | .61 | .67 | .64 | .61 | .59 |
| 9.0 | .68 | .63 | .59 | .68 | .62 | .59 | .67 | .62 | .58 | .65 | .61 | .58 | .64 | .61 | .58 | .56 |
| 10.0 | .65 | .60 | .56 | .65 | .59 | .56 | .64 | .59 | .55 | .63 | .58 | .55 | .62 | .58 | .55 | .54 |

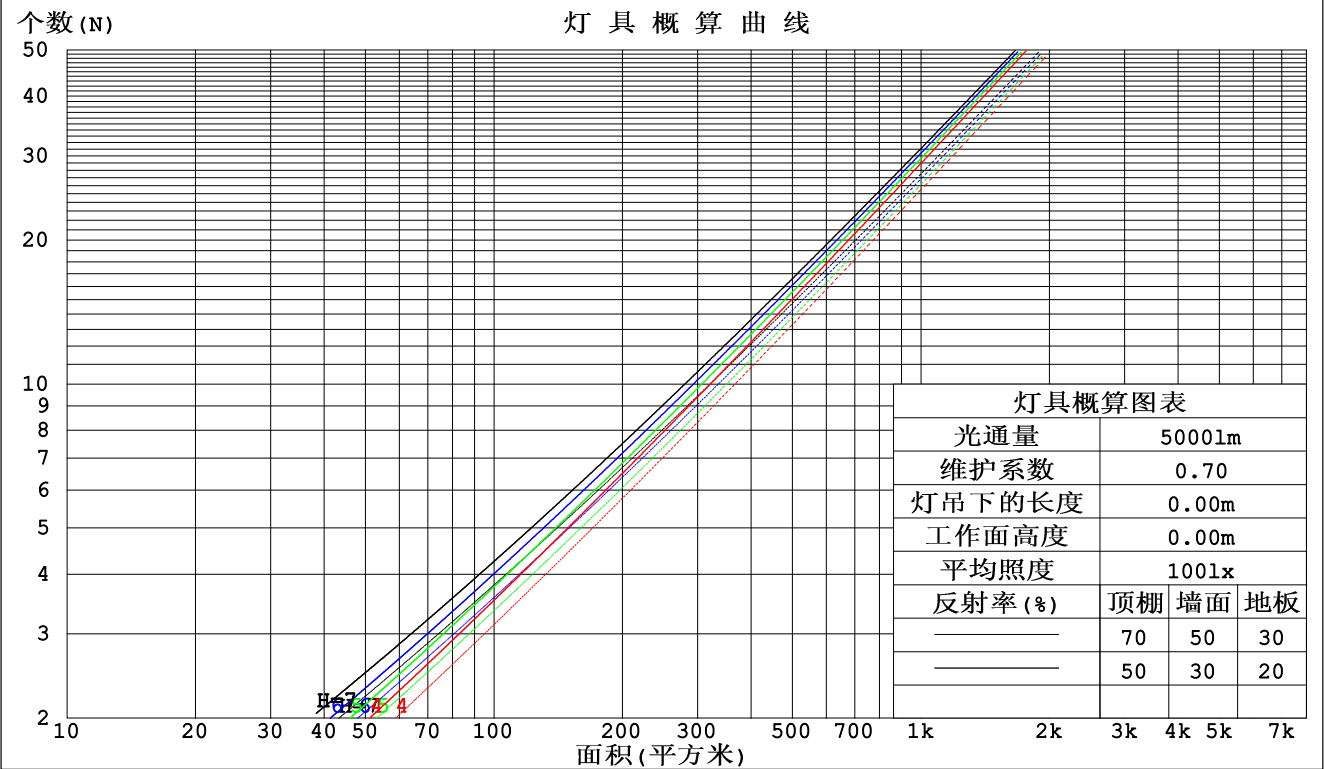

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:LYH
测试日期:2024-07-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度:65.0%
测试距离:10.000米 [K=1.0000]
备注:

墙面和天花板利用系数

| | | | | | |
|---|--|--|-------|--|-------|
| 实测参数: U:24.00V I:0.9429A P:22.63W PF:1.000 实检光通:1260.9x1 lm | | | | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-3060 | | | 灯具类型: | | 灯具重量: |
| 外型尺寸: Length=1m | | | 灯具规格: | | 测试编号: |
| 制造厂商: | | | 发光口面: | | 保护角: |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 墙 壁 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .176 | .100 | .032 | .168 | .096 | .031 | .154 | .088 | .028 | .141 | .081 | .026 | .129 | .075 | .024 | |
| 2.0 | .167 | .091 | .028 | .160 | .088 | .027 | .148 | .082 | .026 | .137 | .077 | .024 | .126 | .071 | .023 | |
| 3.0 | .158 | .084 | .025 | .152 | .081 | .024 | .141 | .077 | .023 | .132 | .072 | .022 | .123 | .068 | .021 | |
| 4.0 | .149 | .078 | .023 | .144 | .076 | .022 | .135 | .072 | .021 | .127 | .068 | .021 | .119 | .065 | .020 | |
| 5.0 | .142 | .072 | .021 | .137 | .071 | .021 | .129 | .067 | .020 | .122 | .064 | .019 | .115 | .061 | .018 | |
| 6.0 | .135 | .068 | .019 | .131 | .066 | .019 | .124 | .064 | .018 | .117 | .061 | .018 | .111 | .058 | .017 | |
| 7.0 | .129 | .064 | .018 | .125 | .062 | .018 | .119 | .060 | .017 | .113 | .058 | .017 | .107 | .056 | .016 | |
| 8.0 | .123 | .060 | .017 | .120 | .059 | .017 | .114 | .057 | .016 | .109 | .055 | .016 | .104 | .053 | .015 | |
| 9.0 | .117 | .057 | .016 | .115 | .056 | .016 | .110 | .054 | .015 | .105 | .052 | .015 | .100 | .051 | .015 | |
| 10.0 | .113 | .054 | .015 | .110 | .053 | .015 | .105 | .052 | .015 | .101 | .050 | .014 | .097 | .049 | .014 | |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 天 花 板 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | .214 | .214 | .214 | .183 | .183 | .183 | .125 | .125 | .125 | .072 | .072 | .072 | .023 | .023 | .023 | |
| 1.0 | .195 | .181 | .169 | .167 | .155 | .145 | .114 | .107 | .100 | .066 | .062 | .058 | .021 | .020 | .019 | |
| 2.0 | .180 | .157 | .137 | .154 | .135 | .119 | .105 | .093 | .083 | .061 | .054 | .048 | .019 | .018 | .016 | |
| 3.0 | .167 | .138 | .114 | .143 | .119 | .099 | .098 | .083 | .070 | .057 | .048 | .041 | .018 | .016 | .013 | |
| 4.0 | .156 | .123 | .097 | .134 | .106 | .085 | .092 | .074 | .060 | .053 | .043 | .035 | .017 | .014 | .012 | |
| 5.0 | .148 | .111 | .085 | .127 | .096 | .074 | .087 | .067 | .052 | .051 | .040 | .031 | .016 | .013 | .010 | |
| 6.0 | .140 | .102 | .075 | .120 | .088 | .065 | .083 | .062 | .046 | .048 | .036 | .027 | .016 | .012 | .009 | |
| 7.0 | .133 | .094 | .067 | .115 | .082 | .059 | .079 | .057 | .042 | .046 | .034 | .025 | .015 | .011 | .008 | |
| 8.0 | .128 | .088 | .061 | .110 | .077 | .053 | .076 | .054 | .038 | .044 | .032 | .023 | .014 | .010 | .007 | |
| 9.0 | .122 | .083 | .056 | .105 | .072 | .049 | .073 | .051 | .035 | .043 | .030 | .021 | .014 | .010 | .007 | |
| 10.0 | .118 | .079 | .053 | .101 | .068 | .046 | .070 | .048 | .033 | .041 | .028 | .019 | .013 | .009 | .006 | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

UGR(Unified Glare Rating) 数据表

| | | | | | | | | | | | |
|---|---------------|-----------------------|------|------|-------|---------------|---------------------|-------|------|------|------|
| 实测参数: U:24.00V I:0.9429A P:22.63W PF:1.000 实检光通:1260.9x1 lm | | | | | | | | | | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-3060 | | | | | 灯具类型: | | | 灯具重量: | | | |
| 外型尺寸: Length=1m | | | | | 灯具规格: | | | 测试编号: | | | |
| 制造厂商: | | | | | 发光口面: | | | 保护角: | | | |
| 反射比: 天花板 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | |
| 墙面 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | |
| 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | |
| 房间尺寸 | | 交叉 (Viewed crosswise) | | | | | 向前 (Viewed endwise) | | | | |
| x = 2H y = 2H | 2H | 12.5 | 13.4 | 12.7 | 13.6 | 13.8 | 16.9 | 17.8 | 17.2 | 18.0 | 18.3 |
| | 3H | 12.5 | 13.3 | 12.8 | 13.5 | 13.8 | 16.8 | 17.6 | 17.1 | 17.9 | 18.1 |
| | 4H | 12.5 | 13.3 | 12.8 | 13.5 | 13.8 | 16.8 | 17.5 | 17.1 | 17.8 | 18.1 |
| | 6H | 12.6 | 13.4 | 13.0 | 13.6 | 14.0 | 16.7 | 17.5 | 17.1 | 17.8 | 18.1 |
| | 8H | 12.8 | 13.5 | 13.1 | 13.8 | 14.1 | 16.8 | 17.4 | 17.1 | 17.8 | 18.1 |
| | 12H | 13.0 | 13.7 | 13.4 | 14.0 | 14.4 | 16.8 | 17.5 | 17.2 | 17.8 | 18.1 |
| 4H | 2H | 12.3 | 13.1 | 12.6 | 13.3 | 13.6 | 16.7 | 17.5 | 17.0 | 17.7 | 18.0 |
| | 3H | 12.3 | 13.0 | 12.7 | 13.3 | 13.7 | 16.6 | 17.2 | 16.9 | 17.6 | 17.9 |
| | 4H | 12.4 | 13.0 | 12.8 | 13.4 | 13.8 | 16.5 | 17.1 | 16.9 | 17.5 | 17.9 |
| | 6H | 12.7 | 13.3 | 13.2 | 13.7 | 14.1 | 16.6 | 17.1 | 17.0 | 17.5 | 17.9 |
| | 8H | 13.0 | 13.5 | 13.5 | 13.9 | 14.3 | 16.6 | 17.1 | 17.1 | 17.5 | 18.0 |
| | 12H | 13.5 | 13.9 | 13.9 | 14.3 | 14.8 | 16.8 | 17.2 | 17.2 | 17.6 | 18.1 |
| 8H | 4H | 12.4 | 12.9 | 12.9 | 13.3 | 13.8 | 16.4 | 16.9 | 16.9 | 17.3 | 17.8 |
| | 6H | 12.9 | 13.3 | 13.4 | 13.7 | 14.2 | 16.5 | 16.9 | 17.0 | 17.4 | 17.8 |
| | 8H | 13.3 | 13.7 | 13.8 | 14.2 | 14.7 | 16.6 | 17.0 | 17.1 | 17.5 | 18.0 |
| | 12H | 14.0 | 14.3 | 14.5 | 14.8 | 15.3 | 16.9 | 17.2 | 17.4 | 17.7 | 18.2 |
| 12H | 4H | 12.4 | 12.9 | 12.9 | 13.3 | 13.8 | 16.4 | 16.8 | 16.8 | 17.3 | 17.7 |
| | 6H | 13.0 | 13.3 | 13.5 | 13.8 | 14.3 | 16.5 | 16.9 | 17.0 | 17.3 | 17.8 |
| | 8H | 13.5 | 13.8 | 14.0 | 14.3 | 14.8 | 16.7 | 17.0 | 17.2 | 17.5 | 18.0 |
| 不同间隔布灯时, 观察者位置引起的UGR变化: | | | | | | | | | | | |
| S = 1.0H | + 1.6 / - 2.6 | | | | | + 4.0 / - 5.7 | | | | | |
| 1.5H | + 2.8 / - 2.5 | | | | | + 6.2 / - 5.7 | | | | | |
| 2.0H | + 2.6 / - 0.9 | | | | | + 5.4 / - 2.0 | | | | | |

依据CIE Pub.117计算, 表格已按1261lm光源光通进行修正 (8log (F/F0) = 0.8) .

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

UF利用系数表

| | | |
|---|-------|-------|
| 实测参数: U:24.00V I:0.9429A P:22.63W PF:1.000 实检光通:1260.9×1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-3060 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |


| 反 射 比 / REFLECTANCE | | | | | | | | | | |
|----------------------------|---|-----|-----|-----|-----|-----|----------------------|-----|-----|---------|
| 天花板 | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| 墙壁 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| 室形指数 | 利用系数 UTILIZATION FACTORS(%) k(RI) × RCR = 5 | | | | | | | | | |
| k = 0.60 | 85 | 78 | 74 | 84 | 78 | 74 | 83 | 78 | 74 | 70 |
| 0.80 | 93 | 86 | 82 | 92 | 86 | 82 | 90 | 85 | 82 | 78 |
| 1.00 | 97 | 91 | 87 | 96 | 91 | 87 | 94 | 90 | 86 | 82 |
| 1.25 | 101 | 96 | 92 | 100 | 95 | 92 | 98 | 94 | 91 | 86 |
| 1.50 | 104 | 99 | 96 | 103 | 98 | 95 | 100 | 96 | 94 | 89 |
| 2.00 | 107 | 103 | 99 | 105 | 101 | 98 | 102 | 99 | 96 | 91 |
| 2.50 | 109 | 105 | 102 | 107 | 103 | 100 | 103 | 101 | 98 | 91 |
| 3.00 | 110 | 107 | 104 | 108 | 105 | 103 | 104 | 102 | 100 | 93 |
| 4.00 | 113 | 110 | 107 | 110 | 108 | 106 | 106 | 104 | 102 | 94 |
| 5.00 | 114 | 111 | 109 | 111 | 109 | 108 | 107 | 105 | 104 | 95 |
| ROOM INDEX | UF (总) | | | | | | | | | UF (直接) |
| 依据标准文件 DIN EN 13032-2 2004 | | | 悬挂灯 | | | | 安装距高比 SHR NOM = 1.25 | | | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

灯具等光强曲线

| | | |
|--|-------|-------|
| 实测参数: U:24.00V I:0.9429A P:22.63W PF:1.000 实检光通:1260.9 \times 1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-3060 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |

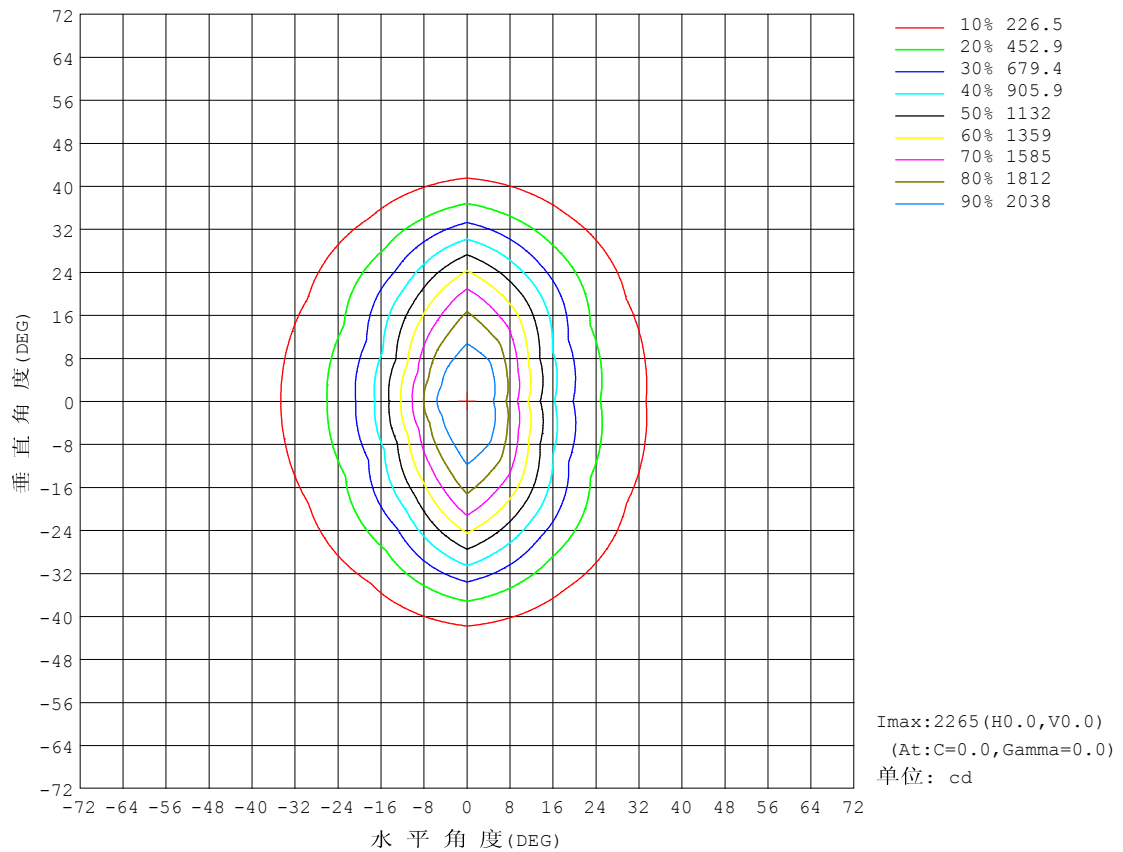


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-22

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

灯具有效平均照度曲线

| | | |
|---|-------|-------|
| 实测参数: U:24.00V I:0.9429A P:22.63W PF:1.000 实检光通:1260.9x1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-3060 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |

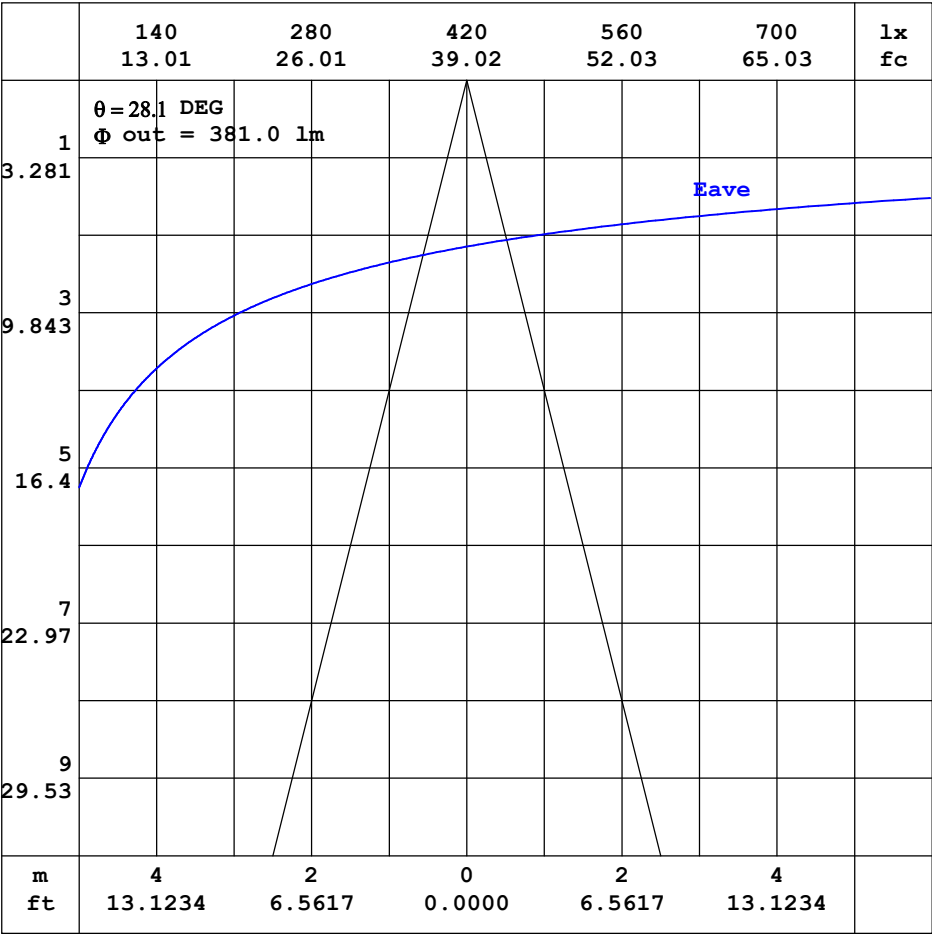


注:曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-22

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

平面等照度曲线


| | | |
|---|-------|-------|
| 实测参数: U:24.00V I:0.9429A P:22.63W PF:1.000 实检光通:1260.9x1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-3060 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |

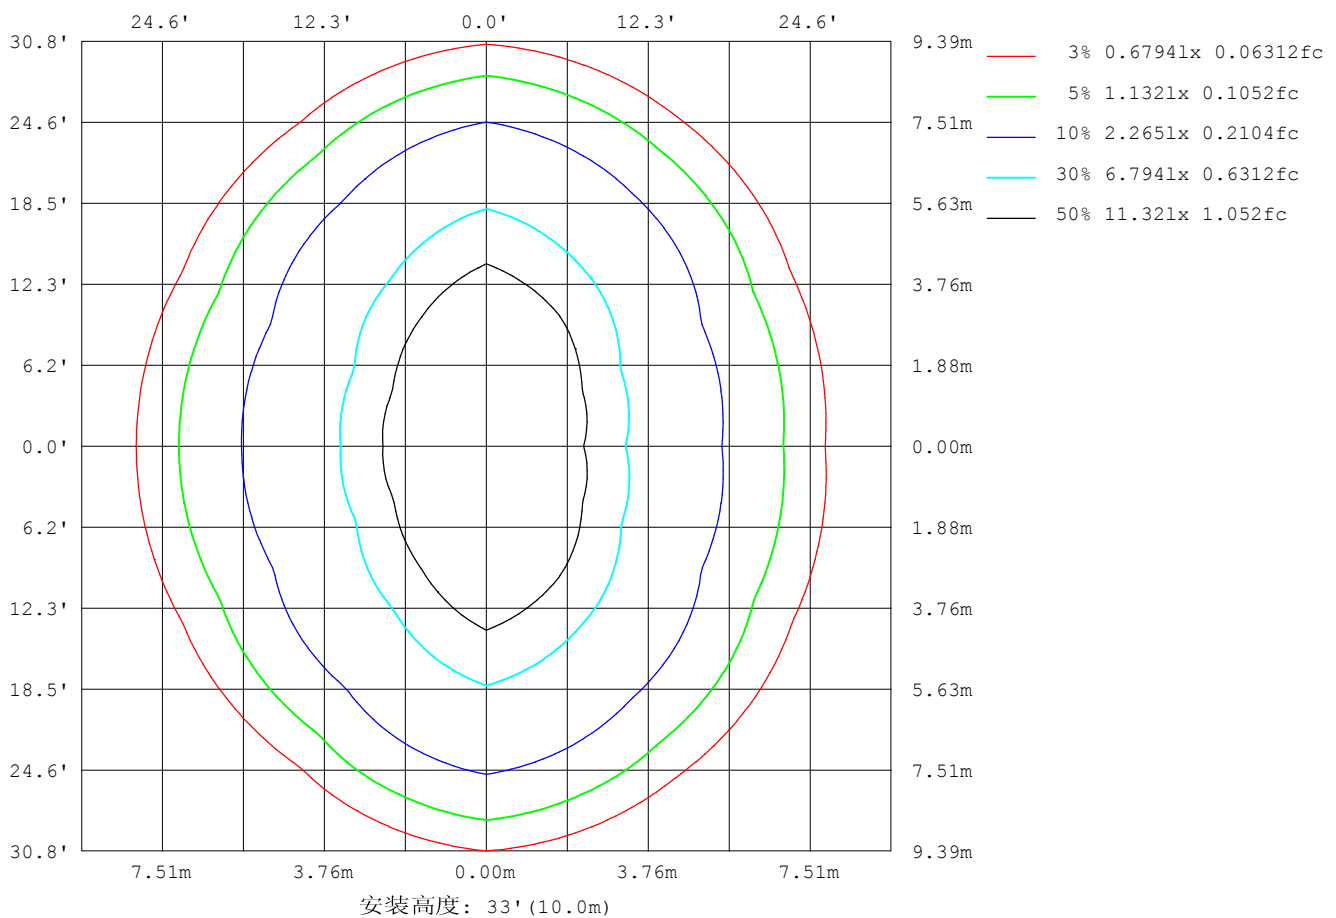

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

平面照度曲线

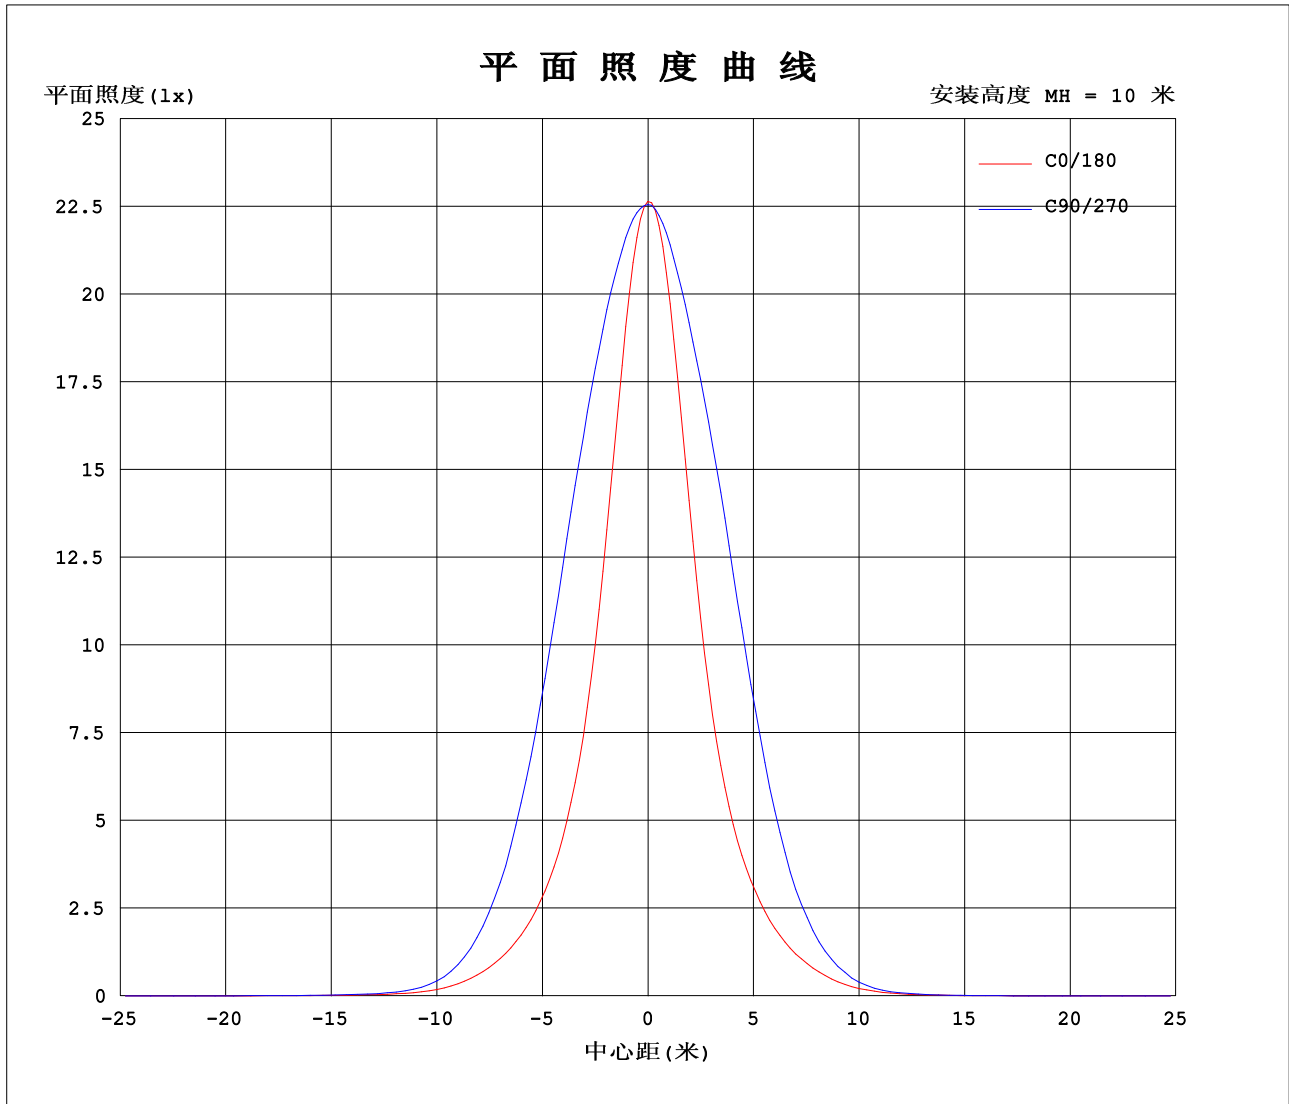

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-22

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

光强分布数据表格

| | | |
|---|-------|-------|
| 实测参数: U:24.00V I:0.9429A P:22.63W PF:1.000 实检光通:1260.9x1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-3060 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |

| | | | | | | | | | | | | | | | | | | | |
|--------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|--------|--|--|--|--|--|--|
| 表--1 | | | | | | | | | | | | | 单位: cd | | | | | | |
| <div>C (DEG) γ (DEG)</div> | 0 | 30 | 60 | 90 | 120 | 150 | 180 | 210 | 240 | 270 | 300 | 330 | | | | | | | |
| 0 | 2265 | 2262 | 2259 | 2255 | 2255 | 2258 | 2265 | 2262 | 2259 | 2255 | 2255 | 2258 | | | | | | | |
| 5 | 2029 | 2112 | 2199 | 2216 | 2133 | 2063 | 2084 | 2077 | 2143 | 2199 | 2189 | 2107 | | | | | | | |
| 10 | 1516 | 1690 | 1973 | 2098 | 1856 | 1618 | 1602 | 1646 | 1877 | 2063 | 1956 | 1686 | | | | | | | |
| 15 | 1012 | 1195 | 1642 | 1919 | 1495 | 1136 | 1085 | 1158 | 1533 | 1885 | 1629 | 1191 | | | | | | | |
| 20 | 665 | 807 | 1270 | 1663 | 1121 | 755 | 717 | 777 | 1173 | 1642 | 1271 | 796 | | | | | | | |
| 25 | 446 | 531 | 901 | 1323 | 783 | 503 | 489 | 518 | 828 | 1300 | 907 | 522 | | | | | | | |
| 30 | 301 | 345 | 591 | 948 | 511 | 335 | 332 | 344 | 542 | 914 | 595 | 344 | | | | | | | |
| 35 | 195 | 222 | 358 | 587 | 311 | 219 | 219 | 222 | 324 | 554 | 361 | 221 | | | | | | | |
| 40 | 113 | 136 | 197 | 303 | 172 | 134 | 130 | 132 | 178 | 285 | 195 | 133 | | | | | | | |
| 45 | 53.5 | 73.9 | 96.8 | 122 | 84.4 | 70.7 | 61.6 | 67.0 | 83.2 | 113 | 92.7 | 69.1 | | | | | | | |
| 50 | 24.6 | 33.5 | 41.8 | 43.9 | 34.9 | 29.7 | 25.5 | 26.7 | 31.7 | 35.7 | 36.0 | 29.0 | | | | | | | |
| 55 | 13.9 | 15.4 | 17.8 | 19.5 | 15.0 | 13.5 | 11.6 | 10.7 | 11.7 | 14.4 | 13.3 | 12.2 | | | | | | | |
| 60 | 9.06 | 9.73 | 10.2 | 11.2 | 9.27 | 8.66 | 5.95 | 5.39 | 5.76 | 7.13 | 6.48 | 6.20 | | | | | | | |
| 65 | 6.76 | 7.17 | 7.54 | 8.03 | 7.12 | 6.57 | 3.08 | 2.91 | 3.22 | 4.02 | 3.64 | 3.37 | | | | | | | |
| 70 | 5.65 | 5.80 | 6.04 | 6.19 | 5.86 | 5.56 | 1.58 | 1.55 | 1.71 | 2.15 | 1.97 | 1.78 | | | | | | | |
| 75 | 5.14 | 5.13 | 5.25 | 5.26 | 5.32 | 5.15 | 0.88 | 0.94 | 1.06 | 1.25 | 1.11 | 1.03 | | | | | | | |
| 80 | 5.12 | 5.03 | 5.14 | 5.17 | 5.27 | 5.13 | 0.85 | 0.89 | 1.06 | 1.17 | 1.06 | 0.92 | | | | | | | |
| 85 | 4.98 | 4.91 | 5.06 | 5.16 | 5.16 | 5.01 | 0.87 | 0.89 | 1.12 | 1.38 | 1.11 | 0.92 | | | | | | | |
| 90 | 4.80 | 4.76 | 4.96 | 5.04 | 5.04 | 4.87 | 1.00 | 1.06 | 1.31 | 1.33 | 1.27 | 1.03 | | | | | | | |
| 95 | 4.65 | 4.66 | 4.92 | 5.06 | 4.97 | 4.74 | 1.29 | 1.36 | 1.66 | 1.71 | 1.59 | 1.31 | | | | | | | |
| 100 | 4.56 | 4.65 | 4.91 | 5.09 | 4.92 | 4.60 | 1.65 | 1.75 | 2.10 | 2.17 | 2.01 | 1.69 | | | | | | | |
| 105 | 4.50 | 4.66 | 4.94 | 5.18 | 4.92 | 4.61 | 2.05 | 2.22 | 2.67 | 2.77 | 2.56 | 2.14 | | | | | | | |
| 110 | 4.50 | 4.75 | 5.13 | 5.43 | 5.10 | 4.68 | 2.56 | 2.83 | 3.36 | 3.47 | 3.24 | 2.72 | | | | | | | |
| 115 | 4.66 | 4.98 | 5.50 | 5.83 | 5.48 | 4.95 | 3.20 | 3.60 | 4.15 | 4.24 | 4.01 | 3.46 | | | | | | | |
| 120 | 5.02 | 5.41 | 6.03 | 6.37 | 6.05 | 5.44 | 4.06 | 4.53 | 5.01 | 5.07 | 4.87 | 4.35 | | | | | | | |
| 125 | 5.69 | 6.07 | 6.73 | 7.06 | 6.81 | 6.21 | 5.15 | 5.56 | 5.91 | 5.95 | 5.78 | 5.38 | | | | | | | |
| 130 | 6.69 | 6.98 | 7.56 | 7.85 | 7.69 | 7.17 | 6.40 | 6.66 | 6.84 | 6.83 | 6.70 | 6.46 | | | | | | | |
| 135 | 7.95 | 8.07 | 8.47 | 8.67 | 8.66 | 8.31 | 7.64 | 7.70 | 7.75 | 7.67 | 7.63 | 7.53 | | | | | | | |
| 140 | 9.31 | 9.20 | 9.39 | 9.47 | 9.64 | 9.52 | 8.66 | 8.62 | 8.60 | 8.42 | 8.46 | 8.43 | | | | | | | |
| 145 | 10.6 | 10.3 | 10.3 | 10.2 | 10.6 | 10.7 | 9.43 | 9.43 | 9.40 | 9.10 | 9.18 | 9.18 | | | | | | | |
| 150 | 11.7 | 11.3 | 10.9 | 10.8 | 11.3 | 11.7 | 9.97 | 10.1 | 10.1 | 9.64 | 9.73 | 9.76 | | | | | | | |
| 155 | 12.5 | 12.1 | 11.4 | 11.4 | 12.0 | 12.5 | 10.4 | 10.6 | 10.7 | 10.1 | 10.1 | 10.2 | | | | | | | |
| 160 | 12.9 | 12.5 | 11.7 | 11.8 | 12.4 | 13.0 | 10.7 | 11.0 | 11.1 | 10.6 | 10.4 | 10.4 | | | | | | | |
| 165 | 13.0 | 12.4 | 12.0 | 12.1 | 12.6 | 13.0 | 11.0 | 11.3 | 11.5 | 11.1 | 10.7 | 10.6 | | | | | | | |
| 170 | 12.7 | 12.2 | 12.2 | 12.4 | 12.6 | 12.8 | 11.2 | 11.6 | 11.9 | 11.6 | 11.2 | 10.7 | | | | | | | |
| 175 | 12.1 | 12.1 | 12.4 | 12.6 | 12.6 | 12.4 | 11.3 | 11.8 | 12.2 | 12.1 | 11.7 | 11.2 | | | | | | | |
| 180 | 11.7 | 12.1 | 12.5 | 12.6 | 12.4 | 12.0 | 11.7 | 12.1 | 12.5 | 12.5 | 12.4 | 11.9 | | | | | | | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:LYH
测试日期:2024-07-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度:65.0%
测试距离:10.000米 [K=1.0000]
备注:

Photometric Data Table [cd]

| G/C | 0.0 | 30.0 | 60.0 | 90.0 | 120.0 | 150.0 | 180.0 | 210.0 | 240.0 | 270.0 |
|-------|-------|-------|-------|-------|-------|-------|--------|--------|-------|-------|
| 0.0 | 2265 | 2262 | 2259 | 2255 | 2255 | 2258 | 2265 | 2262 | 2259 | 2255 |
| 3.0 | 2170 | 2212 | 2244 | 2242 | 2203 | 2182 | 2205 | 2191 | 2212 | 2233 |
| 6.0 | 1940 | 2046 | 2165 | 2197 | 2087 | 1991 | 2005 | 2004 | 2101 | 2176 |
| 9.0 | 1623 | 1786 | 2028 | 2125 | 1919 | 1719 | 1710 | 1745 | 1938 | 2093 |
| 12.0 | 1294 | 1492 | 1849 | 2031 | 1715 | 1422 | 1385 | 1448 | 1746 | 1991 |
| 15.0 | 1012 | 1195 | 1642 | 1919 | 1495 | 1136 | 1085 | 1158 | 1533 | 1885 |
| 18.0 | 780.3 | 952.8 | 1415 | 1773 | 1267 | 891.6 | 843.4 | 915.1 | 1316 | 1749 |
| 21.0 | 612.4 | 738.6 | 1193 | 1601 | 1048 | 692.3 | 662.6 | 717.0 | 1102 | 1577 |
| 24.0 | 483.1 | 576.5 | 973.2 | 1395 | 847.5 | 547.2 | 526.2 | 561.2 | 893.5 | 1376 |
| 27.0 | 382.1 | 443.9 | 770.5 | 1172 | 666.9 | 430.9 | 420.7 | 441.0 | 703.7 | 1149 |
| 30.0 | 300.7 | 344.7 | 591.3 | 947.9 | 511.2 | 335.2 | 332.1 | 344.5 | 541.6 | 913.7 |
| 33.0 | 233.1 | 265.3 | 442.0 | 724.4 | 383.2 | 262.4 | 260.4 | 266.0 | 404.9 | 694.0 |
| 36.0 | 175.7 | 202.5 | 320.0 | 526.1 | 278.8 | 200.4 | 200.0 | 202.0 | 290.1 | 493.7 |
| 39.0 | 126.9 | 151.4 | 223.9 | 354.5 | 196.0 | 148.3 | 146.4 | 147.0 | 202.1 | 330.3 |
| 42.0 | 85.40 | 108.8 | 150.0 | 219.0 | 131.5 | 105.9 | 99.35 | 102.9 | 134.1 | 206.1 |
| 45.0 | 53.53 | 73.86 | 96.79 | 122.3 | 84.40 | 70.69 | 61.64 | 67.01 | 83.22 | 113.2 |
| 48.0 | 33.01 | 47.01 | 58.68 | 64.44 | 50.79 | 42.11 | 36.23 | 39.34 | 47.72 | 55.37 |
| 51.0 | 21.65 | 28.30 | 34.78 | 36.75 | 28.93 | 24.77 | 21.65 | 21.93 | 25.71 | 29.67 |
| 54.0 | 15.34 | 17.73 | 20.84 | 22.66 | 17.34 | 15.32 | 13.57 | 12.63 | 13.97 | 16.78 |
| 57.0 | 11.42 | 12.53 | 13.67 | 15.01 | 11.83 | 10.91 | 8.832 | 8.015 | 8.560 | 10.56 |
| 60.0 | 9.057 | 9.726 | 10.20 | 11.18 | 9.268 | 8.658 | 5.948 | 5.388 | 5.762 | 7.130 |
| 63.0 | 7.491 | 7.995 | 8.385 | 8.979 | 7.828 | 7.258 | 3.999 | 3.768 | 4.066 | 5.026 |
| 66.0 | 6.480 | 6.812 | 7.187 | 7.603 | 6.830 | 6.305 | 2.697 | 2.559 | 2.866 | 3.592 |
| 69.0 | 5.814 | 6.009 | 6.292 | 6.522 | 6.056 | 5.696 | 1.804 | 1.748 | 1.949 | 2.498 |
| 72.0 | 5.402 | 5.484 | 5.639 | 5.701 | 5.584 | 5.352 | 1.225 | 1.240 | 1.334 | 1.688 |
| 75.0 | 5.136 | 5.129 | 5.251 | 5.256 | 5.317 | 5.147 | 0.8758 | 0.9431 | 1.057 | 1.252 |
| 78.0 | 5.135 | 5.051 | 5.159 | 5.171 | 5.298 | 5.147 | 0.8458 | 0.9002 | 1.051 | 1.172 |
| 81.0 | 5.093 | 5.008 | 5.129 | 5.171 | 5.256 | 5.111 | 0.8458 | 0.8941 | 1.057 | 1.172 |
| 84.0 | 5.027 | 4.953 | 5.081 | 5.195 | 5.184 | 5.050 | 0.8521 | 0.8941 | 1.100 | 1.400 |
| 87.0 | 4.912 | 4.851 | 5.021 | 5.045 | 5.105 | 4.960 | 0.9005 | 0.9300 | 1.172 | 1.281 |
| 90.0 | 4.803 | 4.761 | 4.960 | 5.039 | 5.045 | 4.869 | 1.003 | 1.057 | 1.306 | 1.335 |
| 93.0 | 4.713 | 4.688 | 4.936 | 5.039 | 4.996 | 4.785 | 1.167 | 1.220 | 1.505 | 1.546 |
| 96.0 | 4.634 | 4.652 | 4.918 | 5.063 | 4.960 | 4.706 | 1.360 | 1.425 | 1.741 | 1.793 |
| 99.0 | 4.562 | 4.652 | 4.912 | 5.081 | 4.930 | 4.640 | 1.572 | 1.649 | 1.995 | 2.065 |
| 102.0 | 4.525 | 4.652 | 4.912 | 5.105 | 4.918 | 4.604 | 1.807 | 1.914 | 2.315 | 2.398 |
| 105.0 | 4.501 | 4.664 | 4.942 | 5.184 | 4.918 | 4.610 | 2.049 | 2.216 | 2.672 | 2.772 |
| 108.0 | 4.501 | 4.694 | 5.038 | 5.317 | 4.996 | 4.640 | 2.339 | 2.560 | 3.071 | 3.170 |
| 111.0 | 4.501 | 4.779 | 5.195 | 5.492 | 5.153 | 4.731 | 2.672 | 2.977 | 3.506 | 3.612 |
| 114.0 | 4.609 | 4.924 | 5.412 | 5.734 | 5.388 | 4.876 | 3.059 | 3.424 | 3.977 | 4.083 |
| 117.0 | 4.772 | 5.112 | 5.690 | 6.024 | 5.684 | 5.118 | 3.518 | 3.961 | 4.485 | 4.572 |
| 120.0 | 5.019 | 5.414 | 6.034 | 6.375 | 6.046 | 5.444 | 4.062 | 4.529 | 5.010 | 5.073 |
| 123.0 | 5.381 | 5.771 | 6.438 | 6.755 | 6.493 | 5.873 | 4.691 | 5.134 | 5.536 | 5.605 |
| 126.0 | 5.858 | 6.248 | 6.892 | 7.221 | 6.976 | 6.381 | 5.392 | 5.786 | 6.092 | 6.125 |
| 129.0 | 6.462 | 6.774 | 7.387 | 7.674 | 7.513 | 6.968 | 6.153 | 6.438 | 6.648 | 6.650 |
| 132.0 | 7.168 | 7.396 | 7.930 | 8.175 | 8.081 | 7.626 | 6.920 | 7.078 | 7.203 | 7.170 |
| 135.0 | 7.948 | 8.067 | 8.468 | 8.671 | 8.655 | 8.315 | 7.639 | 7.695 | 7.747 | 7.671 |
| 138.0 | 8.757 | 8.738 | 9.018 | 9.160 | 9.253 | 9.040 | 8.267 | 8.281 | 8.255 | 8.125 |
| 141.0 | 9.578 | 9.451 | 9.573 | 9.637 | 9.839 | 9.777 | 8.828 | 8.795 | 8.762 | 8.559 |
| 144.0 | 10.36 | 10.13 | 10.08 | 10.07 | 10.40 | 10.47 | 9.281 | 9.302 | 9.245 | 8.958 |
| 147.0 | 11.07 | 10.78 | 10.53 | 10.48 | 10.90 | 11.16 | 9.661 | 9.713 | 9.680 | 9.315 |
| 150.0 | 11.68 | 11.34 | 10.93 | 10.84 | 11.34 | 11.72 | 9.969 | 10.08 | 10.09 | 9.641 |
| 153.0 | 12.20 | 11.84 | 11.24 | 11.18 | 11.73 | 12.25 | 10.23 | 10.41 | 10.45 | 9.931 |
| 156.0 | 12.61 | 12.20 | 11.49 | 11.44 | 12.05 | 12.64 | 10.46 | 10.69 | 10.77 | 10.22 |
| 159.0 | 12.87 | 12.44 | 11.67 | 11.70 | 12.29 | 12.93 | 10.68 | 10.93 | 11.06 | 10.51 |
| 162.0 | 12.98 | 12.49 | 11.83 | 11.93 | 12.47 | 13.07 | 10.85 | 11.15 | 11.30 | 10.78 |
| 165.0 | 12.97 | 12.45 | 11.97 | 12.13 | 12.57 | 13.05 | 10.99 | 11.32 | 11.53 | 11.09 |
| 168.0 | 12.85 | 12.33 | 12.10 | 12.30 | 12.60 | 12.96 | 11.13 | 11.48 | 11.74 | 11.38 |
| 171.0 | 12.59 | 12.20 | 12.23 | 12.43 | 12.61 | 12.78 | 11.21 | 11.62 | 11.96 | 11.69 |
| 174.0 | 12.24 | 12.11 | 12.37 | 12.54 | 12.61 | 12.50 | 11.28 | 11.77 | 12.18 | 12.00 |
| 177.0 | 11.94 | 12.11 | 12.49 | 12.60 | 12.54 | 12.20 | 11.44 | 11.92 | 12.41 | 12.29 |
| 180.0 | 11.73 | 12.11 | 12.53 | 12.59 | 12.39 | 11.96 | 11.67 | 12.11 | 12.53 | 12.52 |
| G/C | 300.0 | 330.0 | | | | | | | | |
| 0.0 | 2255 | 2258 | | | | | | | | |
| 3.0 | 2239 | 2210 | | | | | | | | |
| 6.0 | 2154 | 2038 | | | | | | | | |
| 9.0 | 2013 | 1783 | | | | | | | | |
| 12.0 | 1834 | 1486 | | | | | | | | |
| 15.0 | 1629 | 1191 | | | | | | | | |
| 18.0 | 1418 | 941.2 | | | | | | | | |
| 21.0 | 1196 | 731.7 | | | | | | | | |
| 24.0 | 975.8 | 567.3 | | | | | | | | |
| 27.0 | 771.5 | 442.3 | | | | | | | | |
| 30.0 | 594.7 | 343.7 | | | | | | | | |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: LYH

测试日期: 2024-07-22

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269

环境湿度: 65.0%

测试距离: 10.000米 [K=1.0000]


备注:

Photometric Data Table [cd]

| | | |
|-------|-------|--------|
| 33.0 | 445.2 | 264.6 |
| 36.0 | 319.4 | 201.5 |
| 39.0 | 222.7 | 147.4 |
| 42.0 | 148.4 | 104.1 |
| 45.0 | 92.71 | 69.07 |
| 48.0 | 53.86 | 41.95 |
| 51.0 | 29.39 | 24.07 |
| 54.0 | 15.97 | 14.29 |
| 57.0 | 9.640 | 9.182 |
| 60.0 | 6.480 | 6.198 |
| 63.0 | 4.573 | 4.343 |
| 66.0 | 3.246 | 2.976 |
| 69.0 | 2.238 | 2.008 |
| 72.0 | 1.521 | 1.403 |
| 75.0 | 1.111 | 1.034 |
| 78.0 | 1.051 | 0.9365 |
| 81.0 | 1.057 | 0.9183 |
| 84.0 | 1.082 | 0.9183 |
| 87.0 | 1.154 | 0.9303 |
| 90.0 | 1.269 | 1.027 |
| 93.0 | 1.451 | 1.196 |
| 96.0 | 1.668 | 1.383 |
| 99.0 | 1.934 | 1.606 |
| 102.0 | 2.224 | 1.866 |
| 105.0 | 2.563 | 2.144 |
| 108.0 | 2.956 | 2.470 |
| 111.0 | 3.385 | 2.856 |
| 114.0 | 3.856 | 3.297 |
| 117.0 | 4.352 | 3.780 |
| 120.0 | 4.871 | 4.354 |
| 123.0 | 5.403 | 4.958 |
| 126.0 | 5.971 | 5.581 |
| 129.0 | 6.527 | 6.251 |
| 132.0 | 7.082 | 6.873 |
| 135.0 | 7.626 | 7.526 |
| 138.0 | 8.140 | 8.088 |
| 141.0 | 8.611 | 8.589 |
| 144.0 | 9.045 | 9.055 |
| 147.0 | 9.420 | 9.442 |
| 150.0 | 9.728 | 9.762 |
| 153.0 | 9.969 | 10.03 |
| 156.0 | 10.16 | 10.26 |
| 159.0 | 10.33 | 10.39 |
| 162.0 | 10.50 | 10.49 |
| 165.0 | 10.69 | 10.56 |
| 168.0 | 10.95 | 10.66 |
| 171.0 | 11.26 | 10.77 |
| 174.0 | 11.61 | 11.05 |
| 177.0 | 12.01 | 11.45 |
| 180.0 | 12.38 | 11.91 |


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

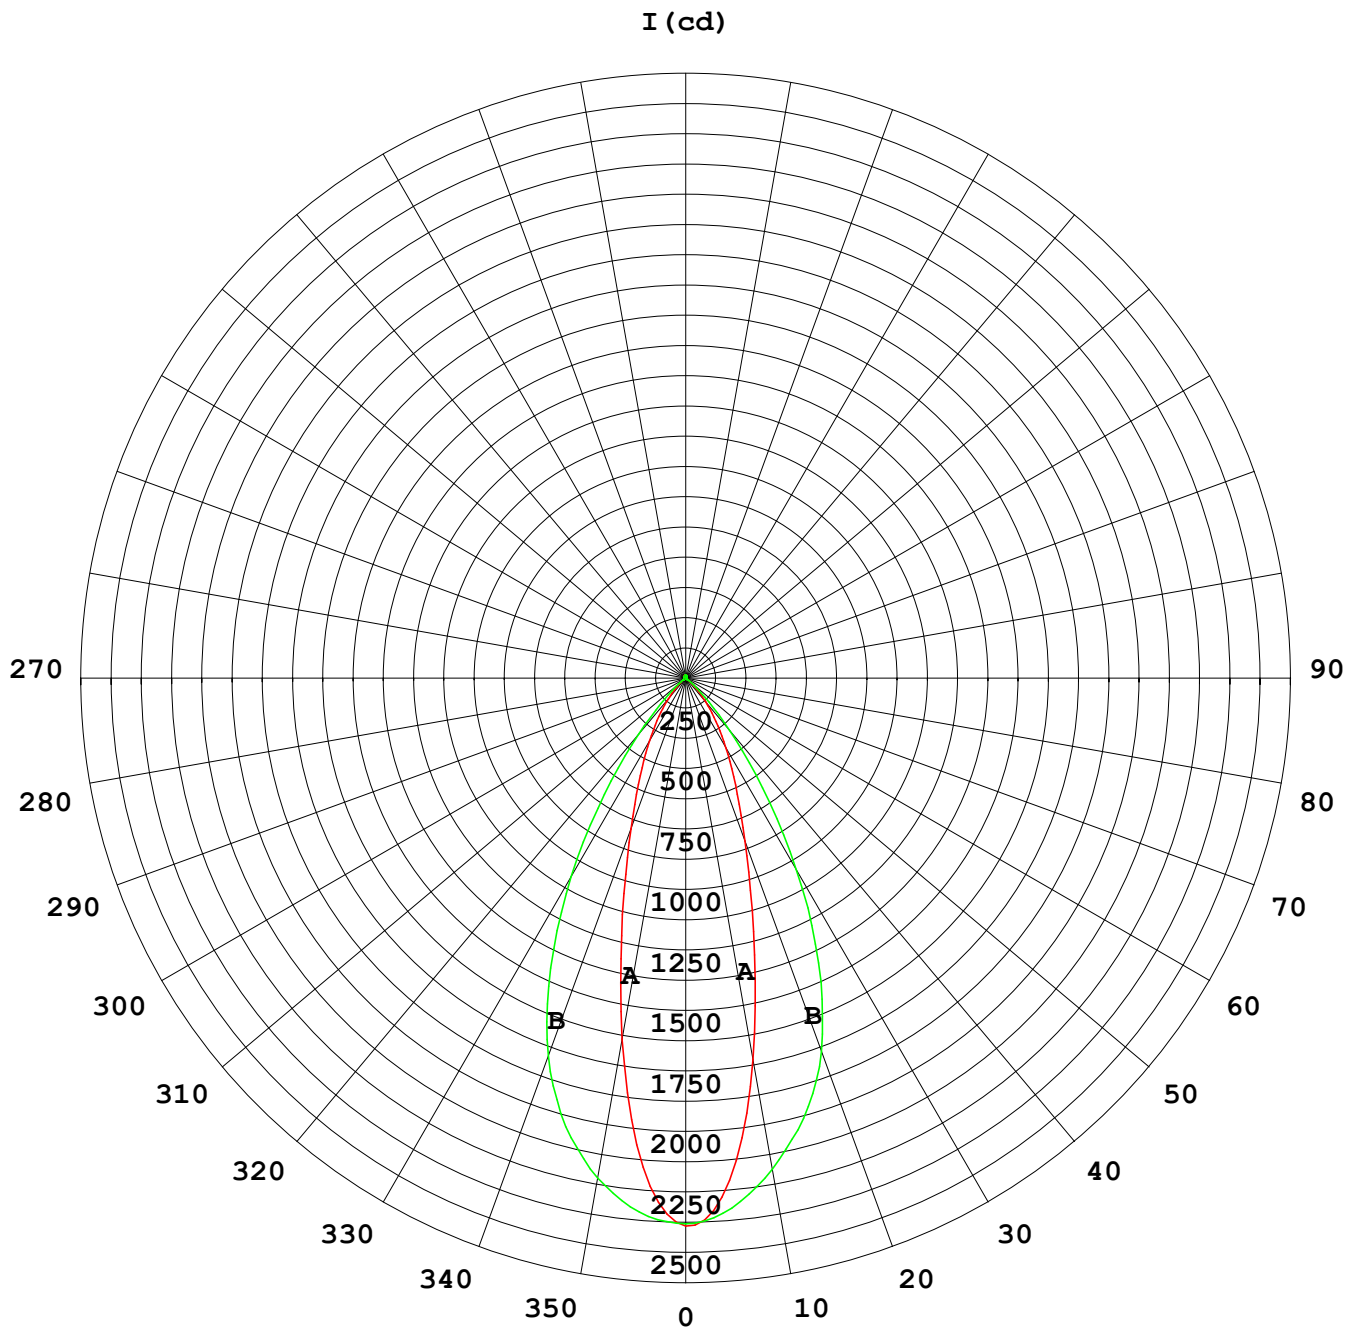

1000 lm

$\kappa = 1$

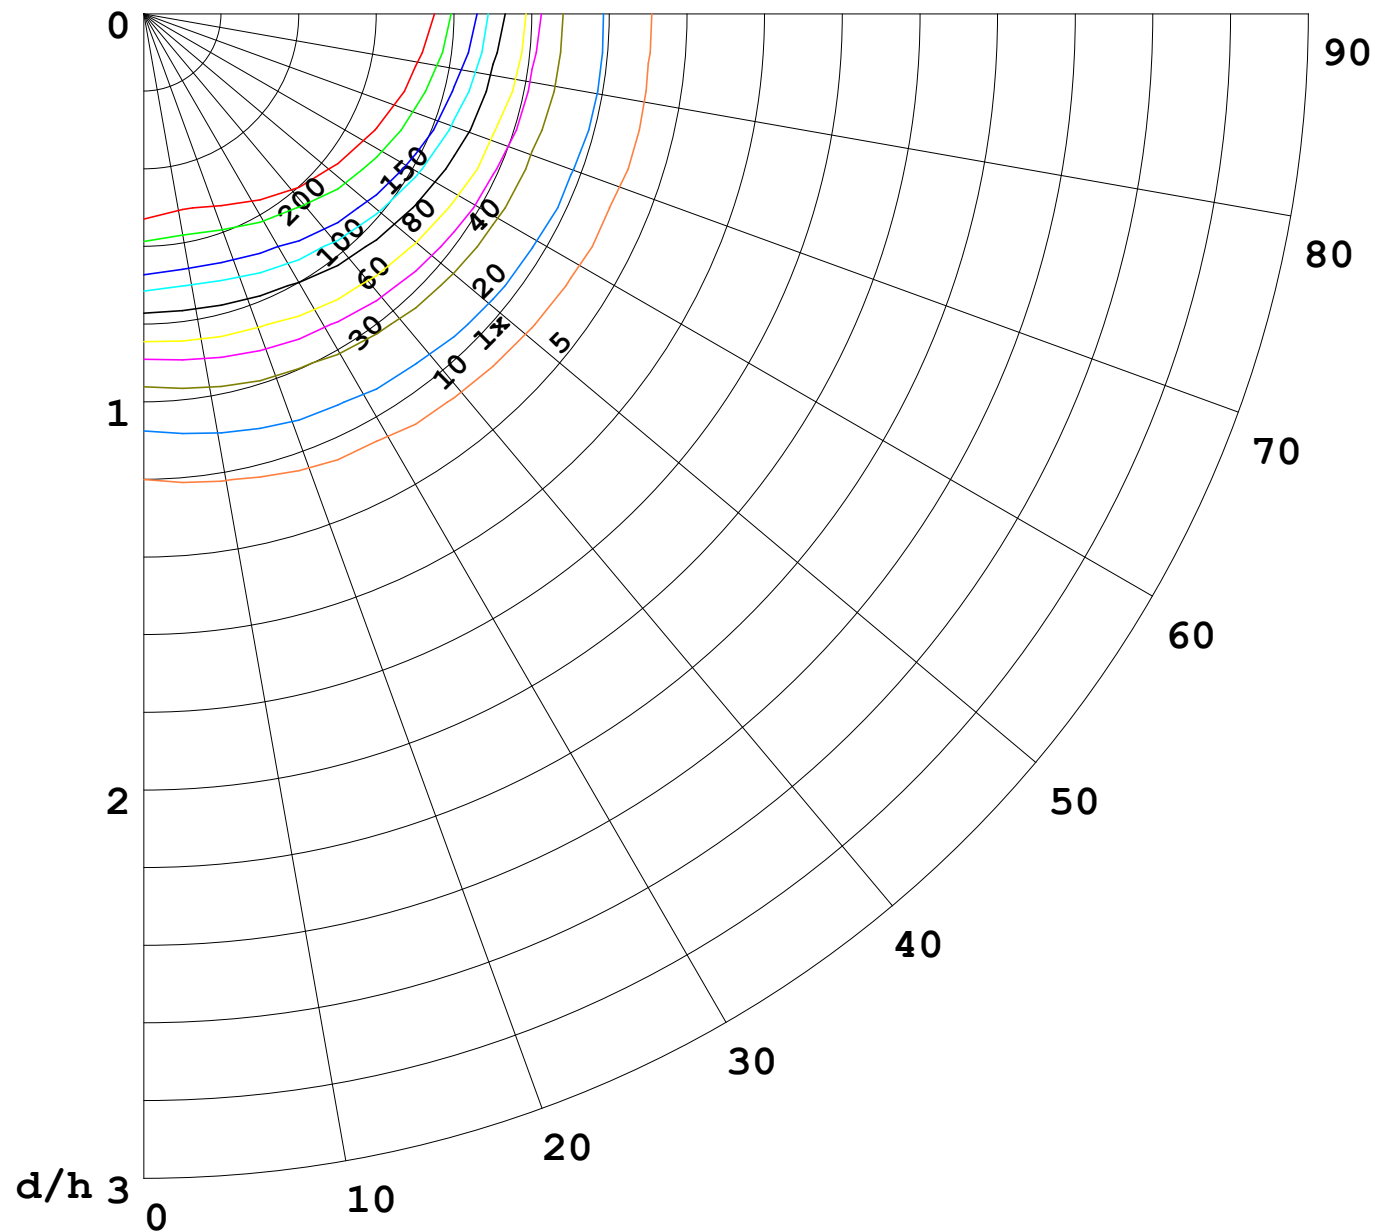

F = 5000 lm
 K = 0.7
 Hcc = 0.0 m
 Hfc = 0.0 m
 Eave = 100 lx

| | Pcc | Pw | Pfc |
|---|-----|----|-----|
| — | 70 | 50 | 30 |
| — | 50 | 30 | 20 |

