


室内灯具光度数据

| | | |
|--|-------|-------|
| 实测参数: U:24.00V I:0.9758A P:23.42W PF:1.000 实检光通:1551.31x1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-24 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |

| 光源数据 | | 光度数据 | | | | 光效: 66.24 lm/W |
|-----------|---------|----------|--------|-------------------|----------|----------------|
| 型号 | 3535 | 峰值光强(cd) | 5351 | S/MH(C0/180) | 0.35 | |
| 标称功率(W) | | 灯具效率(%) | 100.0 | S/MH(C90/270) | 0.38 | |
| 额定电源电压(V) | | 总光通量(lm) | 1551.3 | η UP,DN(C0-180) | 1.8,47.4 | |
| 额定光通量(lm) | 1551.31 | CIE分类 | 直接 | η UP,DN(C180-360) | 1.3,49.5 | |
| 灯具内光源数(只) | 1 | 上射光通比(%) | 3.1 | CIBSE SHR NOM | 0.00 | |
| 实测电源电压(V) | | 下射光通比(%) | 96.9 | CIBSE SHR MAX | 1.00 | |

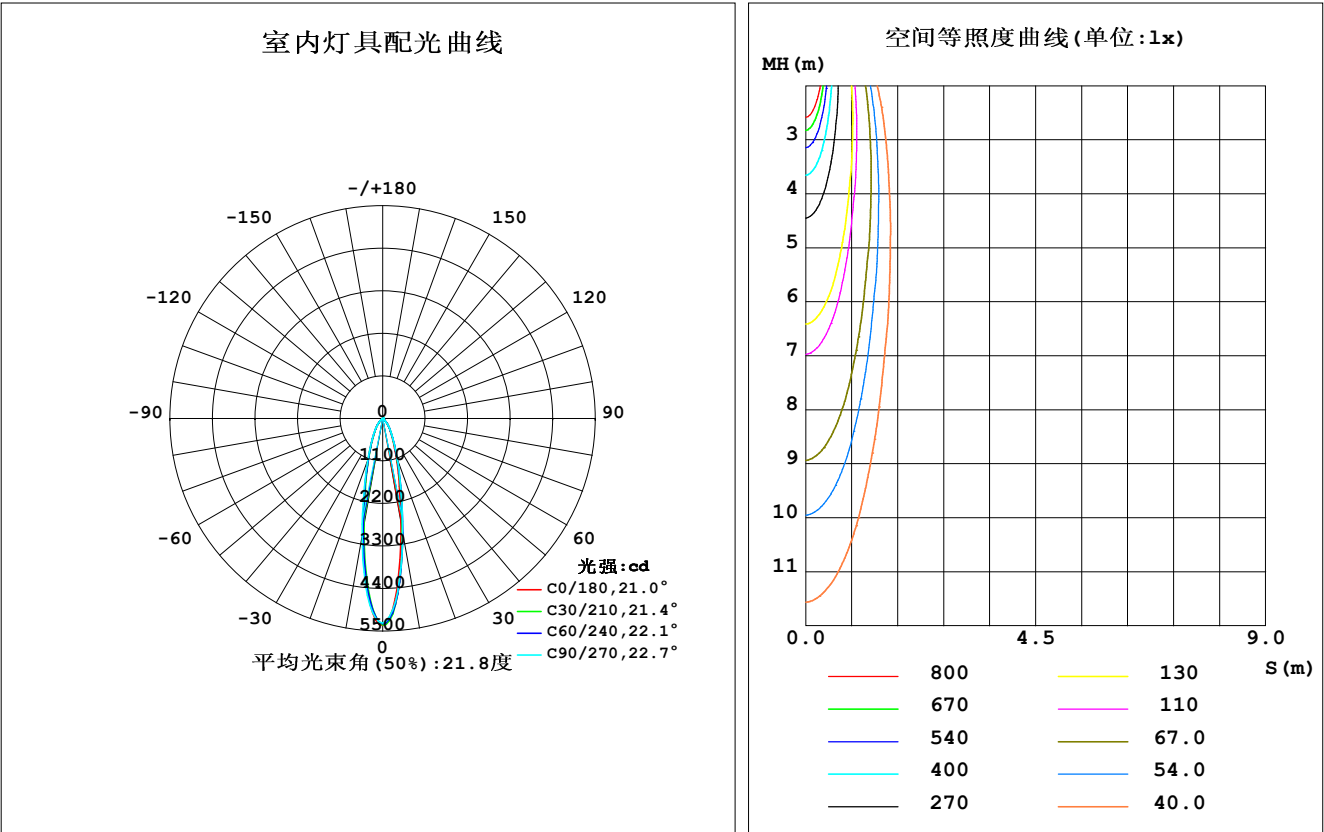


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-19

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

灯具环带光通量和亮度限制曲线

环带光通量：

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | $\gamma(^{\circ})$ | Φ 环 | Φ 总 | %lum, lamp |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|--------------------|----------|----------|------------|
| 10 | 2730 | 2969 | 2999 | 2742 | 2910 | 2863 | 3077 | 3136 | 0- 10 | 375.8 | 375.8 | 24.2, 24.2 |
| 20 | 1003 | 1085 | 1112 | 1029 | 1099 | 1070 | 1127 | 1141 | 10- 20 | 495.6 | 871.4 | 56.2, 56.2 |
| 30 | 427.9 | 452.3 | 460.0 | 437.8 | 464.5 | 454.6 | 471.0 | 476.7 | 20- 30 | 322.1 | 1194 | 76.9, 76.9 |
| 40 | 188.4 | 193.5 | 189.9 | 179.4 | 203.8 | 203.2 | 215.0 | 215.2 | 30- 40 | 194.1 | 1388 | 89.4, 89.4 |
| 50 | 38.40 | 38.99 | 37.04 | 30.96 | 36.94 | 41.87 | 50.35 | 51.83 | 40- 50 | 82.20 | 1470 | 94.7, 94.7 |
| 60 | 11.70 | 11.90 | 12.31 | 11.11 | 7.496 | 7.804 | 9.060 | 8.985 | 50- 60 | 17.72 | 1488 | 95.9, 95.9 |
| 70 | 7.465 | 7.405 | 7.357 | 7.205 | 1.947 | 1.913 | 2.198 | 2.299 | 60- 70 | 6.840 | 1494 | 96.3, 96.3 |
| 80 | 6.776 | 6.623 | 6.585 | 6.718 | 1.067 | 1.070 | 1.116 | 1.086 | 70- 80 | 4.307 | 1499 | 96.6, 96.6 |
| 90 | 6.219 | 6.184 | 6.230 | 6.331 | 1.399 | 1.450 | 1.490 | 1.420 | 80- 90 | 4.211 | 1503 | 96.9, 96.9 |
| 100 | 5.783 | 5.908 | 5.991 | 5.918 | 2.270 | 2.336 | 2.348 | 2.260 | 90-100 | 4.308 | 1507 | 97.2, 97.2 |
| 110 | 5.715 | 5.917 | 6.089 | 5.890 | 3.472 | 3.594 | 3.641 | 3.505 | 100-110 | 4.634 | 1512 | 97.5, 97.5 |
| 120 | 6.351 | 6.638 | 6.992 | 6.726 | 5.313 | 5.559 | 5.664 | 5.412 | 110-120 | 5.276 | 1517 | 97.8, 97.8 |
| 130 | 8.385 | 8.631 | 9.066 | 8.879 | 8.301 | 8.392 | 8.319 | 8.220 | 120-130 | 6.459 | 1524 | 98.2, 98.2 |
| 140 | 11.73 | 11.68 | 11.88 | 11.98 | 11.04 | 11.00 | 10.83 | 10.86 | 130-140 | 7.693 | 1531 | 98.7, 98.7 |
| 150 | 14.70 | 14.46 | 14.31 | 14.73 | 12.56 | 12.60 | 12.39 | 12.43 | 140-150 | 7.847 | 1539 | 99.2, 99.2 |
| 160 | 16.40 | 15.88 | 15.48 | 16.20 | 13.56 | 13.61 | 13.20 | 13.25 | 150-160 | 6.560 | 1546 | 99.6, 99.6 |
| 170 | 16.06 | 15.51 | 15.52 | 16.00 | 14.17 | 14.27 | 13.91 | 13.60 | 160-170 | 4.206 | 1550 | 99.9, 99.9 |
| 180 | 14.69 | 15.03 | 15.37 | 14.95 | 14.65 | 15.01 | 15.33 | 14.92 | 170-180 | 1.418 | 1551 | 100, 100 |
| 单位:° | | 光强:cd | | | | | | | | 单位:lm | | |

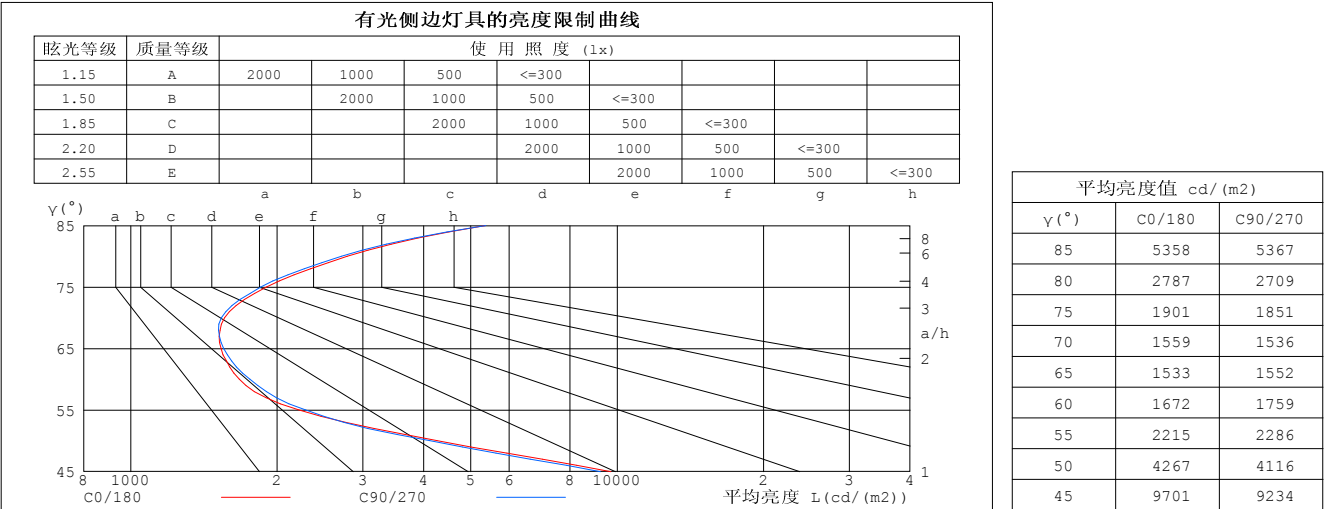


C角度范围： 0度 - 360度
C角度间隔： 30.0度
测试速度：快速
环境温度:25.3℃
测试人员:LYH
测试日期:2024-07-19

γ 角度范围： 0度 - 180度
 γ 角度间隔： 1.0度
测试系统：远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度:65.0%
测试距离:10.000米 [K=1.0000]
备注：

工作面利用系数和灯具概算曲线

| | | |
|--|-------|-------|
| 实测参数: U:24.00V I:0.9758A P:23.42W PF:1.000 实检光通:1551.31x1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-24 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 工 作 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | 1.18 | 1.18 | 1.18 | 1.15 | 1.15 | 1.15 | 1.09 | 1.09 | 1.09 | 1.04 | 1.04 | 1.04 | .99 | .99 | .99 | .97 |
| 1.0 | 1.11 | 1.08 | 1.06 | 1.08 | 1.06 | 1.04 | 1.04 | 1.02 | 1.00 | .99 | .98 | .97 | .95 | .94 | .94 | .92 |
| 2.0 | 1.04 | 1.00 | .97 | 1.02 | .99 | .96 | .98 | .95 | .93 | .95 | .93 | .91 | .92 | .90 | .88 | .87 |
| 3.0 | .98 | .93 | .90 | .96 | .92 | .89 | .93 | .90 | .87 | .90 | .88 | .85 | .88 | .86 | .84 | .82 |
| 4.0 | .92 | .87 | .84 | .91 | .87 | .83 | .89 | .85 | .82 | .86 | .83 | .81 | .84 | .82 | .79 | .78 |
| 5.0 | .88 | .82 | .79 | .87 | .82 | .78 | .84 | .80 | .77 | .83 | .79 | .76 | .81 | .78 | .75 | .74 |
| 6.0 | .83 | .78 | .74 | .82 | .78 | .74 | .81 | .76 | .73 | .79 | .75 | .73 | .78 | .74 | .72 | .70 |
| 7.0 | .80 | .74 | .71 | .79 | .74 | .70 | .77 | .73 | .70 | .76 | .72 | .69 | .75 | .71 | .69 | .67 |
| 8.0 | .76 | .71 | .67 | .75 | .70 | .67 | .74 | .70 | .67 | .73 | .69 | .66 | .72 | .68 | .66 | .64 |
| 9.0 | .73 | .68 | .64 | .72 | .67 | .64 | .71 | .67 | .64 | .70 | .66 | .63 | .69 | .66 | .63 | .62 |
| 10.0 | .70 | .65 | .62 | .69 | .65 | .61 | .68 | .64 | .61 | .68 | .64 | .61 | .67 | .63 | .61 | .59 |

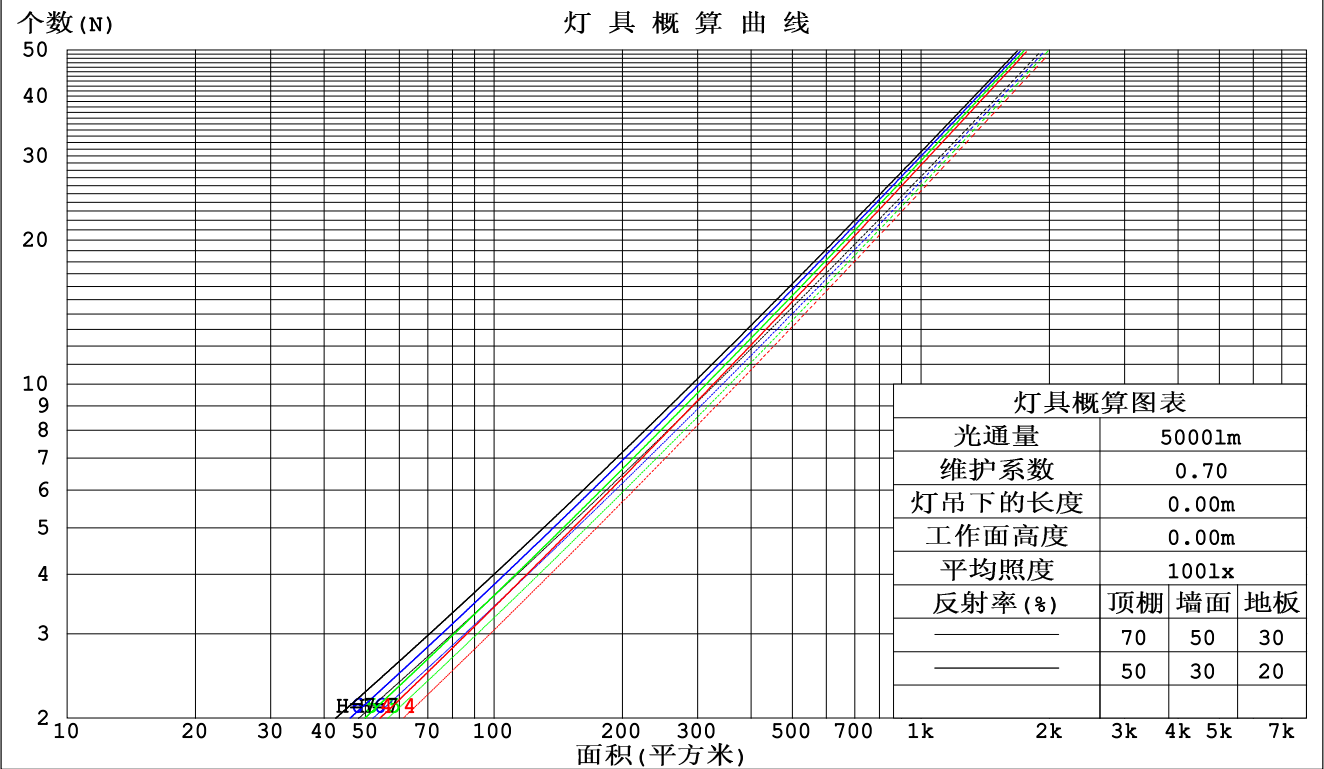

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-19

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

墙面和天花板利用系数

| | | | | | |
|--|--|--|-------|--|-------|
| 实测参数: U:24.00V I:0.9758A P:23.42W PF:1.000 实检光通:1551.31x1 lm | | | | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-24 | | | 灯具类型: | | 灯具重量: |
| 外型尺寸: Length=1m | | | 灯具规格: | | 测试编号: |
| 制造厂商: | | | 发光口面: | | 保护角: |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 墙 壁 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .167 | .095 | .030 | .159 | .091 | .029 | .145 | .083 | .026 | .131 | .076 | .024 | .119 | .069 | .022 | |
| 2.0 | .156 | .086 | .026 | .150 | .083 | .025 | .138 | .077 | .024 | .127 | .071 | .022 | .116 | .066 | .021 | |
| 3.0 | .147 | .078 | .023 | .142 | .076 | .023 | .131 | .071 | .022 | .122 | .067 | .020 | .113 | .062 | .019 | |
| 4.0 | .139 | .072 | .021 | .134 | .070 | .021 | .125 | .066 | .020 | .117 | .063 | .019 | .109 | .059 | .018 | |
| 5.0 | .131 | .067 | .019 | .127 | .065 | .019 | .119 | .062 | .018 | .112 | .059 | .018 | .105 | .056 | .017 | |
| 6.0 | .125 | .062 | .018 | .121 | .061 | .018 | .114 | .058 | .017 | .107 | .056 | .016 | .101 | .053 | .016 | |
| 7.0 | .118 | .059 | .017 | .115 | .057 | .016 | .109 | .055 | .016 | .103 | .053 | .015 | .098 | .051 | .015 | |
| 8.0 | .113 | .055 | .015 | .110 | .054 | .015 | .104 | .052 | .015 | .099 | .050 | .014 | .094 | .048 | .014 | |
| 9.0 | .108 | .052 | .015 | .105 | .051 | .014 | .100 | .049 | .014 | .095 | .048 | .014 | .091 | .046 | .013 | |
| 10.0 | .103 | .049 | .014 | .101 | .049 | .014 | .096 | .047 | .013 | .092 | .046 | .013 | .088 | .044 | .013 | |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 天 花 板 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | .214 | .214 | .214 | .183 | .183 | .183 | .125 | .125 | .125 | .072 | .072 | .072 | .023 | .023 | .023 | |
| 1.0 | .194 | .181 | .170 | .166 | .156 | .146 | .114 | .107 | .101 | .065 | .062 | .059 | .021 | .020 | .019 | |
| 2.0 | .178 | .157 | .139 | .153 | .135 | .120 | .105 | .093 | .084 | .060 | .054 | .049 | .019 | .018 | .016 | |
| 3.0 | .165 | .138 | .116 | .142 | .119 | .101 | .097 | .083 | .071 | .056 | .048 | .042 | .018 | .016 | .014 | |
| 4.0 | .154 | .123 | .099 | .132 | .106 | .086 | .091 | .074 | .061 | .053 | .043 | .036 | .017 | .014 | .012 | |
| 5.0 | .145 | .111 | .086 | .124 | .096 | .075 | .086 | .067 | .053 | .050 | .039 | .031 | .016 | .013 | .010 | |
| 6.0 | .137 | .102 | .076 | .117 | .088 | .067 | .081 | .062 | .047 | .047 | .036 | .028 | .015 | .012 | .009 | |
| 7.0 | .130 | .094 | .069 | .112 | .081 | .060 | .077 | .057 | .042 | .045 | .034 | .025 | .014 | .011 | .008 | |
| 8.0 | .124 | .087 | .063 | .106 | .076 | .055 | .074 | .053 | .039 | .043 | .031 | .023 | .014 | .010 | .008 | |
| 9.0 | .118 | .082 | .058 | .102 | .071 | .050 | .071 | .050 | .036 | .041 | .030 | .021 | .013 | .010 | .007 | |
| 10.0 | .113 | .078 | .054 | .098 | .067 | .047 | .068 | .047 | .033 | .040 | .028 | .020 | .013 | .009 | .007 | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-19

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

UGR(Unified Glare Rating) 数据表

| | | | | | | | | | | | |
|--|-----|-----------------------|------|------|-------|------|---------------------|-------|------|------|------|
| 实测参数: U:24.00V I:0.9758A P:23.42W PF:1.000 实检光通:1551.31x1 lm | | | | | | | | | | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-24 | | | | | 灯具类型: | | | 灯具重量: | | | |
| 外型尺寸: Length=1m | | | | | 灯具规格: | | | 测试编号: | | | |
| 制造厂商: | | | | | 发光口面: | | | 保护角: | | | |
| 反射比: | 天花板 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| | 墙面 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| | 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| 房间尺寸 | | 交叉 (Viewed crosswise) | | | | | 向前 (Viewed endwise) | | | | |
| x = 2H y = 2H | | 14.0 | 14.8 | 14.3 | 15.0 | 15.2 | 14.1 | 14.9 | 14.4 | 15.1 | 15.3 |
| | 3H | 14.0 | 14.7 | 14.3 | 15.0 | 15.2 | 14.0 | 14.8 | 14.3 | 15.0 | 15.3 |
| | 4H | 14.0 | 14.7 | 14.3 | 15.0 | 15.3 | 14.1 | 14.8 | 14.4 | 15.0 | 15.3 |
| | 6H | 14.1 | 14.8 | 14.5 | 15.1 | 15.4 | 14.2 | 14.9 | 14.5 | 15.1 | 15.4 |
| | 8H | 14.3 | 14.9 | 14.6 | 15.2 | 15.5 | 14.3 | 15.0 | 14.7 | 15.3 | 15.6 |
| | 12H | 14.5 | 15.1 | 14.9 | 15.4 | 15.8 | 14.5 | 15.2 | 14.9 | 15.5 | 15.8 |
| 4H | 2H | 13.8 | 14.5 | 14.1 | 14.8 | 15.1 | 13.9 | 14.6 | 14.2 | 14.9 | 15.1 |
| | 3H | 13.8 | 14.4 | 14.2 | 14.8 | 15.1 | 13.9 | 14.5 | 14.3 | 14.8 | 15.2 |
| | 4H | 13.9 | 14.5 | 14.3 | 14.8 | 15.2 | 14.0 | 14.5 | 14.4 | 14.9 | 15.3 |
| | 6H | 14.2 | 14.7 | 14.6 | 15.1 | 15.5 | 14.2 | 14.7 | 14.7 | 15.1 | 15.5 |
| | 8H | 14.4 | 14.9 | 14.9 | 15.3 | 15.7 | 14.5 | 14.9 | 14.9 | 15.3 | 15.8 |
| | 12H | 14.9 | 15.3 | 15.3 | 15.7 | 16.1 | 14.9 | 15.3 | 15.3 | 15.7 | 16.2 |
| 8H | 4H | 13.9 | 14.4 | 14.3 | 14.8 | 15.2 | 14.0 | 14.4 | 14.4 | 14.8 | 15.2 |
| | 6H | 14.3 | 14.7 | 14.8 | 15.1 | 15.6 | 14.4 | 14.7 | 14.8 | 15.2 | 15.7 |
| | 8H | 14.7 | 15.1 | 15.2 | 15.5 | 16.0 | 14.7 | 15.1 | 15.2 | 15.6 | 16.1 |
| | 12H | 15.4 | 15.6 | 15.9 | 16.1 | 16.7 | 15.4 | 15.7 | 15.9 | 16.2 | 16.7 |
| 12H | 4H | 13.9 | 14.3 | 14.3 | 14.7 | 15.2 | 13.9 | 14.4 | 14.4 | 14.8 | 15.2 |
| | 6H | 14.4 | 14.7 | 14.9 | 15.2 | 15.7 | 14.4 | 14.7 | 14.9 | 15.2 | 15.7 |
| | 8H | 14.9 | 15.1 | 15.4 | 15.6 | 16.2 | 14.9 | 15.2 | 15.4 | 15.7 | 16.2 |
| 不同间隔布灯时, 观察者位置引起的UGR变化: | | | | | | | | | | | |
| S = 1.0H | | + 1.7 / - 2.9 | | | | | + 1.8 / - 3.0 | | | | |
| 1.5H | | + 3.3 / - 3.0 | | | | | + 3.6 / - 3.1 | | | | |
| 2.0H | | + 3.5 / - 1.1 | | | | | + 3.3 / - 1.0 | | | | |

依据CIE Pub.117计算, 表格已按1551lm光源光通进行修正 (8log (F/F0) = 1.5) .

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-19

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

UF利用系数表

| | | |
|--|-------|-------|
| 实测参数: U:24.00V I:0.9758A P:23.42W PF:1.000 实检光通:1551.31x1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-24 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |


| 反 射 比 / REFLECTANCE | | | | | | | | | | |
|----------------------------|---|-----|-----|-----|-----|-----|----------------------|-----|-----|---------|
| 天花板 | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| 墙壁 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| 室形指数 | 利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5 | | | | | | | | | |
| k = 0.60 | 85 | 78 | 74 | 84 | 78 | 74 | 83 | 78 | 74 | 70 |
| 0.80 | 93 | 86 | 83 | 92 | 86 | 82 | 90 | 85 | 82 | 78 |
| 1.00 | 97 | 91 | 88 | 96 | 91 | 87 | 94 | 90 | 86 | 82 |
| 1.25 | 101 | 96 | 92 | 100 | 95 | 92 | 98 | 94 | 91 | 86 |
| 1.50 | 104 | 99 | 96 | 103 | 98 | 95 | 100 | 96 | 94 | 89 |
| 2.00 | 107 | 103 | 99 | 105 | 101 | 98 | 102 | 99 | 96 | 91 |
| 2.50 | 109 | 105 | 102 | 107 | 103 | 100 | 103 | 100 | 98 | 91 |
| 3.00 | 110 | 107 | 104 | 108 | 105 | 103 | 104 | 102 | 100 | 93 |
| 4.00 | 113 | 110 | 107 | 110 | 108 | 106 | 106 | 104 | 102 | 94 |
| 5.00 | 114 | 111 | 109 | 111 | 109 | 108 | 107 | 105 | 104 | 95 |
| ROOM INDEX | UF (总) | | | | | | | | | UF (直接) |
| 依据标准文件 DIN EN 13032-2 2004 | | | 悬挂灯 | | | | 安装距高比 SHR NOM = 1.25 | | | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-19

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

灯具等光强曲线

| | | |
|--|-------|-------|
| 实测参数: U:24.00V I:0.9758A P:23.42W PF:1.000 实检光通:1551.31x1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-24 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |

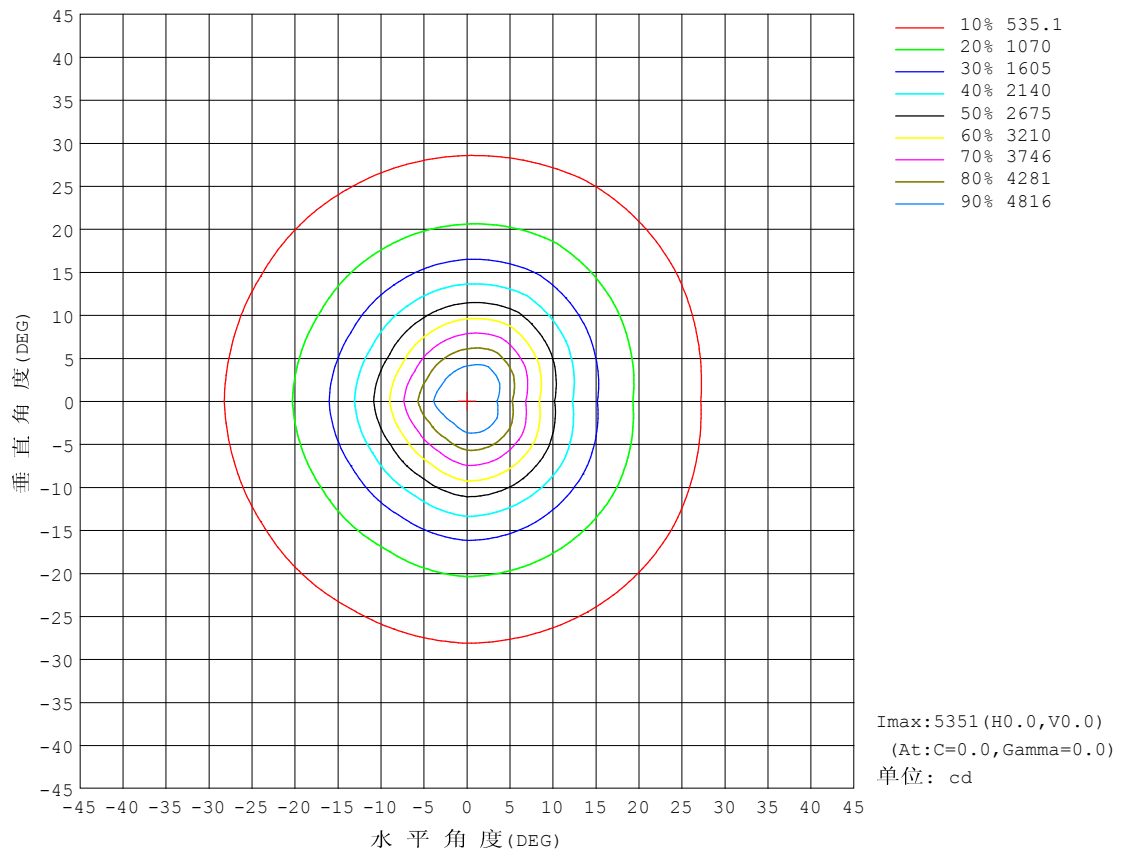


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-19

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

灯具有效平均照度曲线

| | | |
|--|-------|-------|
| 实测参数: U:24.00V I:0.9758A P:23.42W PF:1.000 实检光通:1551.31x1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-24 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |

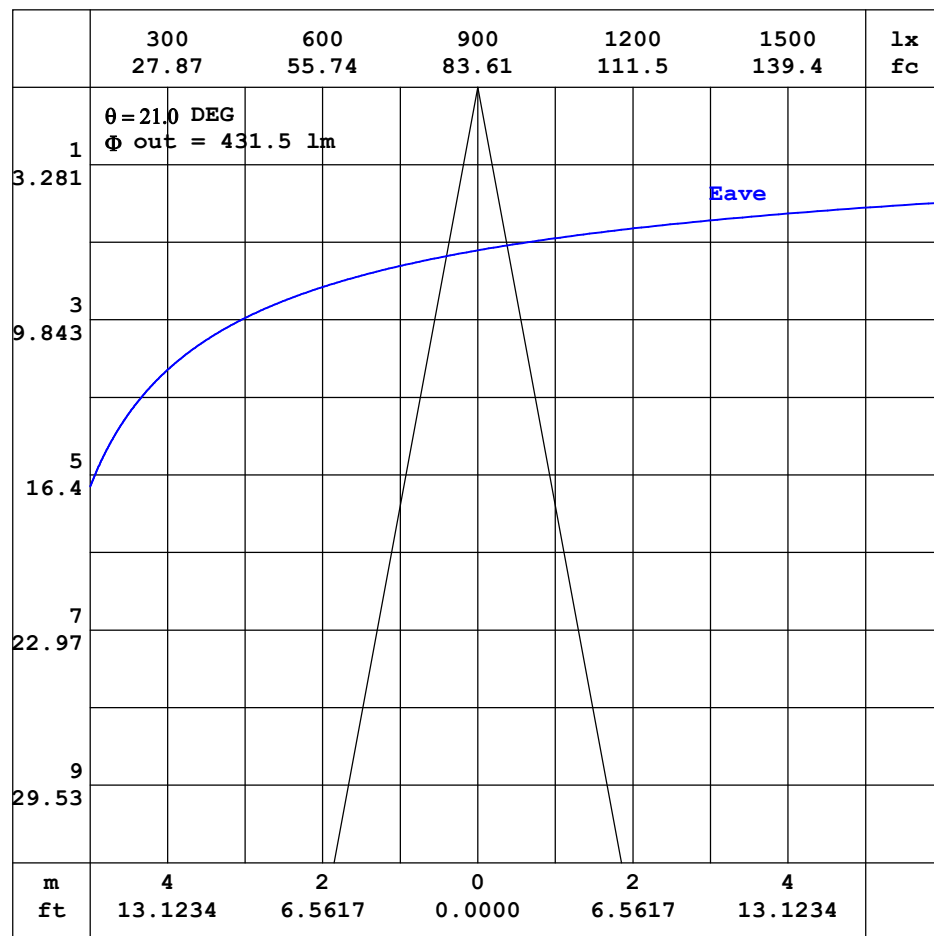


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-19

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

平面等照度曲线


| | | |
|--|-------|-------|
| 实测参数: U:24.00V I:0.9758A P:23.42W PF:1.000 实检光通:1551.31x1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-24 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |

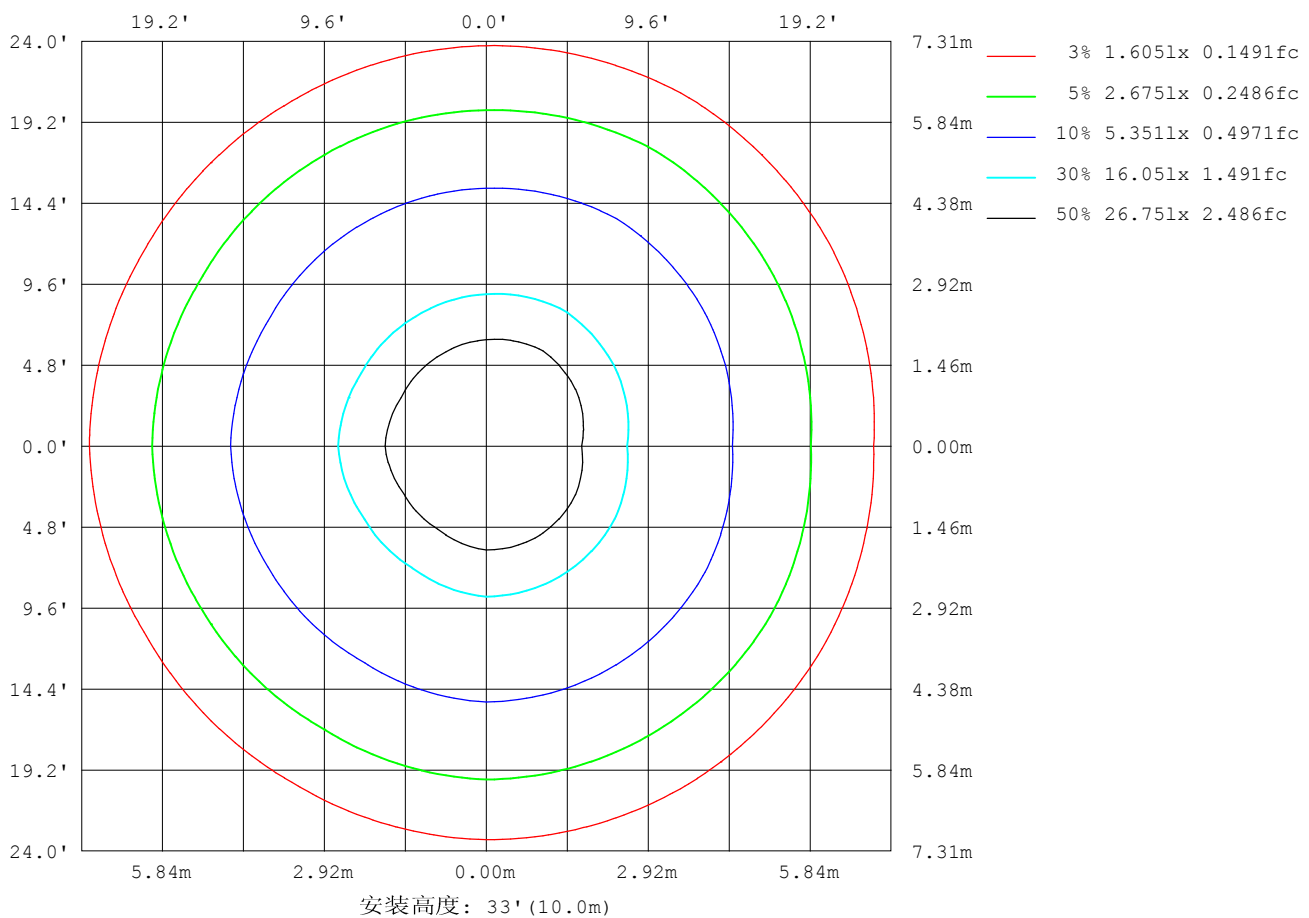

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-19

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

平面照度曲线

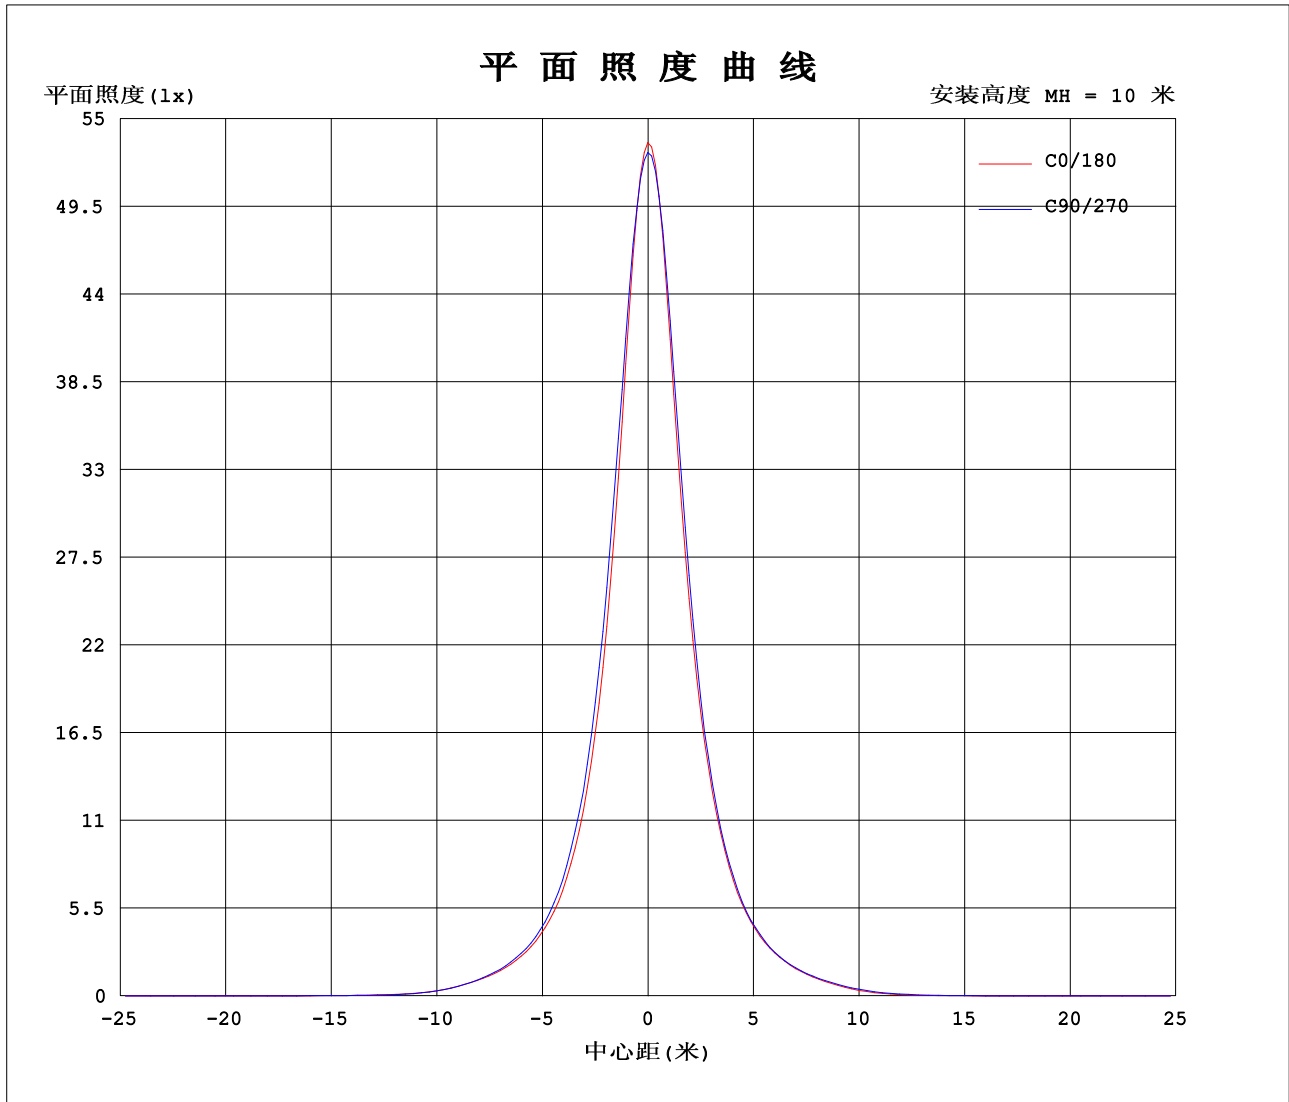

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-19

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

光强分布数据表格

| | | |
|--|-------|-------|
| 实测参数: U:24.00V I:0.9758A P:23.42W PF:1.000 实检光通:1551.31x1 lm | | |
| 灯具名称: AW06-24V-3535-18-3000K-A-24 | 灯具类型: | 灯具重量: |
| 外型尺寸: Length=1m | 灯具规格: | 测试编号: |
| 制造厂商: | 发光口面: | 保护角: |

| | | | | | | | | | | | | | | | | | | | |
|--------------------------------|------|-------|------|------|------|------|------|------|------|------|------|------|--------|--|--|--|--|--|--|
| 表--1 | | | | | | | | | | | | | 单位: cd | | | | | | |
| <div>C (DEG) γ (DEG)</div> | 0 | 30 | 60 | 90 | 120 | 150 | 180 | 210 | 240 | 270 | 300 | 330 | | | | | | | |
| 0 | 5351 | 5337 | 5309 | 5287 | 5288 | 5323 | 5351 | 5337 | 5309 | 5287 | 5288 | 5323 | | | | | | | |
| 5 | 4370 | 4548 | 4551 | 4492 | 4270 | 4284 | 4505 | 4378 | 4462 | 4587 | 4752 | 4649 | | | | | | | |
| 10 | 2730 | 2934 | 3004 | 2999 | 2756 | 2727 | 2910 | 2806 | 2919 | 3077 | 3232 | 3040 | | | | | | | |
| 15 | 1632 | 1765 | 1806 | 1818 | 1674 | 1662 | 1773 | 1711 | 1760 | 1841 | 1944 | 1820 | | | | | | | |
| 20 | 1003 | 1076 | 1094 | 1112 | 1026 | 1032 | 1099 | 1056 | 1083 | 1127 | 1179 | 1103 | | | | | | | |
| 25 | 641 | 678 | 690 | 700 | 652 | 661 | 700 | 674 | 691 | 713 | 744 | 699 | | | | | | | |
| 30 | 428 | 450 | 455 | 460 | 435 | 441 | 465 | 450 | 459 | 471 | 489 | 464 | | | | | | | |
| 35 | 291 | 301 | 306 | 305 | 293 | 295 | 313 | 306 | 310 | 322 | 328 | 318 | | | | | | | |
| 40 | 188 | 194 | 193 | 190 | 176 | 182 | 204 | 200 | 206 | 215 | 220 | 211 | | | | | | | |
| 45 | 96.0 | 99.4 | 95.3 | 91.4 | 78.9 | 82.4 | 102 | 103 | 114 | 122 | 129 | 119 | | | | | | | |
| 50 | 38.4 | 39.8 | 38.2 | 37.0 | 30.7 | 31.3 | 36.9 | 38.5 | 45.3 | 50.4 | 55.5 | 48.1 | | | | | | | |
| 55 | 17.8 | 18.3 | 18.0 | 18.4 | 15.8 | 15.6 | 14.4 | 14.9 | 17.1 | 19.0 | 20.8 | 18.4 | | | | | | | |
| 60 | 11.7 | 11.9 | 11.9 | 12.3 | 11.2 | 11.0 | 7.50 | 7.46 | 8.15 | 9.06 | 9.33 | 8.64 | | | | | | | |
| 65 | 9.07 | 9.08 | 9.12 | 9.18 | 8.68 | 8.60 | 4.10 | 3.98 | 4.30 | 4.74 | 4.96 | 4.70 | | | | | | | |
| 70 | 7.47 | 7.39 | 7.42 | 7.36 | 7.24 | 7.17 | 1.95 | 1.87 | 1.96 | 2.20 | 2.34 | 2.25 | | | | | | | |
| 75 | 6.89 | 6.74 | 6.78 | 6.71 | 6.80 | 6.72 | 1.12 | 1.09 | 1.07 | 1.20 | 1.13 | 1.18 | | | | | | | |
| 80 | 6.78 | 6.62 | 6.63 | 6.59 | 6.74 | 6.70 | 1.07 | 1.03 | 1.11 | 1.12 | 1.11 | 1.06 | | | | | | | |
| 85 | 6.54 | 6.41 | 6.45 | 6.55 | 6.59 | 6.54 | 1.16 | 1.13 | 1.27 | 1.31 | 1.25 | 1.12 | | | | | | | |
| 90 | 6.22 | 6.13 | 6.24 | 6.23 | 6.37 | 6.29 | 1.40 | 1.39 | 1.52 | 1.49 | 1.48 | 1.35 | | | | | | | |
| 95 | 5.96 | 5.92 | 6.09 | 6.10 | 6.19 | 6.04 | 1.80 | 1.79 | 1.92 | 1.88 | 1.86 | 1.74 | | | | | | | |
| 100 | 5.78 | 5.83 | 5.99 | 5.99 | 6.01 | 5.83 | 2.27 | 2.28 | 2.39 | 2.35 | 2.32 | 2.20 | | | | | | | |
| 105 | 5.72 | 5.83 | 5.94 | 5.99 | 5.92 | 5.78 | 2.83 | 2.84 | 2.96 | 2.94 | 2.88 | 2.77 | | | | | | | |
| 110 | 5.72 | 5.87 | 5.96 | 6.09 | 5.94 | 5.84 | 3.47 | 3.52 | 3.67 | 3.64 | 3.56 | 3.44 | | | | | | | |
| 115 | 5.91 | 6.08 | 6.22 | 6.40 | 6.25 | 6.10 | 4.28 | 4.36 | 4.55 | 4.54 | 4.42 | 4.27 | | | | | | | |
| 120 | 6.35 | 6.53 | 6.75 | 6.99 | 6.85 | 6.61 | 5.31 | 5.46 | 5.66 | 5.66 | 5.50 | 5.32 | | | | | | | |
| 125 | 7.17 | 7.31 | 7.60 | 7.89 | 7.79 | 7.48 | 6.69 | 6.84 | 6.99 | 6.97 | 6.81 | 6.66 | | | | | | | |
| 130 | 8.39 | 8.50 | 8.77 | 9.07 | 9.03 | 8.73 | 8.30 | 8.38 | 8.40 | 8.32 | 8.23 | 8.21 | | | | | | | |
| 135 | 10.0 | 10.00 | 10.2 | 10.4 | 10.5 | 10.3 | 9.83 | 9.84 | 9.78 | 9.66 | 9.61 | 9.69 | | | | | | | |
| 140 | 11.7 | 11.6 | 11.7 | 11.9 | 12.0 | 11.9 | 11.0 | 11.0 | 11.0 | 10.8 | 10.8 | 10.9 | | | | | | | |
| 145 | 13.3 | 13.2 | 13.1 | 13.2 | 13.5 | 13.5 | 11.9 | 11.9 | 11.9 | 11.7 | 11.7 | 11.8 | | | | | | | |
| 150 | 14.7 | 14.6 | 14.3 | 14.3 | 14.6 | 14.8 | 12.6 | 12.6 | 12.6 | 12.4 | 12.4 | 12.4 | | | | | | | |
| 155 | 15.8 | 15.6 | 15.2 | 15.1 | 15.4 | 15.9 | 13.1 | 13.1 | 13.2 | 12.9 | 12.9 | 12.9 | | | | | | | |
| 160 | 16.4 | 16.2 | 15.6 | 15.5 | 15.9 | 16.5 | 13.6 | 13.6 | 13.6 | 13.2 | 13.2 | 13.3 | | | | | | | |
| 165 | 16.5 | 16.1 | 15.6 | 15.5 | 16.0 | 16.5 | 13.9 | 14.0 | 14.0 | 13.5 | 13.4 | 13.5 | | | | | | | |
| 170 | 16.1 | 15.6 | 15.4 | 15.5 | 15.9 | 16.1 | 14.2 | 14.2 | 14.3 | 13.9 | 13.6 | 13.6 | | | | | | | |
| 175 | 15.3 | 15.0 | 15.3 | 15.5 | 15.6 | 15.4 | 14.2 | 14.4 | 14.8 | 14.6 | 14.2 | 13.8 | | | | | | | |
| 180 | 14.7 | 14.8 | 15.3 | 15.4 | 15.1 | 14.7 | 14.6 | 14.8 | 15.2 | 15.3 | 15.1 | 14.7 | | | | | | | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:LYH
测试日期:2024-07-19

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度:65.0%
测试距离:10.000米 [K=1.0000]
备注:

Photometric Data Table [cd]

| G/C | 0.0 | 30.0 | 60.0 | 90.0 | 120.0 | 150.0 | 180.0 | 210.0 | 240.0 | 270.0 |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 0.0 | 5351 | 5337 | 5309 | 5287 | 5288 | 5323 | 5351 | 5337 | 5309 | 5287 |
| 3.0 | 4944 | 5060 | 5029 | 4960 | 4816 | 4854 | 5036 | 4931 | 4968 | 5035 |
| 6.0 | 4031 | 4245 | 4254 | 4190 | 3961 | 3960 | 4182 | 4058 | 4155 | 4303 |
| 9.0 | 3025 | 3251 | 3299 | 3299 | 3033 | 3010 | 3209 | 3104 | 3214 | 3382 |
| 12.0 | 2201 | 2402 | 2442 | 2444 | 2247 | 2241 | 2383 | 2294 | 2386 | 2521 |
| 15.0 | 1632 | 1765 | 1806 | 1818 | 1674 | 1662 | 1773 | 1711 | 1760 | 1841 |
| 18.0 | 1207 | 1301 | 1328 | 1342 | 1235 | 1243 | 1327 | 1277 | 1308 | 1376 |
| 21.0 | 913.5 | 975.1 | 992.2 | 1008 | 939.3 | 940.7 | 1000 | 962.3 | 986.5 | 1029 |
| 24.0 | 696.1 | 741.1 | 755.7 | 766.1 | 712.1 | 718.4 | 762.6 | 733.5 | 752.8 | 781.1 |
| 27.0 | 543.3 | 573.0 | 583.0 | 588.5 | 553.5 | 557.9 | 590.7 | 571.8 | 583.5 | 604.6 |
| 30.0 | 427.9 | 450.0 | 454.5 | 460.0 | 434.9 | 440.7 | 464.5 | 449.8 | 459.3 | 471.0 |
| 33.0 | 339.6 | 354.0 | 358.1 | 362.7 | 341.9 | 346.0 | 368.2 | 356.7 | 364.6 | 373.6 |
| 36.0 | 268.6 | 278.6 | 281.4 | 281.9 | 268.9 | 271.4 | 290.1 | 283.2 | 287.5 | 297.3 |
| 39.0 | 207.6 | 212.9 | 214.9 | 212.0 | 199.4 | 205.0 | 224.6 | 219.8 | 225.2 | 234.9 |
| 42.0 | 150.2 | 154.2 | 151.0 | 148.1 | 133.0 | 138.8 | 161.9 | 159.2 | 168.6 | 176.6 |
| 45.0 | 96.04 | 99.36 | 95.34 | 91.41 | 78.94 | 82.37 | 101.7 | 102.9 | 113.6 | 122.0 |
| 48.0 | 55.61 | 57.22 | 55.16 | 52.82 | 44.05 | 45.91 | 56.27 | 58.23 | 67.35 | 72.84 |
| 51.0 | 32.35 | 33.45 | 32.11 | 31.14 | 26.09 | 26.40 | 30.10 | 31.34 | 36.97 | 41.48 |
| 54.0 | 20.25 | 20.73 | 20.39 | 20.53 | 17.41 | 17.34 | 17.03 | 17.71 | 20.45 | 22.63 |
| 57.0 | 14.47 | 14.73 | 14.77 | 15.19 | 13.48 | 13.31 | 10.71 | 11.00 | 12.28 | 13.62 |
| 60.0 | 11.70 | 11.87 | 11.93 | 12.31 | 11.19 | 11.04 | 7.496 | 7.458 | 8.150 | 9.060 |
| 63.0 | 9.995 | 10.01 | 10.10 | 10.25 | 9.572 | 9.445 | 5.278 | 5.206 | 5.602 | 6.158 |
| 66.0 | 8.663 | 8.668 | 8.706 | 8.735 | 8.307 | 8.251 | 3.576 | 3.481 | 3.735 | 4.114 |
| 69.0 | 7.711 | 7.651 | 7.687 | 7.608 | 7.435 | 7.375 | 2.265 | 2.162 | 2.320 | 2.622 |
| 72.0 | 7.121 | 7.002 | 7.036 | 6.983 | 6.980 | 6.910 | 1.488 | 1.418 | 1.427 | 1.634 |
| 75.0 | 6.887 | 6.745 | 6.777 | 6.708 | 6.795 | 6.721 | 1.116 | 1.092 | 1.073 | 1.203 |
| 78.0 | 6.819 | 6.659 | 6.678 | 6.616 | 6.776 | 6.702 | 1.073 | 1.030 | 1.079 | 1.116 |
| 81.0 | 6.733 | 6.598 | 6.592 | 6.549 | 6.709 | 6.671 | 1.079 | 1.030 | 1.141 | 1.128 |
| 84.0 | 6.599 | 6.463 | 6.494 | 6.543 | 6.629 | 6.591 | 1.129 | 1.097 | 1.233 | 1.293 |
| 87.0 | 6.421 | 6.303 | 6.366 | 6.395 | 6.525 | 6.451 | 1.245 | 1.220 | 1.368 | 1.398 |
| 90.0 | 6.219 | 6.132 | 6.237 | 6.230 | 6.372 | 6.291 | 1.399 | 1.385 | 1.515 | 1.490 |
| 93.0 | 6.059 | 5.997 | 6.132 | 6.156 | 6.261 | 6.144 | 1.626 | 1.618 | 1.749 | 1.704 |
| 96.0 | 5.912 | 5.899 | 6.065 | 6.064 | 6.145 | 5.997 | 1.890 | 1.894 | 2.006 | 1.955 |
| 99.0 | 5.801 | 5.825 | 5.997 | 6.003 | 6.047 | 5.856 | 2.166 | 2.164 | 2.294 | 2.237 |
| 102.0 | 5.746 | 5.825 | 5.954 | 5.991 | 5.967 | 5.789 | 2.479 | 2.483 | 2.607 | 2.575 |
| 105.0 | 5.715 | 5.825 | 5.942 | 5.991 | 5.924 | 5.783 | 2.828 | 2.838 | 2.963 | 2.936 |
| 108.0 | 5.715 | 5.850 | 5.942 | 6.028 | 5.924 | 5.807 | 3.196 | 3.224 | 3.368 | 3.359 |
| 111.0 | 5.733 | 5.905 | 5.997 | 6.139 | 5.978 | 5.875 | 3.620 | 3.666 | 3.828 | 3.837 |
| 114.0 | 5.850 | 6.022 | 6.150 | 6.317 | 6.162 | 6.022 | 4.098 | 4.181 | 4.362 | 4.365 |
| 117.0 | 6.051 | 6.213 | 6.401 | 6.587 | 6.450 | 6.256 | 4.663 | 4.769 | 4.970 | 4.977 |
| 120.0 | 6.351 | 6.525 | 6.750 | 6.992 | 6.848 | 6.605 | 5.313 | 5.455 | 5.662 | 5.664 |
| 123.0 | 6.793 | 6.937 | 7.228 | 7.483 | 7.381 | 7.060 | 6.086 | 6.271 | 6.435 | 6.424 |
| 126.0 | 7.375 | 7.526 | 7.816 | 8.114 | 8.018 | 7.692 | 6.988 | 7.148 | 7.270 | 7.228 |
| 129.0 | 8.116 | 8.232 | 8.508 | 8.808 | 8.759 | 8.440 | 7.970 | 8.085 | 8.128 | 8.079 |
| 132.0 | 9.004 | 9.059 | 9.317 | 9.587 | 9.599 | 9.305 | 8.937 | 8.999 | 8.968 | 8.901 |
| 135.0 | 10.00 | 9.998 | 10.19 | 10.44 | 10.50 | 10.29 | 9.833 | 9.840 | 9.777 | 9.656 |
| 138.0 | 11.05 | 11.02 | 11.10 | 11.33 | 11.41 | 11.30 | 10.60 | 10.59 | 10.52 | 10.42 |
| 141.0 | 12.07 | 11.97 | 12.00 | 12.16 | 12.33 | 12.27 | 11.24 | 11.23 | 11.18 | 11.02 |
| 144.0 | 13.03 | 12.93 | 12.87 | 12.98 | 13.21 | 13.23 | 11.75 | 11.75 | 11.73 | 11.58 |
| 147.0 | 13.91 | 13.81 | 13.66 | 13.71 | 13.97 | 14.11 | 12.18 | 12.21 | 12.20 | 12.02 |
| 150.0 | 14.70 | 14.58 | 14.33 | 14.31 | 14.62 | 14.85 | 12.56 | 12.59 | 12.61 | 12.39 |
| 153.0 | 15.41 | 15.25 | 14.87 | 14.80 | 15.15 | 15.52 | 12.88 | 12.94 | 12.96 | 12.69 |
| 156.0 | 15.97 | 15.75 | 15.27 | 15.18 | 15.56 | 16.03 | 13.19 | 13.25 | 13.26 | 12.94 |
| 159.0 | 16.33 | 16.10 | 15.52 | 15.43 | 15.84 | 16.40 | 13.47 | 13.53 | 13.52 | 13.15 |
| 162.0 | 16.46 | 16.19 | 15.62 | 15.54 | 16.00 | 16.52 | 13.71 | 13.78 | 13.76 | 13.31 |
| 165.0 | 16.47 | 16.11 | 15.62 | 15.54 | 16.02 | 16.50 | 13.90 | 13.99 | 13.96 | 13.50 |
| 168.0 | 16.26 | 15.86 | 15.50 | 15.53 | 16.01 | 16.30 | 14.08 | 14.16 | 14.17 | 13.72 |
| 171.0 | 15.93 | 15.48 | 15.36 | 15.50 | 15.86 | 15.99 | 14.20 | 14.29 | 14.38 | 14.03 |
| 174.0 | 15.44 | 15.09 | 15.28 | 15.48 | 15.67 | 15.58 | 14.20 | 14.40 | 14.64 | 14.42 |
| 177.0 | 15.00 | 14.85 | 15.27 | 15.46 | 15.45 | 15.13 | 14.31 | 14.54 | 15.00 | 14.88 |
| 180.0 | 14.69 | 14.79 | 15.27 | 15.37 | 15.15 | 14.75 | 14.65 | 14.78 | 15.24 | 15.33 |
| G/C | 300.0 | 330.0 | | | | | | | | |
| 0.0 | 5288 | 5323 | | | | | | | | |
| 3.0 | 5158 | 5121 | | | | | | | | |
| 6.0 | 4483 | 4350 | | | | | | | | |
| 9.0 | 3544 | 3363 | | | | | | | | |
| 12.0 | 2649 | 2472 | | | | | | | | |
| 15.0 | 1944 | 1820 | | | | | | | | |
| 18.0 | 1432 | 1353 | | | | | | | | |
| 21.0 | 1070 | 1004 | | | | | | | | |
| 24.0 | 811.2 | 766.7 | | | | | | | | |
| 27.0 | 624.6 | 591.2 | | | | | | | | |
| 30.0 | 489.0 | 464.4 | | | | | | | | |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: LYH

测试日期: 2024-07-19

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269

环境湿度: 65.0%

测试距离: 10.000米 [K=1.0000]

备注:


Photometric Data Table [cd]

| | | |
|-------|-------|-------|
| 33.0 | 387.6 | 367.6 |
| 36.0 | 304.1 | 292.2 |
| 39.0 | 239.1 | 230.1 |
| 42.0 | 182.9 | 172.6 |
| 45.0 | 129.1 | 118.5 |
| 48.0 | 80.51 | 70.73 |
| 51.0 | 45.46 | 39.44 |
| 54.0 | 25.22 | 22.21 |
| 57.0 | 14.61 | 13.15 |
| 60.0 | 9.326 | 8.643 |
| 63.0 | 6.404 | 6.059 |
| 66.0 | 4.329 | 4.113 |
| 69.0 | 2.767 | 2.659 |
| 72.0 | 1.677 | 1.658 |
| 75.0 | 1.134 | 1.184 |
| 78.0 | 1.079 | 1.061 |
| 81.0 | 1.135 | 1.061 |
| 84.0 | 1.221 | 1.091 |
| 87.0 | 1.337 | 1.201 |
| 90.0 | 1.484 | 1.355 |
| 93.0 | 1.687 | 1.575 |
| 96.0 | 1.945 | 1.833 |
| 99.0 | 2.215 | 2.102 |
| 102.0 | 2.528 | 2.415 |
| 105.0 | 2.884 | 2.771 |
| 108.0 | 3.276 | 3.151 |
| 111.0 | 3.724 | 3.586 |
| 114.0 | 4.239 | 4.089 |
| 117.0 | 4.829 | 4.658 |
| 120.0 | 5.503 | 5.320 |
| 123.0 | 6.258 | 6.111 |
| 126.0 | 7.080 | 6.970 |
| 129.0 | 7.945 | 7.895 |
| 132.0 | 8.784 | 8.815 |
| 135.0 | 9.606 | 9.686 |
| 138.0 | 10.35 | 10.45 |
| 141.0 | 11.02 | 11.12 |
| 144.0 | 11.57 | 11.63 |
| 147.0 | 12.04 | 12.07 |
| 150.0 | 12.42 | 12.43 |
| 153.0 | 12.74 | 12.74 |
| 156.0 | 12.98 | 13.01 |
| 159.0 | 13.17 | 13.24 |
| 162.0 | 13.29 | 13.40 |
| 165.0 | 13.38 | 13.51 |
| 168.0 | 13.49 | 13.56 |
| 171.0 | 13.68 | 13.61 |
| 174.0 | 14.03 | 13.74 |
| 177.0 | 14.56 | 14.11 |
| 180.0 | 15.15 | 14.69 |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: LYH
测试日期: 2024-07-19


γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 10.000米 [K=1.0000]
备注:

I (cd)

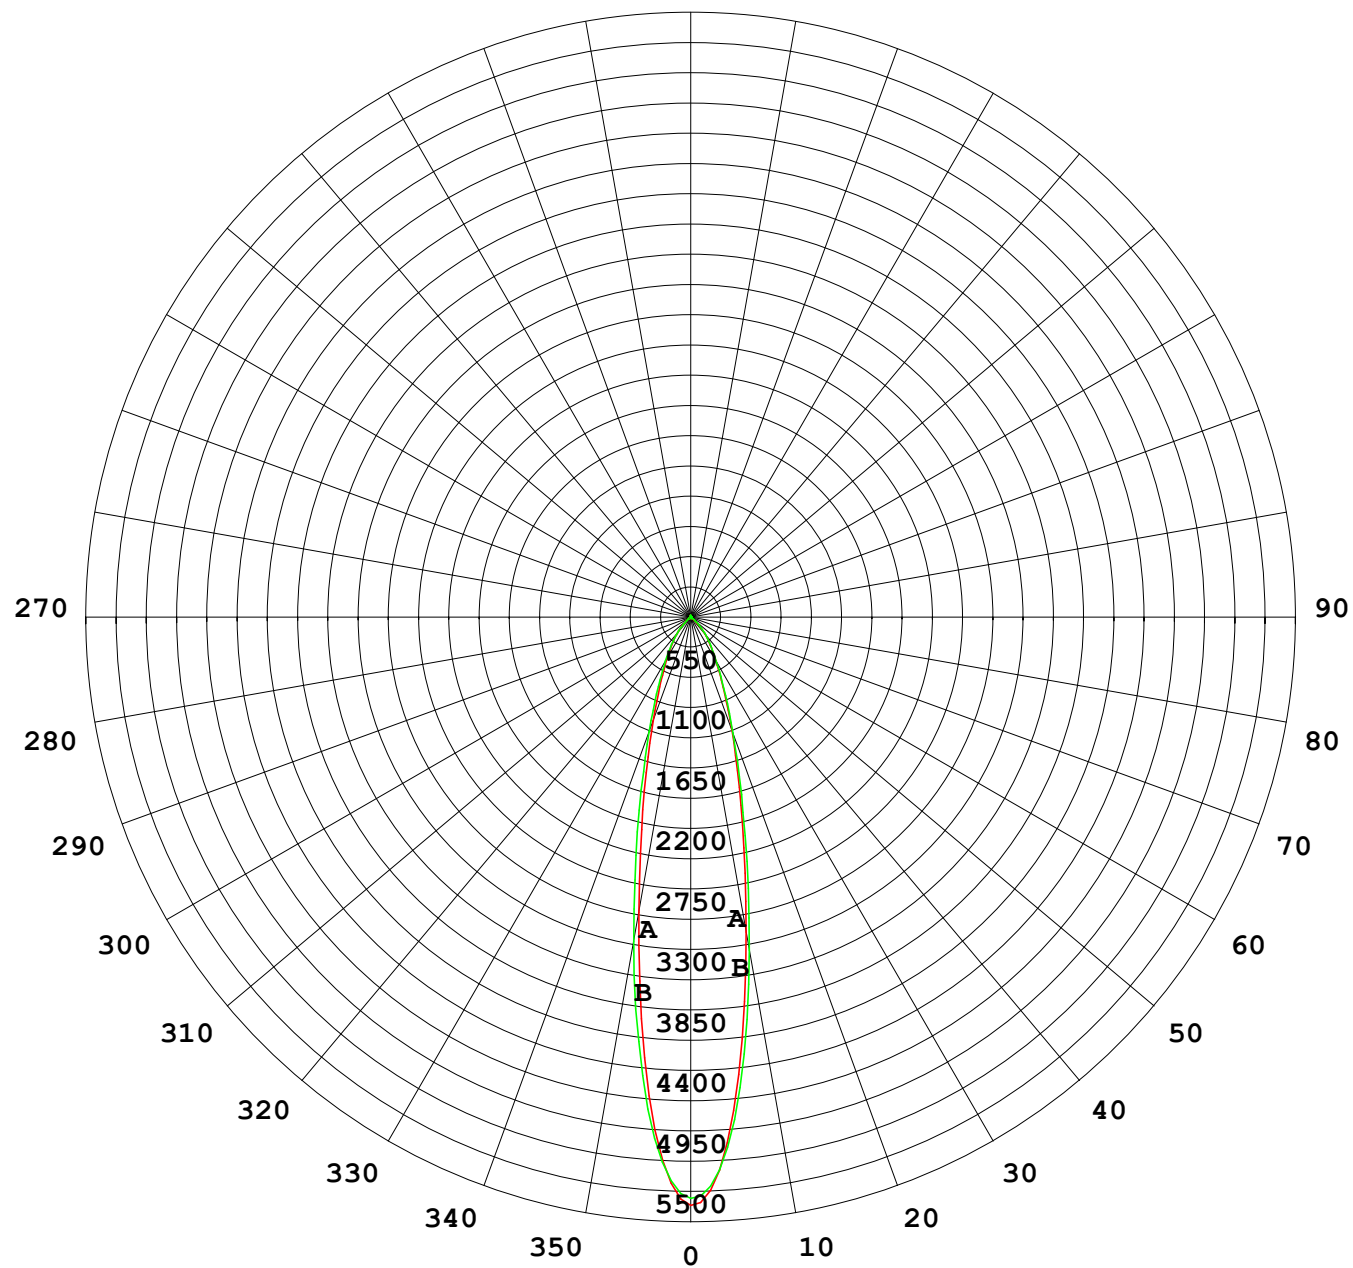

1000 lm

$K = 1$

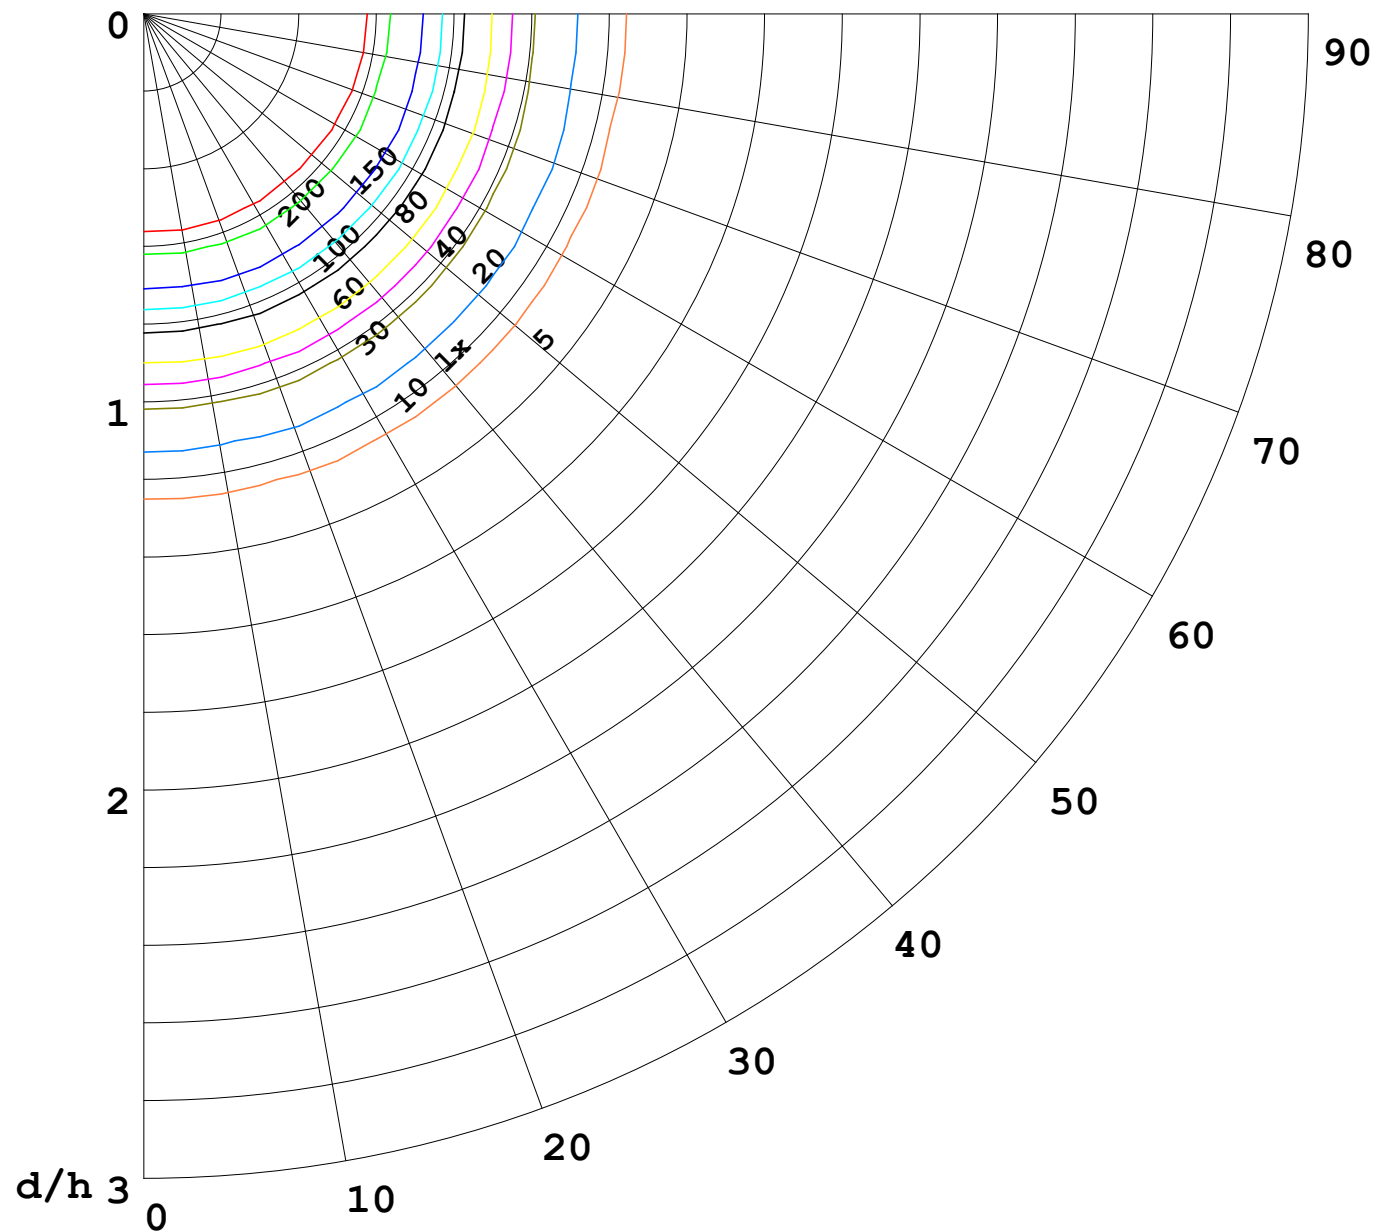

F = 5000 lm
 K = 0.7
 Hcc = 0.0 m
 Hfc = 0.0 m
 Eave = 100 lx

| | Pcc | Pw | Pfc |
|-------|-----|----|-----|
| ————— | 70 | 50 | 30 |
| ————— | 50 | 30 | 20 |

