


AW06 Mono Color Flexible LED Wall Grazer




AW06 is an innovative product based on AW01, equipped with the same 18 rotatable waterproof high-power modules that provide flexible horizontal movement. But, what sets AW06 apart is its compact size and flexible nature. Its small form factor allows for hidden installations and discreet lighting effects, achieving a "lights hidden, impact visible" effect. It's the perfect choice for achieving stunning lighting designs that leave a lasting impression.

Dimension


L62*W26*H22mm



Bending



Min. Bending Diameter



Product Features

- I. Flexible structure with continuous illumination without any shadows or dark areas.
- II. DC24V Input, extend or combine length freely.
- III. Multiple lens options.
- IV. IP67, suitable for wet locations and has a protection rating of IK06.

Product Application

Application areas: wall grazing, cove light, wall wash, residential, hospitality, restaurants, museums.


Cover Styles



A
Standard





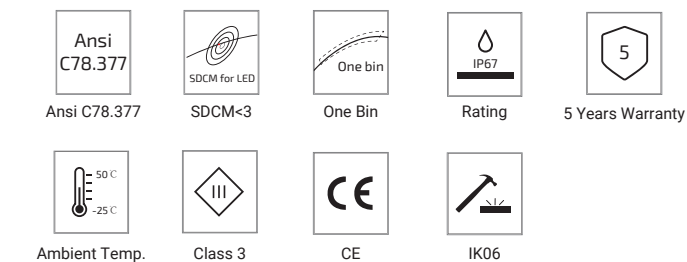

B
Honeycomb




Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	24W/m
Physical	
LED Count	18 LEDs/m
Min. Unit	6 pcs LEDs/ unit
Min. Unit Length	334 mm
Housing Material	Aluminum +Tempered Glass Cover
Output	
LED Light	SMD LED 3535
	>80
Max. Single Feed Length	4 M
Optional Lens	24°, 30°, 40°, 60°, 25°x45°, 30°x60°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-25°C to 50°C

Dependability	
Warranty	5 Years Warranty
IP Rating	IP67
Optional Color	
	2200K(2238±102K)
	2700K(2725±145K)
	3000K(3045±175K)
	3500K(3465±245K)
	4000K(3985±275K)
	4500K(4503±243K)
	5000K(5029±283K)
	6500K(6532±510K)
	Green(520-530nm)
	Blue (455-465nm)

AW06 Mono Color Flexible LED Wall Grazer


Optional LENS Distribution




24°




30°



40°



60°



25°x45°



30°x60°

Model Encoding

AW06 - 24V - 3535 -18 - 3000K- 80 -2545 - A

Product No. _____

Input Voltage _____

LED Type _____

LED Quantity/Meter _____

CCT & Color _____

2200K, 2700K, 3000K, 3500K, 4000K, 4500K, 5000K, 6500K

G=Green, B=Blue

Color Rendering Index _____

80=Ra>80

Lens Distribution _____

24=24° 30=30° 40=40° 60=60° 2545=25°x45° 3060=30°x60°


Cover Styles _____

A=Standard


B=Honeycomb

Mounting Optionals

Fixed Bracket

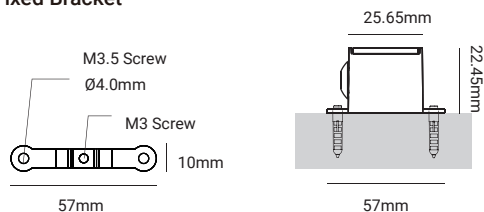



Adjustable Bracket

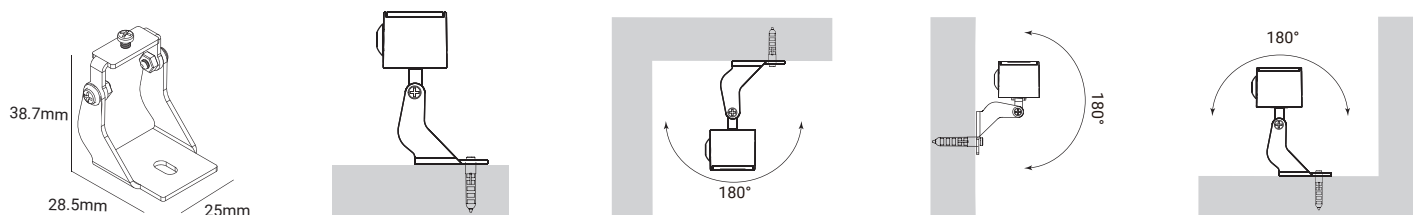


AW06 Mono Color Flexible LED Wall Grazer

Available Custom Length


Min. L=334mm(6×LED) 6 Links (8W)

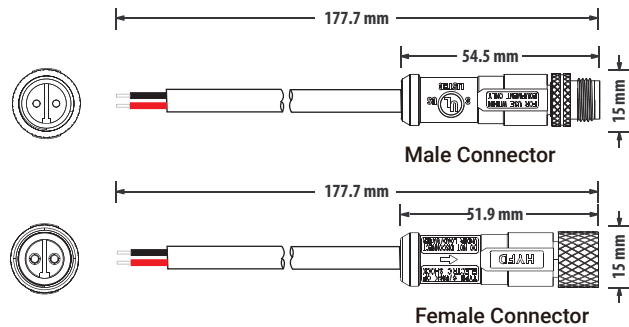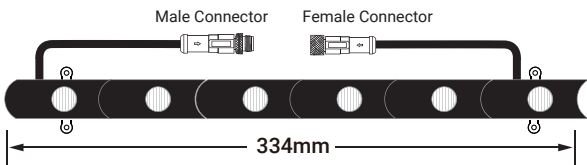


Length =668mm(12×LED) 12 Links (16W)

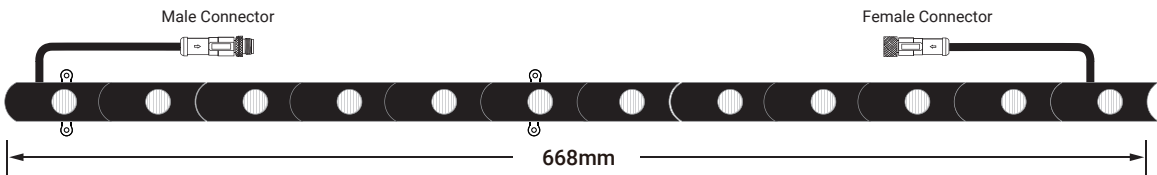


L=1002mm(18×LED) 18 Links (24W)

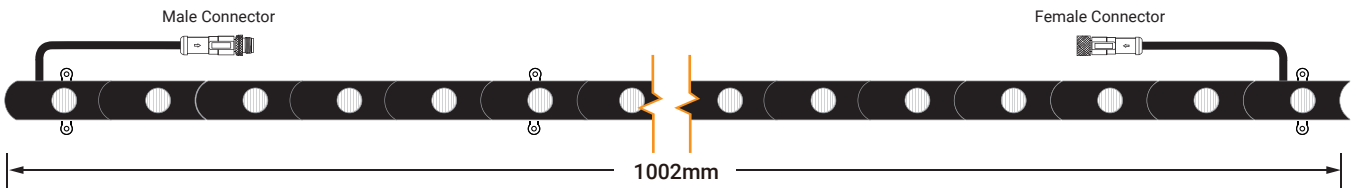

L=1336mm(24×LED) 24 Links (32W)

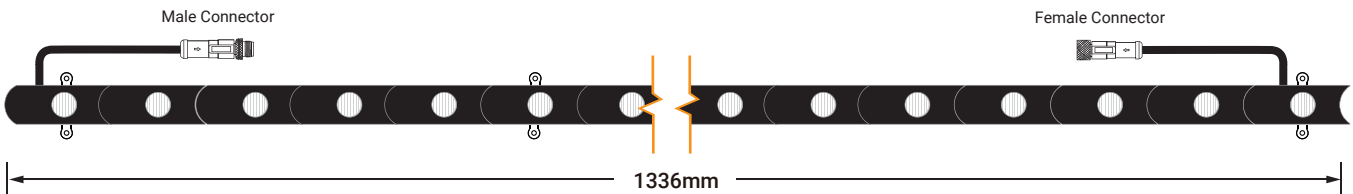

Maximum Linking 4×L=4008mm(L=1002mm)

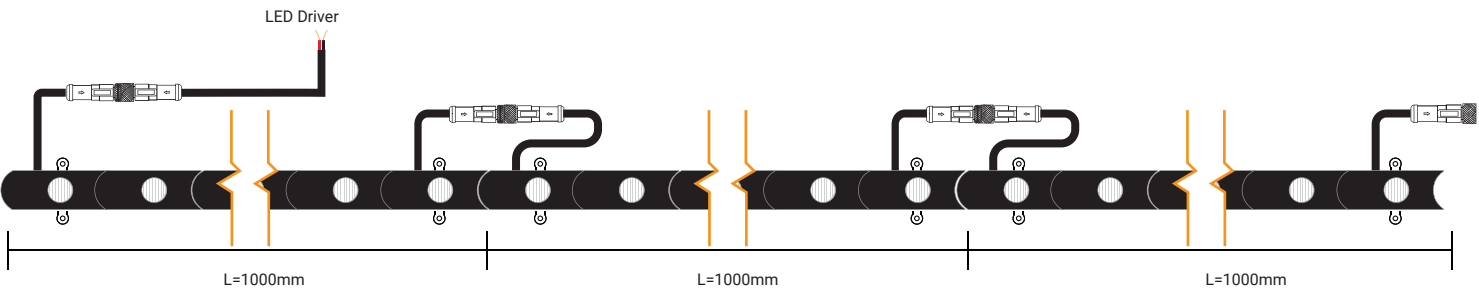

AW06 Mono Color Flexible LED Wall Grazer

Connection

