


LW06 Mono Color Rigid Wall Washer



LW06 is an innovative product based on AW06, it is the latest innovations in the W Wall Wash System, designed for the seamless integration with the AW06. It provide excellent wall washing for straight sections, while AW06 handle curves with precision. LW06 boast an IP67 waterproof rating and is equipped with a waterproof breather valve, ensuring durability and reliability in various conditions.

Dimension

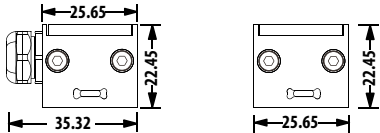

Product Features

- I. Structure with continuous illumination without any shadows or dark areas.
- II. DC24V Input, extend or combine length freely, no need to consider the using of CC driver.
- III. Multiple lens options.
- IV. IP67, suitable for wet locations and has a protection rating of IK06.

Product Application



Application areas: wall grazing, cove light, wall wash, residential, hospitality, restaurants, museums.

Cover Styles



Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	24W/m
Physical	
LED Count	18 LEDs/m
Unit	6 pcs LEDs*3 unit
Standard Length	1002mm
Housing Material	Aluminum +Tempered Glass Cover
Output	
LED Light	SMD LED 3535
CRI	>80
Max. Single Feed Length	4 M
Optional Lens	24°, 30°, 40°, 60°, 25°x45°, 30°x60°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-25°C to 50°C

Dependability	
Warranty	5 Years Warranty
IP Rating	IP67
Optional Color	
	2200K(2238±102K)
	2700K(2725±145K)
	3000K(3045±175K)
	3500K(3465±245K)
	4000K(3985±275K)
	4500K(4503±243K)
	5000K(5029±283K)
	6500K(6532±510K)
	Green(520-530nm)
	Blue (455-465nm)

LW06 Mono Color Rigid Wall Washer

Optional LENS Distribution



24°




30°




40°



60°



25°x45°



30°x60°

Model Encoding

LW06 - 24V - 3535 -18 - 3000K- 80 -2545 - A

Product No. _____

Input Voltage _____

LED Type _____

LED Quantity/Meter _____

CCT & Color _____

2200K, 2700K, 3000K, 3500K, 4000K, 4500K, 5000K, 6500K

G=Green, B=Blue

Color Rendering Index _____

80=Ra>80

Lens Distribution _____


24=24° 30=30° 40=40° 60=60° 2545=25°x45° 3060=30°x60°

Cover Styles _____


A=Standard B=Honeycomb

Mounting Optionals

Fixed Bracket

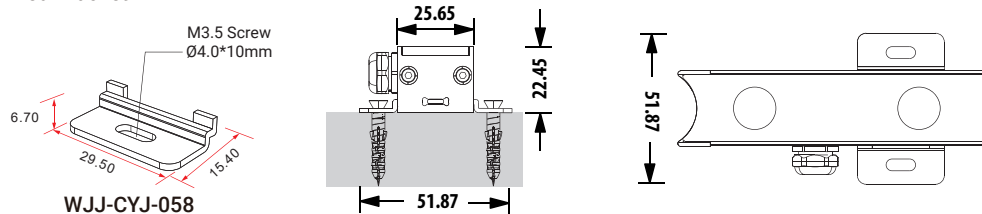

Adjustable Bracket

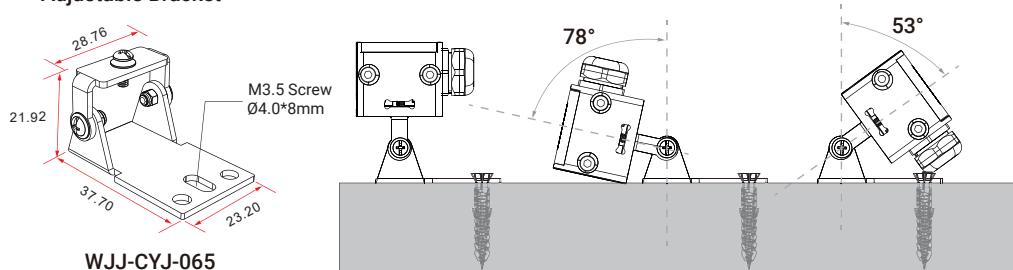


LW06 Mono Color Rigid Wall Washer


Splice Accessories




Length

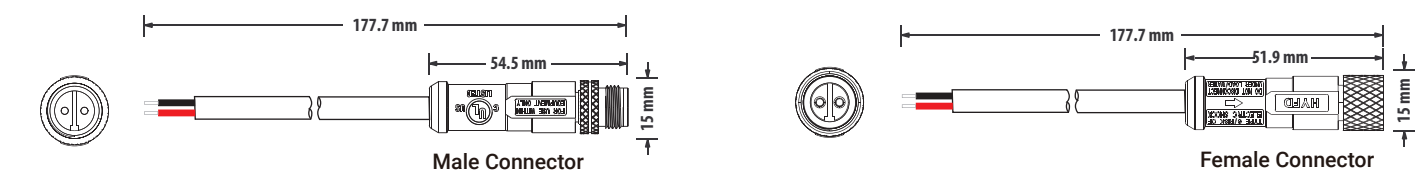

L=1002mm(18×LED) 18 Links (24W)

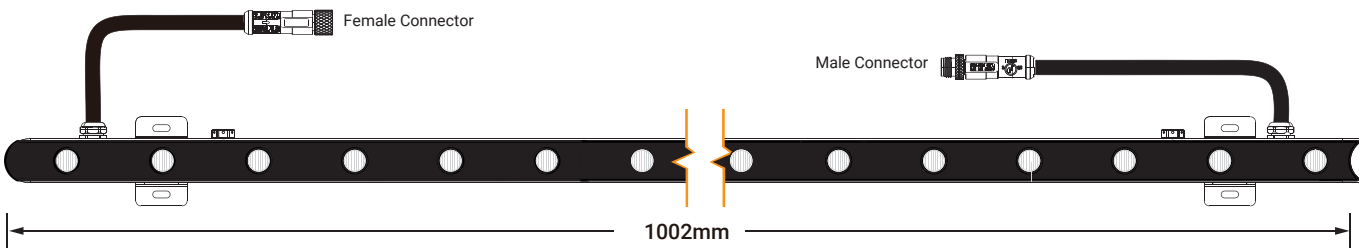

Maximum Linking 4×L=4008mm(L=1002mm)

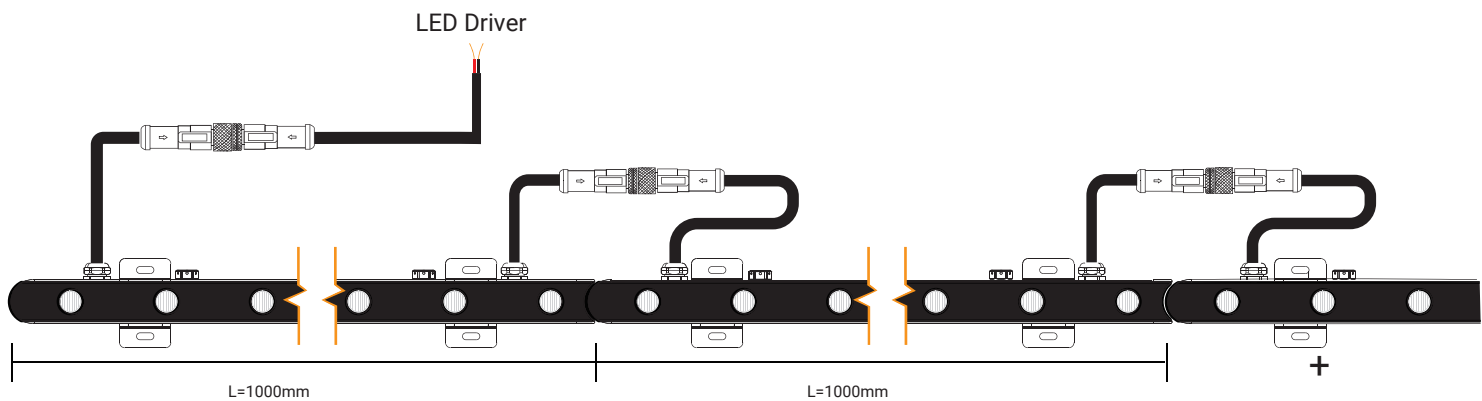

Connection

