


室内灯具光度数据

| | | |
|---|-----------------|----------------|
| 实测参数: U:24.00V I:0.7500A P:18.00W PF:1.000 实检光通:764.43±1 lm | | |
| 灯具名称: SFW20-24V-3535-24-RGB-60 | 灯具类型:硅胶 | 灯具重量: |
| 外型尺寸: 18.5MM*18.5MM | 灯具规格: | 测试编号:202403008 |
| 制造厂商: OLYMPIA | 发光口面:1.0*0.0185 | 保护角: |

| 光源数据 | | 光度数据 | | | | 光效: 42.47 lm/W |
|-----------|--------|----------|--------|-------------------|----------|----------------|
| 型号 | 3535 | 峰值光强(cd) | 655.7 | S/MH(C0/180) | 0.89 | |
| 标称功率(W) | 18 | 灯具效率(%) | 100.0 | S/MH(C90/270) | 0.89 | |
| 额定电源电压(V) | 24 | 总光通量(lm) | 764.43 | η UP,DN(C0-180) | 1.7,43.0 | |
| 额定光通量(lm) | 764.43 | CIE分类 | 直接 | η UP,DN(C180-360) | 1.2,54.1 | |
| 灯具内光源数(只) | 1 | 上射光通比(%) | 2.9 | CIBSE SHR NOM | 1.00 | |
| 实测电源电压(V) | 24 | 下射光通比(%) | 97.1 | CIBSE SHR MAX | 1.00 | |

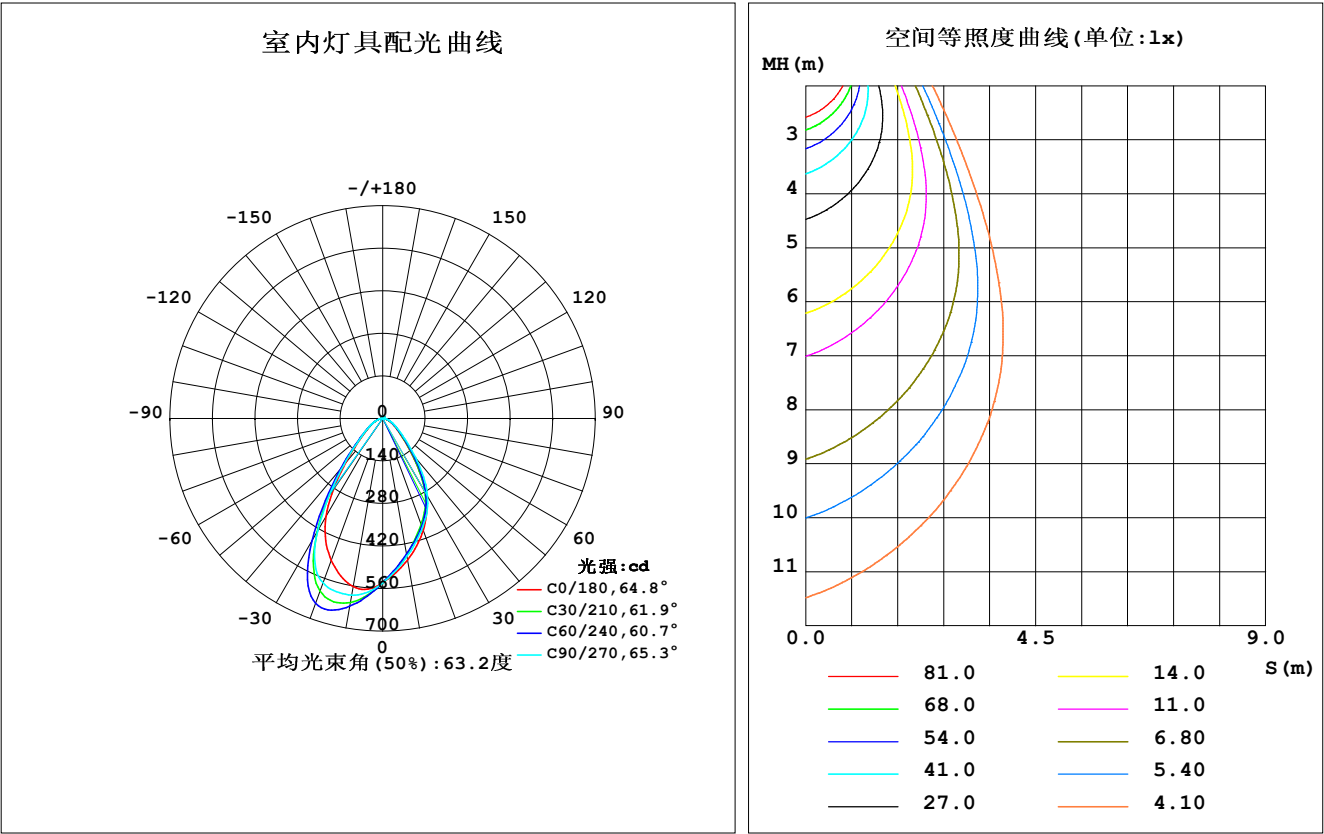


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-03-30

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度:65.0%
测试距离:9.200米 [K=1.0000]
备注:

灯具环带光通量和亮度限制曲线

环带光通量：

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | $\gamma(^{\circ})$ | Φ 环 | Φ 总 | %lum, lamp |
|----------|-------|--------|-------|-------|-------|-------|--------|-------|--------------------|----------|----------|------------|
| 10 | 473.0 | 454.6 | 460.6 | 488.5 | 561.8 | 621.1 | 590.4 | 520.3 | 0- 10 | 50.69 | 50.69 | 6.63, 6.63 |
| 20 | 391.4 | 373.8 | 383.7 | 394.4 | 496.9 | 625.4 | 575.5 | 466.4 | 10- 20 | 139.6 | 190.3 | 24.9, 24.9 |
| 30 | 282.5 | 280.0 | 295.4 | 305.1 | 372.9 | 449.3 | 428.3 | 343.0 | 20- 30 | 188.9 | 379.2 | 49.6, 49.6 |
| 40 | 144.1 | 152.0 | 168.9 | 162.2 | 188.4 | 209.7 | 199.5 | 174.2 | 30- 40 | 159.8 | 539.0 | 70.5, 70.5 |
| 50 | 70.92 | 75.81 | 83.38 | 78.00 | 83.91 | 90.43 | 89.12 | 81.06 | 40- 50 | 92.44 | 631.5 | 82.6, 82.6 |
| 60 | 39.91 | 43.02 | 46.36 | 44.79 | 46.04 | 47.17 | 47.50 | 43.39 | 50- 60 | 54.15 | 685.6 | 89.7, 89.7 |
| 70 | 20.78 | 23.35 | 25.89 | 25.09 | 24.87 | 24.85 | 25.13 | 22.23 | 60- 70 | 33.28 | 718.9 | 94, 94 |
| 80 | 9.021 | 10.01 | 10.94 | 11.57 | 11.09 | 10.36 | 9.559 | 8.509 | 70- 80 | 17.38 | 736.3 | 96.3, 96.3 |
| 90 | 2.776 | 2.787 | 2.744 | 3.541 | 2.692 | 1.745 | 0.9710 | 1.132 | 80- 90 | 6.117 | 742.4 | 97.1, 97.1 |
| 100 | 2.754 | 2.865 | 3.001 | 2.892 | 1.347 | 1.329 | 1.341 | 1.339 | 90-100 | 2.216 | 744.6 | 97.4, 97.4 |
| 110 | 3.075 | 3.264 | 3.398 | 3.186 | 1.860 | 1.844 | 1.879 | 1.900 | 100-110 | 2.444 | 747.0 | 97.7, 97.7 |
| 120 | 3.638 | 3.887 | 4.016 | 3.706 | 2.544 | 2.515 | 2.522 | 2.613 | 110-120 | 2.826 | 749.9 | 98.1, 98.1 |
| 130 | 4.396 | 4.644 | 4.755 | 4.392 | 3.333 | 3.282 | 3.286 | 3.433 | 120-130 | 3.180 | 753.1 | 98.5, 98.5 |
| 140 | 5.161 | 5.322 | 5.423 | 5.139 | 4.162 | 4.094 | 4.085 | 4.219 | 130-140 | 3.339 | 756.4 | 98.9, 98.9 |
| 150 | 5.704 | 5.759 | 5.895 | 5.772 | 4.906 | 4.885 | 4.849 | 4.920 | 140-150 | 3.152 | 759.5 | 99.4, 99.4 |
| 160 | 5.986 | 6.013 | 6.212 | 6.209 | 5.489 | 5.551 | 5.543 | 5.516 | 150-160 | 2.578 | 762.1 | 99.7, 99.7 |
| 170 | 6.237 | 6.300 | 6.458 | 6.471 | 6.052 | 6.084 | 6.101 | 6.064 | 160-170 | 1.703 | 763.8 | 99.9, 99.9 |
| 180 | 6.383 | 6.433 | 6.498 | 6.503 | 6.388 | 6.433 | 6.478 | 6.483 | 170-180 | 0.6035 | 764.4 | 100, 100 |
| 单位: ° | | 光强: cd | | | | | | | | 单位: lm | | |

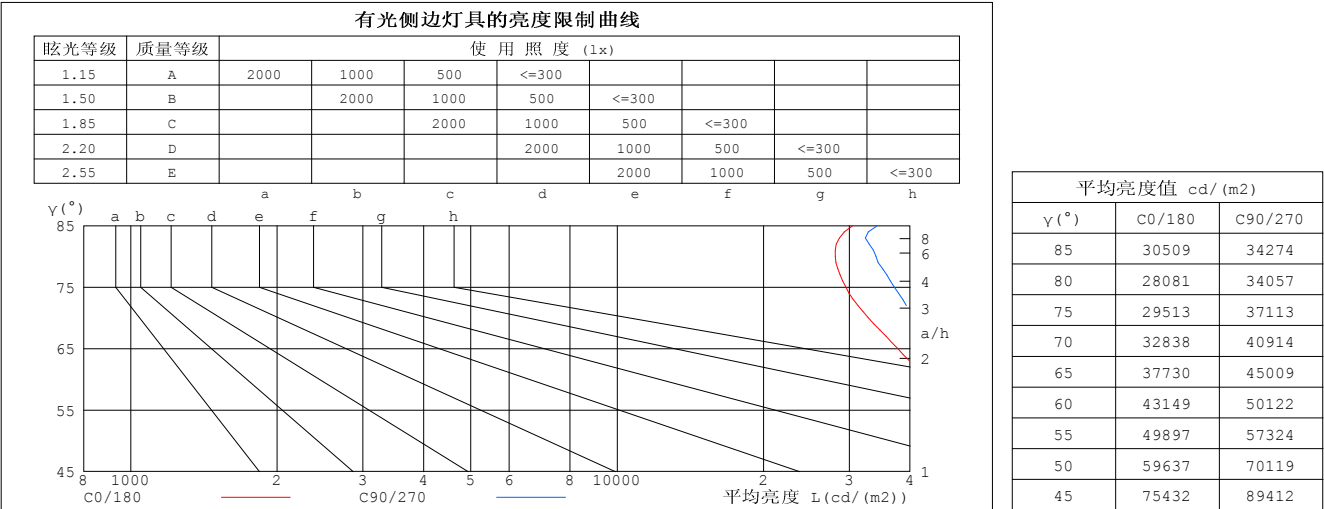


C角度范围： 0度 - 360度
C角度间隔： 30.0度
测试速度：快速
环境温度:25.3℃
测试人员：
测试日期:2024-03-30

γ 角度范围： 0度 - 180度
 γ 角度间隔： 1.0度
测试系统：远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度:65.0%
测试距离:9.200米 [K=1.0000]
备注：

工作面利用系数和灯具概算曲线

| | | |
|---|------------------|-----------------|
| 实测参数: U:24.00V I:0.7500A P:18.00W PF:1.000 实检光通:764.43x1 lm | | |
| 灯具名称: SFW20-24V-3535-24-RGB-60 | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 18.5MM*18.5MM | 灯具规格: | 测试编号: 202403008 |
| 制造厂商: OLYMPIA | 发光口面: 1.0*0.0185 | 保护角: |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 工 作 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | 1.18 | 1.18 | 1.18 | 1.15 | 1.15 | 1.15 | 1.10 | 1.10 | 1.10 | 1.04 | 1.04 | 1.04 | .99 | .99 | .99 | .97 |
| 1.0 | 1.07 | 1.04 | 1.01 | 1.05 | 1.02 | .99 | 1.00 | .98 | .96 | .96 | .94 | .92 | .92 | .90 | .89 | .87 |
| 2.0 | .97 | .92 | .88 | .95 | .90 | .86 | .91 | .87 | .84 | .88 | .85 | .82 | .85 | .82 | .80 | .78 |
| 3.0 | .89 | .82 | .77 | .87 | .81 | .76 | .84 | .79 | .75 | .81 | .77 | .73 | .78 | .75 | .72 | .70 |
| 4.0 | .81 | .74 | .69 | .80 | .73 | .68 | .77 | .71 | .67 | .74 | .70 | .66 | .72 | .68 | .65 | .63 |
| 5.0 | .74 | .67 | .62 | .73 | .66 | .61 | .71 | .65 | .61 | .69 | .64 | .60 | .67 | .62 | .59 | .57 |
| 6.0 | .69 | .61 | .56 | .68 | .61 | .56 | .66 | .60 | .55 | .64 | .59 | .54 | .62 | .57 | .54 | .52 |
| 7.0 | .63 | .56 | .51 | .63 | .56 | .51 | .61 | .55 | .50 | .59 | .54 | .50 | .58 | .53 | .49 | .48 |
| 8.0 | .59 | .52 | .47 | .58 | .52 | .47 | .57 | .51 | .46 | .55 | .50 | .46 | .54 | .49 | .46 | .44 |
| 9.0 | .55 | .48 | .43 | .54 | .48 | .43 | .53 | .47 | .43 | .52 | .46 | .43 | .51 | .46 | .42 | .41 |
| 10.0 | .51 | .45 | .40 | .51 | .44 | .40 | .50 | .44 | .40 | .49 | .43 | .40 | .48 | .43 | .39 | .38 |

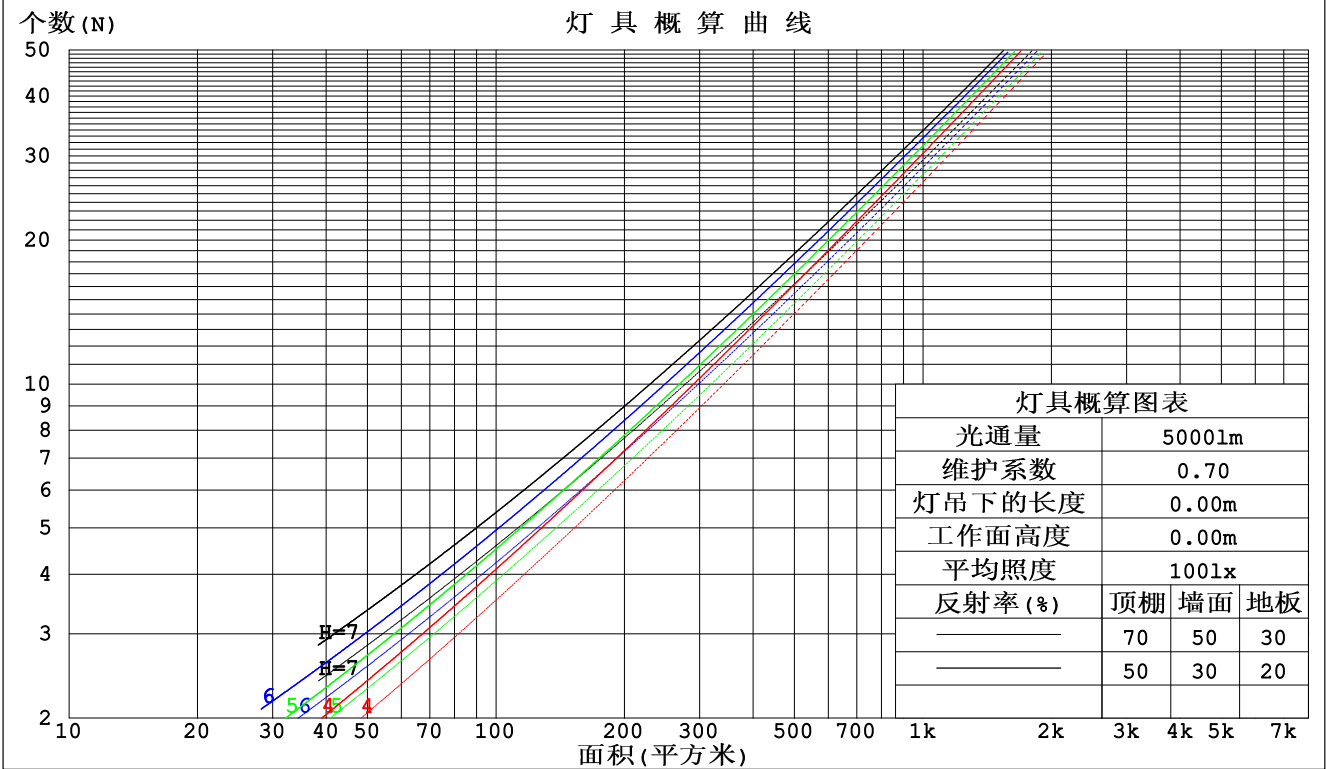

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-03-30

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

墙面和天花板利用系数

| | | |
|---|-----------------|----------------|
| 实测参数: U:24.00V I:0.7500A P:18.00W PF:1.000 实检光通:764.43x1 lm | | |
| 灯具名称: SFW20-24V-3535-24-RGB-60 | 灯具类型:硅胶 | 灯具重量: |
| 外型尺寸: 18.5MM*18.5MM | 灯具规格: | 测试编号:202403008 |
| 制造厂商: OLYMPIA | 发光口面:1.0*0.0185 | 保护角: |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 墙 壁 面 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .231 | .131 | .042 | .223 | .127 | .040 | .209 | .120 | .038 | .195 | .113 | .036 | .183 | .106 | .034 | |
| 2.0 | .220 | .120 | .037 | .213 | .117 | .036 | .200 | .111 | .035 | .189 | .106 | .033 | .178 | .101 | .032 | |
| 3.0 | .207 | .110 | .033 | .201 | .108 | .032 | .190 | .103 | .031 | .180 | .099 | .030 | .170 | .094 | .029 | |
| 4.0 | .194 | .101 | .030 | .189 | .099 | .029 | .180 | .095 | .028 | .171 | .092 | .028 | .162 | .088 | .027 | |
| 5.0 | .183 | .093 | .027 | .178 | .092 | .027 | .170 | .088 | .026 | .162 | .085 | .025 | .154 | .082 | .025 | |
| 6.0 | .172 | .086 | .025 | .168 | .085 | .024 | .161 | .082 | .024 | .153 | .080 | .023 | .147 | .077 | .023 | |
| 7.0 | .163 | .081 | .023 | .159 | .079 | .023 | .152 | .077 | .022 | .146 | .075 | .022 | .140 | .073 | .021 | |
| 8.0 | .154 | .075 | .021 | .151 | .074 | .021 | .145 | .072 | .021 | .139 | .070 | .020 | .133 | .068 | .020 | |
| 9.0 | .146 | .071 | .020 | .143 | .070 | .020 | .138 | .068 | .019 | .132 | .066 | .019 | .127 | .065 | .019 | |
| 10.0 | .139 | .067 | .019 | .136 | .066 | .018 | .131 | .064 | .018 | .126 | .063 | .018 | .122 | .061 | .018 | |

| | | | | | | | | | | | | | | | | |
|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 顶棚 | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| 墙面 | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| 地板 | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| 室空间比 | 天 花 板 利 用 系 数 | | | | | | | | | | | | | | | |
| 0.0 | .212 | .212 | .212 | .182 | .182 | .182 | .124 | .124 | .124 | .071 | .071 | .071 | .023 | .023 | .023 | |
| 1.0 | .197 | .179 | .163 | .169 | .154 | .140 | .115 | .106 | .097 | .066 | .061 | .056 | .021 | .020 | .018 | |
| 2.0 | .185 | .155 | .129 | .158 | .133 | .112 | .109 | .092 | .078 | .063 | .054 | .046 | .020 | .017 | .015 | |
| 3.0 | .175 | .136 | .106 | .150 | .118 | .092 | .103 | .082 | .064 | .059 | .048 | .038 | .019 | .015 | .012 | |
| 4.0 | .166 | .122 | .089 | .142 | .106 | .077 | .098 | .074 | .054 | .057 | .043 | .032 | .018 | .014 | .011 | |
| 5.0 | .158 | .111 | .077 | .136 | .096 | .067 | .093 | .067 | .047 | .054 | .039 | .028 | .017 | .013 | .009 | |
| 6.0 | .151 | .102 | .068 | .130 | .089 | .059 | .090 | .062 | .042 | .052 | .037 | .025 | .017 | .012 | .008 | |
| 7.0 | .145 | .095 | .061 | .124 | .083 | .053 | .086 | .058 | .038 | .050 | .034 | .022 | .016 | .011 | .007 | |
| 8.0 | .139 | .089 | .055 | .119 | .078 | .048 | .083 | .054 | .034 | .048 | .032 | .020 | .016 | .011 | .007 | |
| 9.0 | .133 | .084 | .051 | .115 | .073 | .045 | .080 | .051 | .032 | .046 | .030 | .019 | .015 | .010 | .006 | |
| 10.0 | .128 | .080 | .048 | .111 | .070 | .042 | .077 | .049 | .030 | .045 | .029 | .018 | .015 | .010 | .006 | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-03-30

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度:65.0%
测试距离:9.200米 [K=1.0000]
备注:

UGR(Unified Glare Rating) 数据表

| | | | | | | | | | | | |
|---|-----|----------------------|------|------|-----------------|------|--------------------|----------------|------|------|------|
| 实测参数: U:24.00V I:0.7500A P:18.00W PF:1.000 实检光通:764.43x1 lm | | | | | | | | | | | |
| 灯具名称: SFW20-24V-3535-24-RGB-60 | | | | | 灯具类型:硅胶 | | | 灯具重量: | | | |
| 外型尺寸: 18.5MM*18.5MM | | | | | 灯具规格: | | | 测试编号:202403008 | | | |
| 制造厂商: OLYMPIA | | | | | 发光口面:1.0*0.0185 | | | 保护角: | | | |
| 反射比: | 天花板 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| | 墙面 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| | 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| 房间尺寸 | | 交叉(Viewed crosswise) | | | | | 向前(Viewed endwise) | | | | |
| x = 2H y = 2H | 2H | 24.4 | 25.6 | 24.7 | 25.8 | 26.0 | 24.9 | 26.1 | 25.2 | 26.3 | 26.6 |
| | 3H | 25.1 | 26.1 | 25.4 | 26.4 | 26.7 | 25.7 | 26.8 | 26.0 | 27.0 | 27.3 |
| | 4H | 25.3 | 26.3 | 25.6 | 26.6 | 26.9 | 26.0 | 27.1 | 26.4 | 27.3 | 27.6 |
| | 6H | 25.5 | 26.5 | 25.9 | 26.8 | 27.1 | 26.3 | 27.2 | 26.7 | 27.6 | 27.9 |
| | 8H | 25.6 | 26.5 | 26.0 | 26.8 | 27.2 | 26.4 | 27.3 | 26.8 | 27.6 | 27.9 |
| | 12H | 25.7 | 26.5 | 26.0 | 26.9 | 27.2 | 26.5 | 27.3 | 26.8 | 27.7 | 28.0 |
| 4H | 2H | 24.7 | 25.7 | 25.0 | 26.0 | 26.3 | 25.1 | 26.2 | 25.5 | 26.4 | 26.7 |
| | 3H | 25.5 | 26.4 | 25.9 | 26.7 | 27.1 | 26.1 | 27.0 | 26.5 | 27.3 | 27.6 |
| | 4H | 25.9 | 26.7 | 26.3 | 27.1 | 27.4 | 26.6 | 27.3 | 27.0 | 27.7 | 28.1 |
| | 6H | 26.2 | 26.9 | 26.7 | 27.3 | 27.7 | 26.9 | 27.6 | 27.4 | 28.0 | 28.4 |
| | 8H | 26.4 | 27.0 | 26.8 | 27.4 | 27.9 | 27.1 | 27.7 | 27.5 | 28.1 | 28.6 |
| | 12H | 26.5 | 27.1 | 26.9 | 27.5 | 28.0 | 27.2 | 27.8 | 27.7 | 28.2 | 28.7 |
| 8H | 4H | 26.0 | 26.7 | 26.5 | 27.1 | 27.5 | 26.6 | 27.3 | 27.1 | 27.7 | 28.1 |
| | 6H | 26.5 | 27.0 | 27.0 | 27.5 | 28.0 | 27.2 | 27.7 | 27.6 | 28.1 | 28.6 |
| | 8H | 26.7 | 27.2 | 27.2 | 27.7 | 28.2 | 27.4 | 27.8 | 27.9 | 28.3 | 28.8 |
| | 12H | 26.9 | 27.3 | 27.4 | 27.8 | 28.4 | 27.6 | 28.0 | 28.1 | 28.5 | 29.0 |
| 12H | 4H | 26.0 | 26.6 | 26.5 | 27.1 | 27.5 | 26.6 | 27.2 | 27.1 | 27.7 | 28.1 |
| | 6H | 26.5 | 27.0 | 27.0 | 27.5 | 28.0 | 27.2 | 27.6 | 27.7 | 28.1 | 28.6 |
| | 8H | 26.8 | 27.2 | 27.3 | 27.7 | 28.2 | 27.4 | 27.8 | 28.0 | 28.3 | 28.9 |
| 不同间隔布灯时, 观察者位置引起的UGR变化: | | | | | | | | | | | |
| S = 1.0H | | + 0.6 / - 0.7 | | | | | + 0.5 / - 0.7 | | | | |
| 1.5H | | + 0.7 / - 0.6 | | | | | + 0.9 / - 0.4 | | | | |
| 2.0H | | + 0.9 / - 0.7 | | | | | + 1.1 / - 0.6 | | | | |

依据CIE Pub.117计算, 表格已按764.41m光源光通进行修正 (8log(F/F0) = -0.9) .

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-03-30

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

UF利用系数表

| | | |
|---|-----------------|----------------|
| 实测参数: U:24.00V I:0.7500A P:18.00W PF:1.000 实检光通:764.43x1 lm | | |
| 灯具名称: SFW20-24V-3535-24-RGB-60 | 灯具类型:硅胶 | 灯具重量: |
| 外型尺寸: 18.5MM*18.5MM | 灯具规格: | 测试编号:202403008 |
| 制造厂商: OLYMPIA | 发光口面:1.0*0.0185 | 保护角: |


| 反 射 比 / REFLECTANCE | | | | | | | | | | |
|----------------------------|---|-----|-----|-----|-----|-----|---------------------|-----|-----|---------|
| 天花板 | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| 墙壁 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| 工作面 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| 室形指数 | 利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5 | | | | | | | | | |
| k = 0.60 | 73 | 64 | 59 | 72 | 64 | 59 | 71 | 64 | 59 | 54 |
| 0.80 | 82 | 74 | 68 | 81 | 73 | 68 | 79 | 72 | 68 | 62 |
| 1.00 | 88 | 80 | 75 | 87 | 80 | 75 | 85 | 80 | 74 | 69 |
| 1.25 | 94 | 86 | 81 | 92 | 86 | 81 | 90 | 84 | 80 | 74 |
| 1.50 | 98 | 91 | 86 | 96 | 90 | 85 | 93 | 88 | 84 | 78 |
| 2.00 | 102 | 96 | 92 | 100 | 95 | 91 | 97 | 92 | 89 | 82 |
| 2.50 | 105 | 99 | 95 | 103 | 98 | 94 | 99 | 95 | 92 | 84 |
| 3.00 | 107 | 102 | 98 | 105 | 100 | 97 | 101 | 97 | 94 | 86 |
| 4.00 | 110 | 106 | 102 | 107 | 104 | 101 | 103 | 100 | 98 | 89 |
| 5.00 | 112 | 108 | 105 | 109 | 106 | 103 | 104 | 102 | 100 | 91 |
| ROOM INDEX | UF (总) | | | | | | | | | UF (直接) |
| 依据标准文件 DIN EN 13032-2 2004 | | | 悬挂灯 | | | | 安装距高比 SHRNOM = 1.25 | | | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-03-30

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度:65.0%
测试距离:9.200米 [K=1.0000]
备注:

灯 具 等 光 强 曲 线

| | | |
|---|------------------|-----------------|
| 实测参数: U:24.00V I:0.7500A P:18.00W PF:1.000 实检光通:764.43x1 lm | | |
| 灯具名称: SFW20-24V-3535-24-RGB-60 | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 18.5MM*18.5MM | 灯具规格: | 测试编号: 202403008 |
| 制造厂商: OLYMPIA | 发光口面: 1.0*0.0185 | 保护角: |

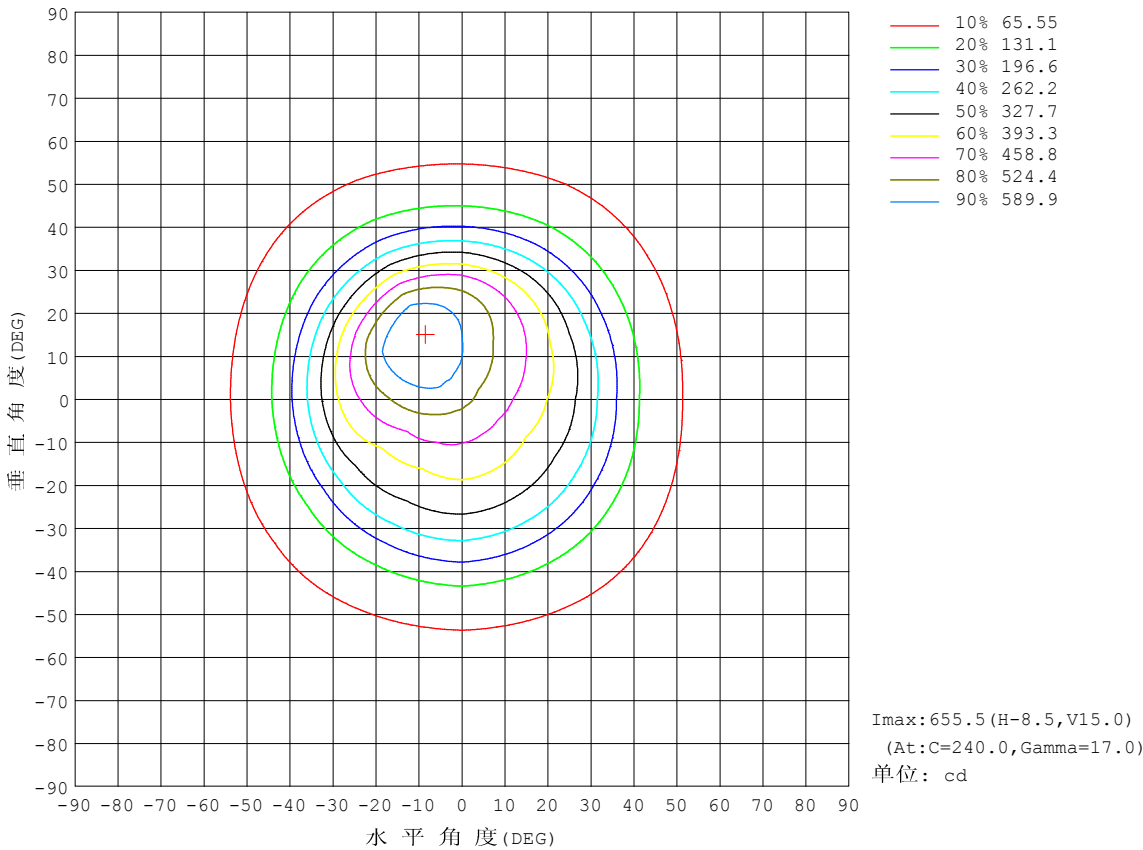


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-03-30

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

灯具有效平均照度图

| | | |
|---|------------------|-----------------|
| 实测参数: U:24.00V I:0.7500A P:18.00W PF:1.000 实检光通:764.43x1 lm | | |
| 灯具名称: SFW20-24V-3535-24-RGB-60 | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 18.5MM*18.5MM | 灯具规格: | 测试编号: 202403008 |
| 制造厂商: OLYMPIA | 发光口面: 1.0*0.0185 | 保护角: |

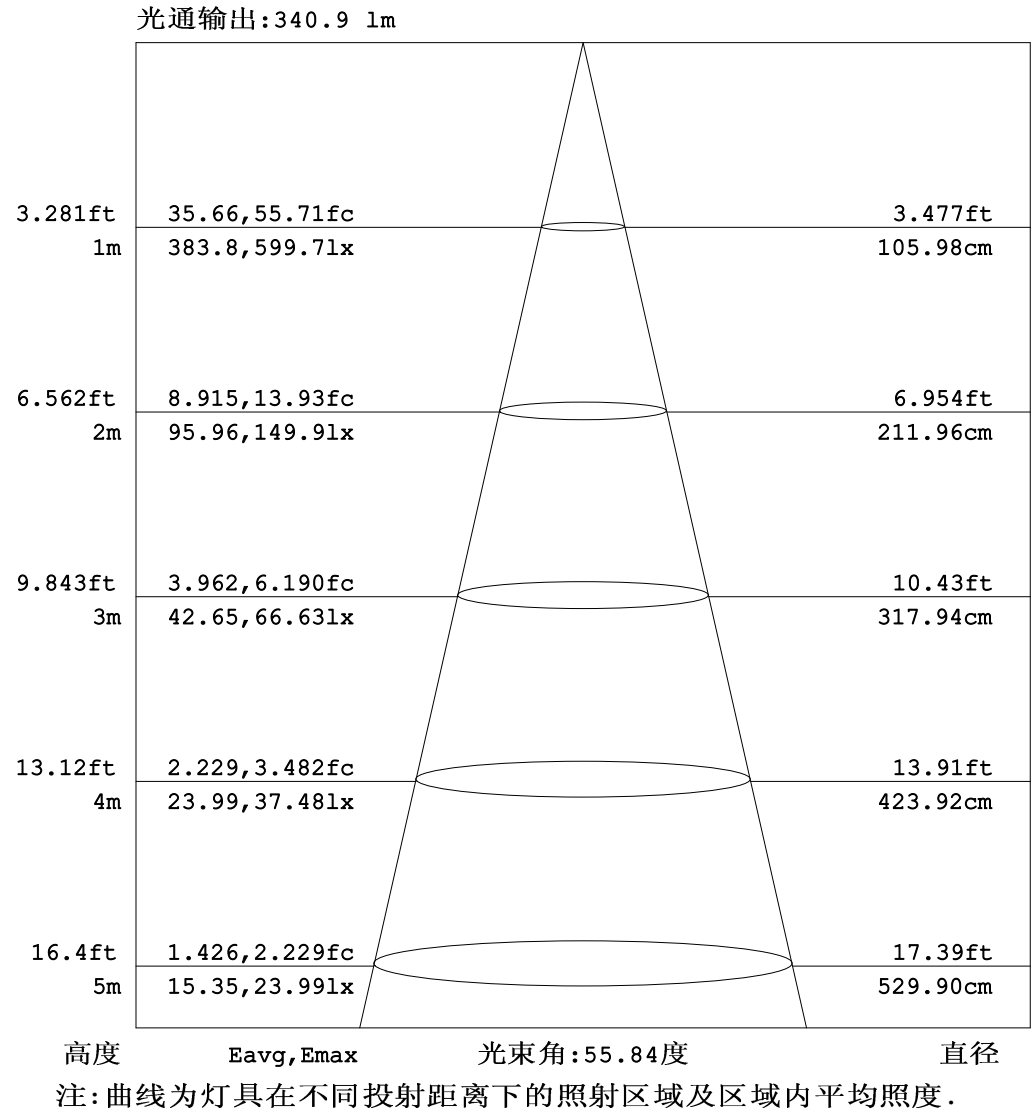


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-03-30

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

平面等照度曲线


| | | |
|---|------------------|-----------------|
| 实测参数: U:24.00V I:0.7500A P:18.00W PF:1.000 实检光通:764.43x1 lm | | |
| 灯具名称: SFW20-24V-3535-24-RGB-60 | 灯具类型: 硅胶 | 灯具重量: |
| 外型尺寸: 18.5MM*18.5MM | 灯具规格: | 测试编号: 202403008 |
| 制造厂商: OLYMPIA | 发光口面: 1.0*0.0185 | 保护角: |

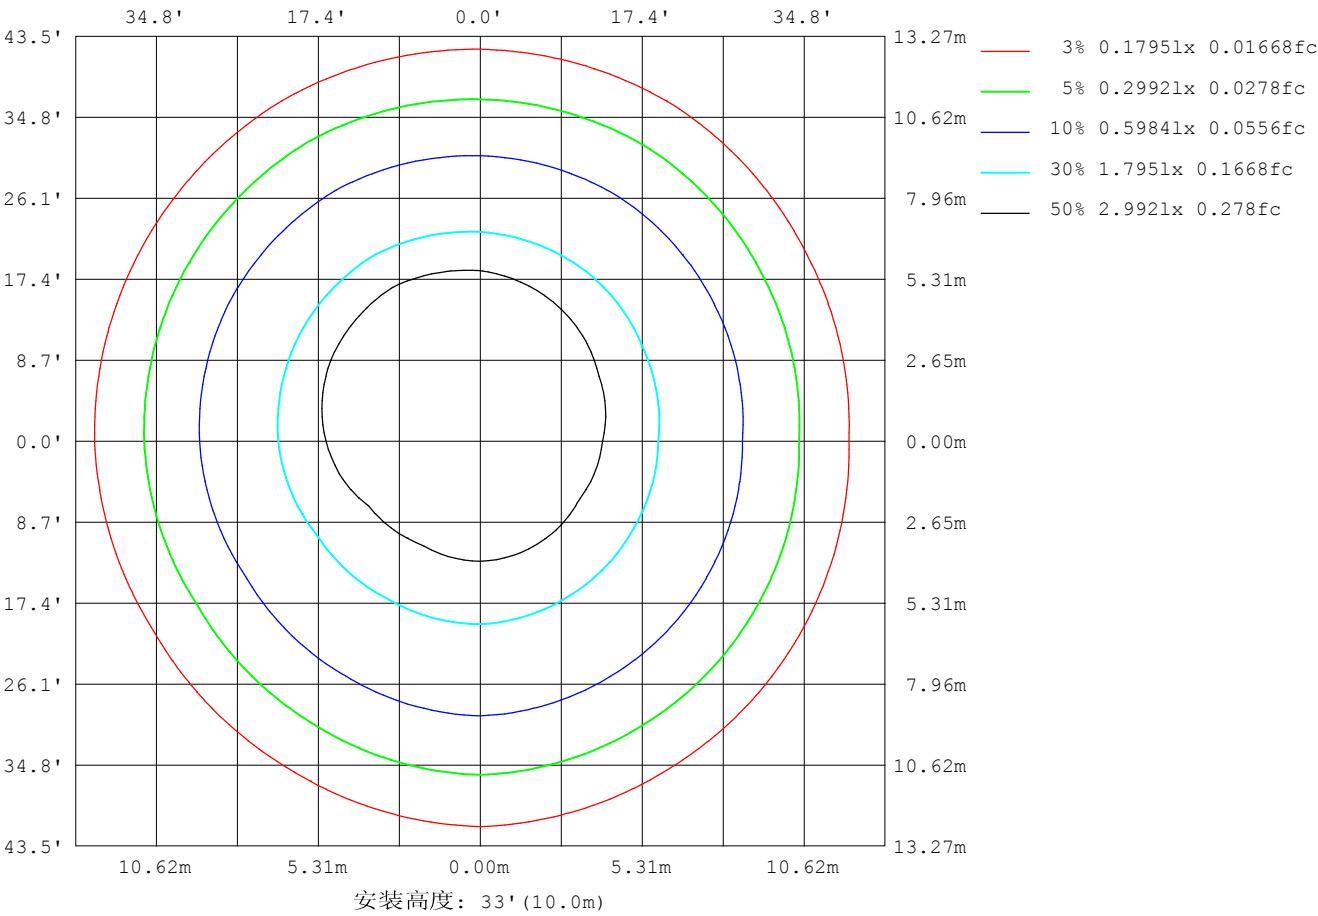

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-03-30

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

平面照度曲线

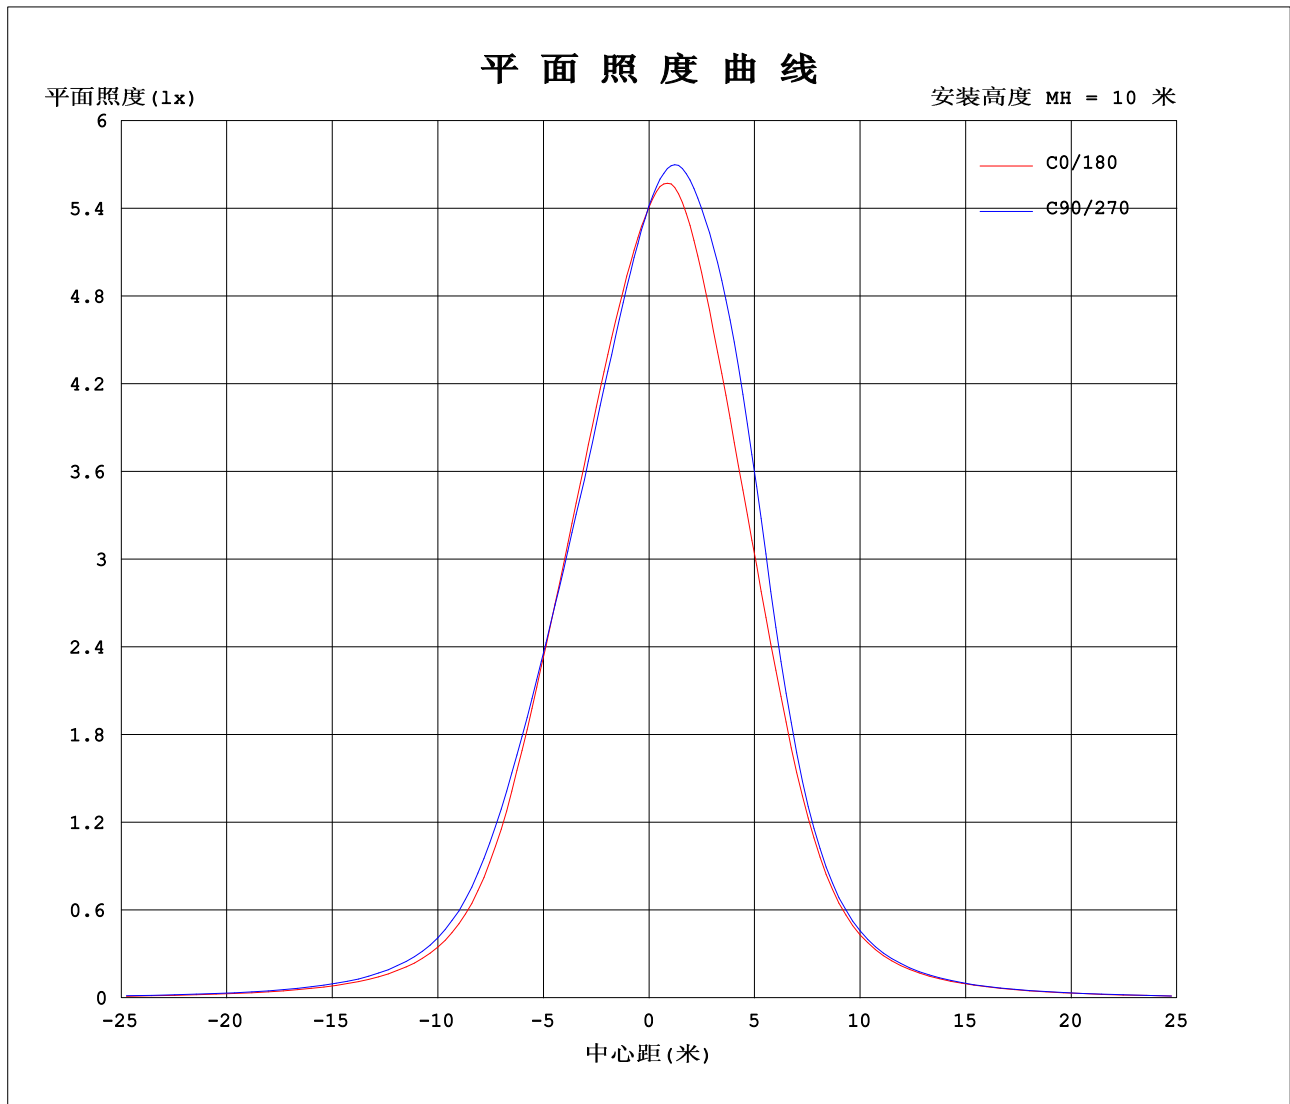

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-03-30

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度: 65.0%
测试距离: 9.200米 [K=1.0000]
备注:

光强分布数据表格

| | | |
|---|-----------------|----------------|
| 实测参数: U:24.00V I:0.7500A P:18.00W PF:1.000 实检光通:764.43x1 lm | | |
| 灯具名称: SFW20-24V-3535-24-RGB-60 | 灯具类型:硅胶 | 灯具重量: |
| 外型尺寸: 18.5MM*18.5MM | 灯具规格: | 测试编号:202403008 |
| 制造厂商: OLYMPIA | 发光口面:1.0*0.0185 | 保护角: |

| 表--1 | | | | | | | | | | | | | 单位: cd | | | | | | |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|--------|--|--|--|--|--|--|
| C (DEG) γ (DEG) | 0 | 30 | 60 | 90 | 120 | 150 | 180 | 210 | 240 | 270 | 300 | 330 | | | | | | | |
| 0 | 541 | 541 | 540 | 541 | 539 | 537 | 541 | 541 | 540 | 541 | 539 | 537 | | | | | | | |
| 5 | 509 | 499 | 496 | 502 | 513 | 533 | 564 | 584 | 587 | 574 | 549 | 522 | | | | | | | |
| 10 | 473 | 455 | 454 | 461 | 473 | 504 | 562 | 615 | 627 | 590 | 541 | 500 | | | | | | | |
| 15 | 435 | 412 | 415 | 422 | 425 | 456 | 537 | 624 | 653 | 590 | 523 | 473 | | | | | | | |
| 20 | 391 | 370 | 377 | 384 | 381 | 408 | 497 | 604 | 647 | 576 | 497 | 436 | | | | | | | |
| 25 | 343 | 330 | 334 | 344 | 342 | 365 | 444 | 539 | 586 | 527 | 451 | 381 | | | | | | | |
| 30 | 283 | 277 | 283 | 295 | 296 | 314 | 373 | 432 | 466 | 428 | 372 | 314 | | | | | | | |
| 35 | 210 | 211 | 220 | 235 | 231 | 240 | 280 | 310 | 329 | 305 | 273 | 236 | | | | | | | |
| 40 | 144 | 147 | 156 | 169 | 162 | 163 | 188 | 206 | 214 | 199 | 186 | 163 | | | | | | | |
| 45 | 98.7 | 102 | 108 | 117 | 110 | 109 | 123 | 132 | 138 | 130 | 123 | 110 | | | | | | | |
| 50 | 70.9 | 74.0 | 77.6 | 83.4 | 78.5 | 77.5 | 83.9 | 88.5 | 92.4 | 89.1 | 85.5 | 76.6 | | | | | | | |
| 55 | 52.9 | 55.7 | 57.9 | 60.8 | 58.7 | 58.2 | 61.2 | 63.0 | 65.3 | 64.2 | 61.8 | 55.5 | | | | | | | |
| 60 | 39.9 | 42.2 | 43.8 | 46.4 | 44.9 | 44.7 | 46.0 | 46.5 | 47.8 | 47.5 | 45.7 | 41.0 | | | | | | | |
| 65 | 29.5 | 31.6 | 33.0 | 35.2 | 34.1 | 34.1 | 34.5 | 34.3 | 35.2 | 35.3 | 33.6 | 29.9 | | | | | | | |
| 70 | 20.8 | 22.5 | 24.2 | 25.9 | 25.1 | 25.1 | 24.9 | 24.4 | 25.3 | 25.1 | 23.7 | 20.8 | | | | | | | |
| 75 | 14.1 | 15.2 | 16.5 | 17.8 | 17.5 | 17.6 | 16.9 | 16.4 | 16.8 | 16.6 | 15.4 | 13.5 | | | | | | | |
| 80 | 9.02 | 9.71 | 10.3 | 10.9 | 11.3 | 11.8 | 11.1 | 10.5 | 10.2 | 9.56 | 8.98 | 8.03 | | | | | | | |
| 85 | 4.92 | 5.44 | 5.60 | 5.53 | 6.52 | 7.44 | 6.47 | 5.83 | 5.14 | 3.74 | 3.95 | 3.64 | | | | | | | |
| 90 | 2.78 | 2.77 | 2.80 | 2.74 | 3.22 | 3.87 | 2.69 | 2.10 | 1.39 | 0.97 | 1.09 | 1.17 | | | | | | | |
| 95 | 2.68 | 2.74 | 2.76 | 2.86 | 2.81 | 2.82 | 1.19 | 1.16 | 1.16 | 1.12 | 1.17 | 1.10 | | | | | | | |
| 100 | 2.75 | 2.84 | 2.88 | 3.00 | 2.89 | 2.89 | 1.35 | 1.30 | 1.36 | 1.34 | 1.37 | 1.31 | | | | | | | |
| 105 | 2.88 | 3.00 | 3.06 | 3.17 | 3.04 | 2.99 | 1.59 | 1.52 | 1.60 | 1.58 | 1.61 | 1.58 | | | | | | | |
| 110 | 3.08 | 3.22 | 3.31 | 3.40 | 3.23 | 3.14 | 1.86 | 1.80 | 1.89 | 1.88 | 1.91 | 1.89 | | | | | | | |
| 115 | 3.32 | 3.50 | 3.60 | 3.68 | 3.49 | 3.35 | 2.18 | 2.13 | 2.20 | 2.19 | 2.23 | 2.25 | | | | | | | |
| 120 | 3.64 | 3.84 | 3.94 | 4.02 | 3.81 | 3.60 | 2.54 | 2.48 | 2.55 | 2.52 | 2.59 | 2.64 | | | | | | | |
| 125 | 4.01 | 4.21 | 4.30 | 4.38 | 4.14 | 3.92 | 2.93 | 2.85 | 2.92 | 2.89 | 2.98 | 3.05 | | | | | | | |
| 130 | 4.40 | 4.60 | 4.68 | 4.75 | 4.52 | 4.27 | 3.33 | 3.25 | 3.31 | 3.29 | 3.38 | 3.49 | | | | | | | |
| 135 | 4.79 | 4.98 | 5.02 | 5.11 | 4.89 | 4.64 | 3.76 | 3.66 | 3.71 | 3.68 | 3.79 | 3.88 | | | | | | | |
| 140 | 5.16 | 5.32 | 5.33 | 5.42 | 5.25 | 5.03 | 4.16 | 4.07 | 4.12 | 4.09 | 4.18 | 4.26 | | | | | | | |
| 145 | 5.47 | 5.59 | 5.57 | 5.69 | 5.57 | 5.40 | 4.55 | 4.47 | 4.52 | 4.47 | 4.55 | 4.63 | | | | | | | |
| 150 | 5.70 | 5.78 | 5.73 | 5.90 | 5.82 | 5.72 | 4.91 | 4.85 | 4.92 | 4.85 | 4.90 | 4.94 | | | | | | | |
| 155 | 5.87 | 5.92 | 5.87 | 6.06 | 6.05 | 5.99 | 5.21 | 5.19 | 5.28 | 5.21 | 5.23 | 5.21 | | | | | | | |
| 160 | 5.99 | 6.02 | 6.01 | 6.21 | 6.21 | 6.21 | 5.49 | 5.50 | 5.60 | 5.54 | 5.54 | 5.49 | | | | | | | |
| 165 | 6.11 | 6.15 | 6.16 | 6.35 | 6.34 | 6.38 | 5.77 | 5.78 | 5.90 | 5.84 | 5.84 | 5.77 | | | | | | | |
| 170 | 6.24 | 6.29 | 6.31 | 6.46 | 6.44 | 6.50 | 6.05 | 6.02 | 6.15 | 6.10 | 6.11 | 6.02 | | | | | | | |
| 175 | 6.32 | 6.40 | 6.42 | 6.50 | 6.50 | 6.50 | 6.26 | 6.23 | 6.36 | 6.32 | 6.35 | 6.27 | | | | | | | |
| 180 | 6.38 | 6.40 | 6.47 | 6.50 | 6.50 | 6.50 | 6.39 | 6.39 | 6.47 | 6.48 | 6.49 | 6.47 | | | | | | | |

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-03-30

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269
环境湿度:65.0%
测试距离:9.200米 [K=1.0000]
备注:

Photometric Data Table [cd]

| G/C | 0.0 | 30.0 | 60.0 | 90.0 | 120.0 | 150.0 | 180.0 | 210.0 | 240.0 | 270.0 |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| 0.0 | 540.6 | 541.4 | 540.0 | 541.4 | 539.4 | 536.9 | 540.6 | 541.4 | 540.0 | 541.4 |
| 3.0 | 522.0 | 515.6 | 513.0 | 518.0 | 525.6 | 538.0 | 557.2 | 567.9 | 569.2 | 562.3 |
| 6.0 | 501.9 | 490.1 | 487.0 | 494.2 | 505.7 | 529.5 | 565.9 | 591.5 | 595.7 | 578.6 |
| 9.0 | 480.3 | 464.3 | 461.6 | 469.5 | 482.2 | 511.4 | 564.7 | 610.4 | 620.0 | 588.9 |
| 12.0 | 457.7 | 437.8 | 437.4 | 445.8 | 454.4 | 485.8 | 553.7 | 621.3 | 640.0 | 591.8 |
| 15.0 | 434.5 | 411.7 | 415.2 | 421.5 | 425.1 | 456.4 | 536.6 | 624.5 | 652.8 | 590.1 |
| 18.0 | 409.0 | 387.0 | 392.1 | 398.4 | 398.0 | 427.1 | 513.4 | 616.6 | 654.6 | 584.7 |
| 21.0 | 381.9 | 362.2 | 369.2 | 375.6 | 372.9 | 399.3 | 487.3 | 595.3 | 639.8 | 569.9 |
| 24.0 | 353.7 | 338.6 | 343.8 | 352.4 | 349.8 | 373.9 | 455.9 | 555.9 | 603.7 | 541.7 |
| 27.0 | 320.8 | 312.1 | 315.6 | 325.3 | 325.6 | 347.9 | 418.4 | 501.5 | 543.8 | 494.8 |
| 30.0 | 282.5 | 277.0 | 282.9 | 295.4 | 295.8 | 314.4 | 372.9 | 432.4 | 466.1 | 428.3 |
| 33.0 | 240.0 | 239.6 | 246.3 | 261.0 | 258.7 | 273.1 | 320.2 | 357.6 | 383.3 | 353.5 |
| 36.0 | 196.0 | 197.5 | 206.9 | 221.7 | 216.4 | 223.6 | 261.1 | 288.7 | 303.5 | 280.0 |
| 39.0 | 156.3 | 159.5 | 167.9 | 181.9 | 174.6 | 177.4 | 205.5 | 223.9 | 234.3 | 218.1 |
| 42.0 | 123.8 | 127.3 | 135.1 | 145.6 | 138.5 | 138.5 | 158.2 | 173.3 | 179.3 | 167.3 |
| 45.0 | 98.68 | 102.3 | 108.3 | 117.0 | 110.3 | 109.1 | 122.6 | 132.0 | 137.6 | 130.4 |
| 48.0 | 80.34 | 83.64 | 87.95 | 94.75 | 89.43 | 88.07 | 96.73 | 102.7 | 107.1 | 103.0 |
| 51.0 | 66.70 | 69.58 | 72.89 | 78.16 | 73.84 | 72.76 | 78.39 | 82.44 | 85.71 | 83.12 |
| 54.0 | 56.05 | 58.81 | 61.01 | 64.28 | 62.03 | 61.42 | 64.87 | 66.82 | 69.67 | 68.44 |
| 57.0 | 47.34 | 49.62 | 51.55 | 54.81 | 52.58 | 52.19 | 54.48 | 55.35 | 57.32 | 56.85 |
| 60.0 | 39.91 | 42.24 | 43.80 | 46.36 | 44.88 | 44.70 | 46.04 | 46.53 | 47.81 | 47.50 |
| 63.0 | 33.50 | 35.52 | 37.03 | 39.23 | 38.20 | 38.00 | 38.83 | 38.87 | 39.71 | 39.94 |
| 66.0 | 27.61 | 29.61 | 30.99 | 33.19 | 32.21 | 32.16 | 32.44 | 32.18 | 33.05 | 33.19 |
| 69.0 | 22.37 | 24.25 | 25.70 | 27.59 | 26.84 | 26.77 | 26.67 | 26.30 | 27.13 | 27.08 |
| 72.0 | 17.87 | 19.24 | 20.87 | 22.48 | 21.94 | 21.74 | 21.40 | 21.10 | 21.62 | 21.58 |
| 75.0 | 14.13 | 15.20 | 16.48 | 17.77 | 17.49 | 17.56 | 16.92 | 16.45 | 16.84 | 16.61 |
| 78.0 | 10.94 | 11.68 | 12.53 | 13.52 | 13.58 | 13.91 | 13.23 | 12.60 | 12.67 | 12.18 |
| 81.0 | 8.126 | 8.772 | 9.248 | 9.729 | 10.23 | 10.86 | 10.09 | 9.466 | 9.110 | 8.292 |
| 84.0 | 5.664 | 6.234 | 6.414 | 6.350 | 7.334 | 8.230 | 7.302 | 6.683 | 6.085 | 4.760 |
| 87.0 | 3.650 | 4.031 | 4.124 | 4.191 | 5.014 | 5.894 | 4.877 | 4.194 | 3.379 | 1.947 |
| 90.0 | 2.776 | 2.774 | 2.801 | 2.744 | 3.217 | 3.866 | 2.692 | 2.096 | 1.394 | 0.9710 |
| 93.0 | 2.684 | 2.719 | 2.754 | 2.820 | 2.820 | 2.839 | 1.330 | 1.182 | 1.116 | 1.035 |
| 96.0 | 2.694 | 2.769 | 2.779 | 2.890 | 2.829 | 2.830 | 1.201 | 1.161 | 1.202 | 1.161 |
| 99.0 | 2.719 | 2.820 | 2.850 | 2.970 | 2.880 | 2.875 | 1.302 | 1.251 | 1.322 | 1.291 |
| 102.0 | 2.799 | 2.900 | 2.945 | 3.066 | 2.945 | 2.930 | 1.438 | 1.387 | 1.458 | 1.442 |
| 105.0 | 2.879 | 3.001 | 3.060 | 3.172 | 3.035 | 2.991 | 1.589 | 1.518 | 1.599 | 1.578 |
| 108.0 | 2.990 | 3.126 | 3.191 | 3.297 | 3.156 | 3.076 | 1.745 | 1.683 | 1.770 | 1.748 |
| 111.0 | 3.120 | 3.272 | 3.357 | 3.458 | 3.276 | 3.182 | 1.921 | 1.869 | 1.946 | 1.924 |
| 114.0 | 3.266 | 3.438 | 3.533 | 3.619 | 3.427 | 3.297 | 2.122 | 2.060 | 2.137 | 2.115 |
| 117.0 | 3.442 | 3.629 | 3.728 | 3.815 | 3.603 | 3.438 | 2.328 | 2.261 | 2.343 | 2.316 |
| 120.0 | 3.638 | 3.835 | 3.939 | 4.016 | 3.809 | 3.604 | 2.544 | 2.482 | 2.549 | 2.522 |
| 123.0 | 3.859 | 4.051 | 4.150 | 4.232 | 4.005 | 3.785 | 2.775 | 2.713 | 2.765 | 2.748 |
| 126.0 | 4.085 | 4.283 | 4.377 | 4.458 | 4.211 | 3.981 | 3.011 | 2.934 | 2.996 | 2.970 |
| 129.0 | 4.311 | 4.519 | 4.603 | 4.680 | 4.452 | 4.187 | 3.253 | 3.171 | 3.233 | 3.206 |
| 132.0 | 4.557 | 4.755 | 4.814 | 4.896 | 4.663 | 4.413 | 3.499 | 3.417 | 3.474 | 3.442 |
| 135.0 | 4.789 | 4.981 | 5.020 | 5.107 | 4.889 | 4.644 | 3.755 | 3.663 | 3.710 | 3.683 |
| 138.0 | 5.020 | 5.187 | 5.206 | 5.298 | 5.100 | 4.881 | 4.001 | 3.909 | 3.956 | 3.924 |
| 141.0 | 5.231 | 5.378 | 5.372 | 5.474 | 5.311 | 5.102 | 4.243 | 4.146 | 4.197 | 4.156 |
| 144.0 | 5.417 | 5.539 | 5.518 | 5.639 | 5.502 | 5.328 | 4.479 | 4.392 | 4.439 | 4.392 |
| 147.0 | 5.578 | 5.679 | 5.638 | 5.775 | 5.679 | 5.529 | 4.695 | 4.623 | 4.685 | 4.623 |
| 150.0 | 5.704 | 5.785 | 5.734 | 5.895 | 5.824 | 5.720 | 4.906 | 4.854 | 4.916 | 4.849 |
| 153.0 | 5.804 | 5.870 | 5.824 | 6.001 | 5.965 | 5.891 | 5.092 | 5.065 | 5.132 | 5.060 |
| 156.0 | 5.895 | 5.936 | 5.900 | 6.096 | 6.076 | 6.041 | 5.268 | 5.256 | 5.343 | 5.271 |
| 159.0 | 5.975 | 6.001 | 5.990 | 6.182 | 6.171 | 6.167 | 5.433 | 5.442 | 5.544 | 5.483 |
| 162.0 | 6.031 | 6.071 | 6.066 | 6.272 | 6.262 | 6.283 | 5.599 | 5.618 | 5.730 | 5.658 |
| 165.0 | 6.111 | 6.152 | 6.156 | 6.353 | 6.337 | 6.383 | 5.765 | 5.779 | 5.901 | 5.839 |
| 168.0 | 6.191 | 6.237 | 6.247 | 6.418 | 6.398 | 6.468 | 5.941 | 5.930 | 6.061 | 5.995 |
| 171.0 | 6.262 | 6.318 | 6.332 | 6.478 | 6.463 | 6.503 | 6.097 | 6.071 | 6.202 | 6.146 |
| 174.0 | 6.307 | 6.393 | 6.398 | 6.503 | 6.488 | 6.503 | 6.222 | 6.191 | 6.328 | 6.282 |
| 177.0 | 6.352 | 6.398 | 6.443 | 6.503 | 6.503 | 6.503 | 6.343 | 6.297 | 6.448 | 6.387 |
| 180.0 | 6.383 | 6.398 | 6.468 | 6.498 | 6.503 | 6.503 | 6.388 | 6.393 | 6.473 | 6.478 |
| G/C | 300.0 | 330.0 | | | | | | | | |
| 0.0 | 539.4 | 536.9 | | | | | | | | |
| 3.0 | 546.8 | 529.3 | | | | | | | | |
| 6.0 | 548.4 | 517.6 | | | | | | | | |
| 9.0 | 543.7 | 504.5 | | | | | | | | |
| 12.0 | 534.8 | 489.7 | | | | | | | | |
| 15.0 | 522.8 | 473.2 | | | | | | | | |
| 18.0 | 508.8 | 452.8 | | | | | | | | |
| 21.0 | 490.6 | 426.0 | | | | | | | | |
| 24.0 | 462.9 | 392.8 | | | | | | | | |
| 27.0 | 423.4 | 356.3 | | | | | | | | |
| 30.0 | 372.1 | 313.9 | | | | | | | | |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员:

测试日期: 2024-03-30

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.0.269

环境湿度: 65.0%

测试距离: 9.200米 [K=1.0000]

备注:

Photometric Data Table [cd]

| | | |
|-------|-------|-------|
| 33.0 | 314.6 | 267.4 |
| 36.0 | 254.2 | 220.3 |
| 39.0 | 201.0 | 175.9 |
| 42.0 | 157.4 | 138.5 |
| 45.0 | 123.5 | 110.0 |
| 48.0 | 98.52 | 87.96 |
| 51.0 | 79.96 | 71.52 |
| 54.0 | 65.72 | 59.20 |
| 57.0 | 54.53 | 49.26 |
| 60.0 | 45.73 | 41.04 |
| 63.0 | 38.06 | 34.15 |
| 66.0 | 31.36 | 27.95 |
| 69.0 | 25.54 | 22.41 |
| 72.0 | 20.09 | 17.66 |
| 75.0 | 15.39 | 13.53 |
| 78.0 | 11.36 | 10.07 |
| 81.0 | 7.884 | 7.069 |
| 84.0 | 4.894 | 4.416 |
| 87.0 | 2.361 | 2.257 |
| 90.0 | 1.091 | 1.173 |
| 93.0 | 1.106 | 1.091 |
| 96.0 | 1.197 | 1.135 |
| 99.0 | 1.327 | 1.266 |
| 102.0 | 1.463 | 1.417 |
| 105.0 | 1.614 | 1.578 |
| 108.0 | 1.785 | 1.759 |
| 111.0 | 1.971 | 1.959 |
| 114.0 | 2.167 | 2.206 |
| 117.0 | 2.373 | 2.402 |
| 120.0 | 2.589 | 2.638 |
| 123.0 | 2.815 | 2.884 |
| 126.0 | 3.052 | 3.135 |
| 129.0 | 3.298 | 3.392 |
| 132.0 | 3.539 | 3.648 |
| 135.0 | 3.785 | 3.884 |
| 138.0 | 4.027 | 4.111 |
| 141.0 | 4.258 | 4.332 |
| 144.0 | 4.484 | 4.543 |
| 147.0 | 4.700 | 4.739 |
| 150.0 | 4.901 | 4.940 |
| 153.0 | 5.102 | 5.101 |
| 156.0 | 5.298 | 5.266 |
| 159.0 | 5.484 | 5.432 |
| 162.0 | 5.665 | 5.608 |
| 165.0 | 5.835 | 5.774 |
| 168.0 | 6.001 | 5.925 |
| 171.0 | 6.157 | 6.076 |
| 174.0 | 6.298 | 6.226 |
| 177.0 | 6.438 | 6.357 |
| 180.0 | 6.493 | 6.473 |

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员:

测试日期: 2024-03-30

γ角度范围: 0度 - 180度


γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.269

环境湿度: 65.0%


测试距离: 9.200米 [K=1.0000]

备注:

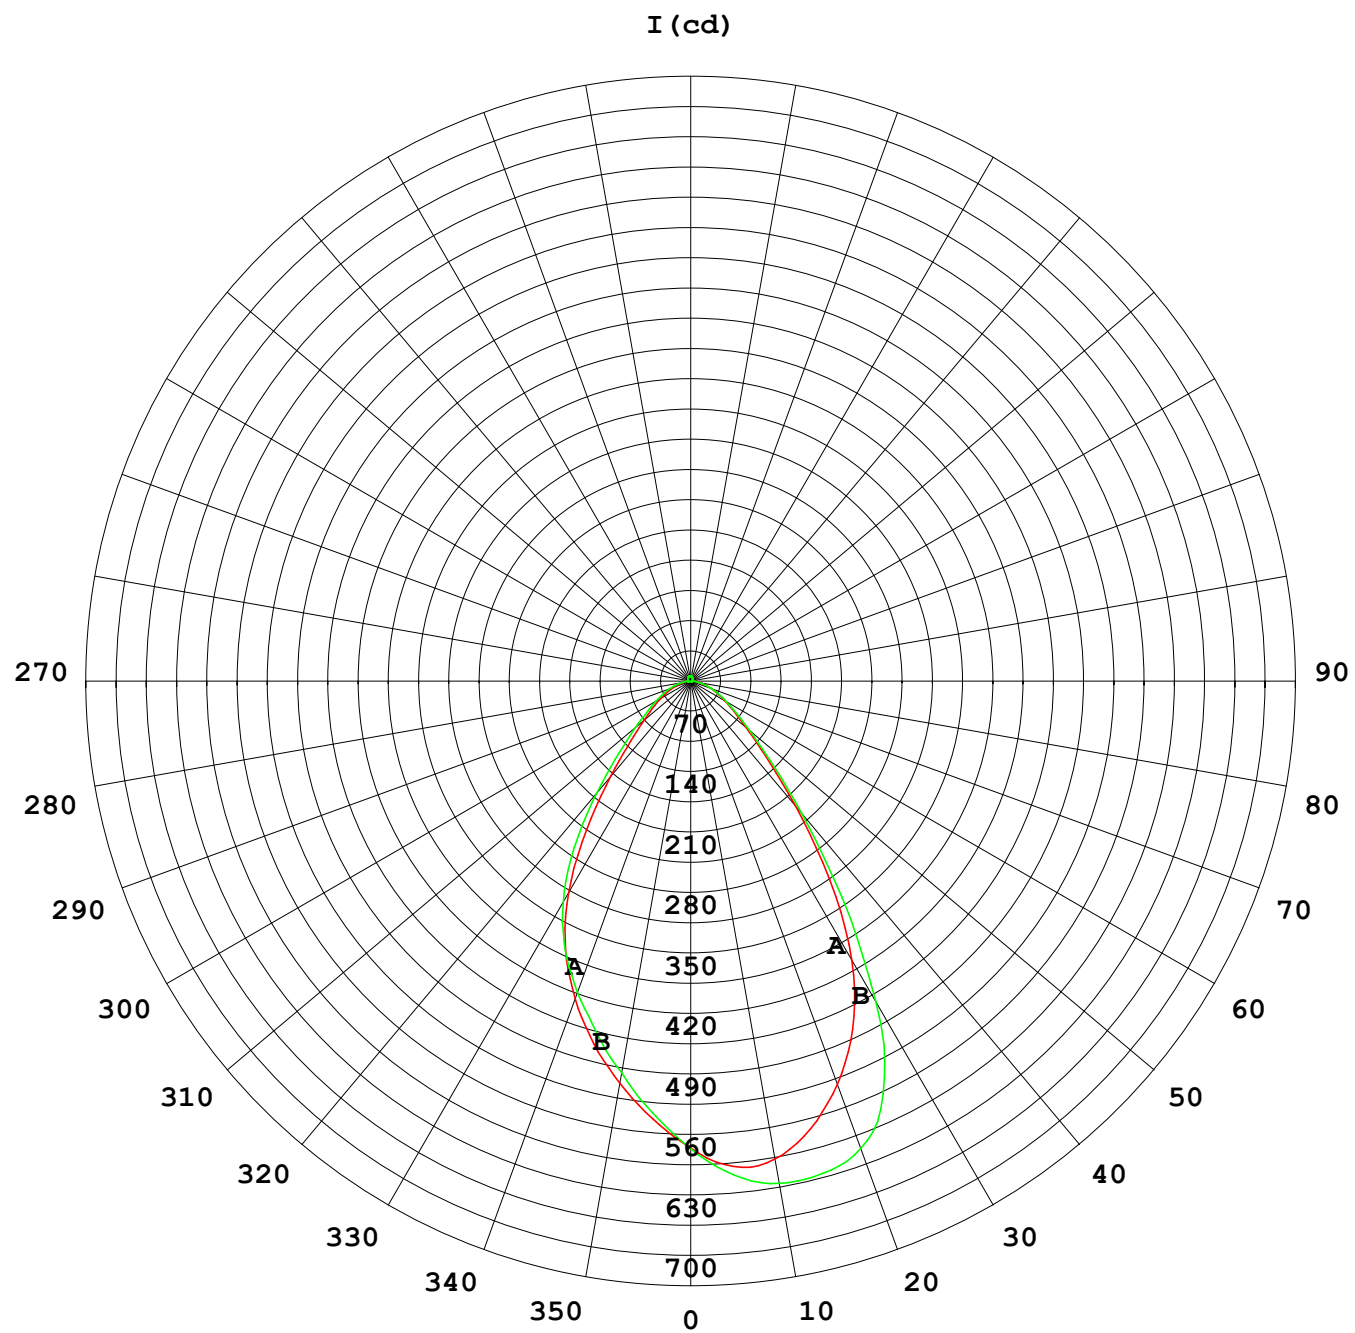

1000 lm

$\kappa = 1$

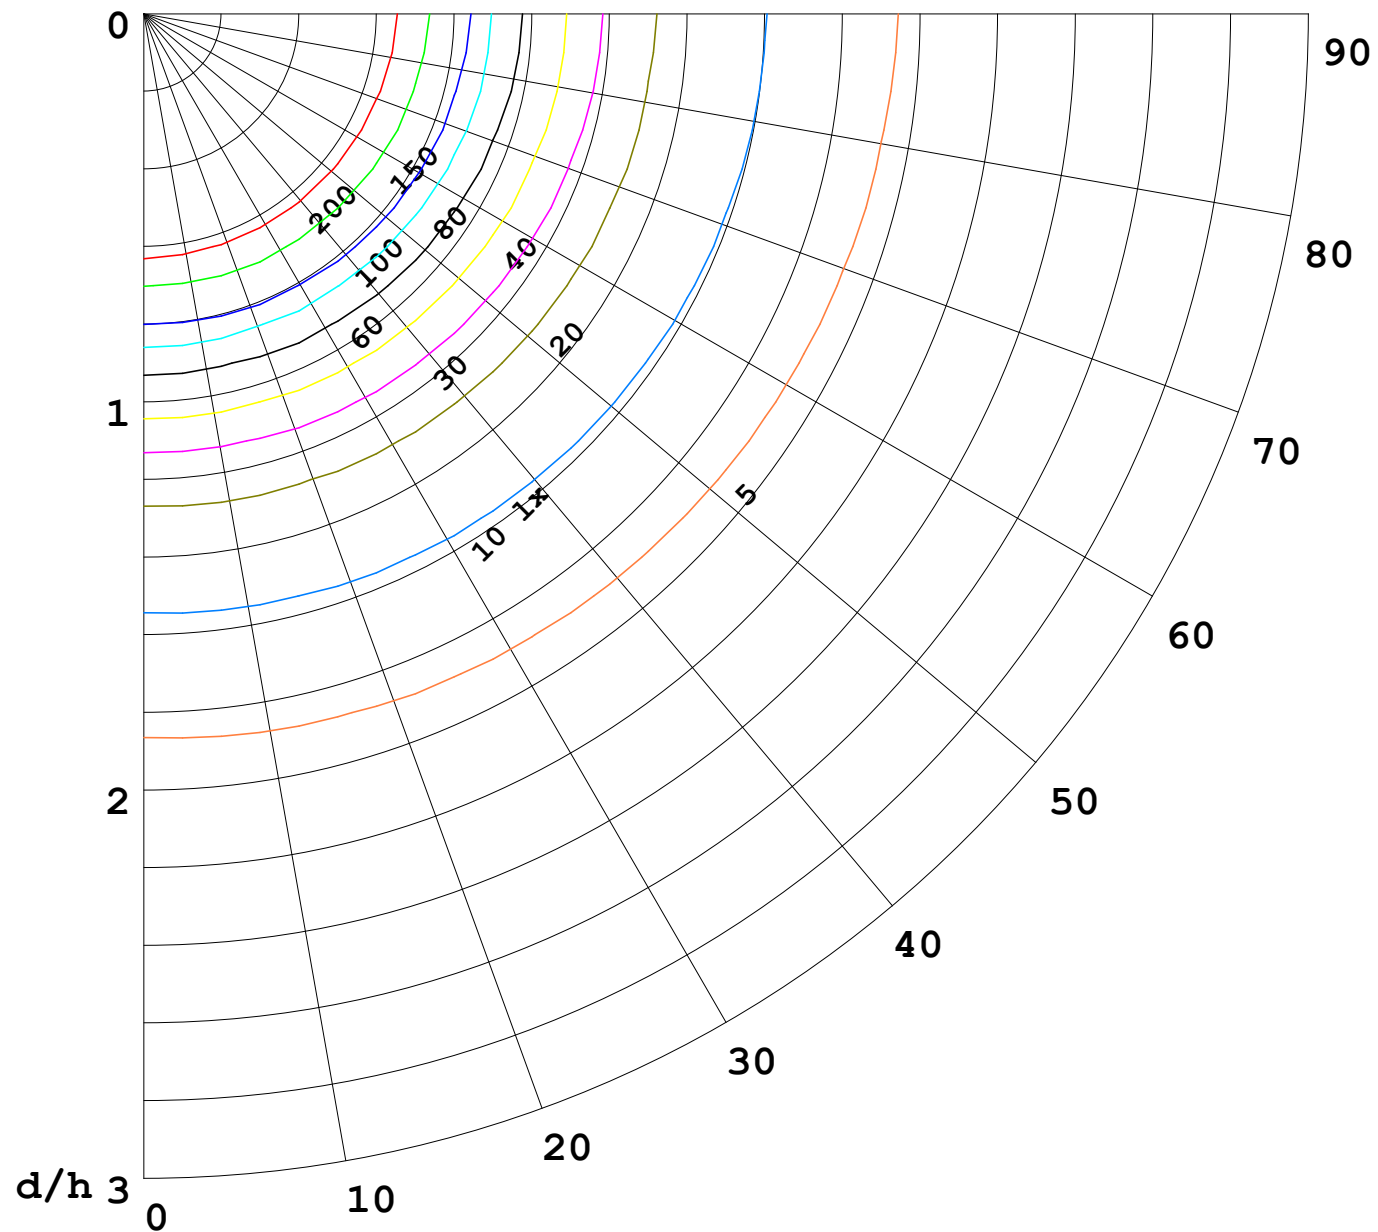

F = 5000 lm
 K = 0.7
 Hcc = 0.0 m
 Hfc = 0.0 m
 Eave = 100 lx

| | Pcc | Pw | Pfc |
|---|-----|----|-----|
| — | 70 | 50 | 30 |
| — | 50 | 30 | 20 |

