




SFW20 Multi Color RGB Silicone Flexible LED Wall Grazer

SFW20-24V-3535-24-RGB


Specification

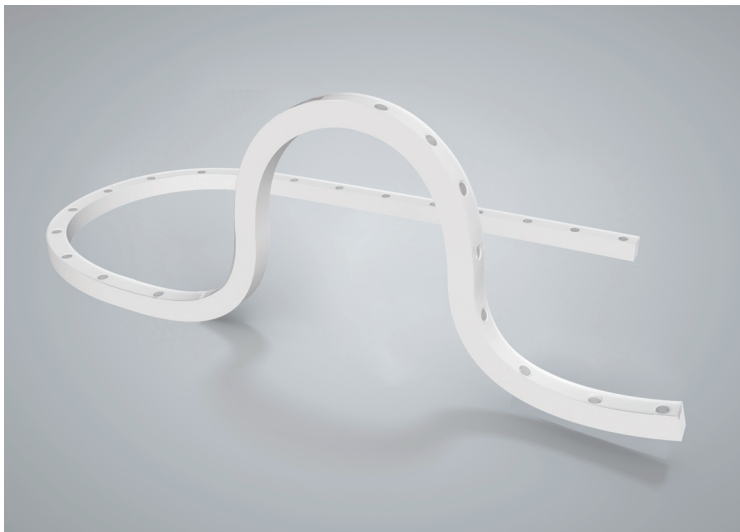


Dimension

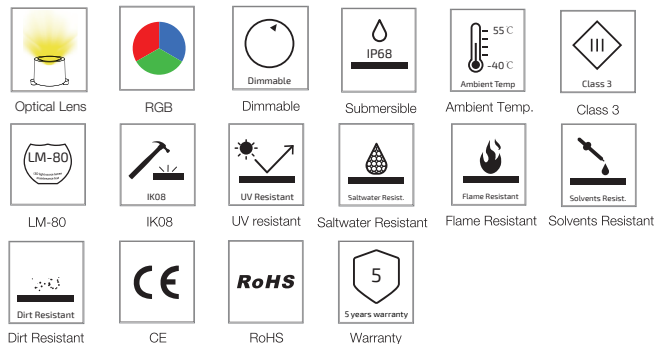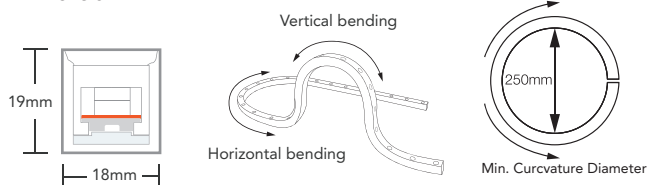

Optional LENS Distribution



Optional Cover:

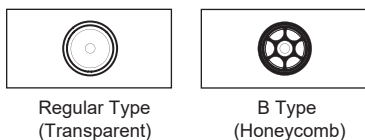




Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	18W/m
Physical	
LED Count	24 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	250mm
Mini. Curvature Diameter:	250mm(Horizontal)/400mm(Vertical)
Output	
LED Light	Epistar SMD LED 3535
CRI	>80
Max. Length Single Feed	4 M
Optional Lens	60°, 20°x40°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68

Emitting Color




Illuminance Distribution

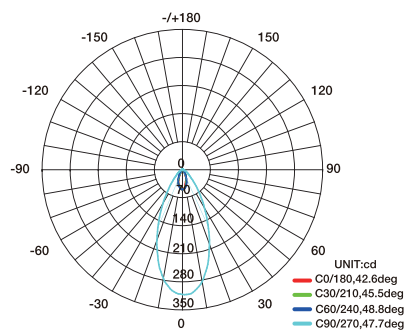


SFW20 Multi Color RGB Silicone Flexible LED Wall Grazer

Connection

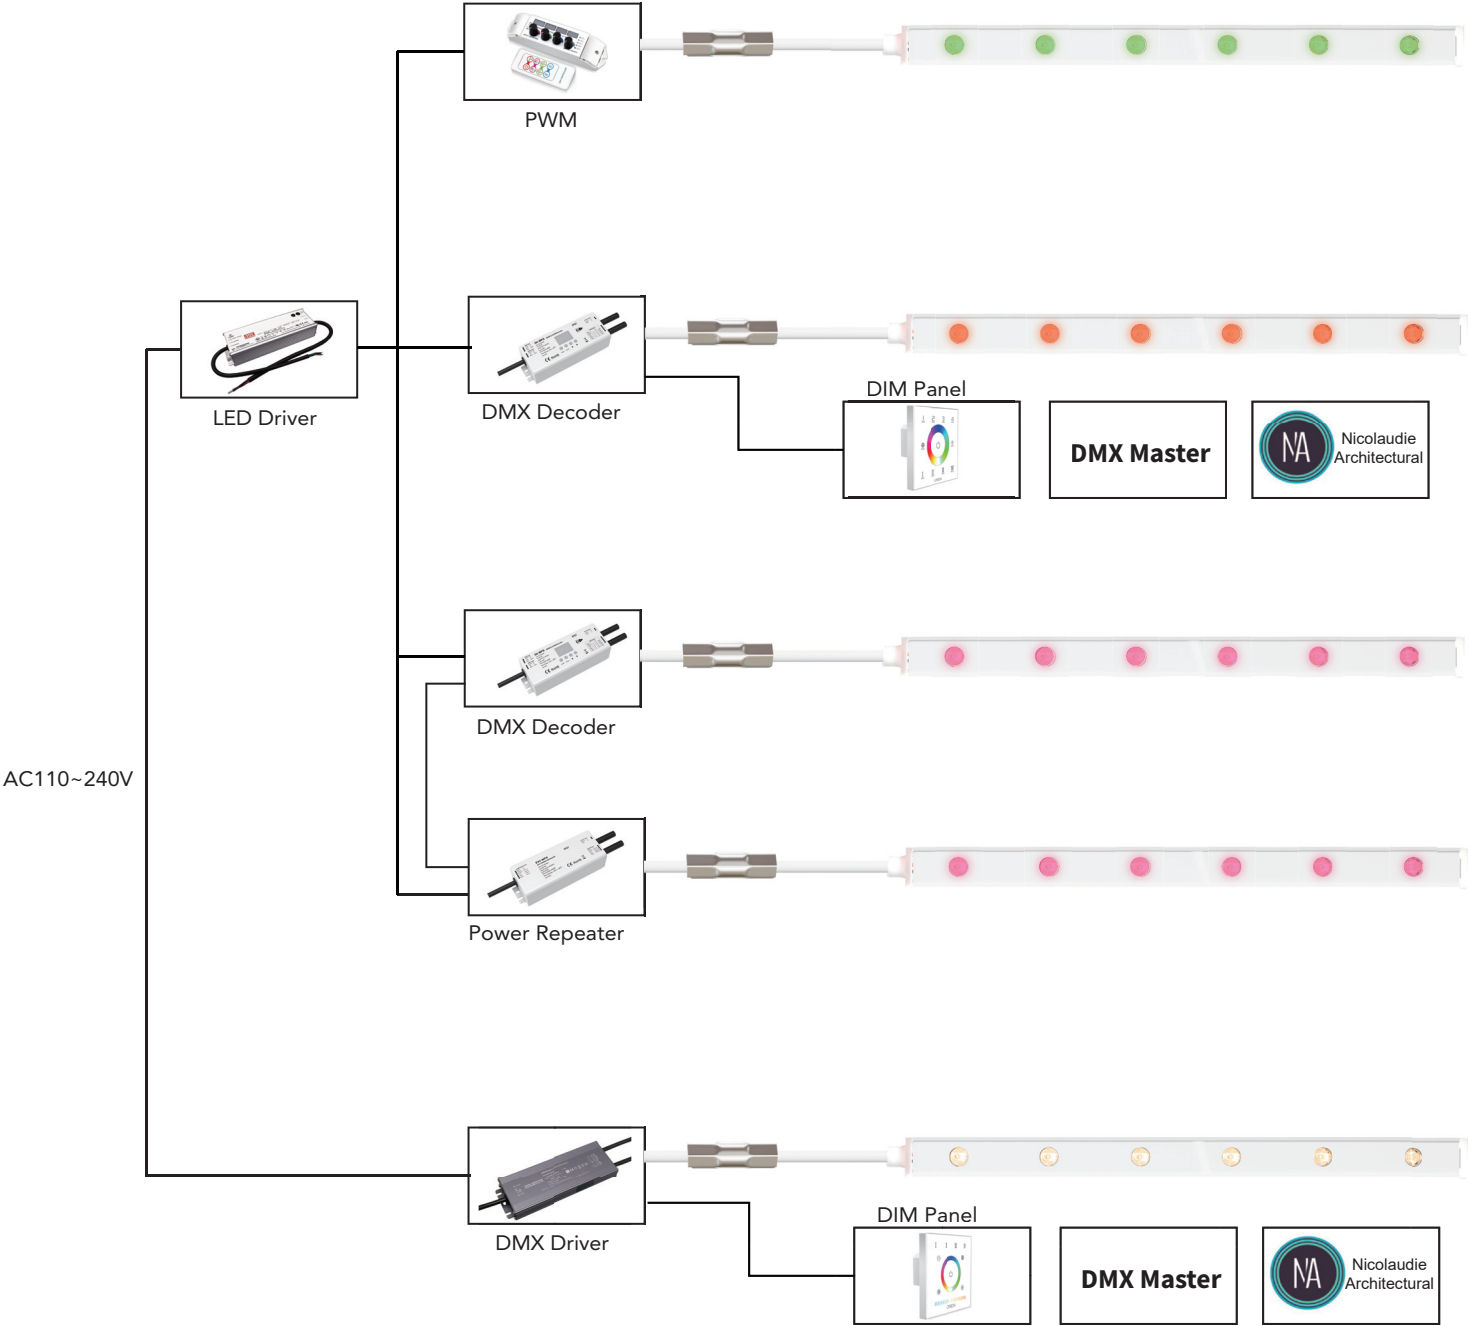


SFW20 Configuration and Accessories



Mold injection Connector (IP68 Factory Assembly Only)

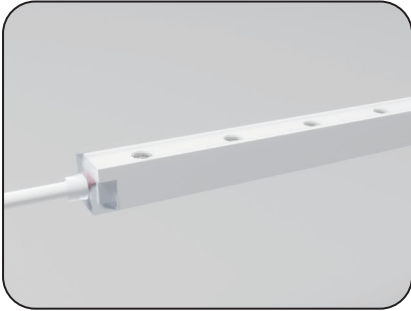



Direct Entry Connector
MJ-SFW20-RGB-D01/02/03
MJ-SFW20-RGB-D01SM
MJ-SFW20-RGB-D02SF
MJ-SFW20-RGB-D03SFM

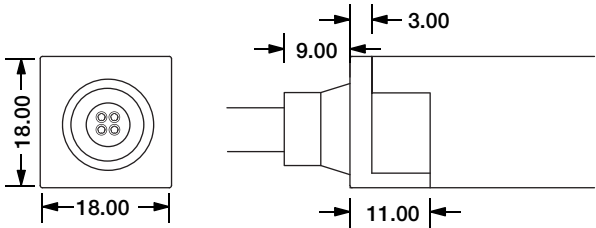


Bottom Entry Connector
MJ-SFW20-RGB-B01/02/03
MJ-SFW20-RGB-B01SM
MJ-SFW20-RGB-B02SF
MJ-SFW20-RGB-B03SFM

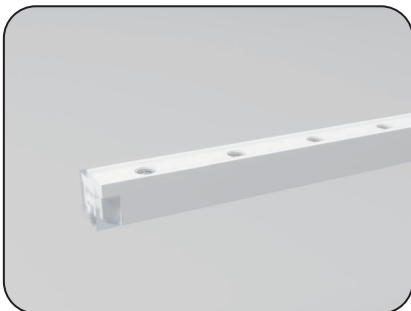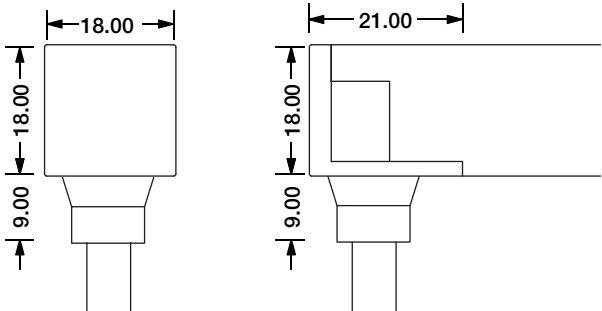


End Cap

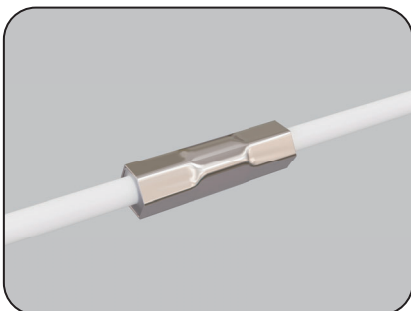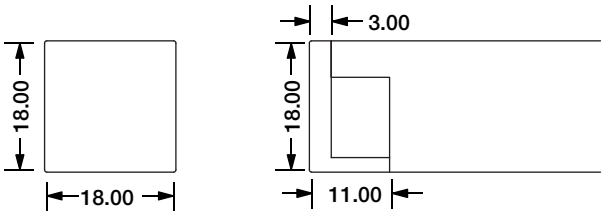


Waterproof Interrupter

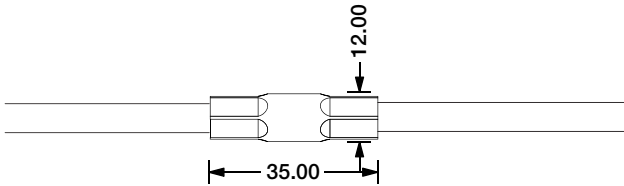



Male Connector
M12-M-4C-20AWG-D6-W-0327-S

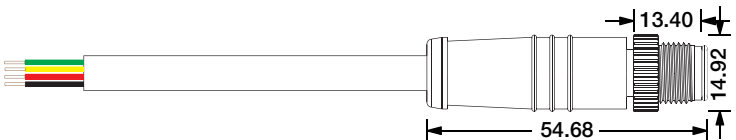



SFW20 Configuration and Accessories

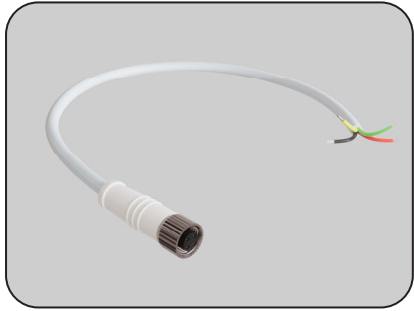



Female Connector
M12-F-4C-20AWG-D6-W-0327-S

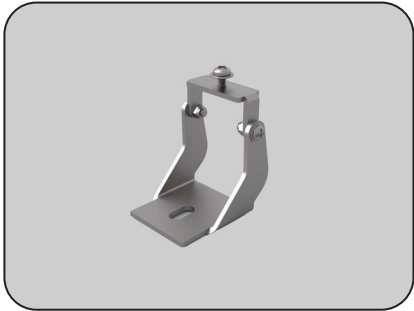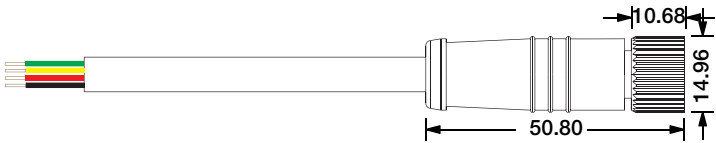



Angle Adjustable Bracket
SFW20-ACC-HX-S2830C2

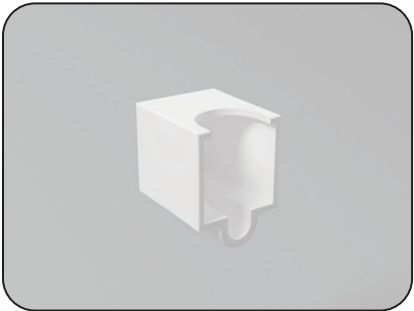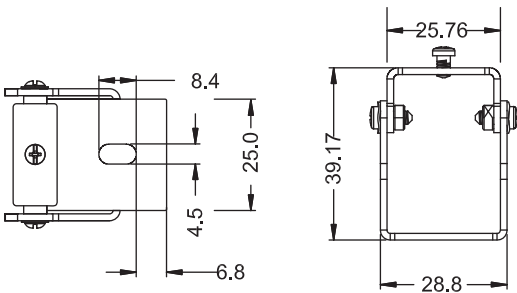


DIY Front Connector Accessories
SJJ-WGJ-029

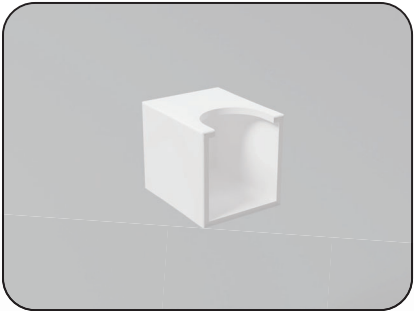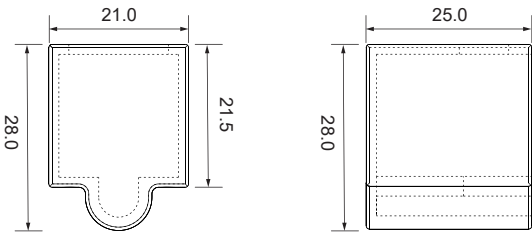


DIY End Connector Accessories
SJJ-WGJ-030

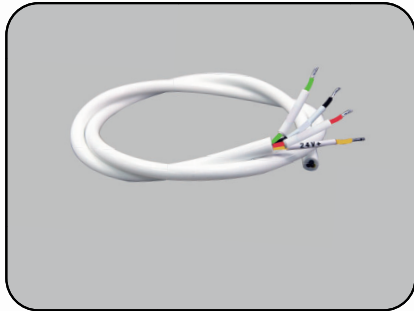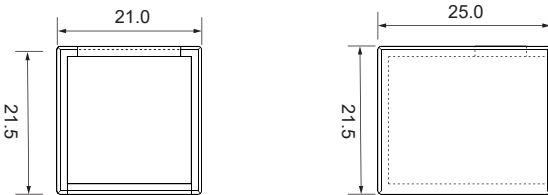



DIY Connected Cable
S-4C-20AWG-D6-UL-06




SFW20 LED Wall Grazer Mounting Channel

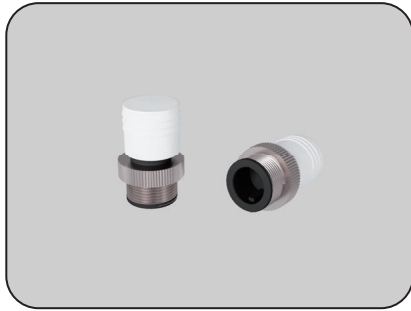

Male Connector End Cap
SYZ-EC-M12-M

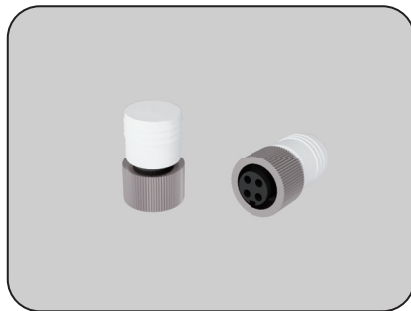

Female Connector End Cap
SYZ-EC-M12-F-4C




SFW20 LED Wall Grazer Mounting Channel


1.Aluminum Channel




Unit:mm






Installation Way



Surface Mounted




Recessed

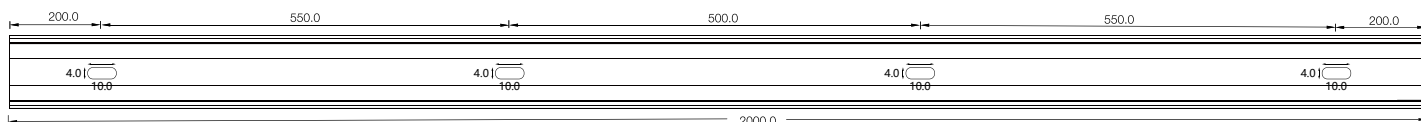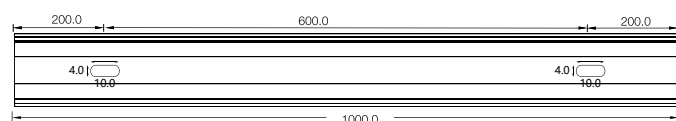


Model	W x H(mm)	Standard Length	Screw Holes	Holes Numbers	Suitable Product
ALCW20S01-035	20.2*23.2	35mm	Φ4.0mm	2	SFW20
ALCW20S01-100		1000mm	4.0x10.0mm	2	SFW20
ALCW20S01-200		2000mm	4.0x10.0mm	4	SFW20




Unit:mm






Installation Way



Surface Mounted




Recessed

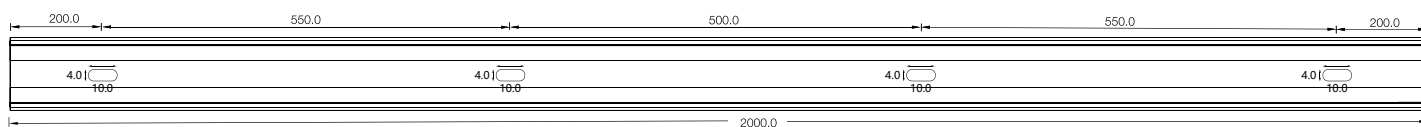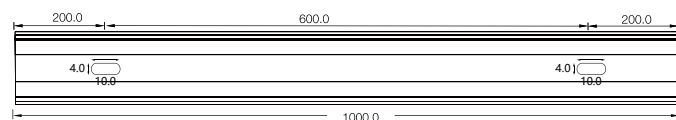



Model	W x H(mm)	Standard Length	Screw Holes	Holes Numbers	Suitable Product
ALCW20H01-035	20.2*35.0	35mm	Φ4.0mm	2	SFW20
ALCW20H01-100		1000mm	4.0x10.0mm	2	SFW20
ALCW20H01-200		2000mm	4.0x10.0mm	4	SFW20

SFW20 LED Wall Grazer Mounting Channel

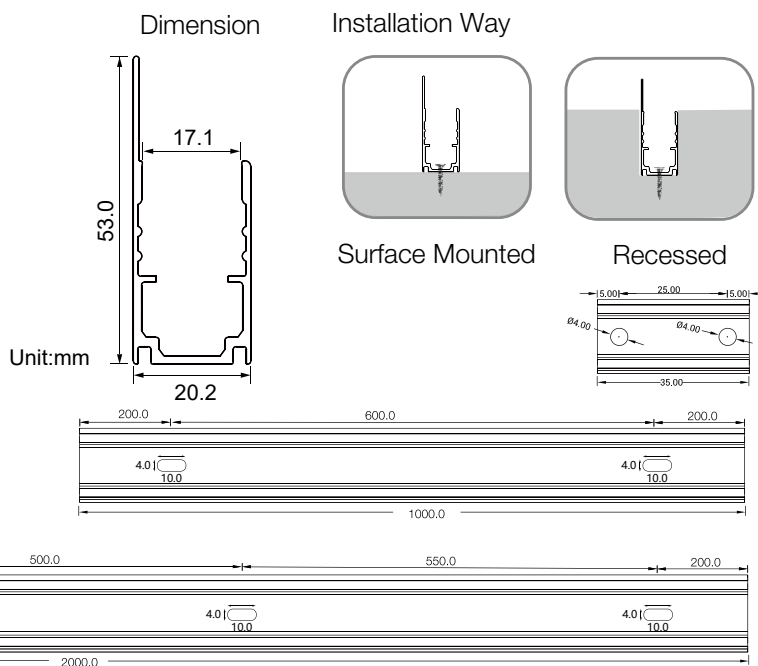

Model	W x H(mm)	Standard Length	Screw Holes	Holes Numbers	Suitable Product
ALCW20H02-035	20.2*53.0	35mm	Φ4.0mm	2	SFW20
ALCW20H02-100		1000mm	4.0x10mm	2	SFW20
ALCW20H02-200		2000mm	4.0x10mm	4	SFW20


2. Flexible Aluminum Channel

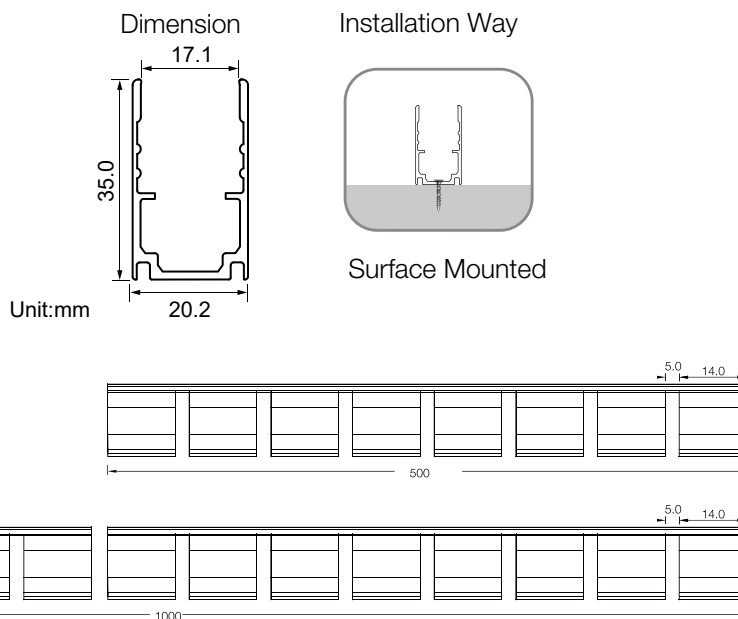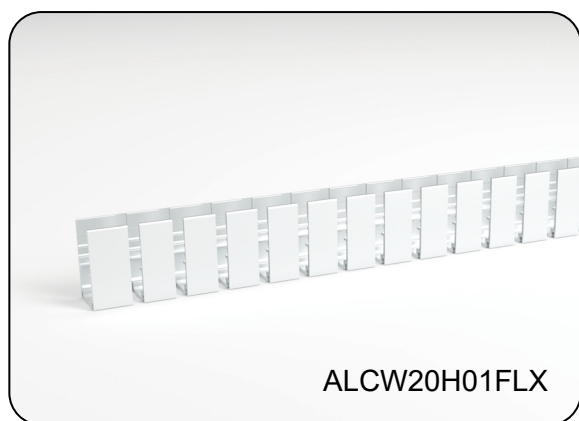


Model	W x H(mm)	Standard Length	Suitable Product
ALCW20H01FLX-50	20.2*35.0	500mm	SFW20
ALCW20H01FLX-100		1000mm	SFW20

SFW20 LED Wall Grazer Mounting Channel


3. Flexible Stainless Steel Channel



Installation Way



Surface Mounted

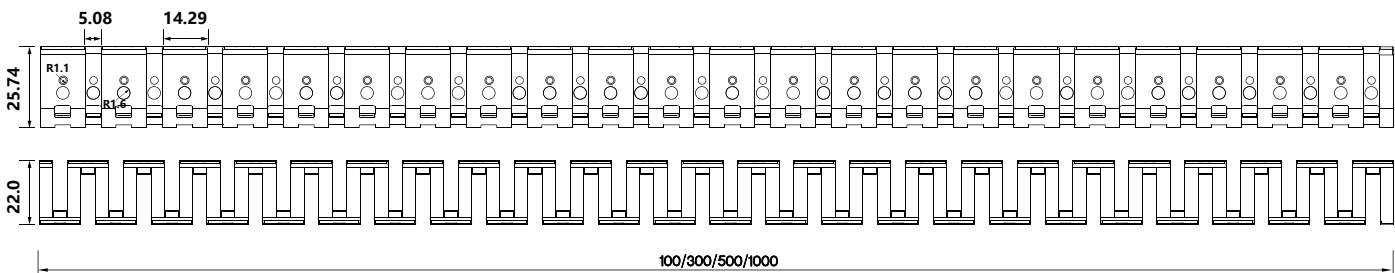

Model	W x H(mm)	Standard Length	Suitable Product
SSC20FLX01	22.00*25.74	100mm	SFW20
SSC20FLX03		300mm	SFW20
SSC20FLX05		500mm	SFW20
SSC20FLX10		1000mm	SFW20