






SFW20 Multi Color RGBW Silicone Flexible LED Wall Grazer

SFW20-24V-3535-24-RGBW


Specification

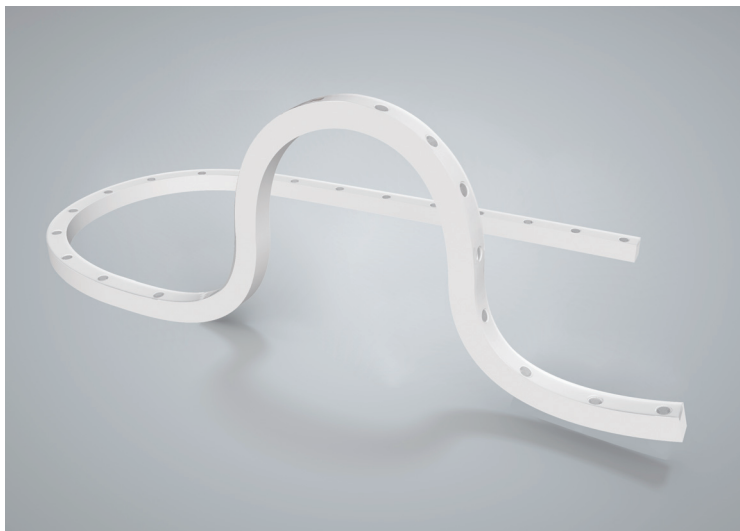

Dimension

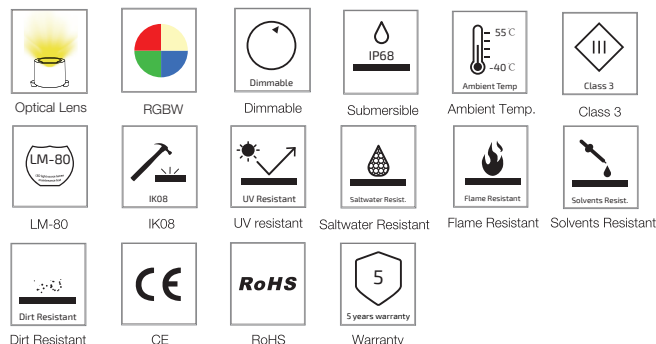


Optional LENS Distribution



Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	24W/m
Physical	
LED Count	24 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	250mm
Mini. Curvature Diameter:	250mm(Horizontal)/400mm(Vertical)
Output	
LED Light	Epistar SMD LED 3535
Color	RGBW(3000K/4000K/6000K)
Max. Length Single Feed	3.5M
Optional Lens	20°, 25°, 38°, 60°, 20°x40°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68


Optional Cover:

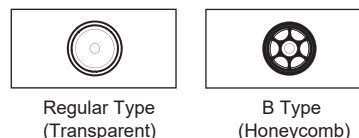


Emitting Color




Illuminance Distribution

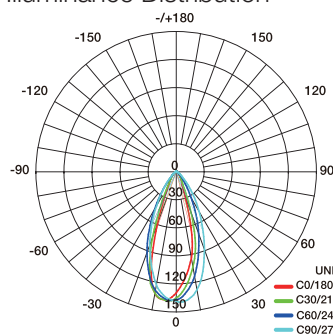

AVERAGE BEAM ANGLE(50%):40.7 DEG
Red




AVERAGE BEAM ANGLE(50%):41.2 DEG
Green

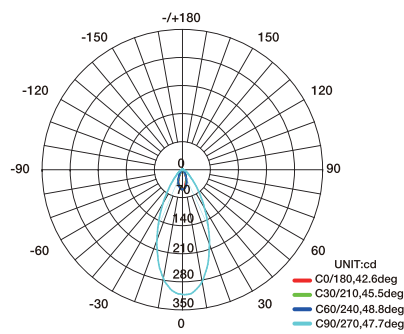

AVERAGE BEAM ANGLE(50%):46.2 DEG
Blue


SFW20 Multi Color RGBW Silicone Flexible LED Wall Grazer

Connection

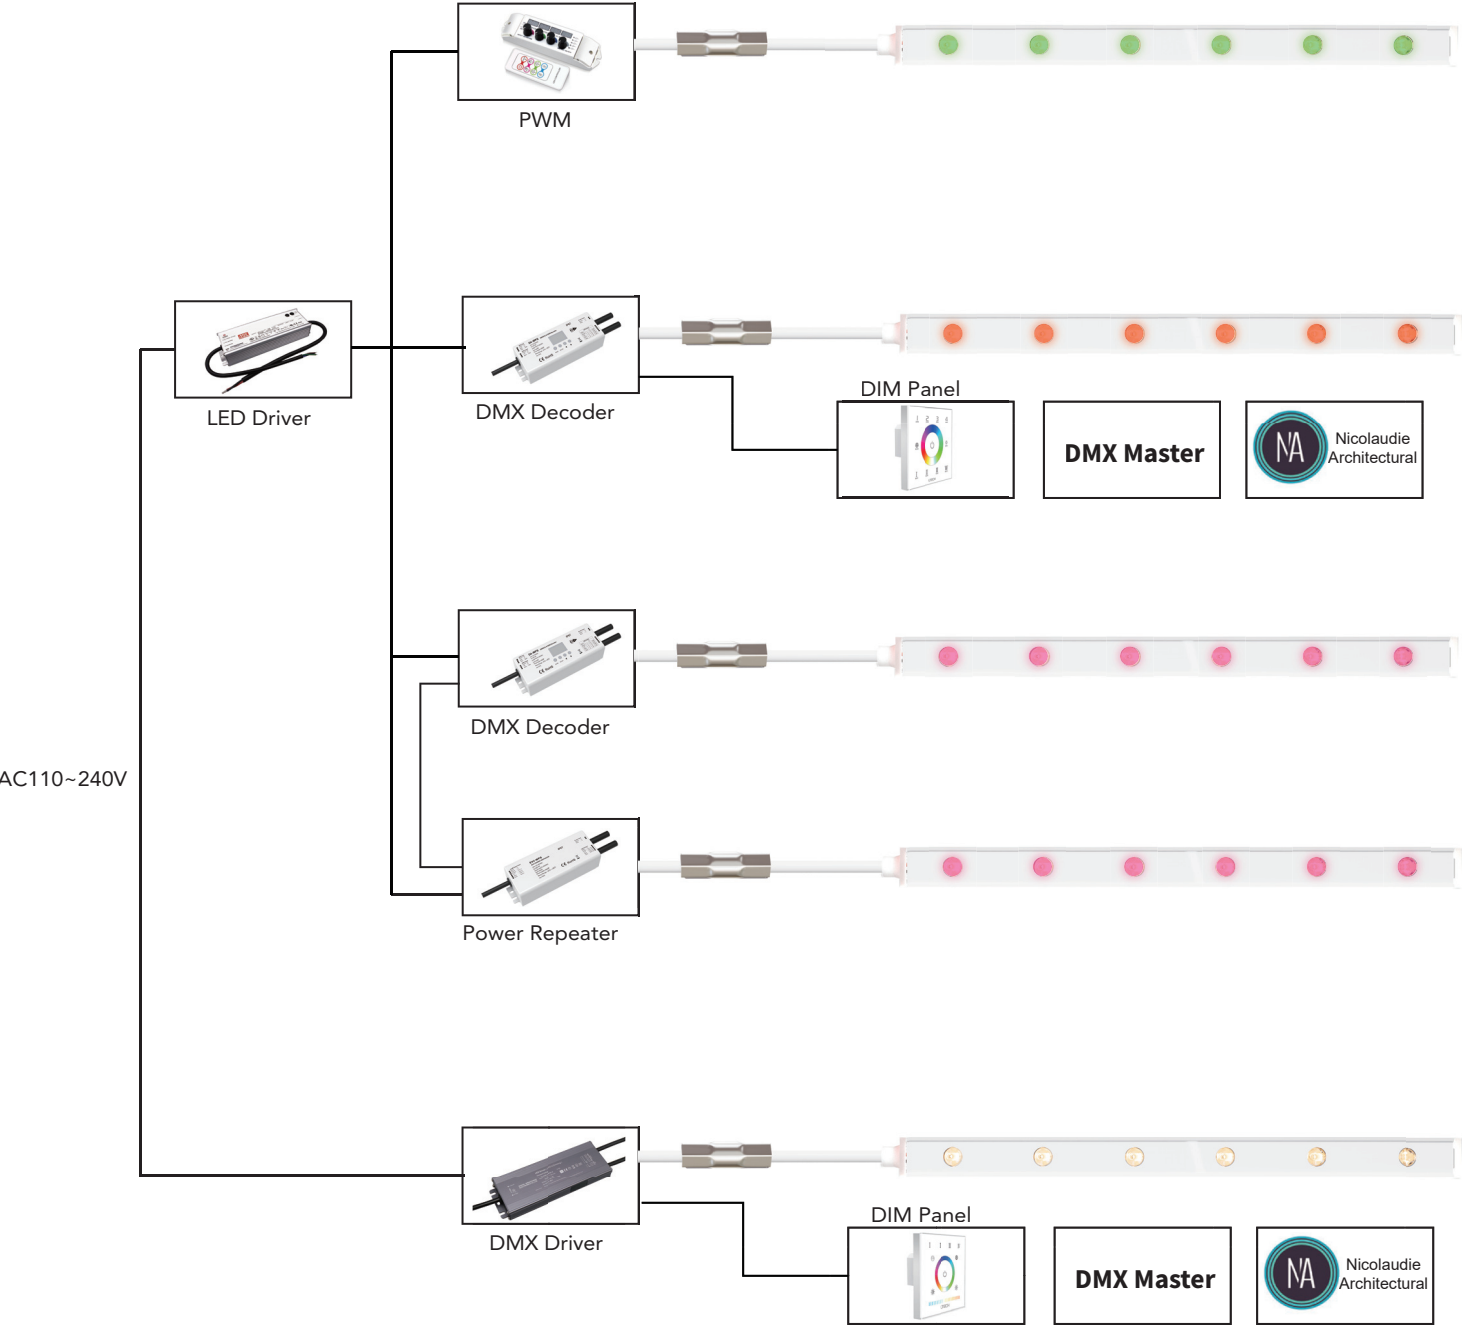


SFW20 Configuration and Accessories



Mold injection Connector (IP68 Factory Assembly Only)

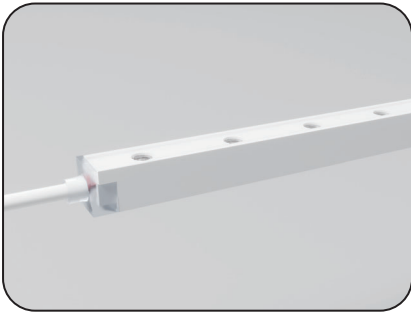



Direct Entry Connector
MJ-SFW20-RGBW-D01/02/03
MJ-SFW20-RGBW-D01SM
MJ-SFW20-RGBW-D02SF
MJ-SFW20-RGBW-D03SFM

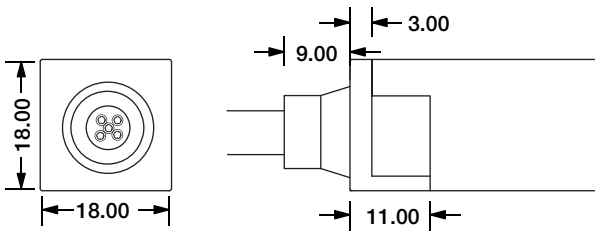


Bottom Entry Connector
MJ-SFW20-RGBW-B01/02/03
MJ-SFW20-RGBW-B01SM
MJ-SFW20-RGBW-B02SF
MJ-SFW20-RGBW-B03SFM

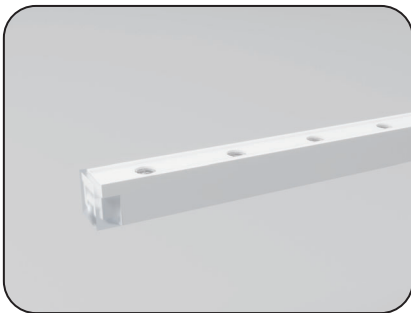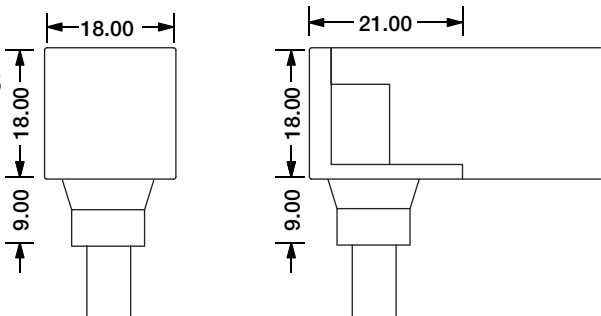


End Cap

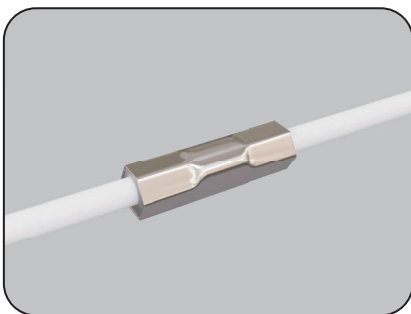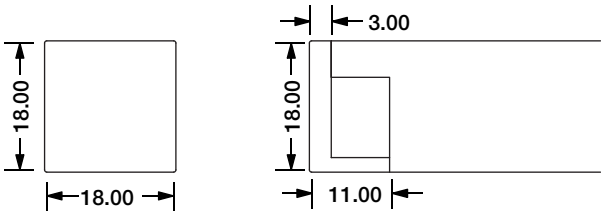


Waterproof Interrupter

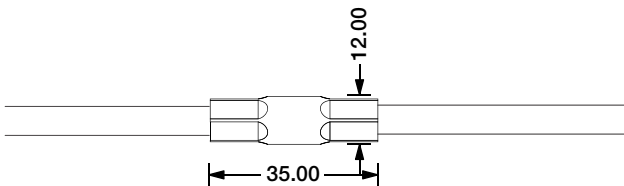



Male Connector
M12-M-5C-20AWG-D6-W-0327-S

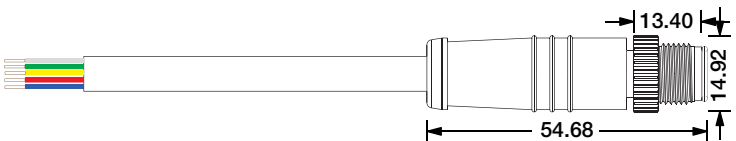



SFW20 Configuration and Accessories

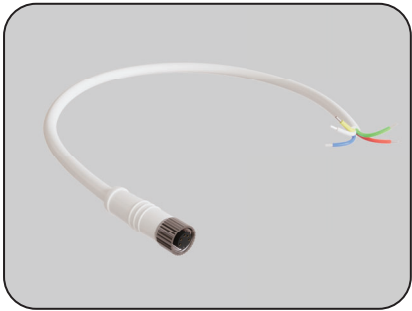



Female Connector
M12-F-5C-20AWG-D6-W-0327-S

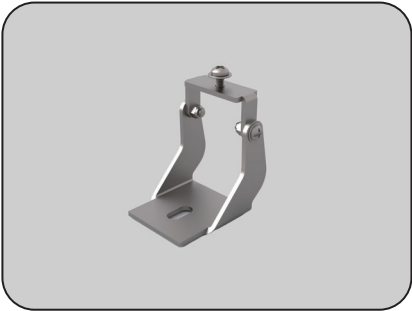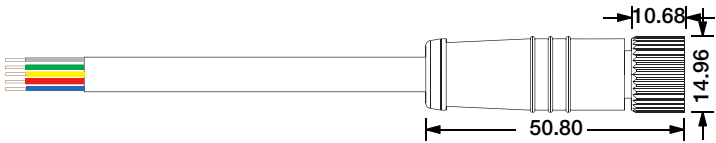



Angle Adjustable Bracket
SFW20-ACC-HX-S2830C2

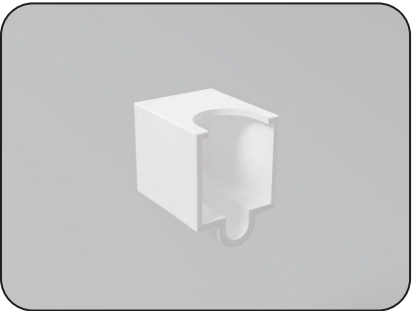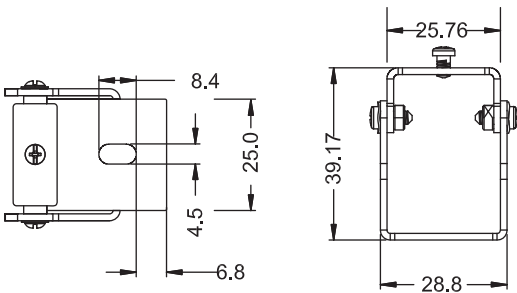


DIY Front Connector Accessories
SJJ-WGJ-029

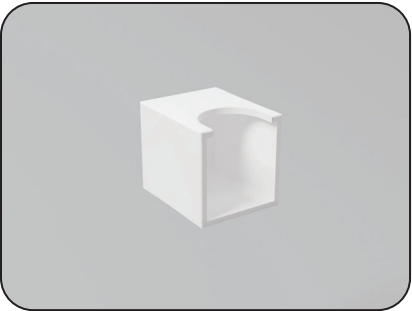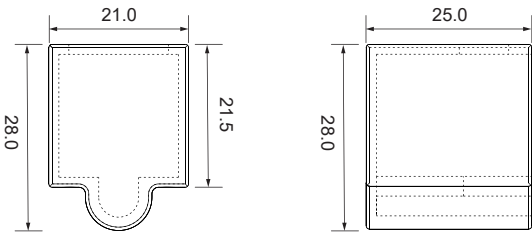


DIY End Connector Accessories
SJJ-WGJ-030

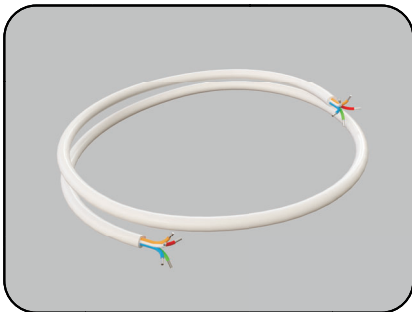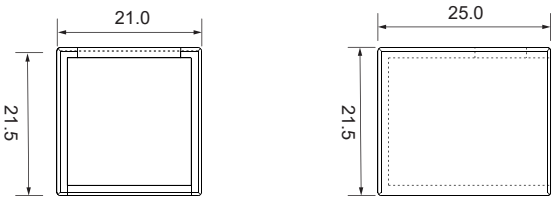



DIY Connected Cable
S-5C-20AWG-D6-UL-06




SFW20 LED Wall Grazer Mounting Channel

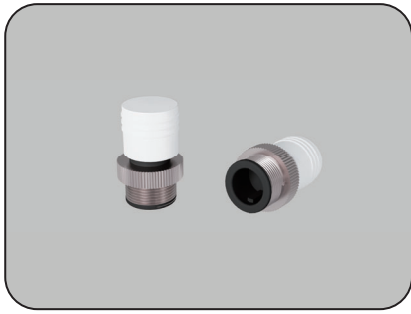

Male Connector End Cap
SYZ-EC-M12-M

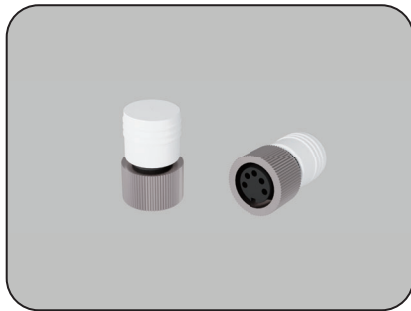

Female Connector End Cap
SYZ-EC-M12-F-5C




SFW20 LED Wall Grazer Mounting Channel


1.Aluminum Channel




Unit:mm






Installation Way



Surface Mounted




Recessed

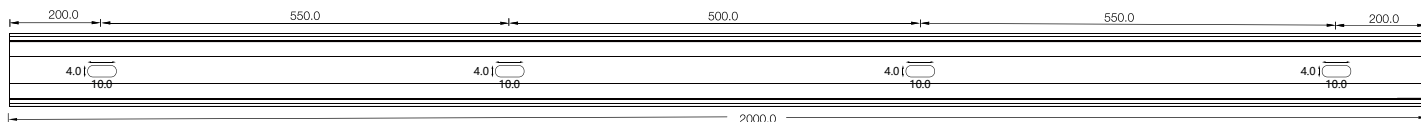


Model	W x H(mm)	Standard Length	Screw Holes	Holes Numbers	Suitable Product
ALCW20S01-035	20.2*23.2	35mm	Ø4.0mm	2	SFW20
ALCW20S01-100		1000mm	4.0x10mm	2	SFW20
ALCW20S01-200		2000mm	4.0x10mm	4	SFW20




Unit:mm






Installation Way



Surface Mounted




Recessed

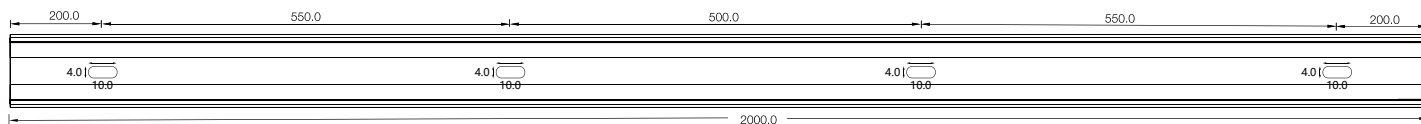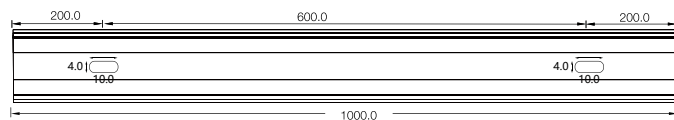



Model	W x H(mm)	Standard Length	Screw Holes	Holes Numbers	Suitable Product
ALCW20H01-035	20.2*35.0	35mm	Ø4.0mm	2	SFW20
ALCW20H01-100		1000mm	4.0x10mm	2	SFW20
ALCW20H01-200		2000mm	4.0x10mm	4	SFW20

SFW20 LED Wall Grazer Mounting Channel

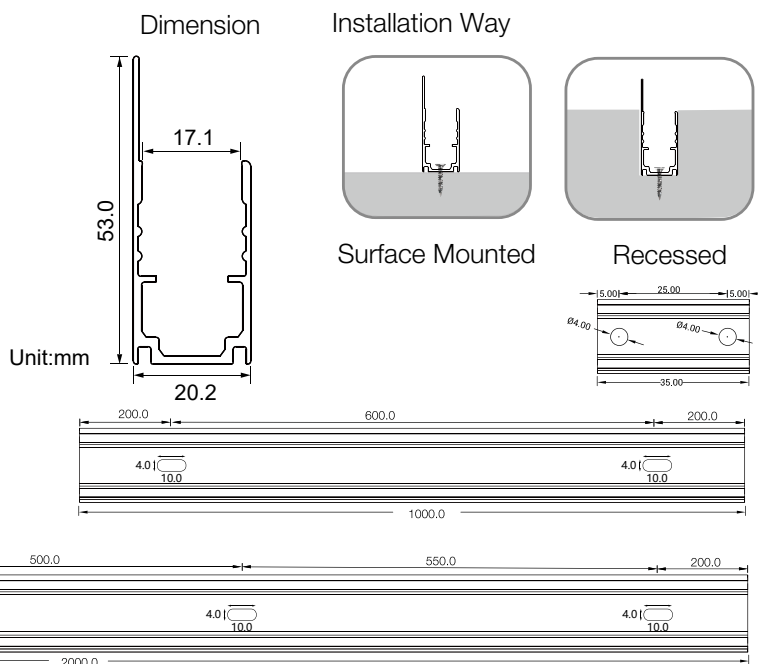

Model	W x H(mm)	Standard Length	Screw Holes	Holes Numbers	Suitable Product
ALCW20H02-035	20.2*53.0	35mm	Φ4.0mm	2	SFW20
ALCW20H02-100		1000mm	4.0x10mm	2	SFW20
ALCW20H02-200		2000mm	4.0x10mm	4	SFW20


2. Flexible Aluminum Channel

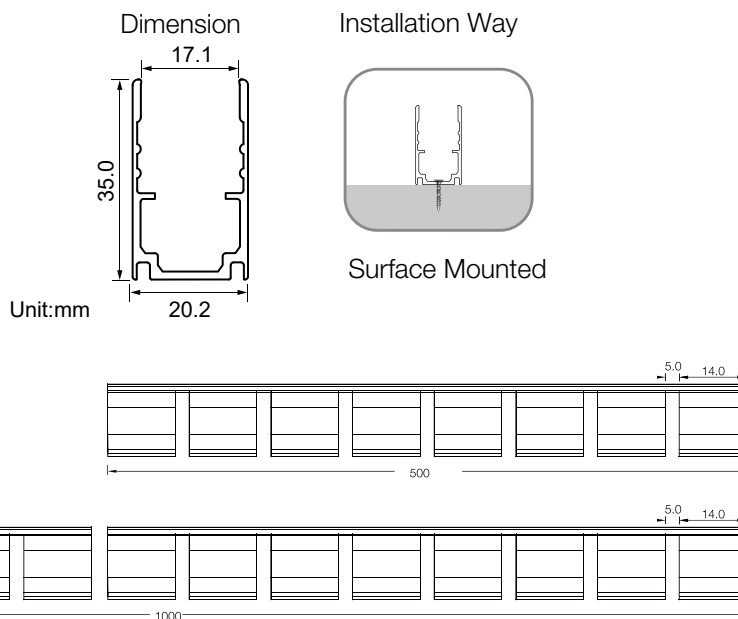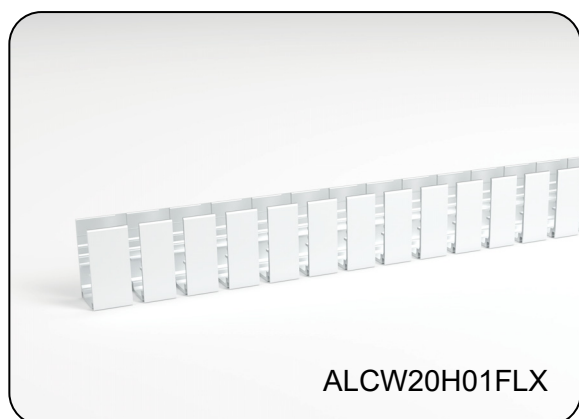


Model	W x H(mm)	Standard Length	Suitable Product
ALCW20H01FLX-50	20.2*35.0	500mm	SFW20
ALCW20H01FLX-100		1000mm	SFW20

SFW20 LED Wall Grazer Mounting Channel


3. Flexible Stainless Steel Channel



Installation Way



Surface Mounted

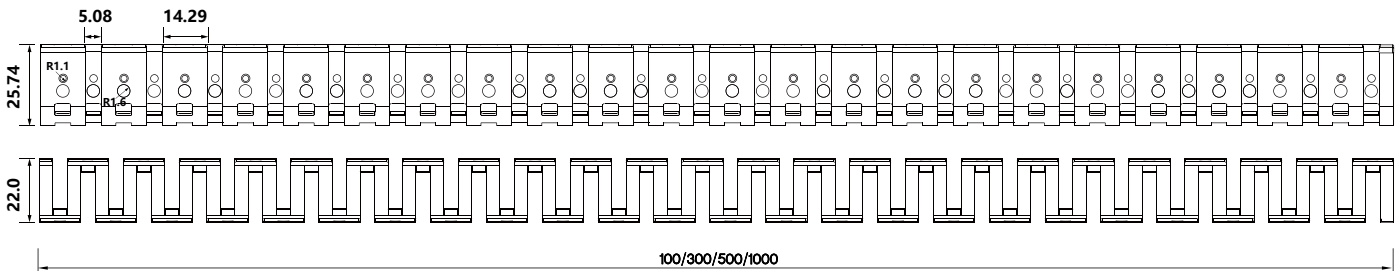

Model	W x H(mm)	Standard Length	Suitable Product
SSC20FLX01	22.00*25.74	100mm	SFW20
SSC20FLX03		300mm	SFW20
SSC20FLX05		500mm	SFW20
SSC20FLX10		1000mm	SFW20