

E:\IES\工程测试\硅胶\SFW20\SFW20-24V-3535-24-2700K+6000K-90-25\SFW20-24V-3535-24-2700K+6000K-90-6000K-25\SFW20-24V-3535-24-2700K+6000K-90-600






33.0	106.2	104.6
36.0	82.07	80.63
39.0	64.89	63.30
42.0	52.42	50.99
45.0	43.28	42.17
48.0	36.37	35.52
51.0	30.96	30.31
54.0	26.55	26.19
57.0	22.74	22.48
60.0	19.46	19.15
63.0	16.43	16.14
66.0	13.70	13.37
69.0	11.21	11.00
72.0	8.938	8.807
75.0	6.960	7.001
78.0	5.221	5.312
81.0	3.673	3.823
84.0	2.327	2.492
87.0	1.289	1.425
90.0	0.6775	0.7453
93.0	0.6033	0.5278
96.0	0.6636	0.5427
99.0	0.7290	0.5777
102.0	0.8094	0.6681
105.0	0.8949	0.7536
108.0	1.001	0.8591
111.0	1.106	0.9846
114.0	1.237	1.100
117.0	1.378	1.241
120.0	1.518	1.392
123.0	1.659	1.543
126.0	1.825	1.713
129.0	1.986	1.879
132.0	2.147	2.045
135.0	2.302	2.211
138.0	2.458	2.372
141.0	2.599	2.517
144.0	2.729	2.658
147.0	2.845	2.779
150.0	2.945	2.895
153.0	3.036	2.985
156.0	3.106	3.050
159.0	3.176	3.111
162.0	3.242	3.171
165.0	3.312	3.231
168.0	3.393	3.282
171.0	3.483	3.357
174.0	3.579	3.437
177.0	3.669	3.548
180.0	3.759	3.659

Y角度范围: 0度 - 180度  
Y角度间隔: 1.0度  
测试系统: 远方(EVERFINE)GO-2000B\_V1系统 V2.0.269  
环境湿度: 65.0%  
测试距离: 9.200米 [K=1.0000]  
备注:


I (cd)

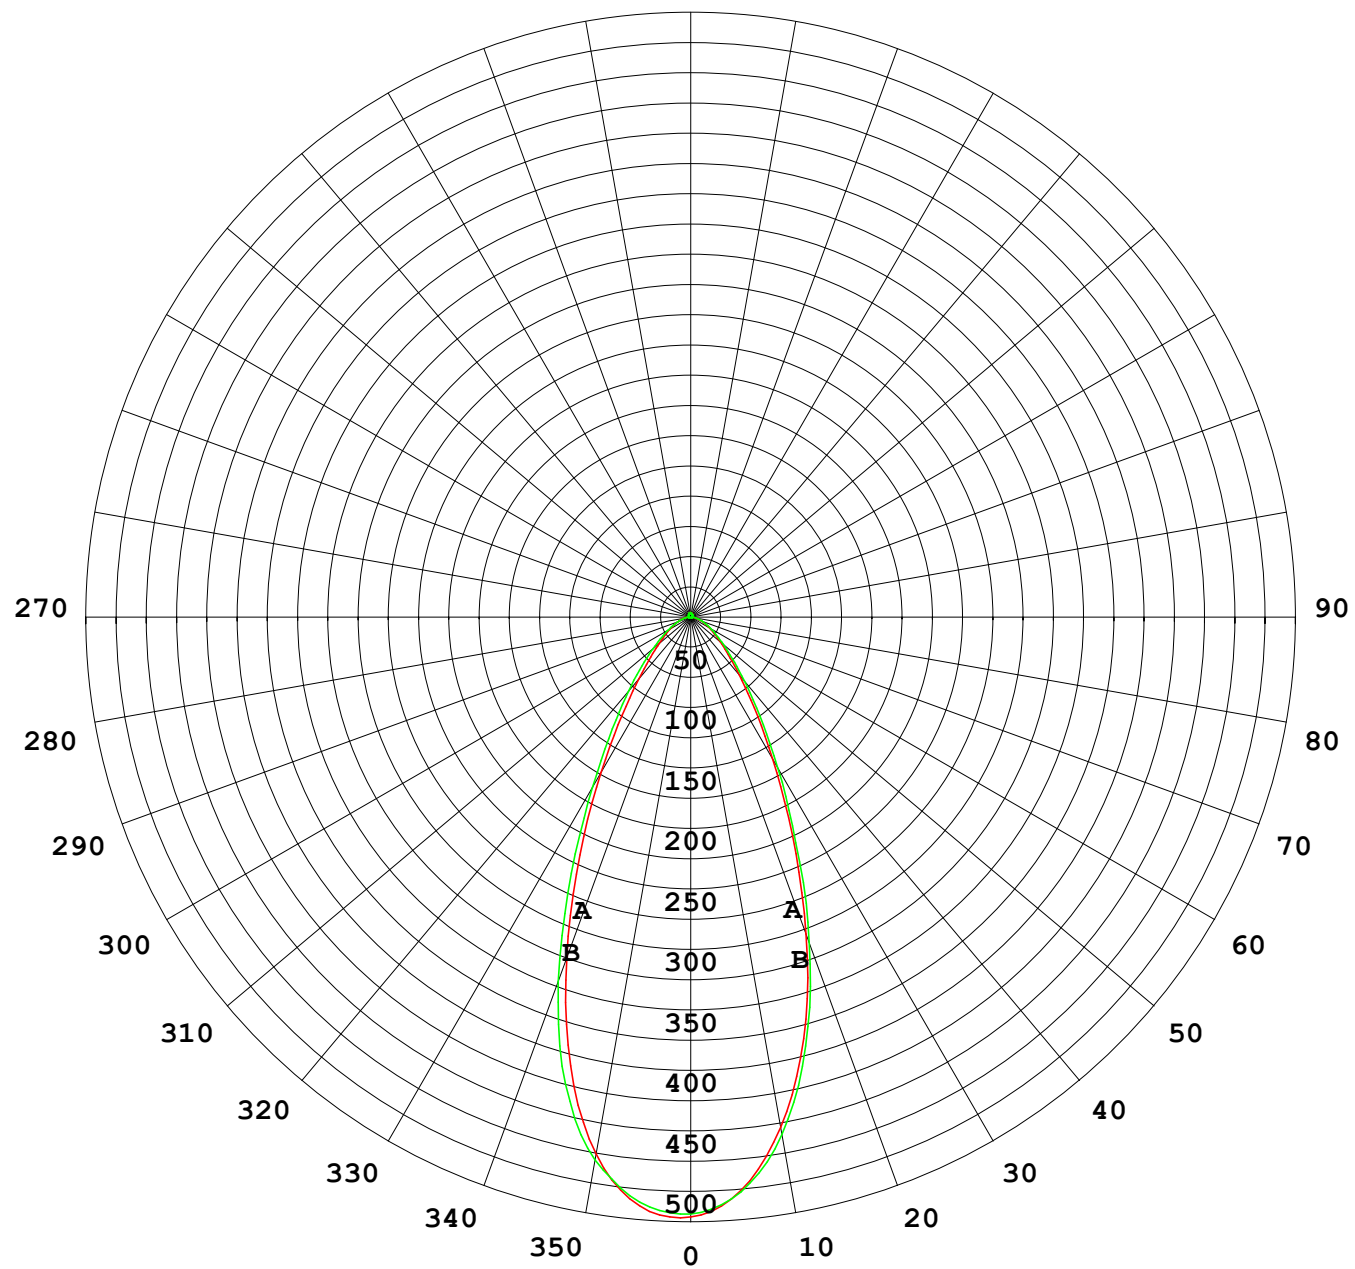



1000 lm

$\kappa = 1$

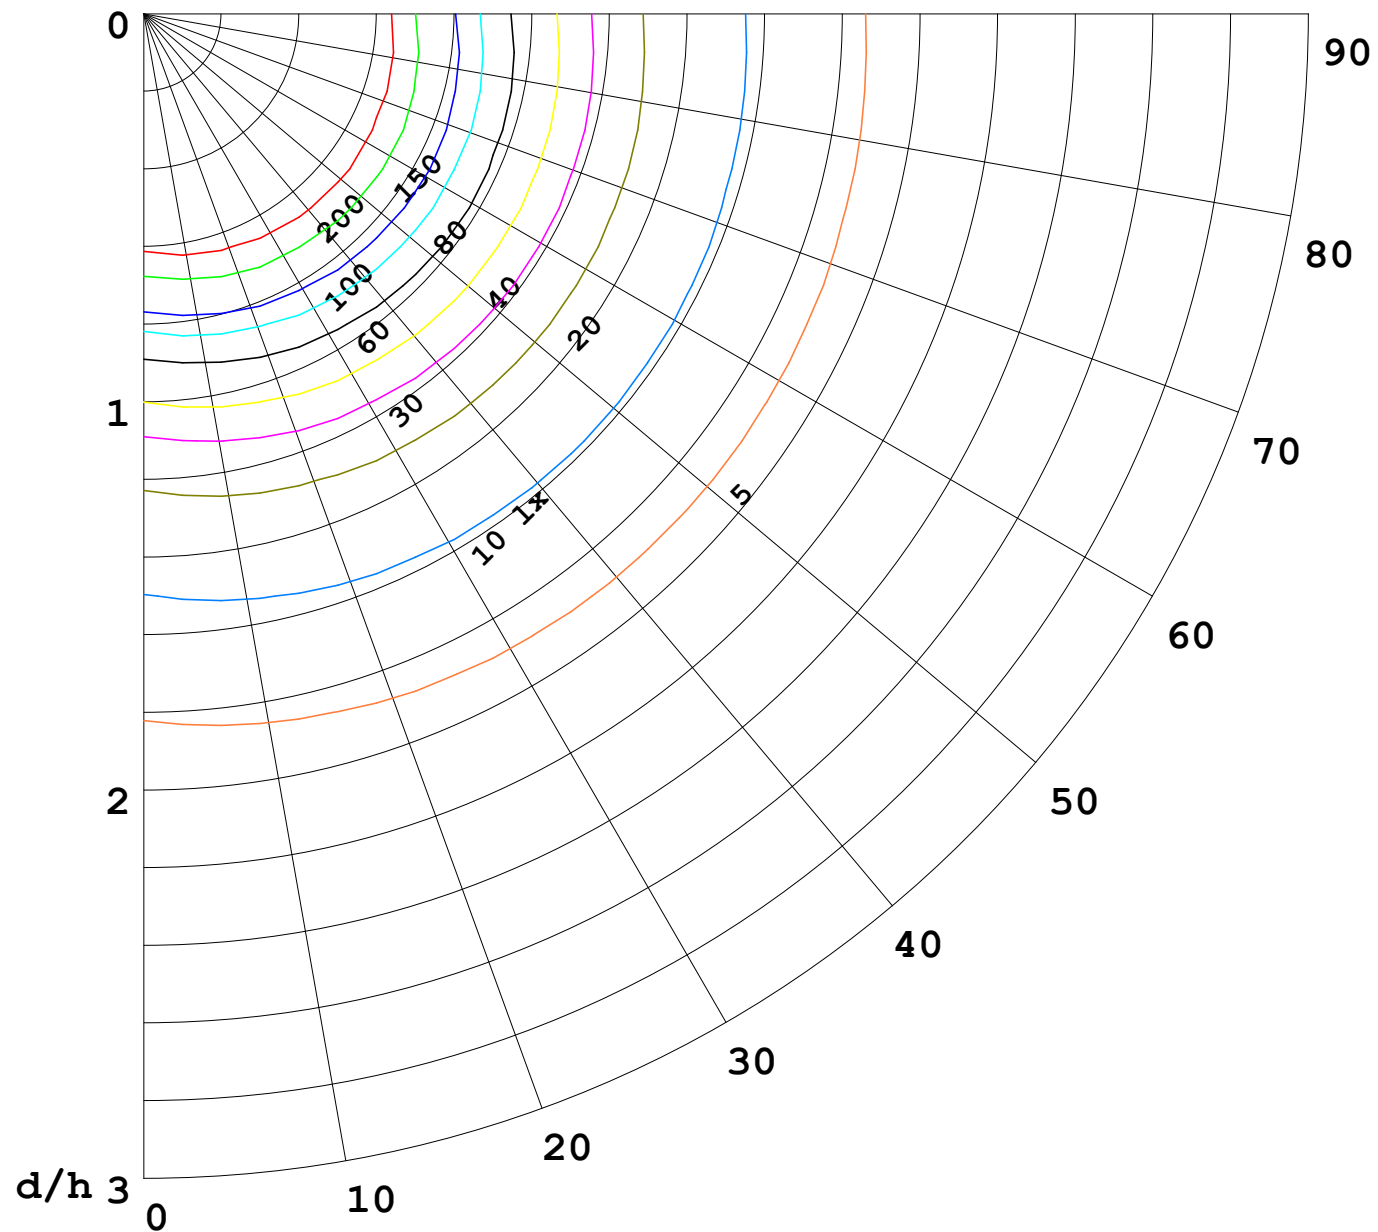

F = 5000 lm  
 K = 0.7  
 Hcc = 0.0 m  
 Hfc = 0.0 m  
 Eave = 100 lx

	Pcc	Pw	Pfc
—	70	50	30
—	50	30	20

