




















## AAI Figure

Test:U:24.00V I:0.3913A P:9.391W PF:1.000 Freq:0Hz Lamp Flux:427.593x1 lm		
NAME: SFW20-24V-3535-24-2700K+6000K-90-6000K-38	TYPE:硅胶	WEIGHT:
SPEC.:	DIM.: 18.5MM*18.5MM	SERIAL No.:202305005
MFR.: OLYMPIA	SUR.:1.0*0.0185	Shielding Angle:

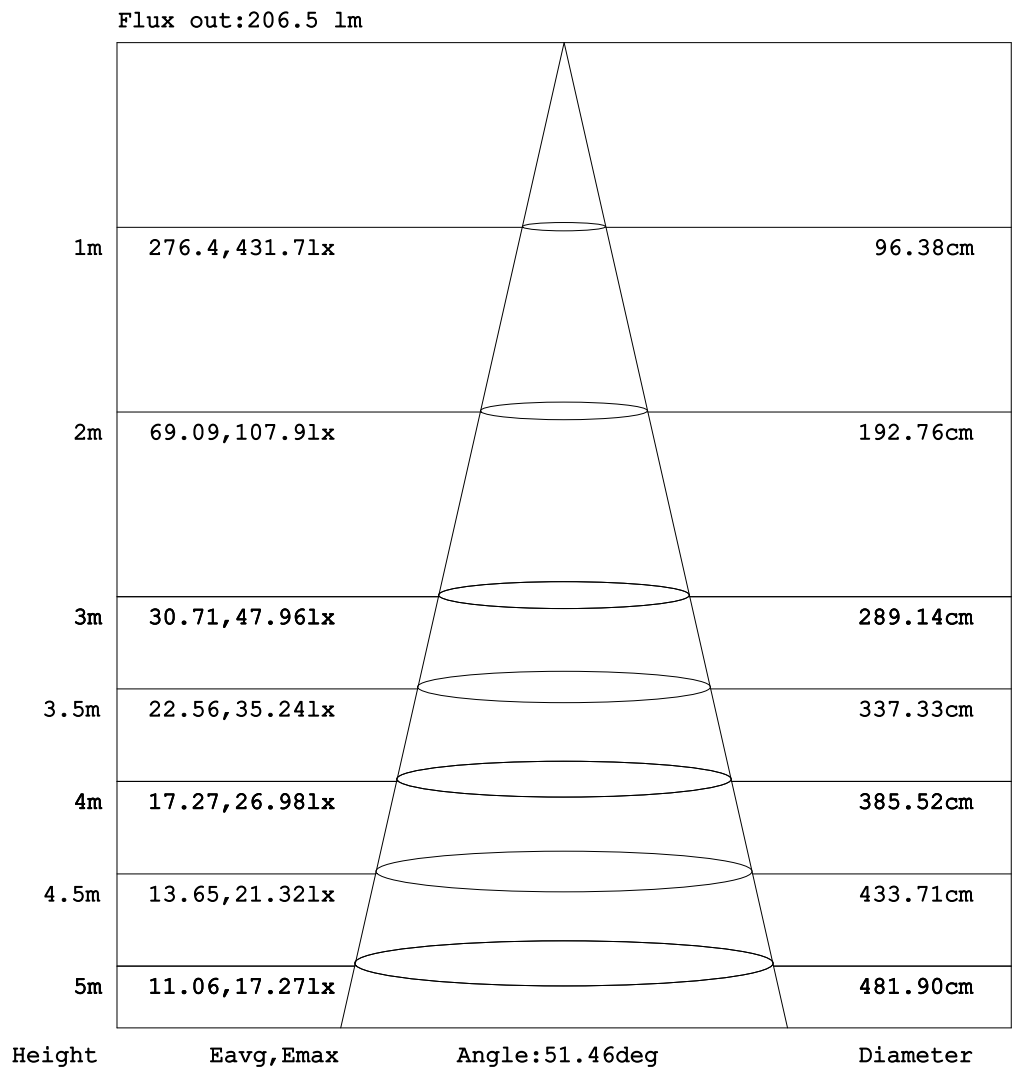

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:WFW  
Test Date:2023-05-24


```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

```





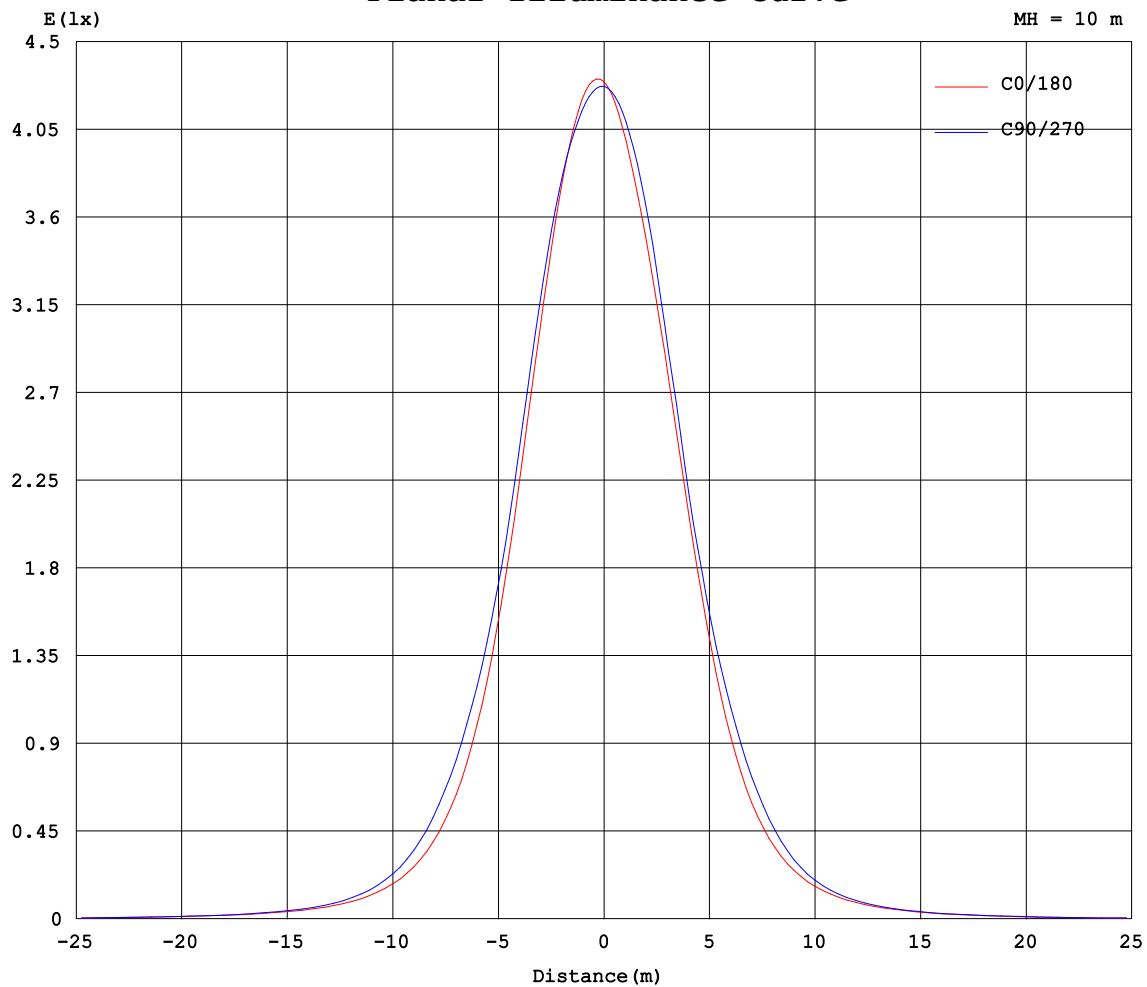

```

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:


```








I (cd)

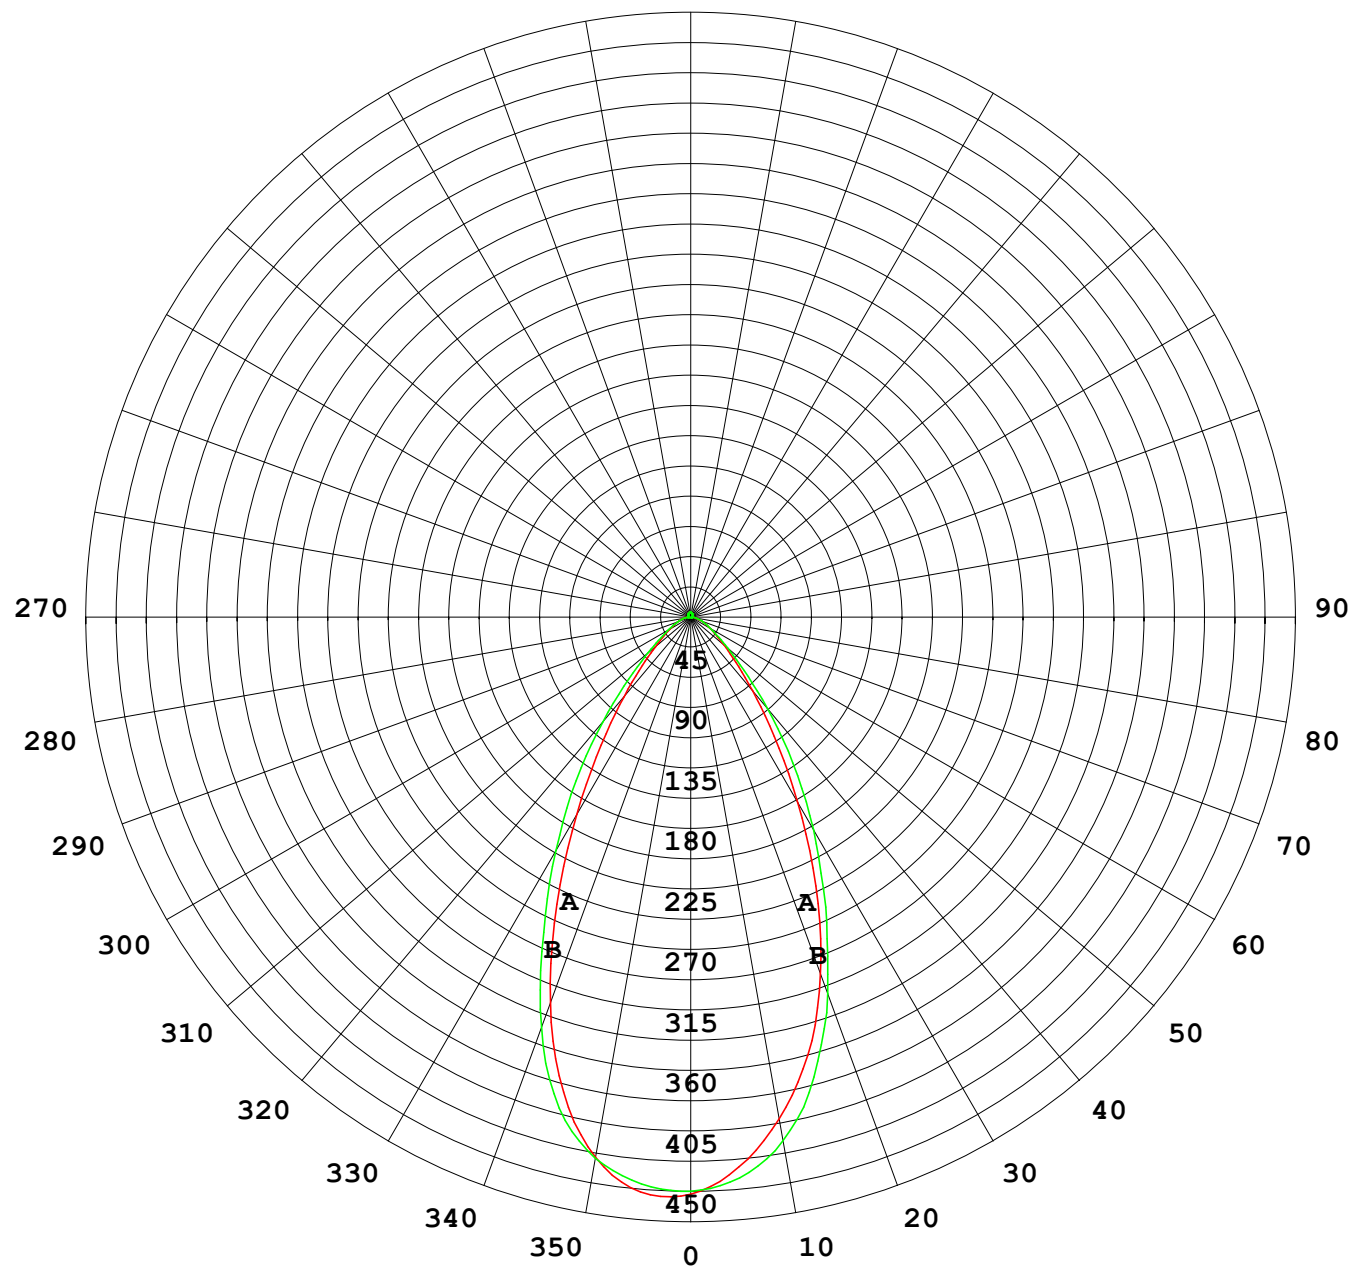



1000 lm

$\kappa = 1$

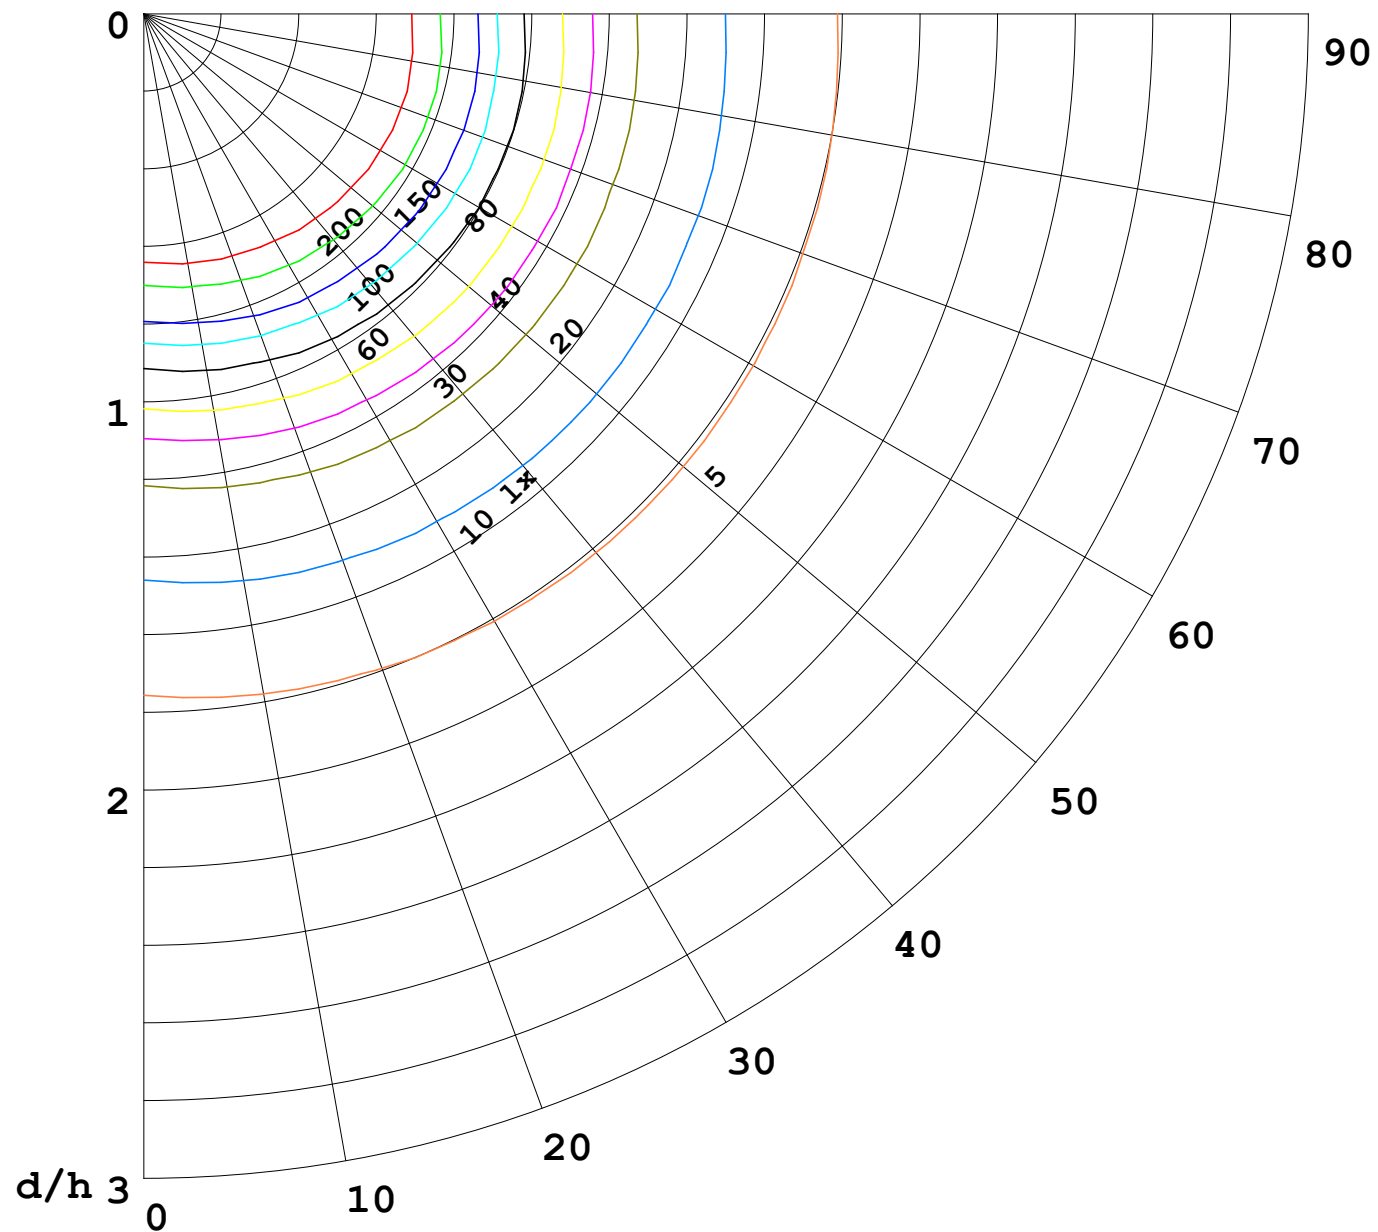

F = 5000 lm  
 K = 0.7  
 Hcc = 0.0 m  
 Hfc = 0.0 m  
 Eave = 100 lx

	Pcc	Pw	Pfc
—	70	50	30
—	50	30	20

